
SNOWFLAKE SQL

PART 1: DATABASE AND SESSION MANAGEMENT

Step 1: Check Current Session Information

```
SELECT
    CURRENT_USER() AS USER_NAME,
    CURRENT_ROLE() AS ACTIVE_ROLE,
    CURRENT_WAREHOUSE() AS ACTIVE_WAREHOUSE,
    CURRENT_DATABASE() AS ACTIVE_DATABASE,
    CURRENT_SCHEMA() AS ACTIVE_SCHEMA;
```

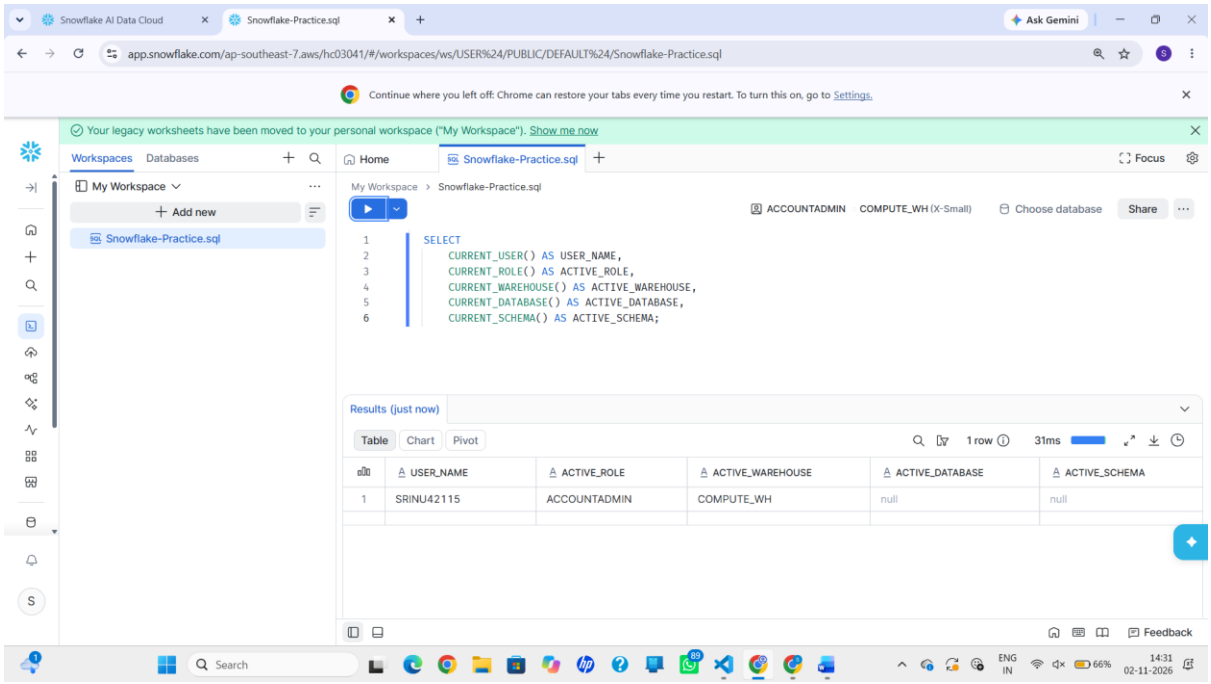

Explanation:


- CURRENT_USER() – Displays the logged-in user.
- CURRENT_ROLE() – Displays the active role.
- CURRENT_WAREHOUSE() – Displays the active warehouse.
- CURRENT_DATABASE() – Displays the selected database.
- CURRENT_SCHEMA() – Displays the selected schema.

Step 2: Create a Database

```
CREATE DATABASE IF NOT EXISTS SRINIVAS_HOSPITAL_DB;
```


Explanation:

- **CREATE DATABASE creates a new database.**
- **IF NOT EXISTS prevents an error if the database already exists.**
- **SRINIVAS_HOSPITAL_DB is the database name.**

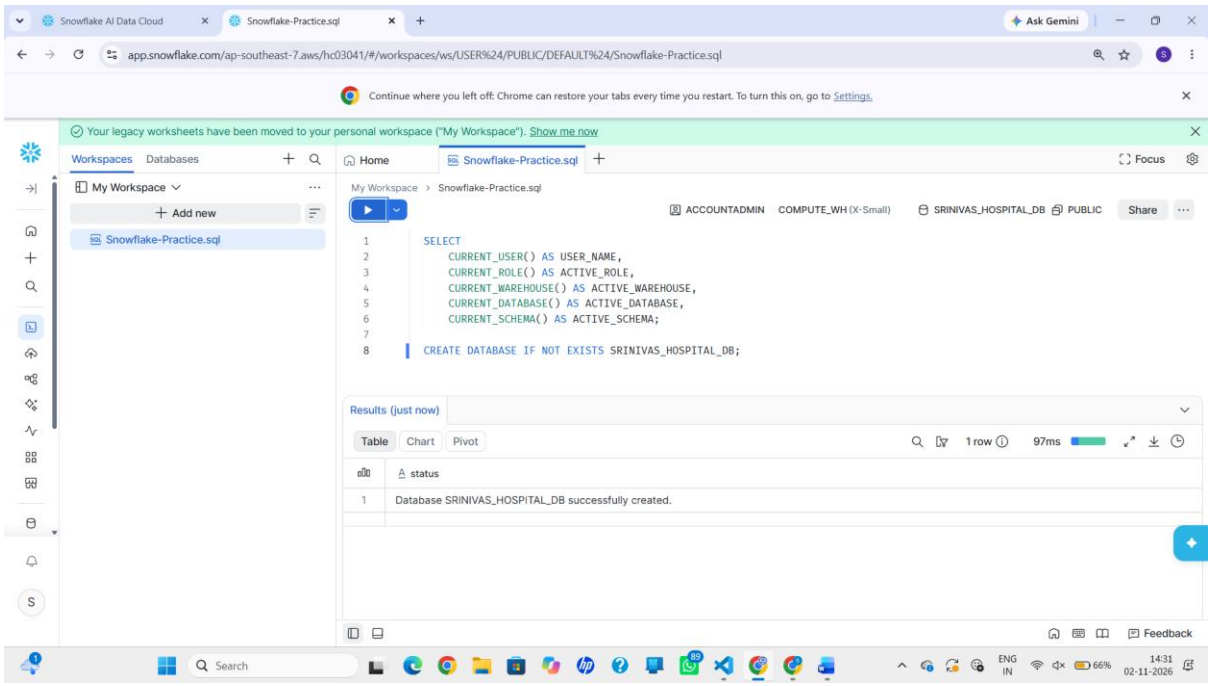


Verify the database:

```
SHOW DATABASES LIKE 'SRINIVAS_HOSPITAL_DB';
```

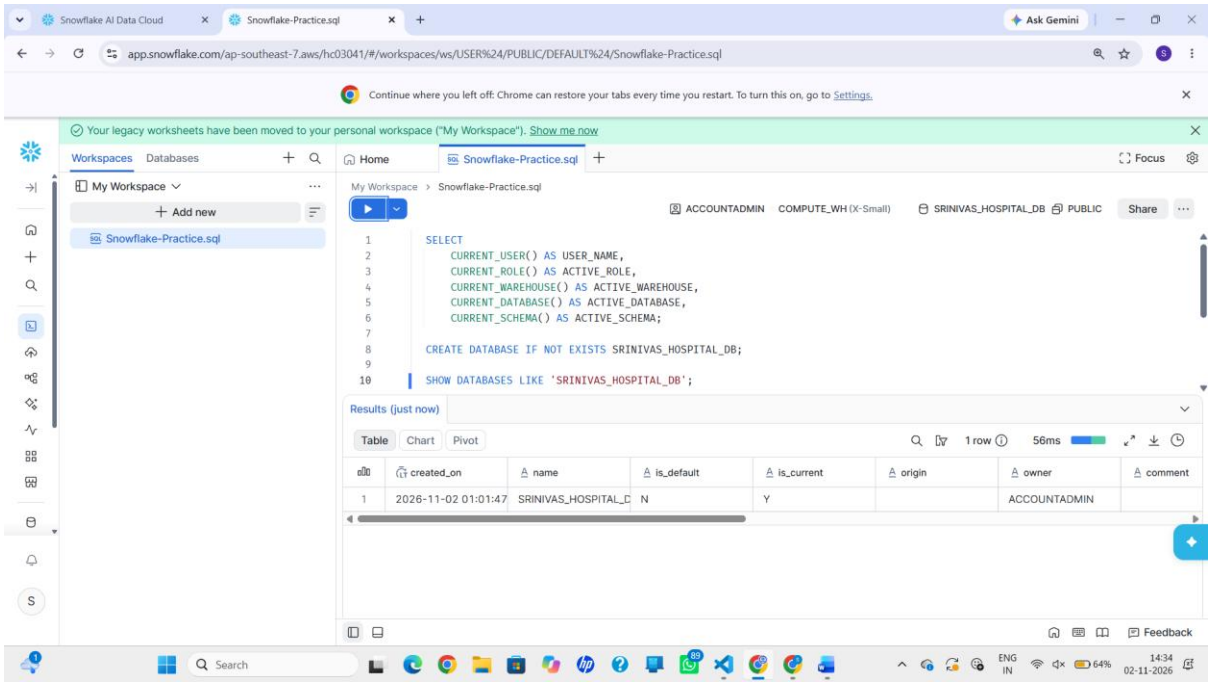


Display all databases:

```
SHOW DATABASES;
```

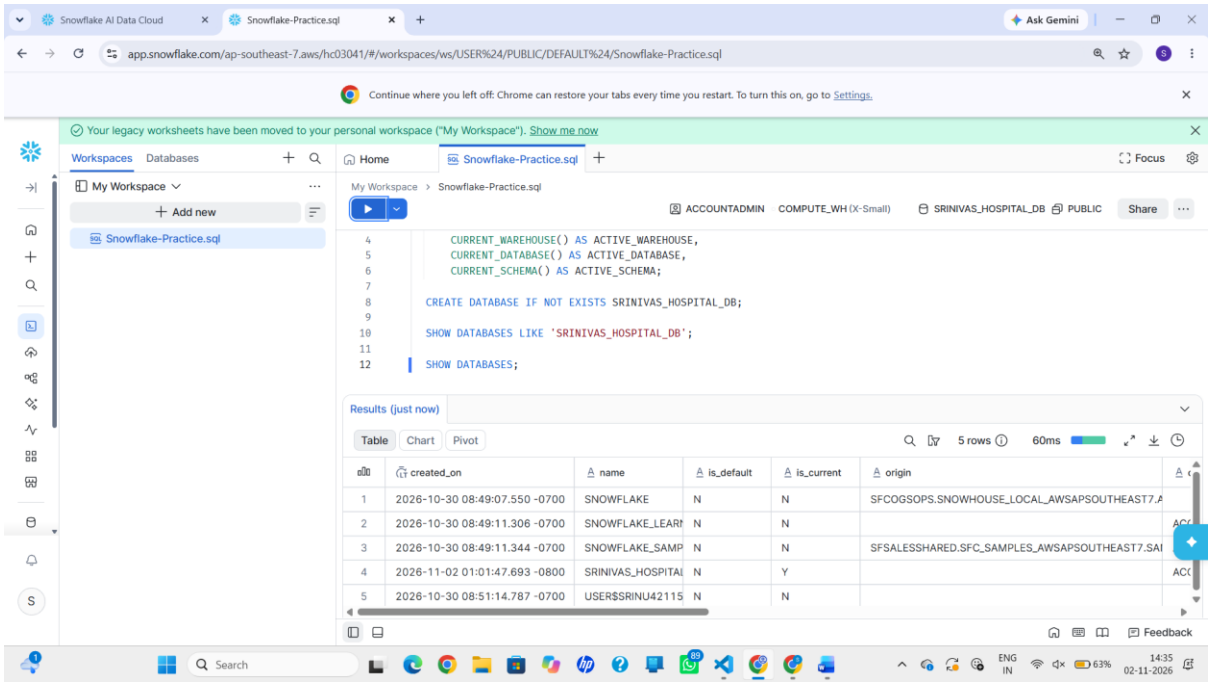

Step 3: Create a Schema

```
CREATE SCHEMA IF NOT EXISTS SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA;
```

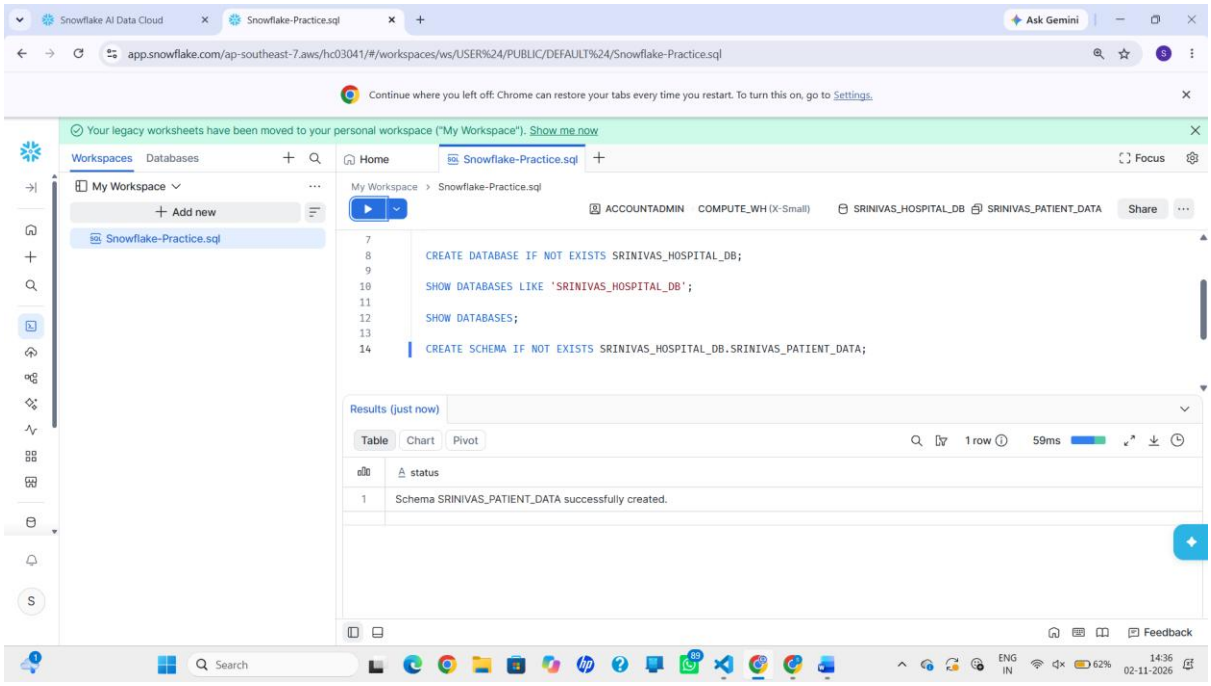

Explanation:

A schema is a logical container inside a database. It organizes tables, views, stages and other database objects.


Here:

- Database: SRINIVAS_HOSPITAL_DB
- Schema: SRINIVAS_PATIENT_DATA

Select the schema:


```
USE SCHEMA SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA;
```

This tells Snowflake that you want to work inside **SRINIVAS_PATIENT_DATA**.

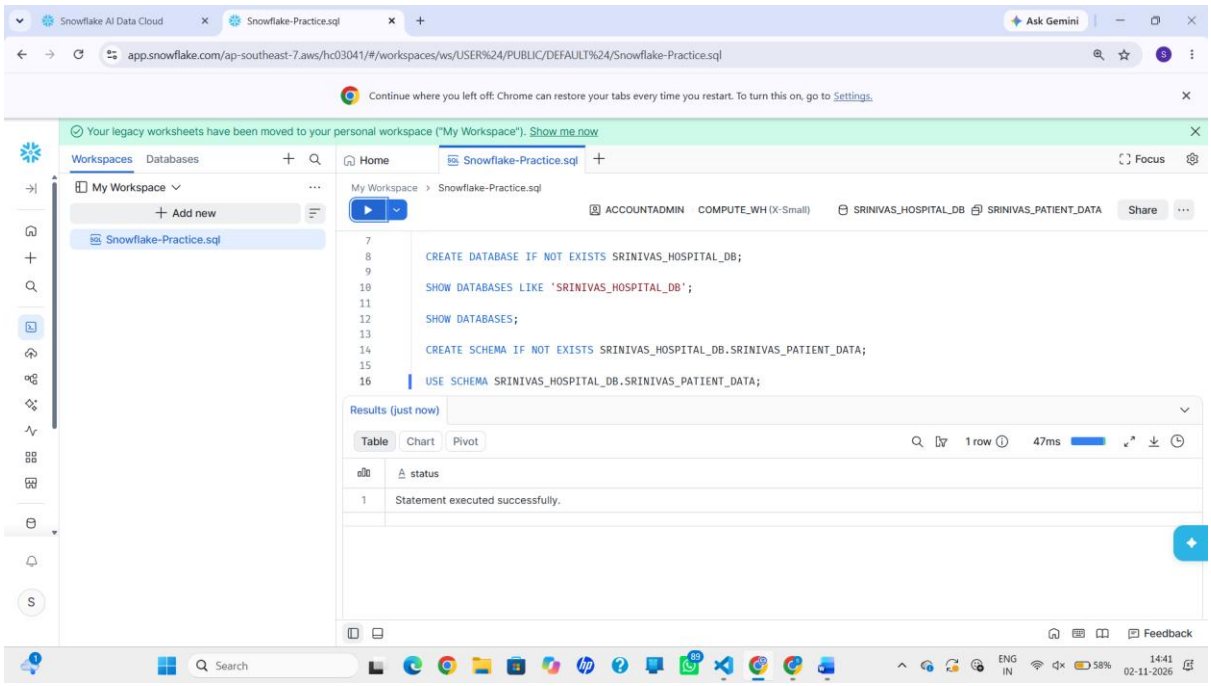

Verify:

```
SHOW SCHEMAS IN DATABASE SRINIVAS_HOSPITAL_DB;
```

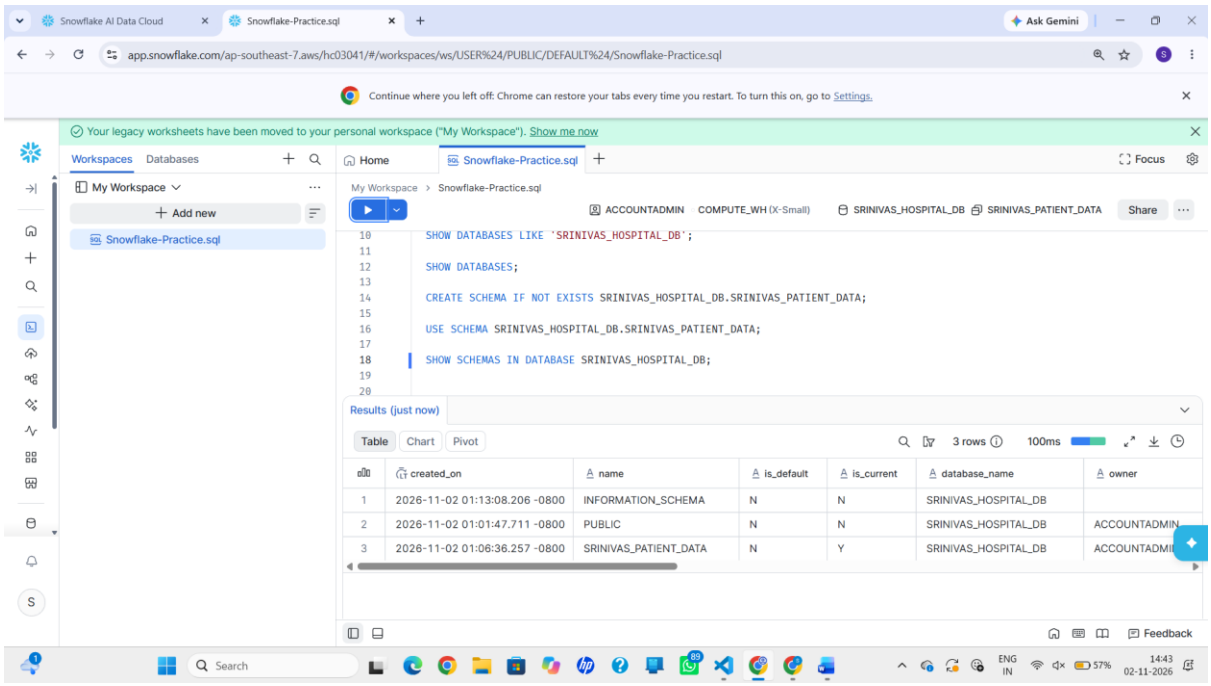

PART 2: VIRTUAL WAREHOUSE MANAGEMENT

Step 4: Create a Virtual Warehouse

```
CREATE WAREHOUSE IF NOT EXISTS SRINIVAS_HOSPITAL_WH

WAREHOUSE_SIZE = 'XSMALL'


AUTO_SUSPEND = 60

AUTO_RESUME = TRUE

INITIALLY_SUSPENDED = TRUE;
```


Explanation:

- WAREHOUSE_SIZE – Specifies the computing capacity.
- XSMALL – Smallest standard warehouse size.
- AUTO_SUSPEND = 60 – Suspends after 60 seconds of inactivity.
- AUTO_RESUME = TRUE – Automatically resumes when needed.
- INITIALLY_SUSPENDED = TRUE – Creates the warehouse in suspended mode.

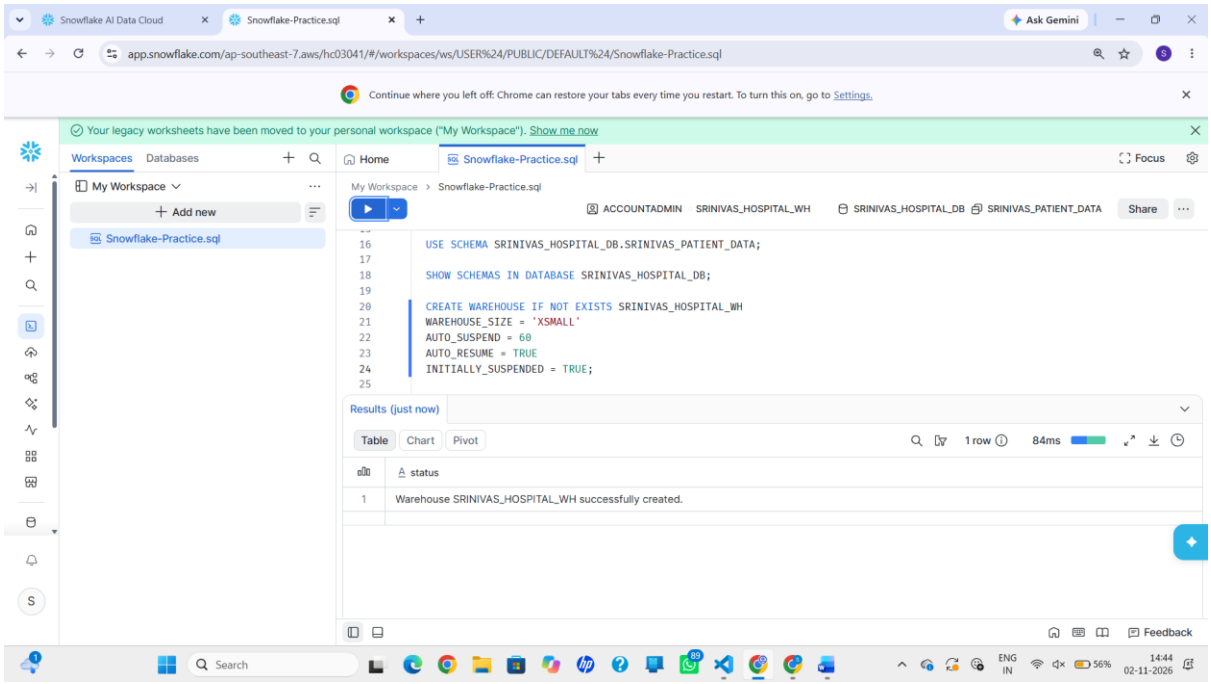


Select the warehouse:

```
USE WAREHOUSE SRINIVAS_HOSPITAL_WH;
```

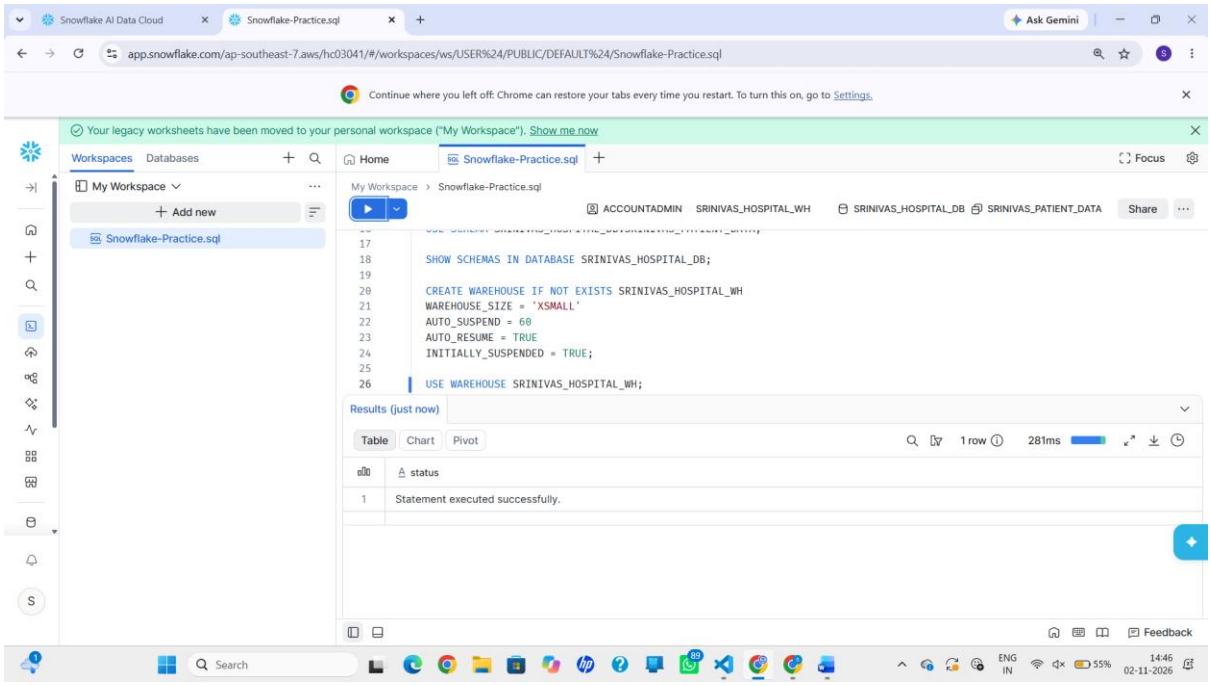


Verify:

```
SHOW WAREHOUSES LIKE 'SRINIVAS_HOSPITAL_WH';
```

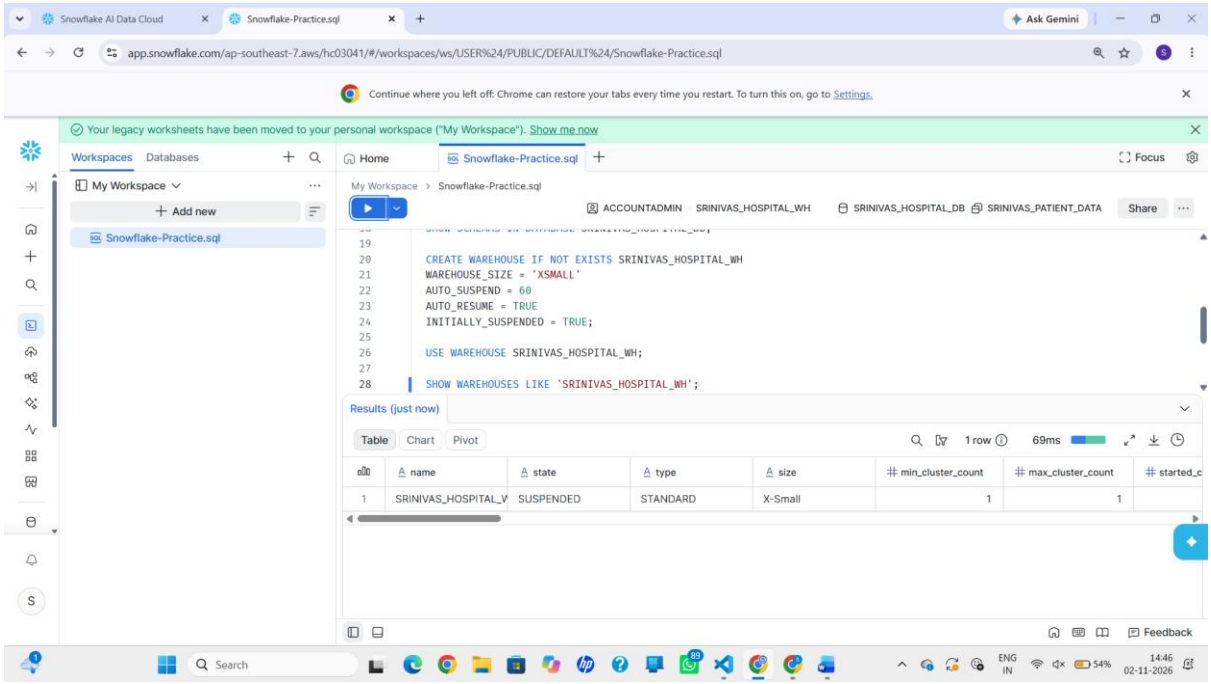

Check active warehouse:


```
SELECT CURRENT_WAREHOUSE();
```

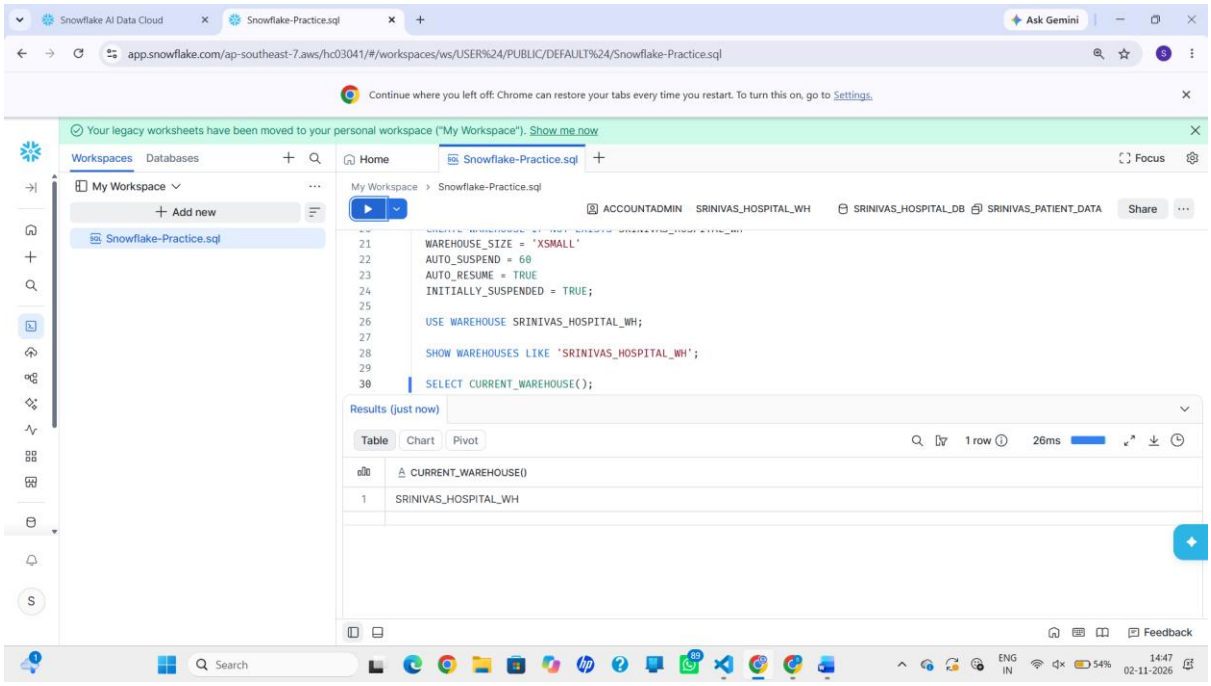

PART 3: TABLE CREATION


Step 5: Create an Employee Table

```
CREATE TABLE IF NOT EXISTS
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS
(
    PATIENT_ID NUMBER(10,0),
    PATIENT_NAME VARCHAR(100),
    AGE NUMBER(3,0),
    GENDER VARCHAR(20),
    DISEASE VARCHAR(100),
    DOCTOR_NAME VARCHAR(100),
    TREATMENT_COST NUMBER(12,2)
);
```

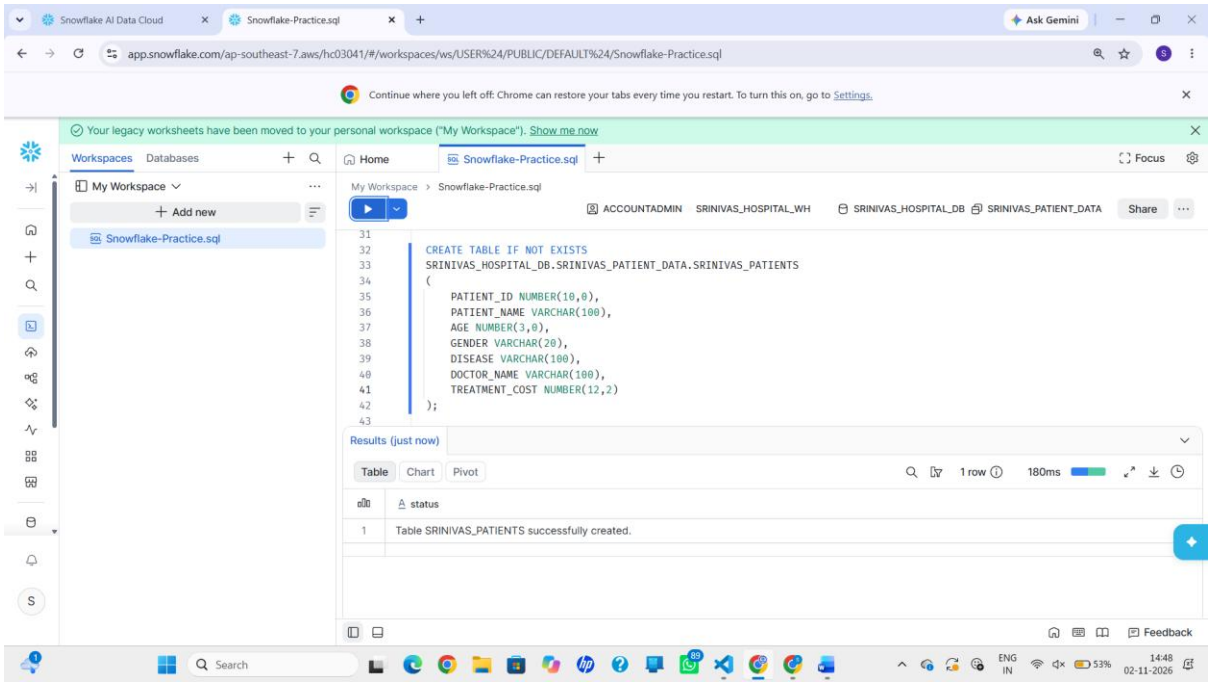


Verify table:

```
SHOW TABLES IN SCHEMA
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA;
```

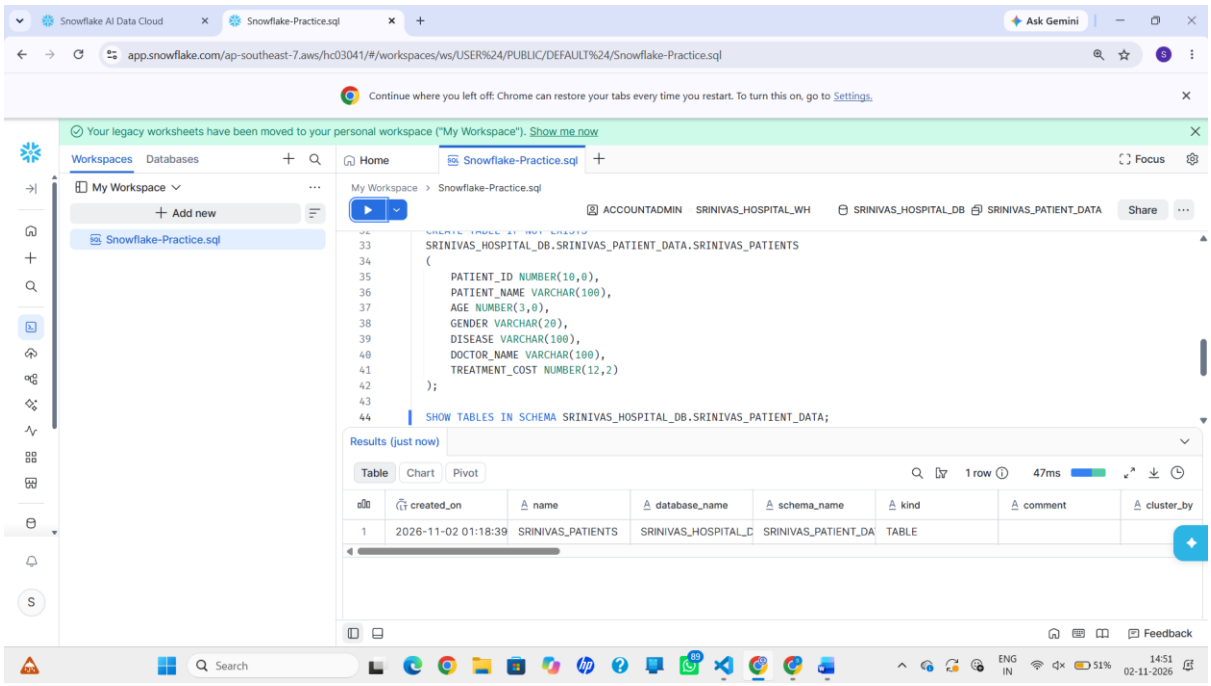

Check table structure:

```
DESCRIBE TABLE
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS;
```

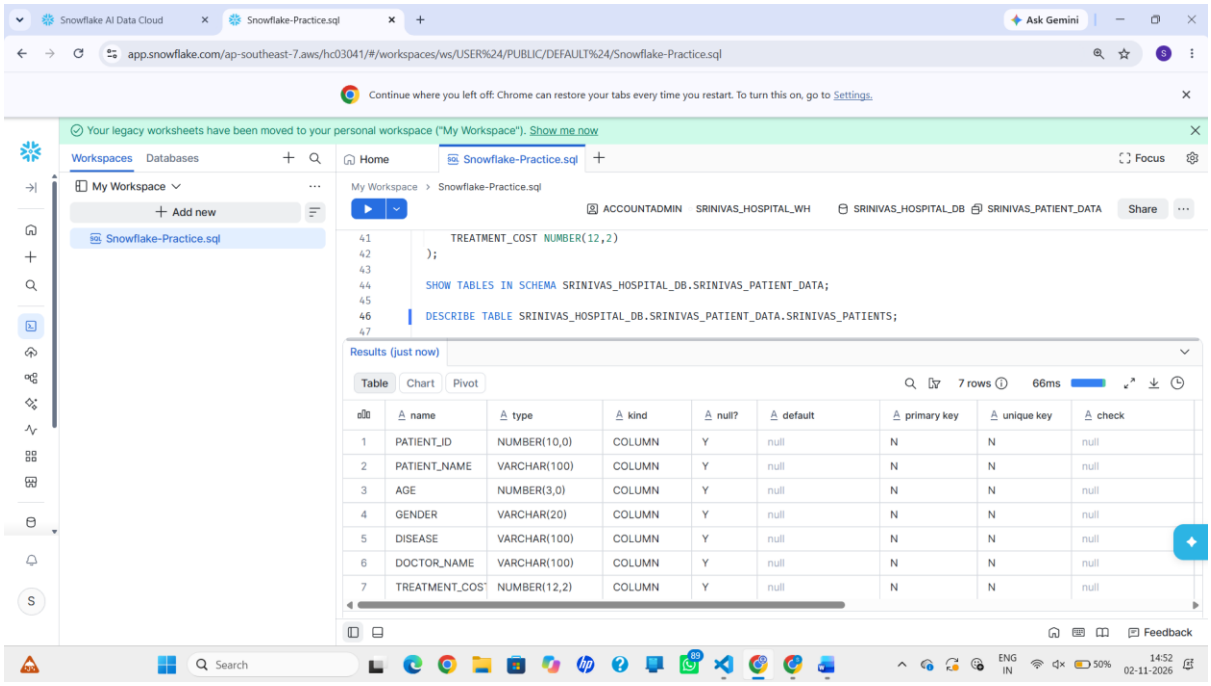

PART 4: FILE FORMAT CREATION

Step 6: Create a CSV File Format

A file format defines how Snowflake should read and interpret an external or staged file.

```
CREATE FILE FORMAT IF NOT EXISTS

SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_HOSPITAL_CSV_FORMAT

TYPE = CSV


SKIP_HEADER = 1

FIELD_OPTIONALLY_ENCLOSED_BY = '"'

EMPTY_FIELD_AS_NULL = TRUE;
```


Explanation:

- TYPE = CSV – Specifies CSV format.
- SKIP_HEADER = 1 – Skips the first row containing column names.
- FIELD_OPTIONALLY_ENCLOSED_BY – Handles values enclosed in double quotes.
- EMPTY_FIELD_AS_NULL – Converts empty fields into NULL values.

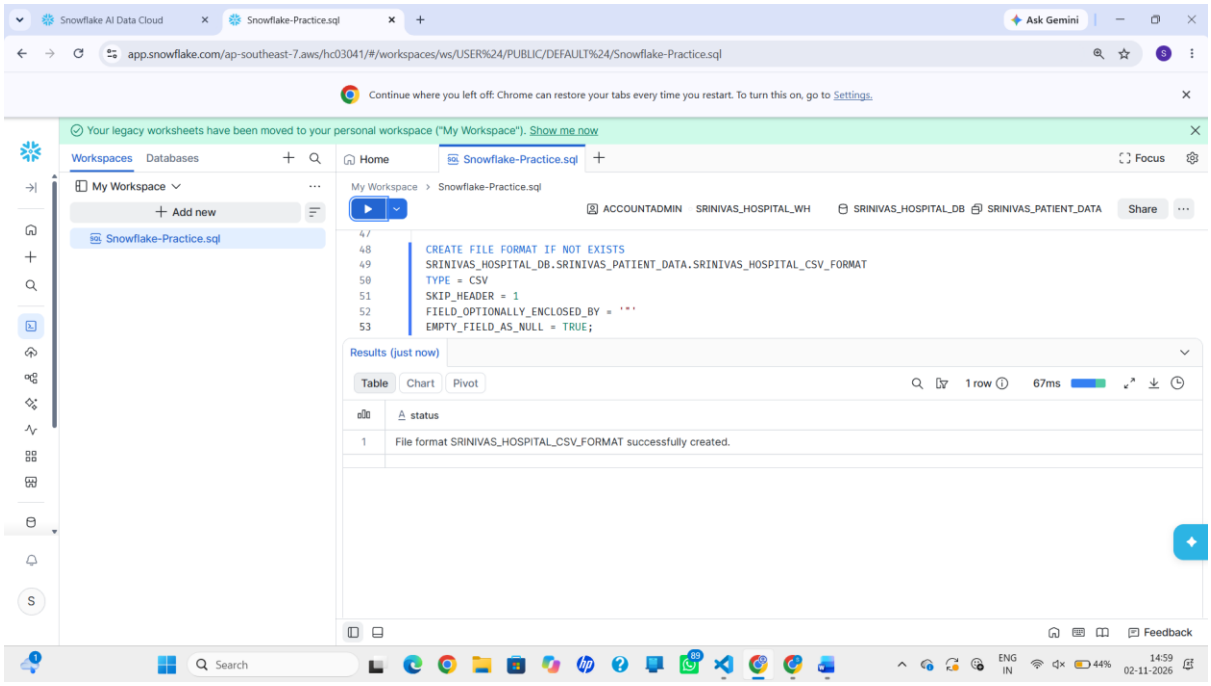


Verify:

```
SHOW FILE FORMATS IN SCHEMA
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA;
```

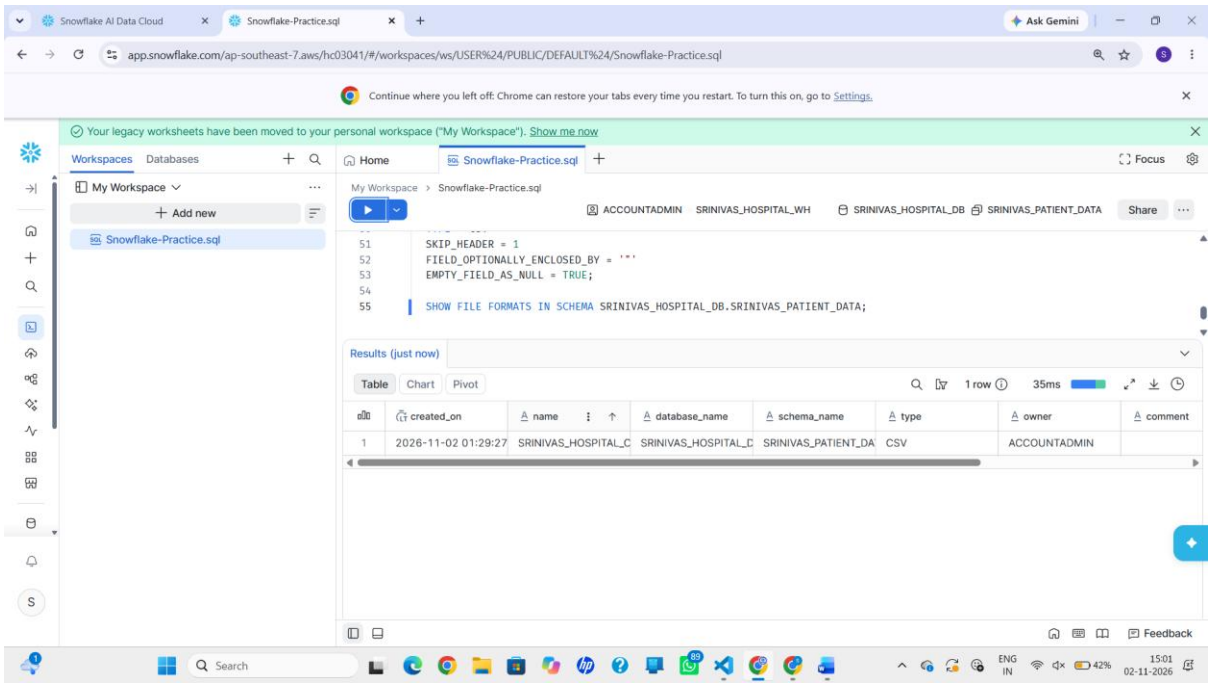

View file format properties:

```
DESCRIBE FILE FORMAT
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_HOSPITAL_CSV_FORMAT;
```

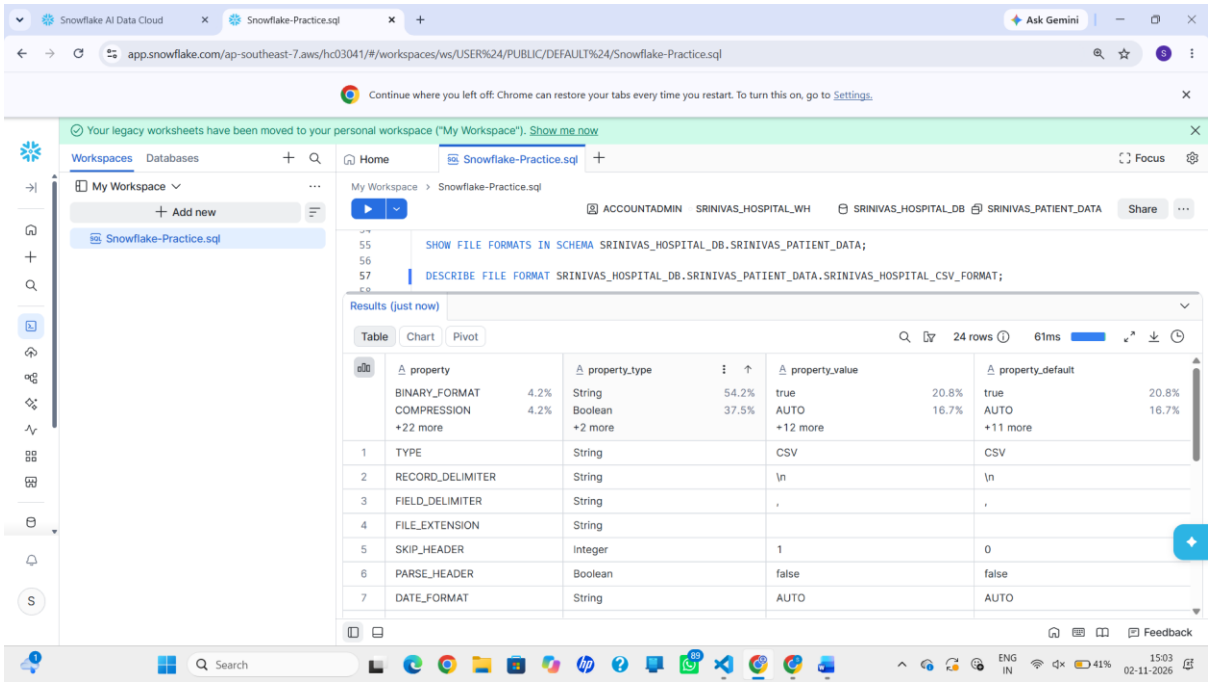

PART 5: INTERNAL STAGE MANAGEMENT

Step 7: Create an Internal Stage


A stage is a location used to store or reference files before loading them into Snowflake tables.

```
CREATE STAGE IF NOT EXISTS
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENT_STAGE

FILE_FORMAT =
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_HOSPITAL_CSV_FORMAT;
```


Explanation:

- CREATE STAGE creates a named stage.
- SRINIVAS_PATIENT_STAGE is the stage name.
- FILE_FORMAT specifies the CSV interpretation rules.

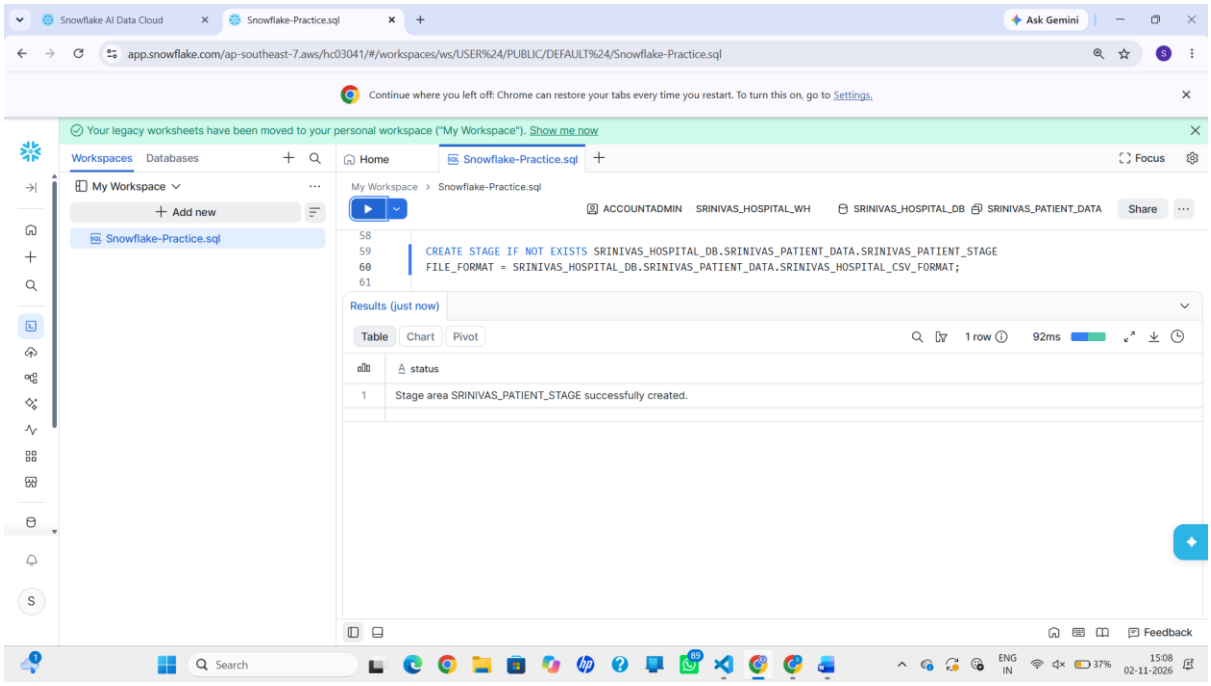


Verify:

```
SHOW STAGES IN SCHEMA
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA;
```

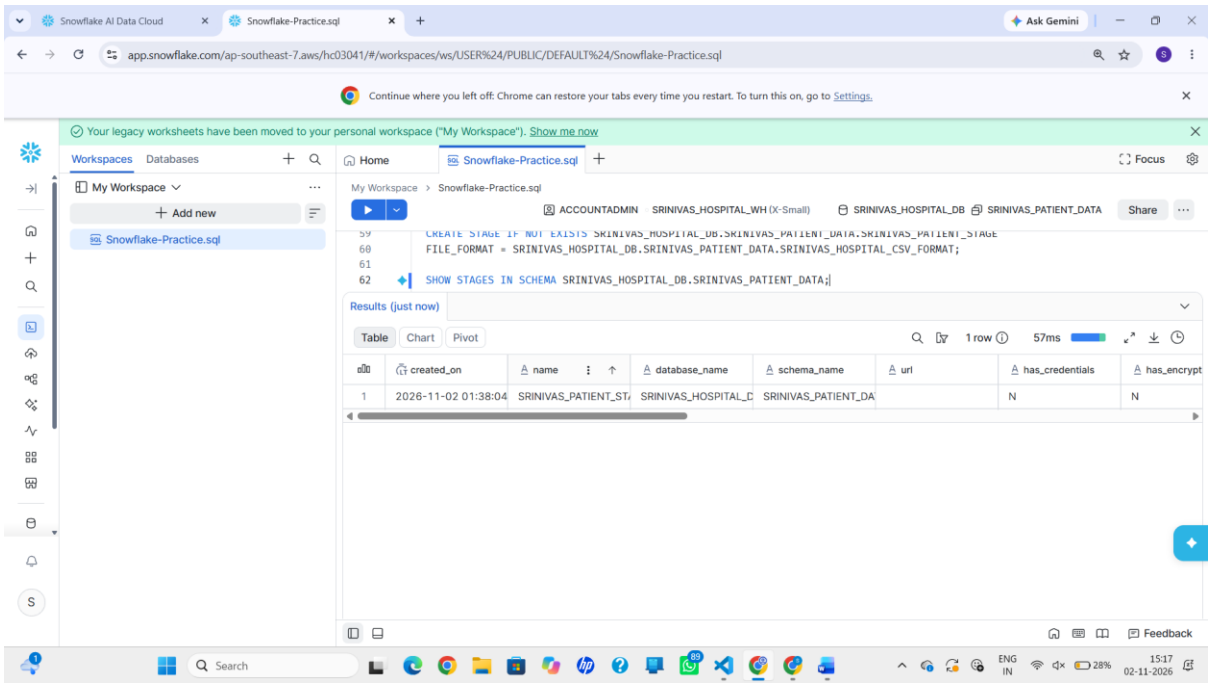

List the files inside the stage:

```
LIST @SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENT_STAGE;
```

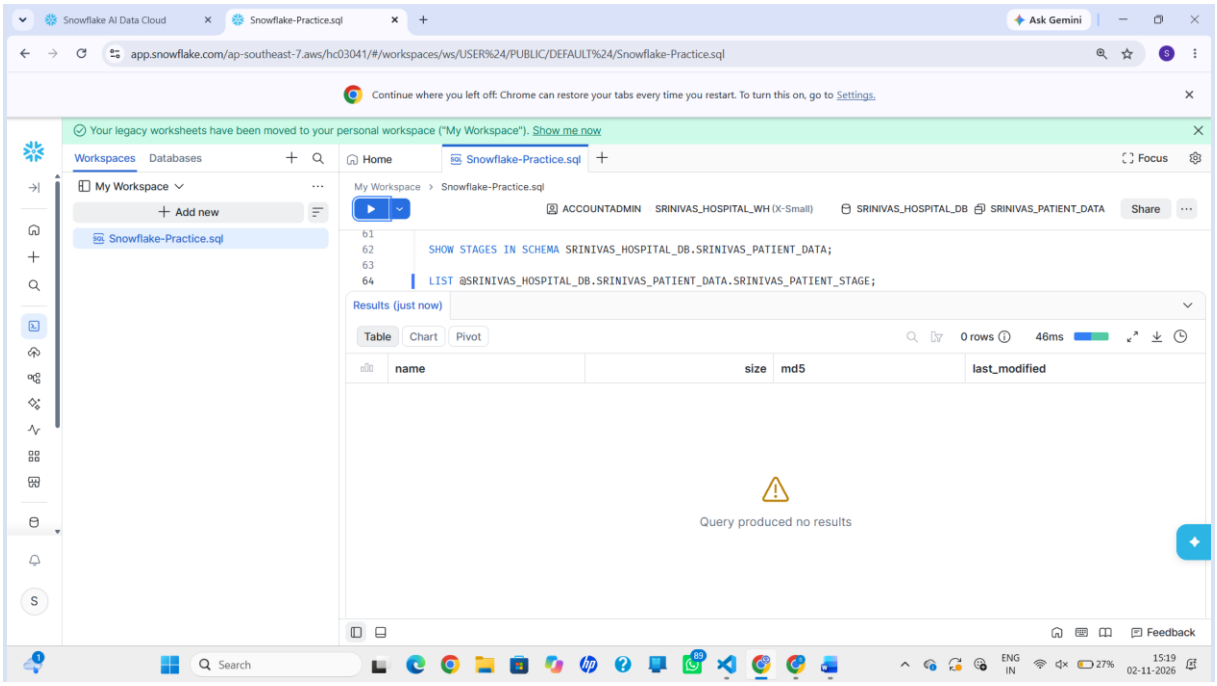

Step 8: Prepare the CSV File


Create a local CSV file named:

SRINIVAS_HOSPITAL_PATIENTS.csv

Add the following data:


```
PATIENT_ID,PATIENT_NAME,AGE,GENDER,DISEASE,DOCTOR_NAME,TREATMENT_COST
501,Ramesh,45,Male,Diabetes,Dr_Kumar,25000
502,Sita,32,Female,Fever,Dr_Priya,5000
503,Arun,60,Male,Heart Disease,Dr_Raj,85000
504,Divya,28,Female,Asthma,Dr_Kumar,12000
505,Kiran,50,Male,Diabetes,Dr_Priya,30000
506,Meena,38,Female,Migraine,Dr_Raj,8000
507,Anil,65,Male,Heart Disease,Dr_Kumar,95000
508,Pooja,24,Female,Fever,Dr_Priya,4000
509,Suresh,55,Male,Asthma,Dr_Raj,15000
510,Nisha,42,Female,Diabetes,Dr_Kumar,22000
```

Upload SRINIVAS_HOSPITAL_PATIENTS.csv into the named internal stage using Snowsight.

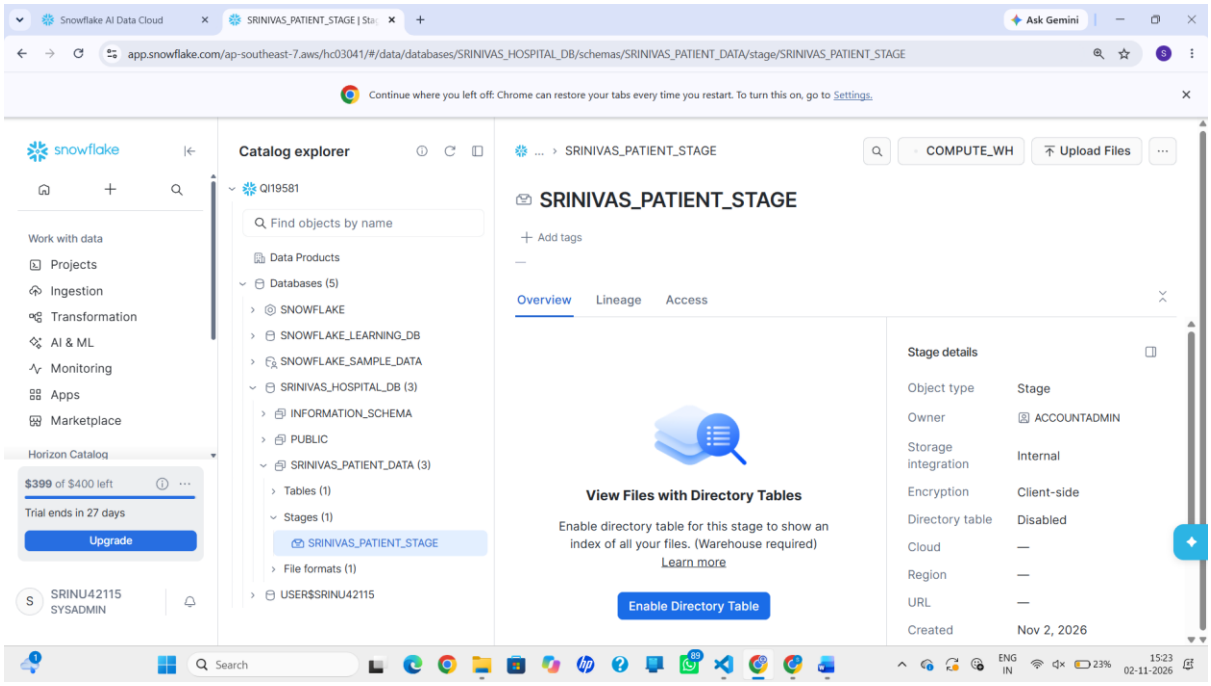

Verify the uploaded file:

```
LIST @SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENT_STAGE;
```

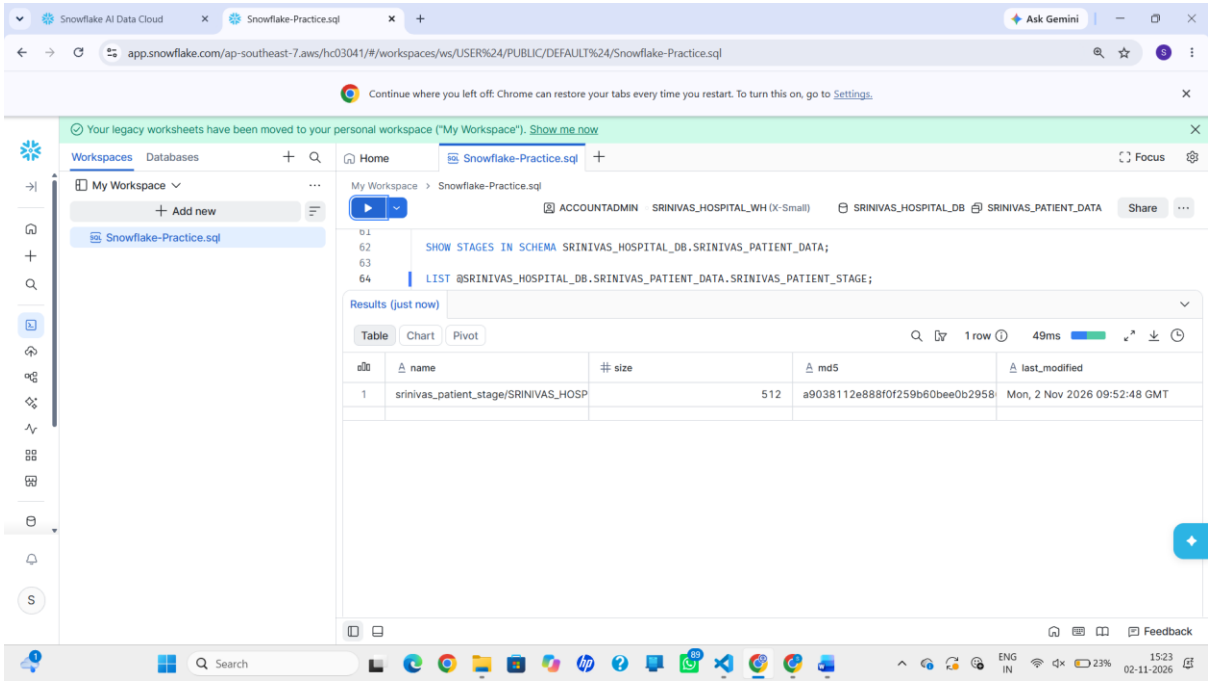

PART 6: LOADING DATA INTO SNOWFLAKE

Step 9: Load CSV Data Using COPY INTO

```
COPY INTO

SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS
```

```
FROM
@SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENT_S
TAGE

FILE_FORMAT = (

    FORMAT_NAME =



'SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_HOSPITAL_
CSV_FORMAT'

)

ON_ERROR = 'ABORT_STATEMENT';
```

Explanation:


- **COPY INTO – Loads data into a Snowflake table.**
- **`SRINIVAS_PATIENTS` – Destination table.**
- **FROM – Specifies the source.**
- **`SRINIVAS_PATIENT_STAGE` – Source stage.**
- **FILE_FORMAT – Specifies the CSV parsing configuration.**
- **ABORT_STATEMENT – Stops the load if an error occurs.**

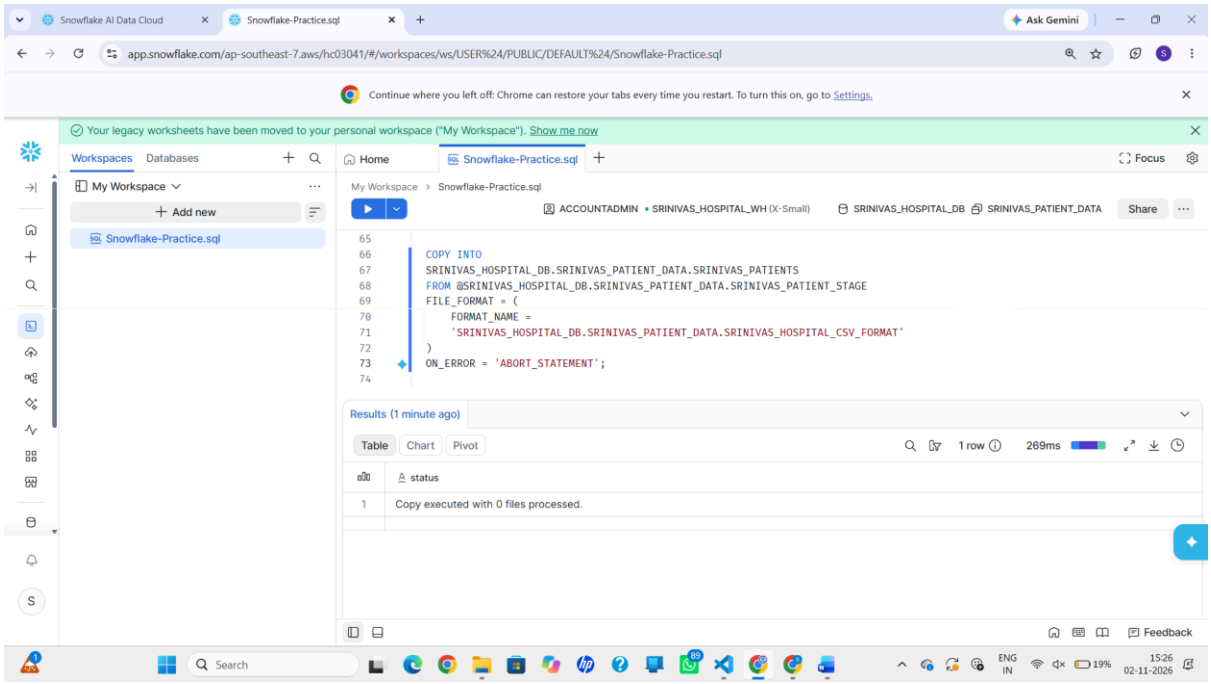

Step 10: Verify Loaded Records


Display all records:

```
SELECT * FROM
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS;
```

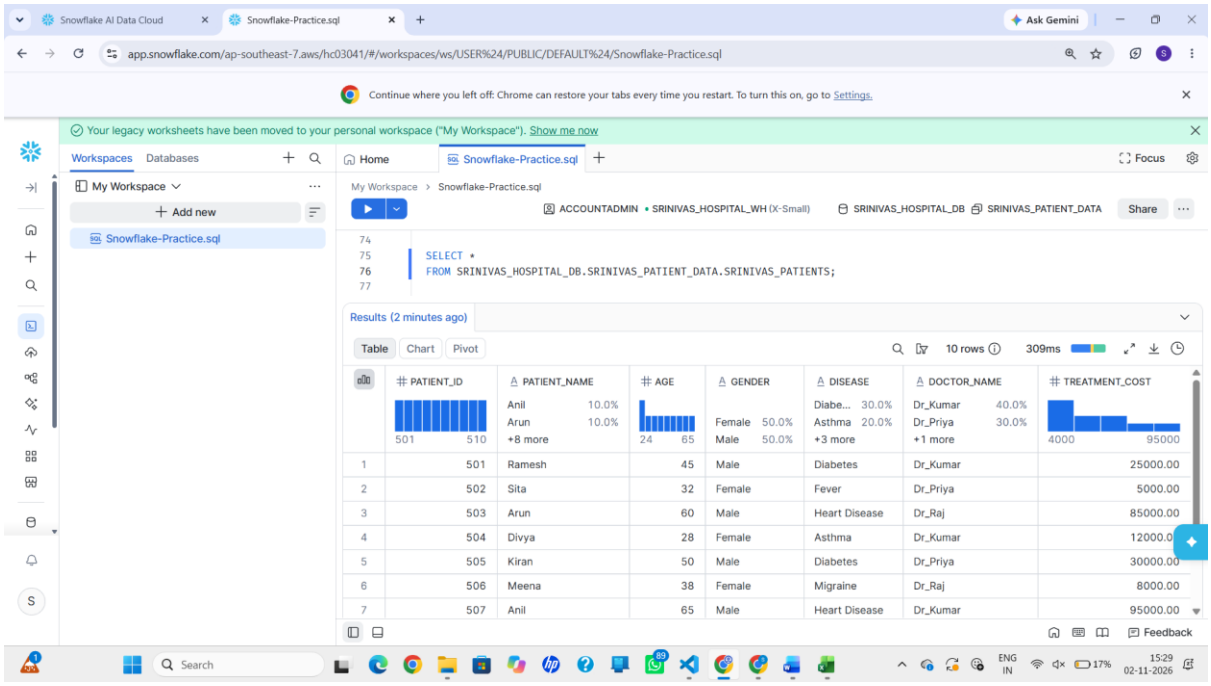

Count the records:


```
SELECT COUNT(*) AS TOTAL_PATIENTS FROM
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS;
```

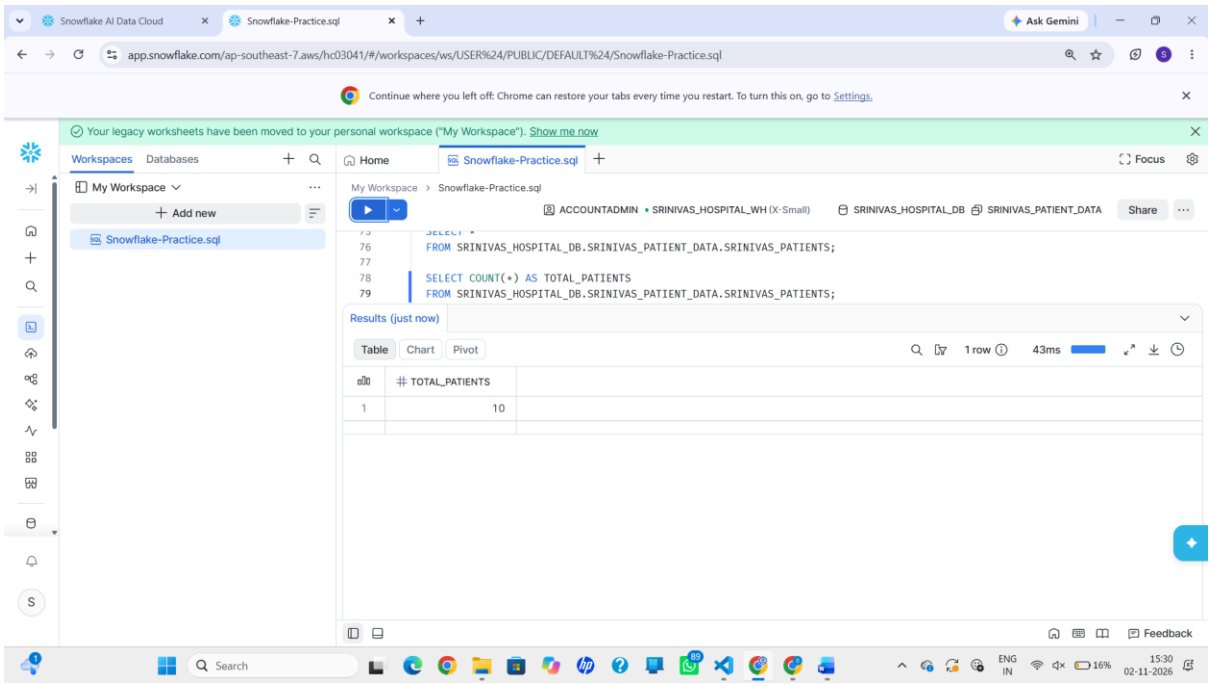

Display the first five records:

```
SELECT * FROM
SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS
```

```
LIMIT 5;
```

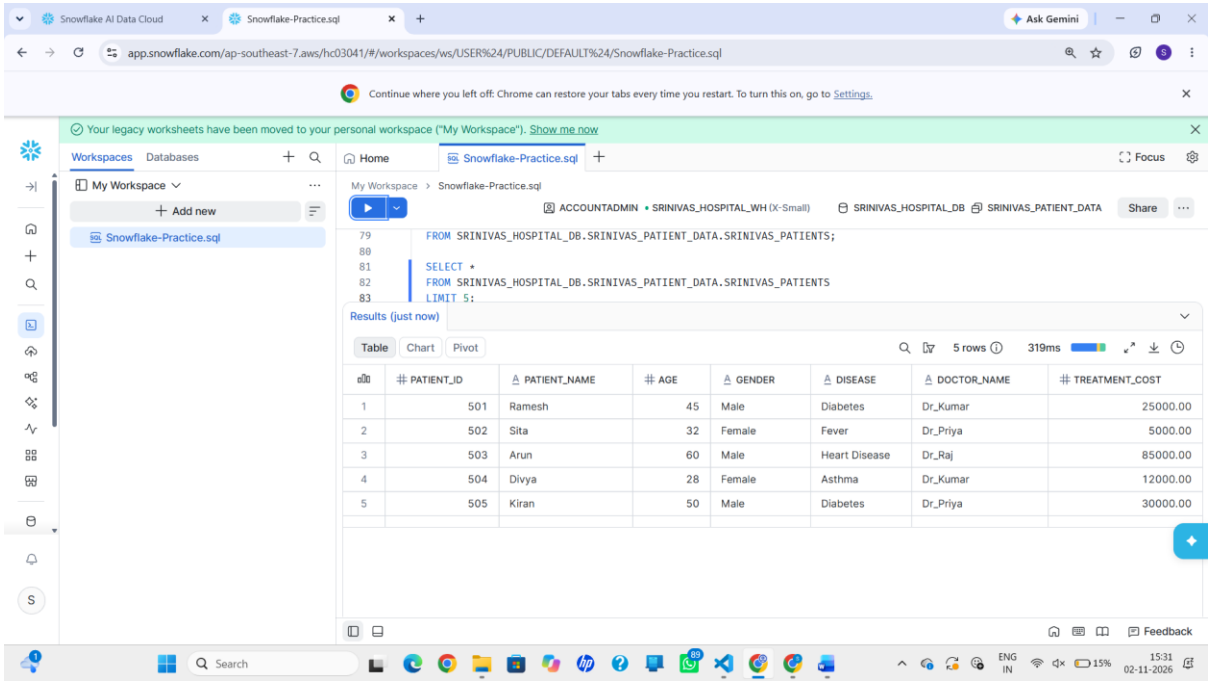
Snowflake AI Data Cloud
Snowflake-Practice.sql
Ask Gemini
app.snowflake.com/ap-southeast-7.aws/hc03041/#/workspaces/ws/USER%24/PUBLIC/DEFAULT%24/Snowflake-Practice.sql
Continue where you left off: Chrome can restore your tabs every time you restart. To turn this on, go to Settings.
Your legacy worksheets have been moved to your personal workspace ("My Workspace"). Show me now
Workspaces
Databases
My Workspace
Add new
Snowflake-Practice.sql
Home
Snowflake-Practice.sql
Focus
My Workspace > Snowflake-Practice.sql
ACCOUNTADMIN • SRINIVAS_HOSPITAL_WH (X-Small)
SRINIVAS_HOSPITAL_DB
SRINIVAS_PATIENT_DATA
Share
79 FROM SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS;
80
81 SELECT *
82 FROM SRINIVAS_HOSPITAL_DB.SRINIVAS_PATIENT_DATA.SRINIVAS_PATIENTS
83 LIMIT 5;
Results (just now)
Table
Chart
Pivot
5 rows
319ms
PATIENT_ID
PATIENT_NAME
AGE
GENDER
DISEASE
DOCTOR_NAME
TREATMENT_COST
1 501 Ramesh 45 Male Diabetes Dr_Kumar 25000.00
2 502 Sita 32 Female Fever Dr_Priya 5000.00
3 503 Arun 60 Male Heart Disease Dr_Raj 85000.00
4 504 Divya 28 Female Asthma Dr_Kumar 12000.00
5 505 Kiran 50 Male Diabetes Dr_Priya 30000.00
Feedback
Search
ENG
IN
15%
15:31
02-11-2026