

Exp No:15 Experiment to understand EDA-Quantitative and Qualitative analysis.

Description: Understand the importance of EDA-Quantitative and Qualitative analysis.

10/1/24, 9:52 AM 9.9.2024-Visualization.ipynb - Colab

```
import seaborn as sns
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
%matplotlib inline
```

```
tips=sns.load_dataset('tips')
```


```
tips.head()
```

	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4

[addCode](#) [addText](#)

```
sns.displot(tips.total_bill,kde=True)
```

<seaborn.axisgrid.FacetGrid at 0x79bb4c7ea680>

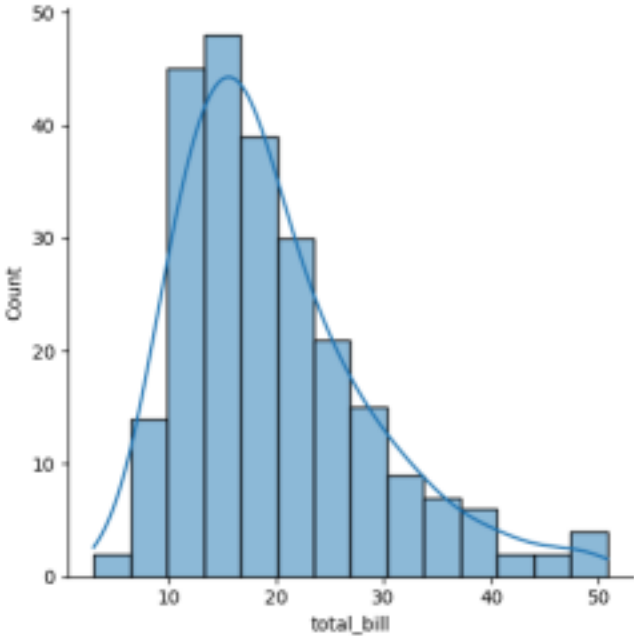


```
sns.displot(tips.total_bill,kde=False)
```


https://colab.research.google.com/drive/1ixdO2LyjKtMYUgtZcoc8jSlnDGmeKn4_#scrollTo=J9uBGy0XX3rZ&printMode=true 1/9

10/1/24, 9:52 AM 9.9.2024-Visualization.ipynb - Colab


<seaborn.axisgrid.FacetGrid at 0x79bb0b0af580>

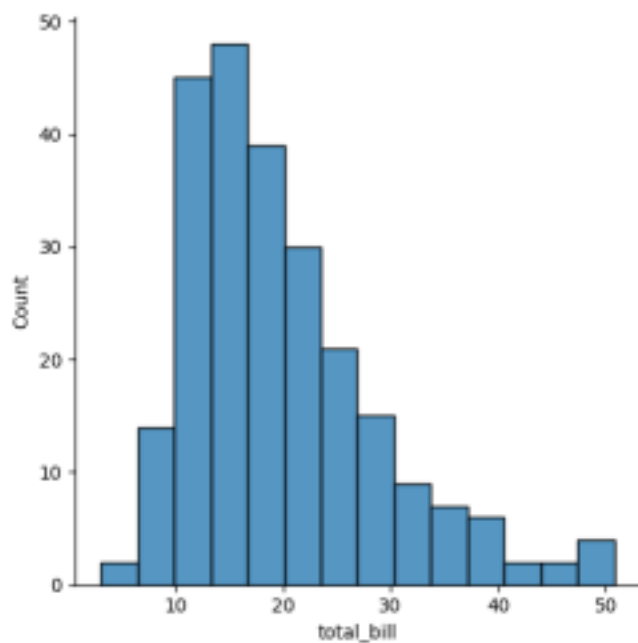


```
sns.jointplot(x=tips.tip,y=tips.total_bill)
<seaborn.axisgrid.JointGrid at 0x79bb08fc96c0>
```

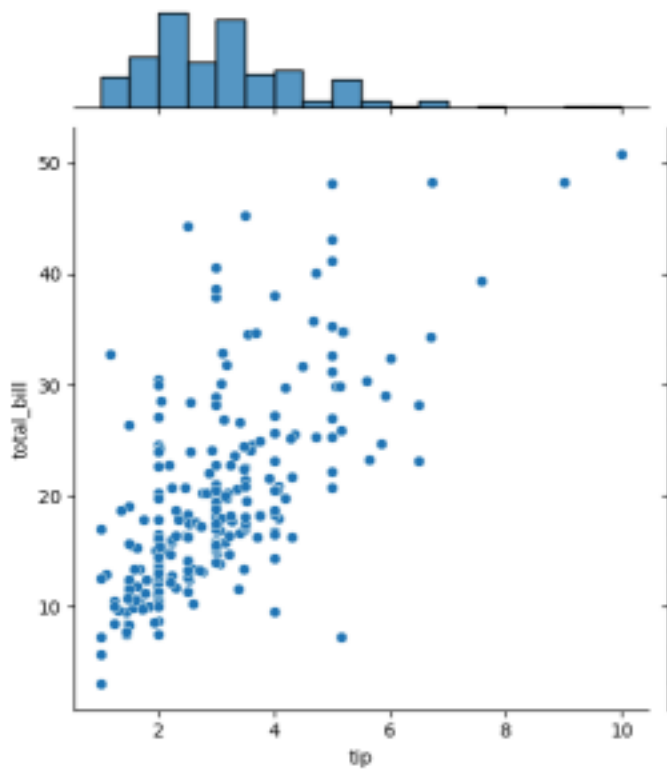


```
sns.jointplot(x=tips.tip,y=tips.total_bill,kind="reg")
```

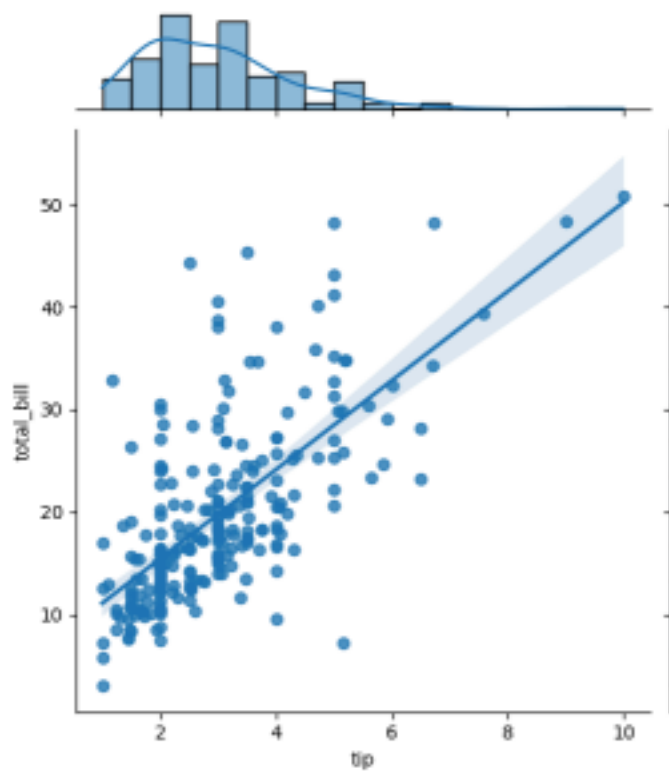

```
sns.jointplot(x=tips.tip,y=tips.total_bill,kind="hex")
<seaborn.axisgrid.JointGrid at 0x79bb088f4730>
```

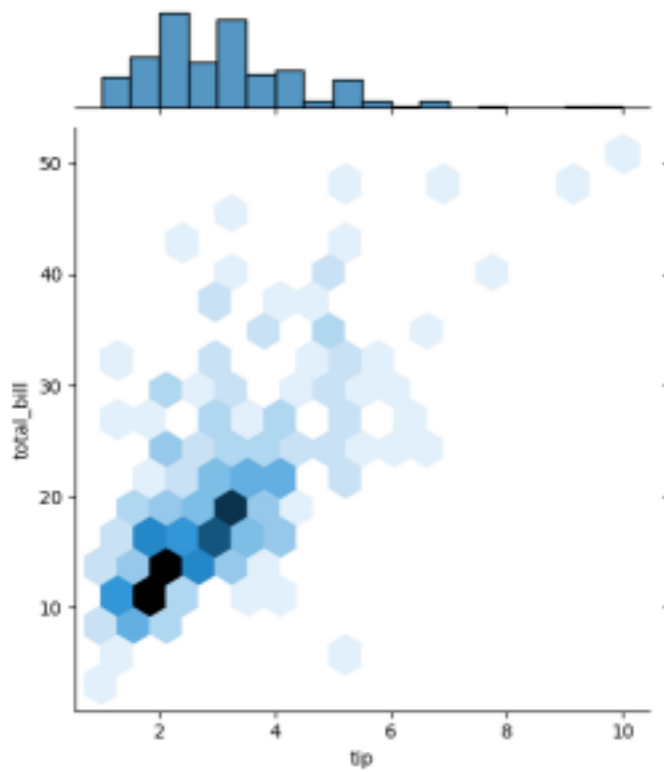

```
sns.pairplot(tips)
```

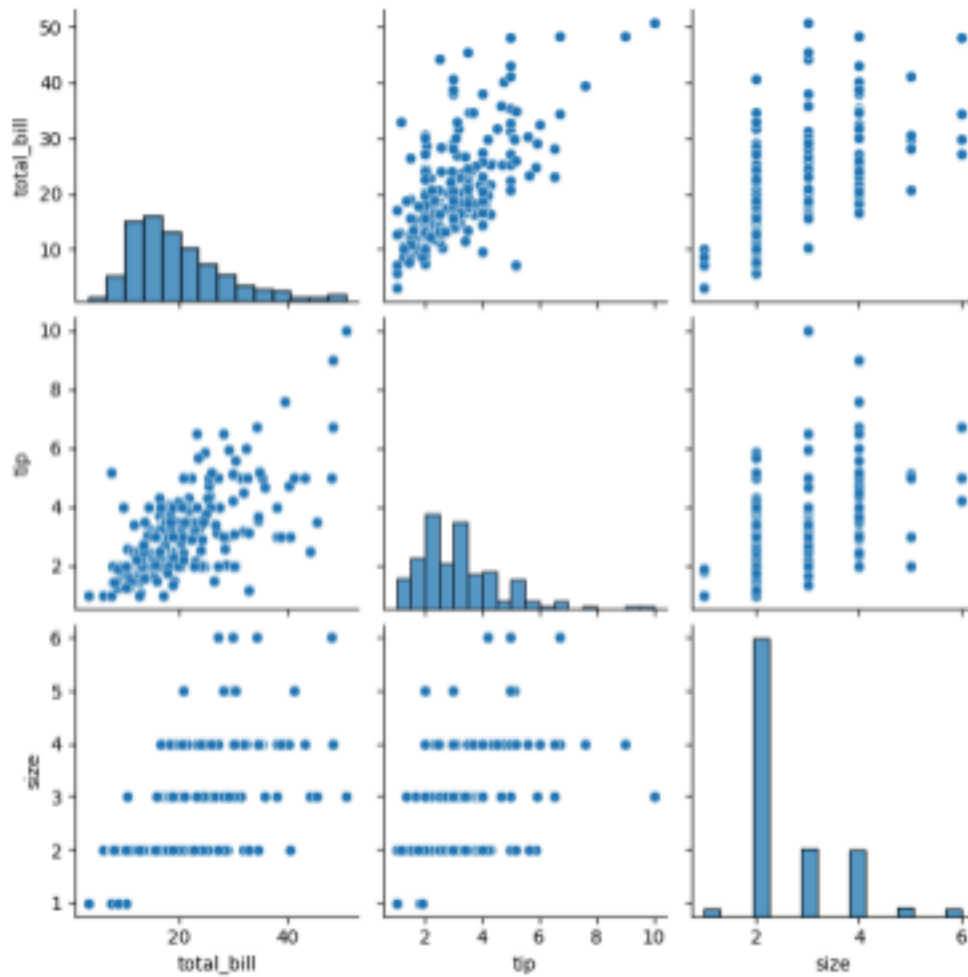

```
tips.time.value_counts()
count
```


```
time
```

```
Dinner 176
```


```
Lunch 68
```

```
dtype: int64
```

```
sns.pairplot(tips,hue='time')
```

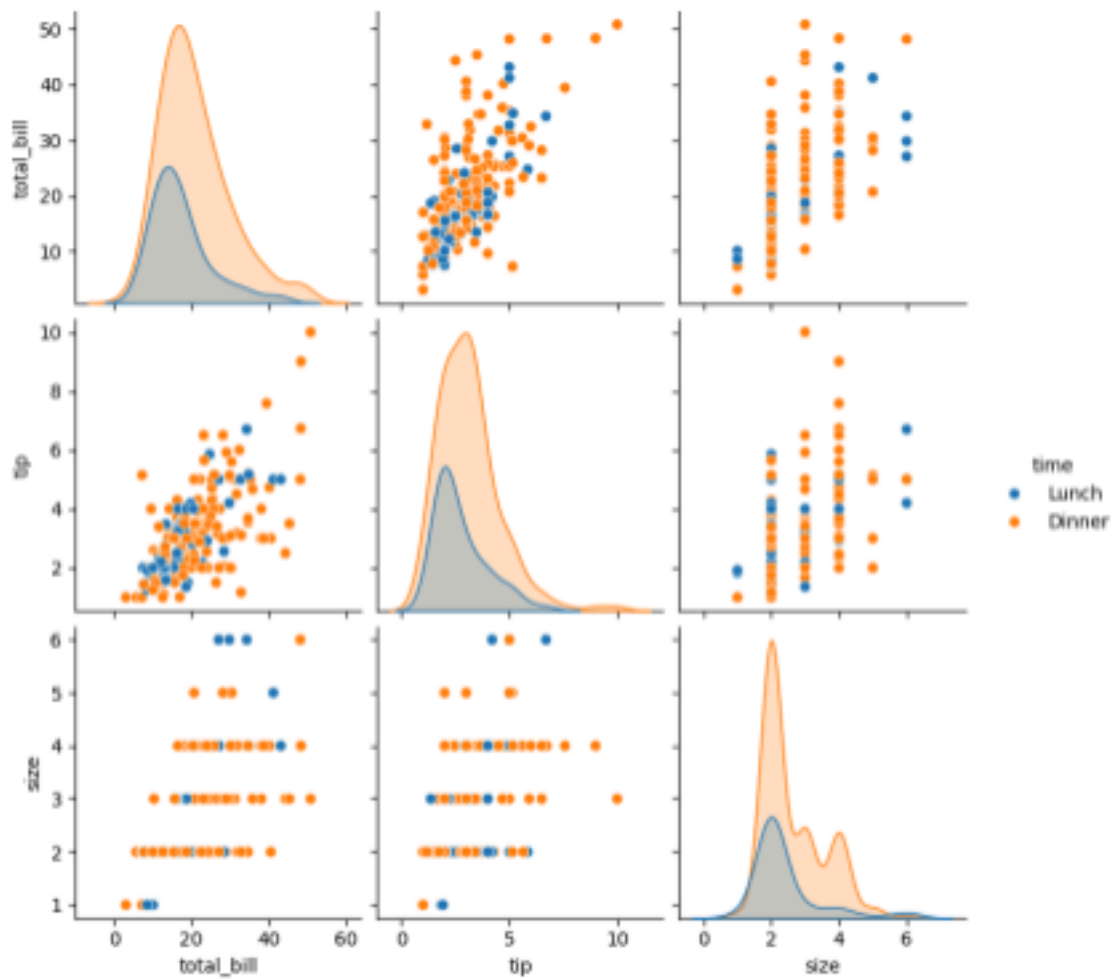


```
sns.pairplot(tips, hue='day')
```

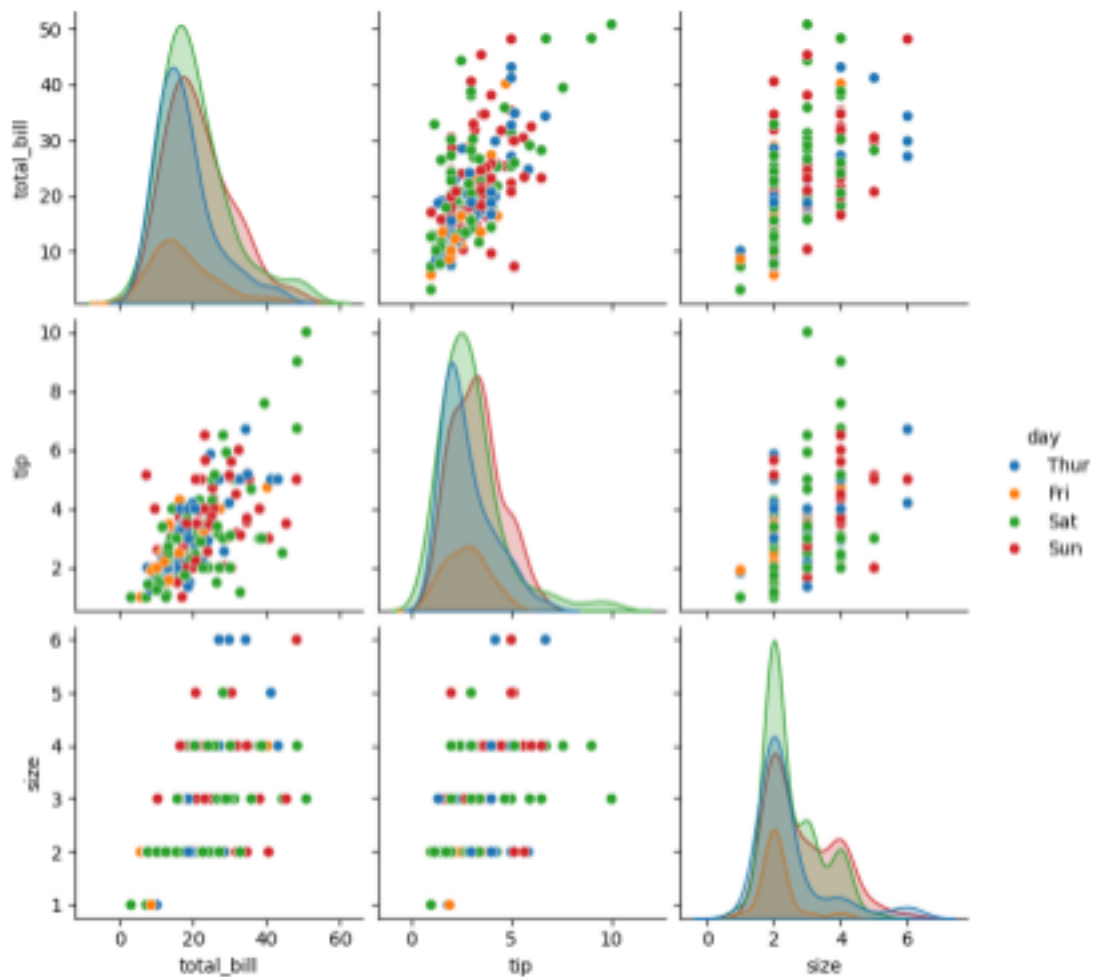


```
sns.heatmap(tips.corr(numeric_only=True),annot=True)
```

<Axes: >

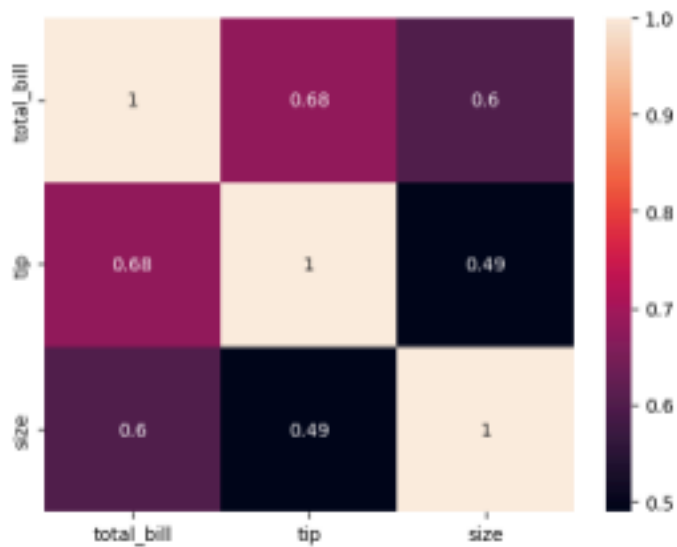


```
sns.boxplot(tips.total_bill)
```


<Axes: ylabel='total_bill'>

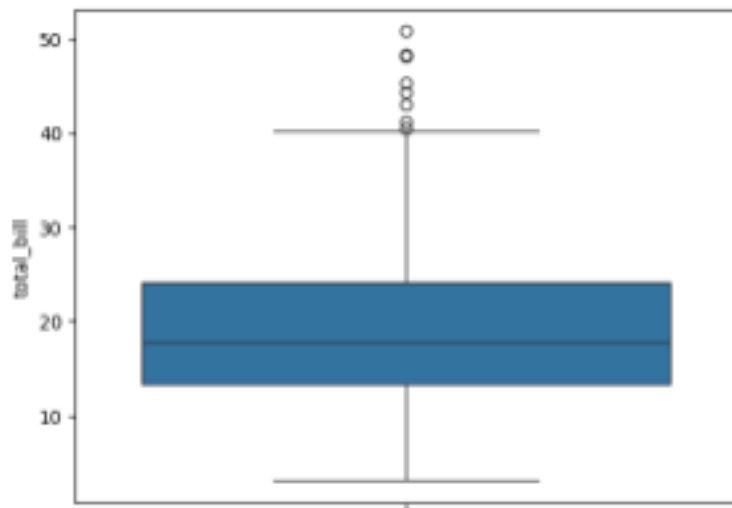


```
sns.boxplot(tips.tip)
<Axes: ylabel='tip'>
```

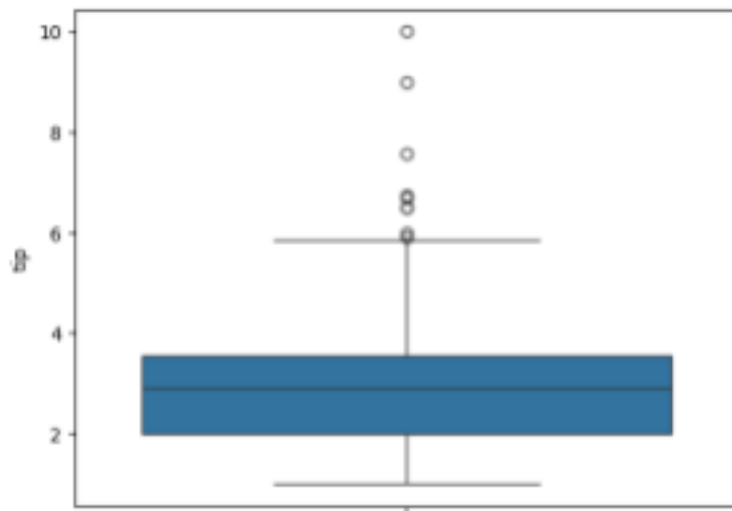


```
sns.countplot(tips.day)
<Axes: xlabel='count', ylabel='day'>
```

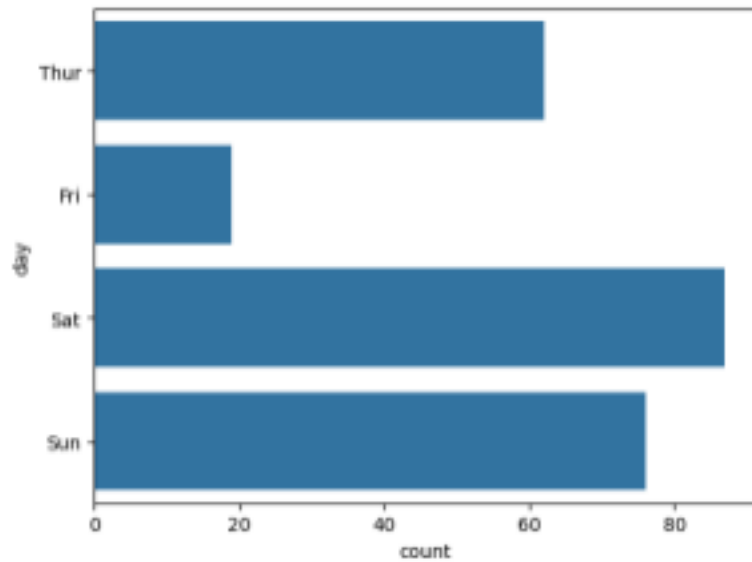


```
sns.countplot(tips.sex)
```

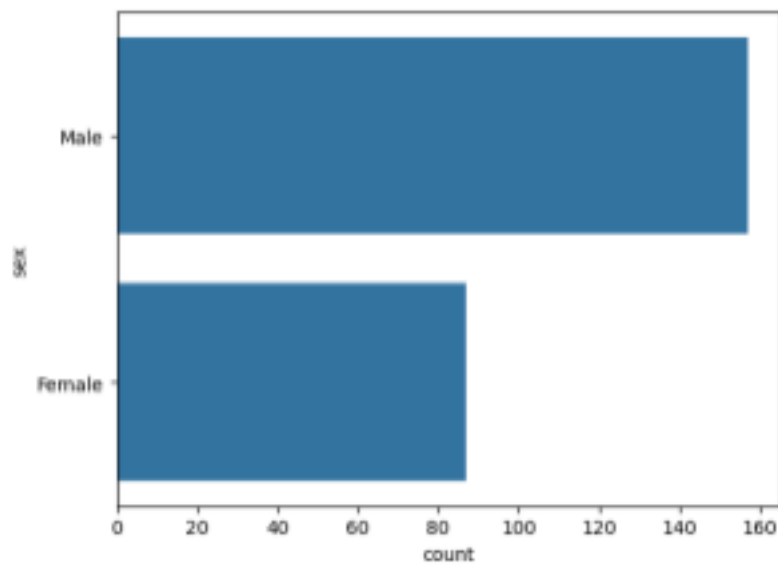

```
tips.sex.value_counts().plot(kind='pie')
<Axes: ylabel='count'>
```

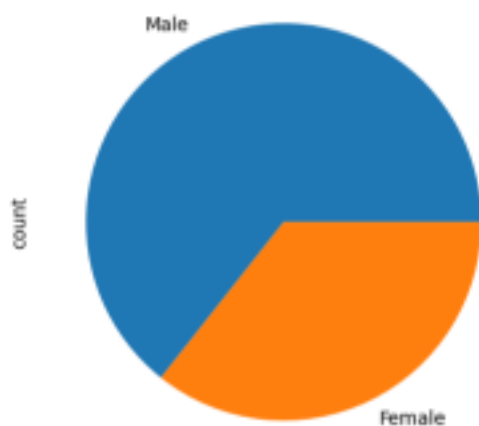

```
tips.sex.value_counts().plot(kind='bar')
<Axes: xlabel='sex'>
```

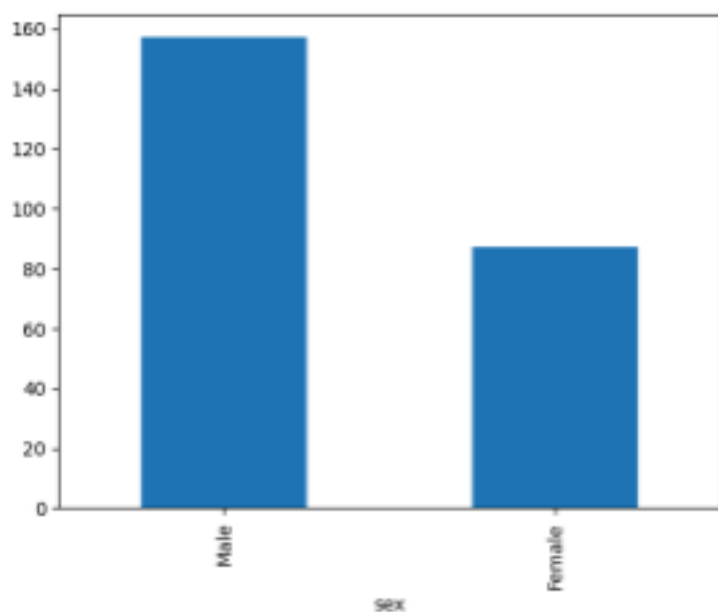

```
sns.countplot(tips[tips.time=='Dinner']['day'])
```