



01 - Register Successful

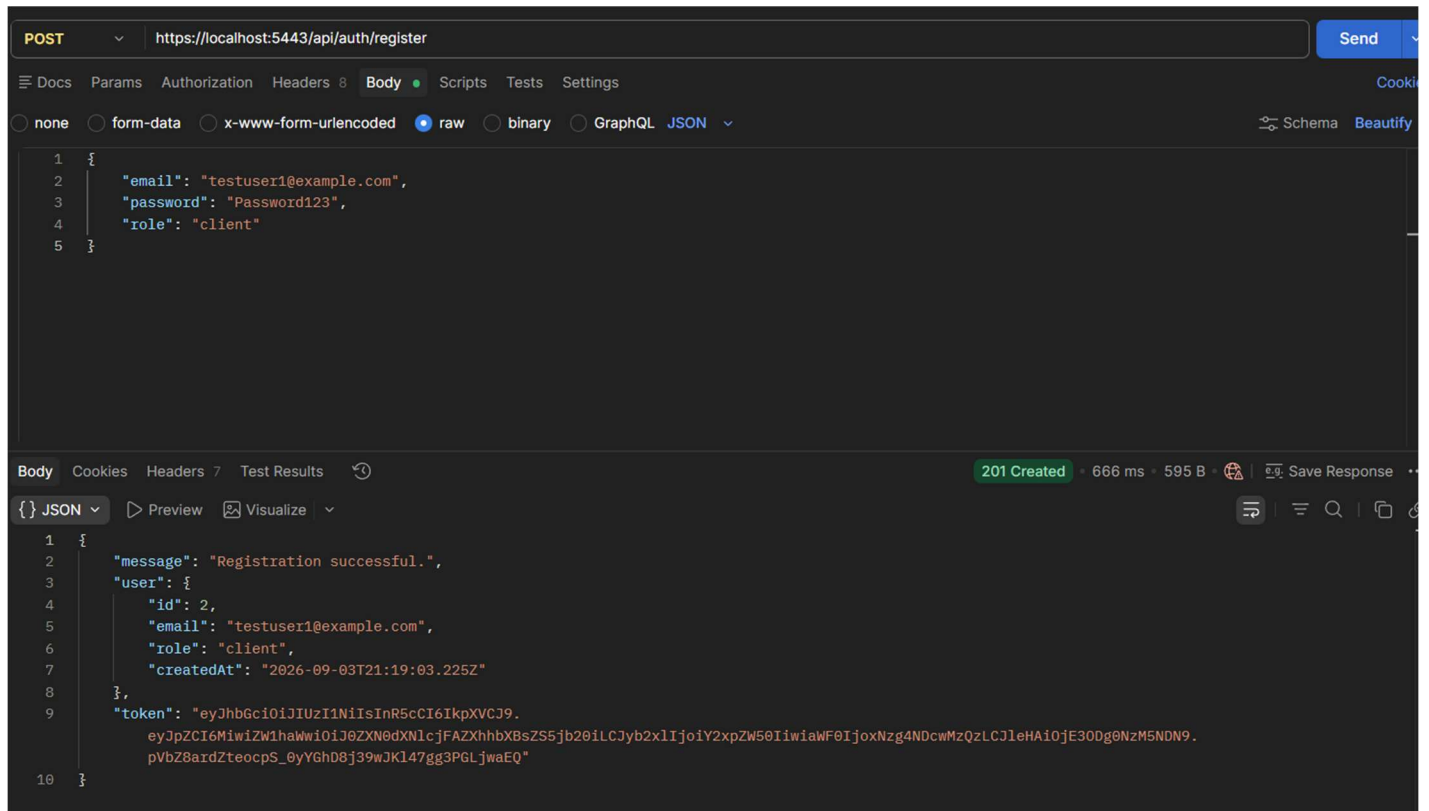

02 - Register - Duplicate Email

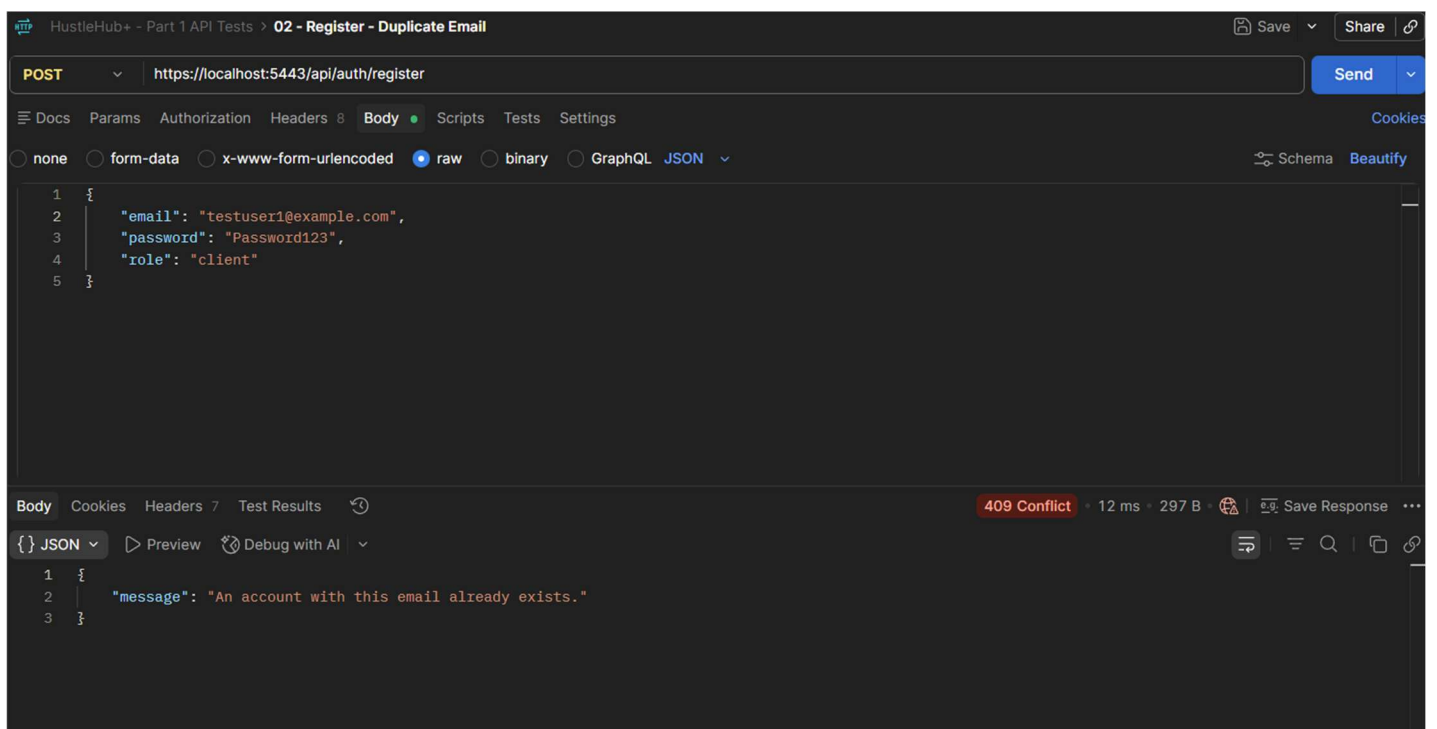

05 - Login – Successful

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/login`. The request body is a JSON object with email and password. The response is a 200 OK status with a JSON body containing a success message, user details, and a token.

Request:

```
POST https://localhost:5443/api/auth/login
{
  "email": "testuser1@example.com",
  "password": "Password123"
}
```

Response: 200 OK • 627 ms • 583 B

```
{
  "message": "Login successful.",
  "user": {
    "id": 2,
    "email": "testuser1@example.com",
    "role": "client",
    "createdAt": "2026-09-03T21:19:03.225Z"
  },
  "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6MiwiZW1haWwiOiJ0ZXN0dXNlcjFAZXhhbXBsZS5jb201LCJyb2x1IjoieY2xpZW50IiwiaWF0IjoxNzgzNDcwNzYzLCJleHAiOjE3ODg0NzQzNjN9.JtkYCG4qr4mFCrubEpjkf6jZ9nA15F0aNH0mS9kNUGk"
}
```

06 - Login - Incorrect Password

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/login`. The request body is a JSON object with email and an incorrect password. The response is a 401 Unauthorized status with a JSON body containing an error message.

Request:

```
POST https://localhost:5443/api/auth/login
{
  "email": "testuser1@example.com",
  "password": "WrongPassword123"
}
```

Response: 401 Unauthorized • 623 ms • 285 B

```
{
  "message": "Invalid email or password."
}
```

07 - Get Profile - No Token

The screenshot shows the Postman interface for a GET request to `https://localhost:5443/api/auth/me`. The 'Authorization' tab is selected, and the 'Auth Type' is set to 'No Auth'. The response is a 401 Unauthorized status with a message: "Authentication required."

```
{
  "message": "Authentication required."
}
```

08 - Get Profile - Valid Token

The screenshot shows the Postman interface for a GET request to `https://localhost:5443/api/auth/me`. The 'Authorization' tab is selected, and the 'Auth Type' is set to 'Bearer ...'. A token is entered in the 'Token' field. The response is a 200 OK status with a JSON body containing user information.

```
{
  "user": {
    "id": 2,
    "email": "testuser1@example.com",
    "role": "client",
    "createdAt": "2026-09-03T21:19:03.225Z"
  }
}
```

09 - Get Profile - Invalid Token

The screenshot shows the Postman interface for a GET request to `https://localhost:5443/api/auth/me`. The request is configured with the 'Authorization' tab selected, showing a 'Bearer ...' token. The response is a **401 Unauthorized** status with a response time of 10 ms and a body size of 284 B. The response body is displayed in JSON format:

```
{
  "message": "Invalid or expired token."
}
```

03 - Register - Invalid Email

The screenshot shows the Postman interface for a POST request to `https://localhost:5443/api/auth/register`. The request is configured with the 'Body' tab selected, showing a raw JSON body:

```
{
  "email": "not-an-email",
  "password": "Password123",
  "role": "client"
}
```

The response is a **400 Bad Request** status with a response time of 16 ms and a body size of 353 B. The response body is displayed in JSON format:

```
{
  "message": "Validation failed.",
  "errors": [
    {
      "field": "email",
      "message": "A valid email address is required."
    }
  ]
}
```

04 - Register - Weak Password

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/register`. The request body is a JSON object with the following fields:

```
1 {
2   "email": "weakpassword@example.com",
3   "password": "password",
4   "role": "client"
5 }
```

The response is a 400 Bad Request, indicating a validation failure. The response body is a JSON object with the following structure:

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "password",
6       "message": "Password must contain at least one uppercase letter."
7     },
8     {
9       "field": "password",
10      "message": "Password must contain at least one number."
11     }
12   ]
13 }
```

12 - Register - Invalid Role


The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/register`. The request body is a JSON object with the following fields:

```
1 {
2   "email": "invalidrole@example.com",
3   "password": "Password123",
4   "role": "admin"
5 }
```

The response is a 400 Bad Request, indicating a validation failure. The response body is a JSON object with the following structure:

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "role",
6       "message": "Role must be either \"client\" or \"freelancer\"."
7     }
8   ]
9 }
```

13 - Malformed JSON

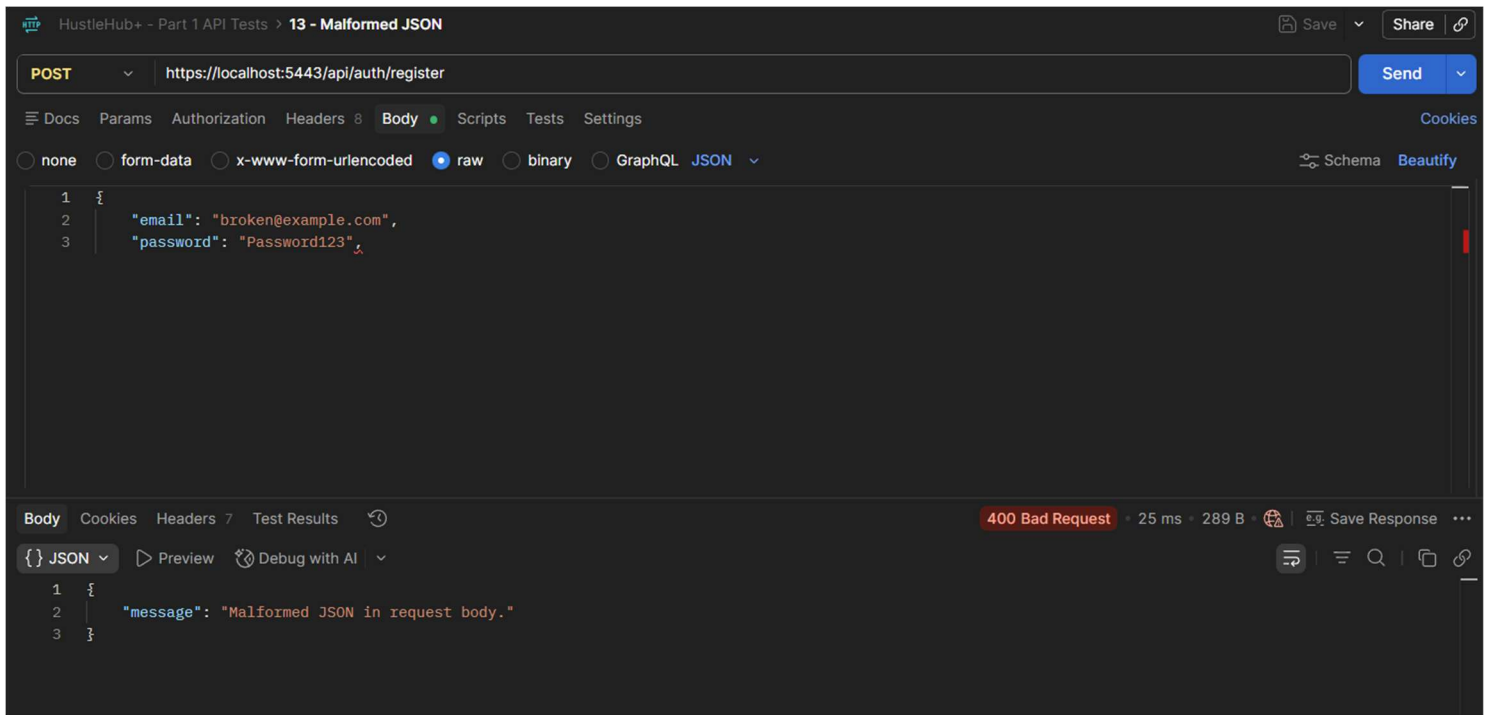


Postman interface showing a POST request to `https://localhost:5443/api/auth/register`. The request body is malformed JSON:

```
1 {  
2   "email": "broken@example.com",  
3   "password": "Password123",  
}
```

The response is a **400 Bad Request** with a status of 25 ms and 289 B. The response body is:

```
1 {  
2   "message": "Malformed JSON in request body."  
3 }
```

14 - Unknown Endpoint

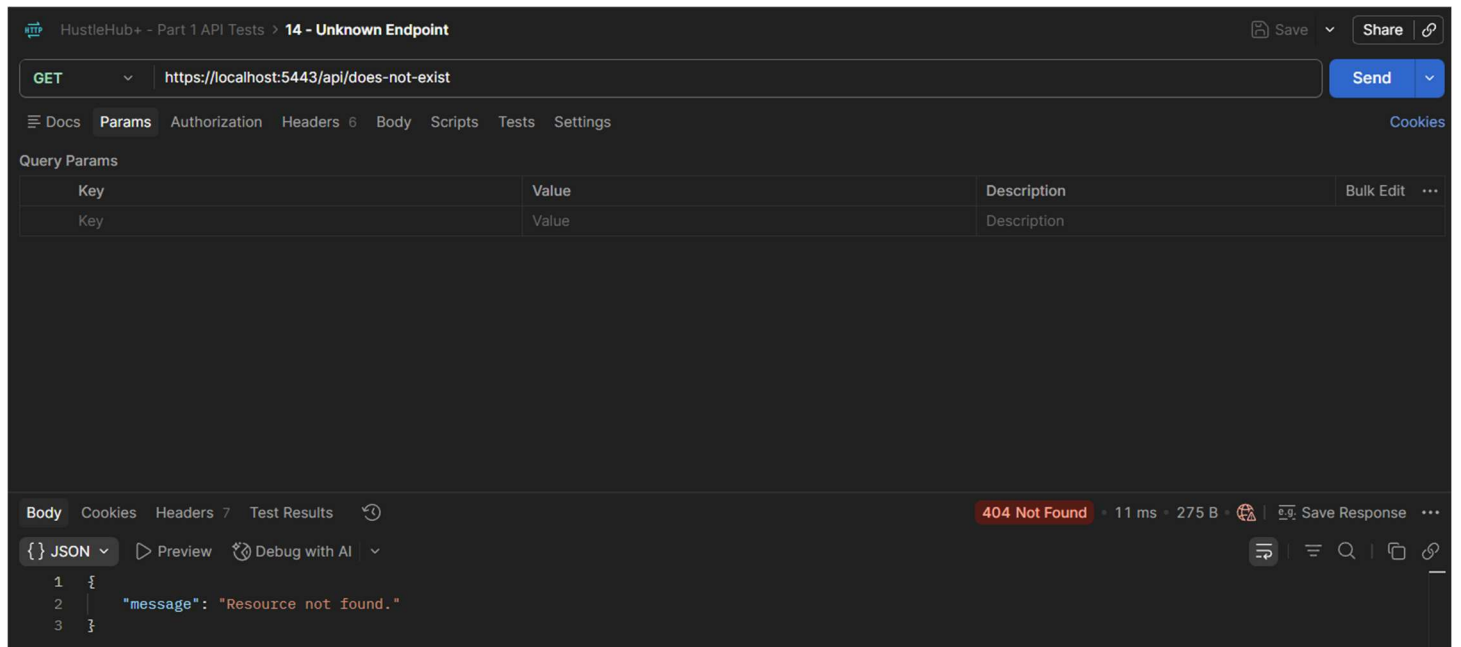

Postman interface showing a GET request to `https://localhost:5443/api/does-not-exist`. The response is a **404 Not Found** with a status of 11 ms and 275 B. The response body is:

```
1 {  
2   "message": "Resource not found."  
3 }
```

10 - Register - Missing Email

The screenshot shows the Postman interface for a test titled "10 - Register - Missing Email". The request is a POST to `https://localhost:5443/api/auth/register` with a raw JSON body:

```
1 {
2   "password": "Password123",
3   "role": "client"
4 }
```

The response is a 400 Bad Request with a status of 146 ms and 402 B. The JSON response body is:

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "email",
6       "message": "Email is required."
7     },
8     {
9       "field": "email",
10      "message": "A valid email address is required."
11     }
12   ]
13 }
```

11 - Register - Missing Password

The screenshot shows the Postman interface for a test titled "11 - Register - Missing Password". The request is a POST to `https://localhost:5443/api/auth/register` with a raw JSON body:

```
1 {
2   "email": "missingpassword@example.com",
3   "role": "client"
4 }
```

The response is a 400 Bad Request with a status of 41 ms and 662 B. The JSON response body is:

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "password",
6       "message": "Invalid value"
7     },
8     {
9       "field": "password",
10      "message": "Password must be at least 8 characters long."
11     },
12     {
13       "field": "password",
14       "message": "Password must contain at least one uppercase letter."
15     }
16   ]
17 }
```