



01 - Register Successful

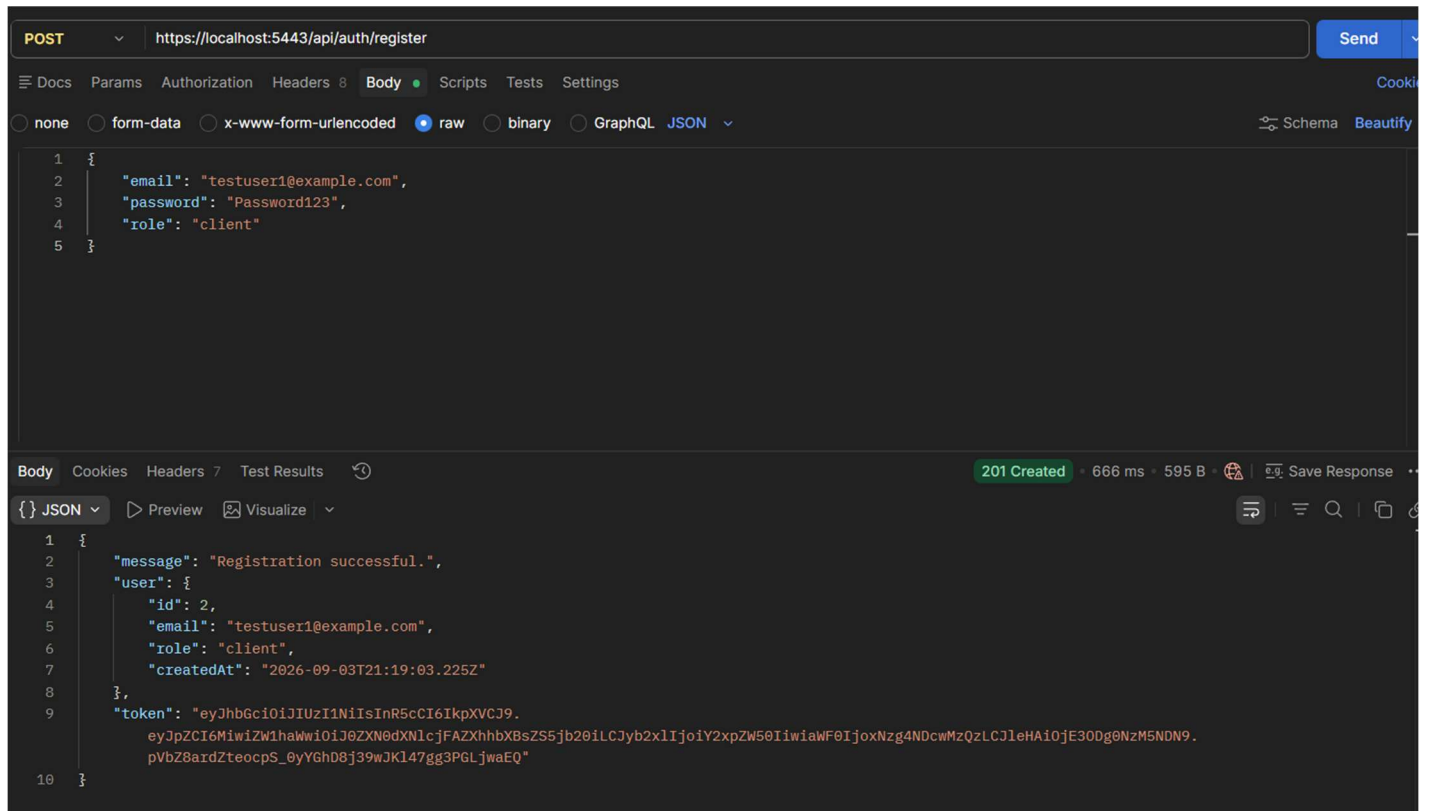

02 - Register - Duplicate Email

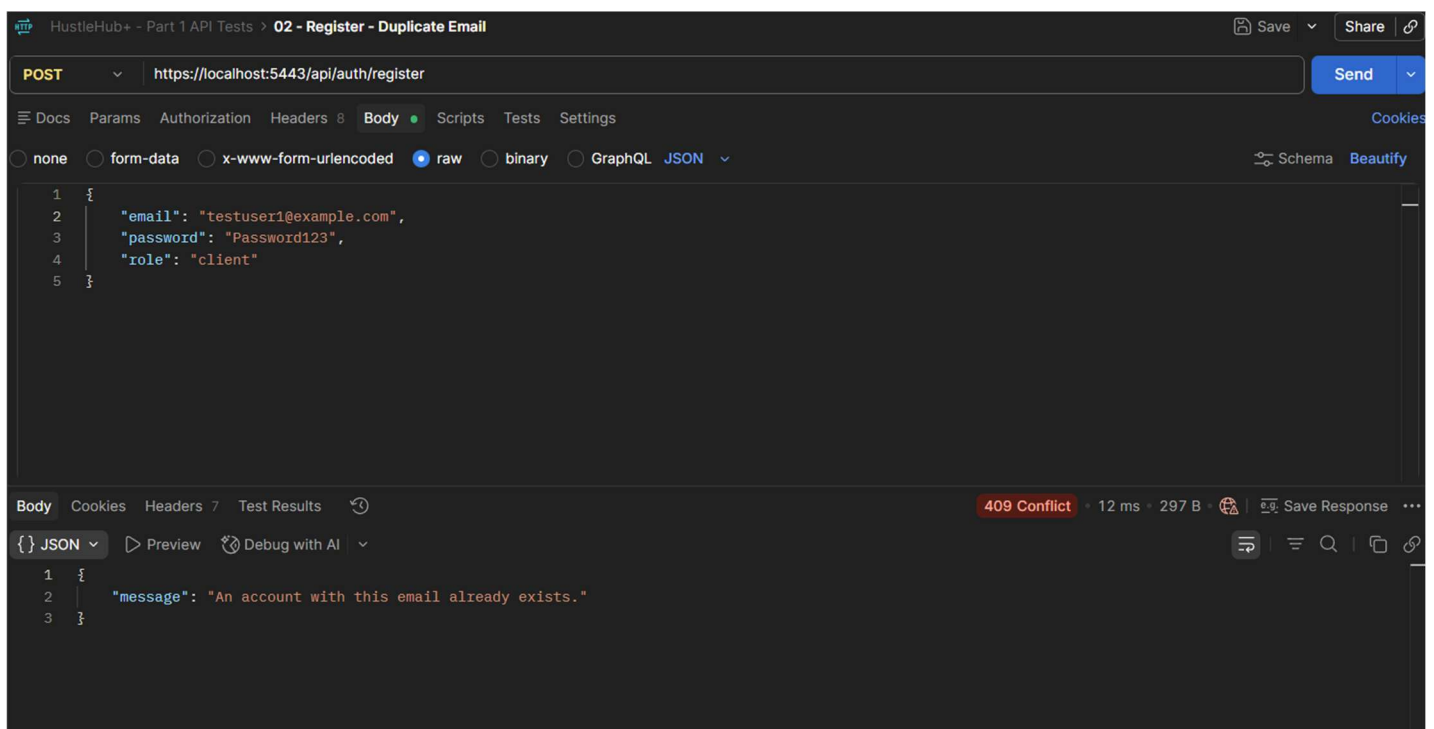

05 - Login – Successful

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/login`. The request body is a JSON object with the following structure:

```
1 {
2   "email": "testuser1@example.com",
3   "password": "Password123"
4 }
```

The response status is **200 OK** with a response time of 627 ms and a body size of 583 B. The response body is a JSON object:

```
1 {
2   "message": "Login successful.",
3   "user": {
4     "id": 2,
5     "email": "testuser1@example.com",
6     "role": "client",
7     "createdAt": "2026-09-03T21:19:03.225Z"
8   },
9   "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6MiwiZW1haWwiOiJ0ZXN0dXNlcjFAZXhhbXBsZS5jb201LCJyb2x1IjoieY2xpZW50IiwiaWF0IjoxNzgzNDcwNzYzLCJleHAiOjE3ODg0NzQzNjN9.JtkYCG4qr4mFCrubEpjkf6jZ9nA15F0aNH0mS9kNUGk"
10 }
```

06 - Login - Incorrect Password

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/login`. The request body is a JSON object with the following structure:

```
1 {
2   "email": "testuser1@example.com",
3   "password": "WrongPassword123"
4 }
```

The response status is **401 Unauthorized** with a response time of 623 ms and a body size of 285 B. The response body is a JSON object:

```
1 {
2   "message": "Invalid email or password."
3 }
```

07 - Get Profile - No Token

The screenshot shows the Postman interface for a GET request to `https://localhost:5443/api/auth/me`. The 'Authorization' tab is selected, and the 'Auth Type' is set to 'No Auth'. The response status is '401 Unauthorized' with a message: 'This request does not use any authorization.' The response body is JSON: `{ "message": "Authentication required." }`.

```
GET https://localhost:5443/api/auth/me
```

Auth Type: No Auth

No Auth

This request does not use any authorization.

Body: `{ "message": "Authentication required." }`

08 - Get Profile - Valid Token

The screenshot shows the Postman interface for a GET request to `https://localhost:5443/api/auth/me`. The 'Authorization' tab is selected, and the 'Auth Type' is set to 'Bearer ...'. A token is entered in the 'Token' field. The response status is '200 OK' with a response body containing user information.

```
GET https://localhost:5443/api/auth/me
```

Auth Type: Bearer ...

Token: `.....`

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Body: `{ "user": { "id": 2, "email": "testuser1@example.com", "role": "client", "createdAt": "2026-09-03T21:19:03.225Z" } }`

09 - Get Profile - Invalid Token

HustleHub+ - Part 1 API Tests > 09 - Get Profile - Invalid Token

GET `https://localhost:5443/api/auth/me` Send

Docs Params **Authorization** Headers 7 Body Scripts Tests Settings

Auth Type: Bearer ...

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Token: `.....`

Body Cookies Headers 7 Test Results 401 Unauthorized • 10 ms • 284 B • Save Response

`{}` JSON Preview Pass the correct auth credentials

```
1 {
2   "message": "Invalid or expired token."
3 }
```

03 - Register - Invalid Email

HustleHub+ - Part 1 API Tests > 03 - Register - Invalid Email

POST `https://localhost:5443/api/auth/register` Send

Docs Params Authorization Headers 8 **Body** Scripts Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON Schema Beautify

```
1 {
2   "email": "not-an-email",
3   "password": "Password123",
4   "role": "client"
5 }
```

Body Cookies Headers 7 Test Results 400 Bad Request • 16 ms • 353 B • Save Response

`{}` JSON Preview Debug with AI

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "email",
6       "message": "A valid email address is required."
7     }
8   ]
9 }
```

04 - Register - Weak Password

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/register`. The request body is a JSON object with the following fields:

```
1 {
2   "email": "weakpassword@example.com",
3   "password": "password",
4   "role": "client"
5 }
```

The response is a 400 Bad Request with the following JSON body:

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "password",
6       "message": "Password must contain at least one uppercase letter."
7     },
8     {
9       "field": "password",
10      "message": "Password must contain at least one number."
11     }
12   ]
13 }
```

The status bar indicates a 400 Bad Request, 12 ms, and 450 B.

12 - Register - Invalid Role

The screenshot shows a REST client interface for a POST request to `https://localhost:5443/api/auth/register`. The request body is a JSON object with the following fields:


```
1 {
2   "email": "invalidrole@example.com",
3   "password": "Password123",
4   "role": "admin"
5 }
```

The response is a 400 Bad Request with the following JSON body:

```
1 {
2   "message": "Validation failed.",
3   "errors": [
4     {
5       "field": "role",
6       "message": "Role must be either \"client\" or \"freelancer\"."
7     }
8   ]
9 }
```

The status bar indicates a 400 Bad Request, 14 ms, and 367 B.

13 - Malformed JSON

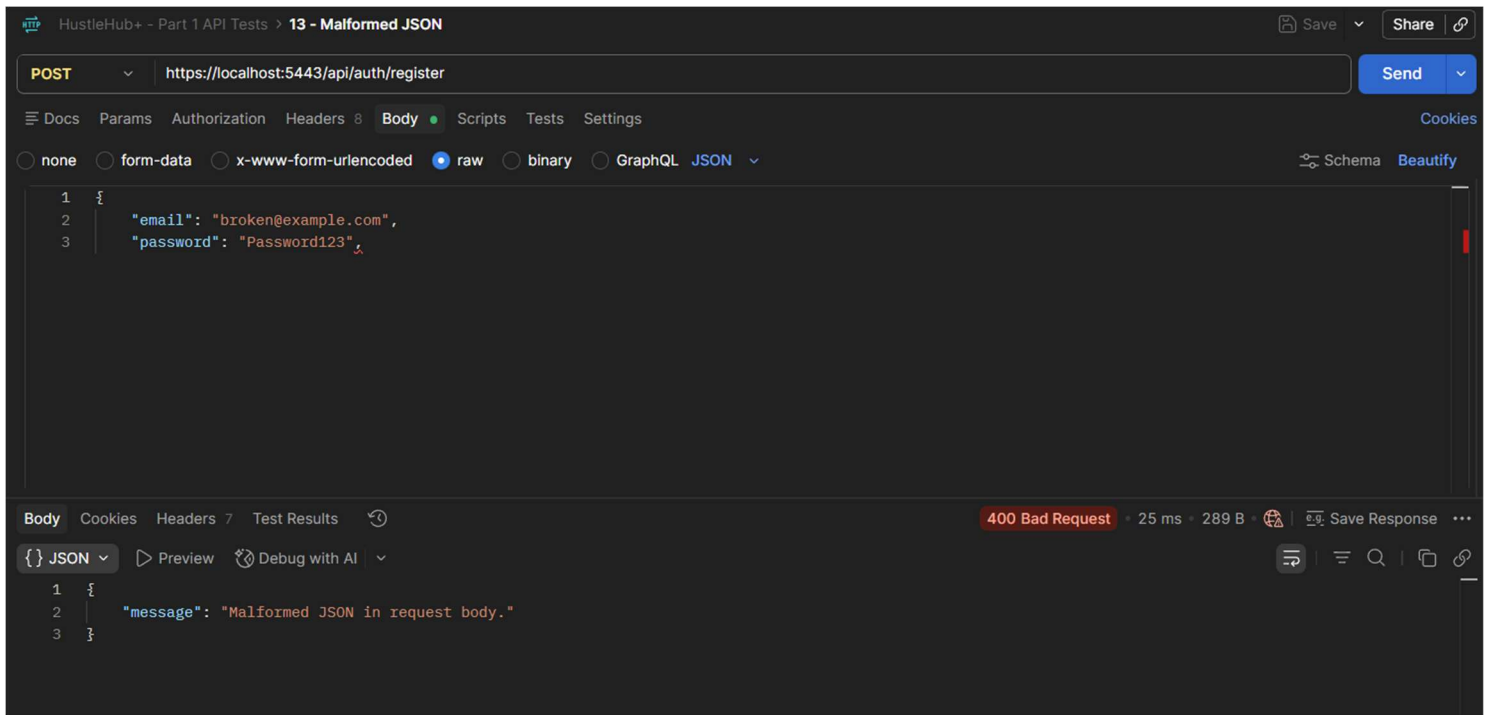


Postman interface showing a POST request to `https://localhost:5443/api/auth/register`. The request body is malformed JSON:

```
1 {  
2   "email": "broken@example.com",  
3   "password": "Password123",  
}
```

The response is a **400 Bad Request** with a status of 25 ms and 289 B. The response body is:

```
1 {  
2   "message": "Malformed JSON in request body."  
3 }
```

14 - Unknown Endpoint

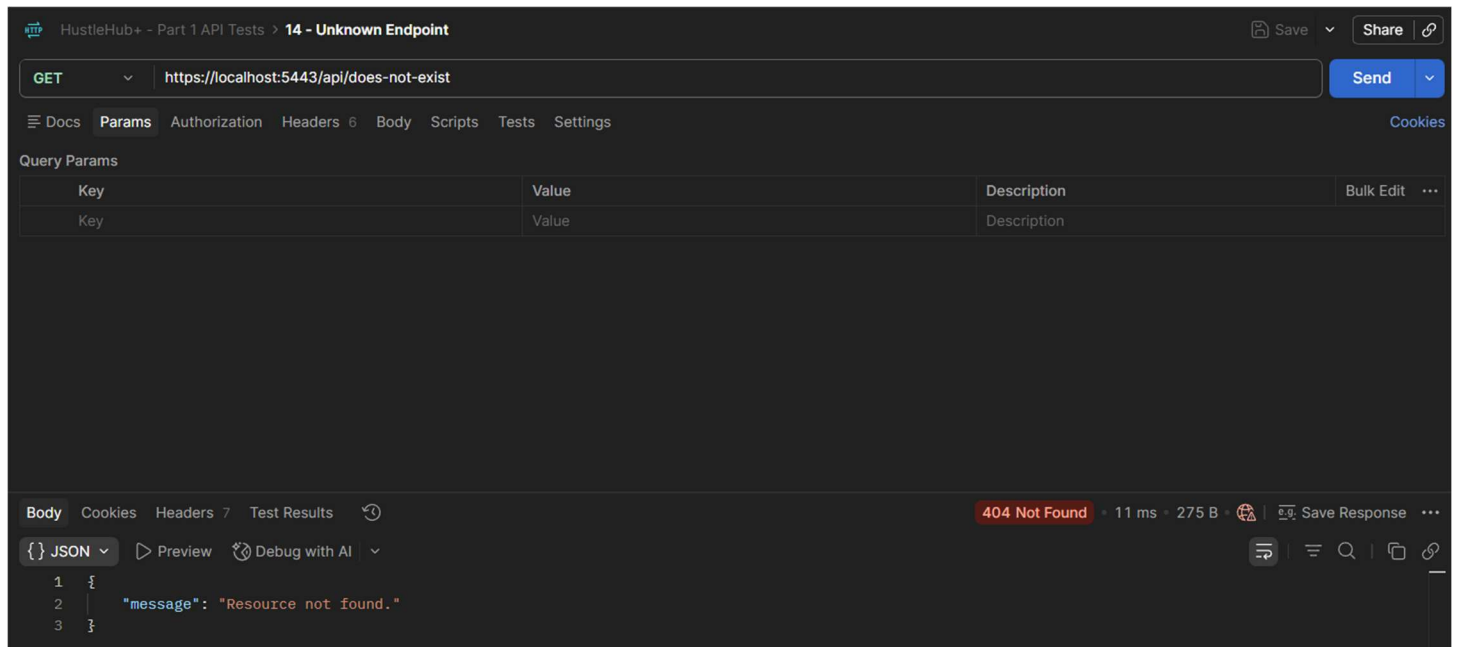

Postman interface showing a GET request to `https://localhost:5443/api/does-not-exist`. The response is a **404 Not Found** with a status of 11 ms and 275 B. The response body is:

```
1 {  
2   "message": "Resource not found."  
3 }
```