



Create Customer API Documentation (V2) – Request Structure and Response Description


Create a customer (V2)

URL Path: openapi/v2/account/kyc/create-customer

Http type: POST

contentType: multipart/form-data

Request Structure

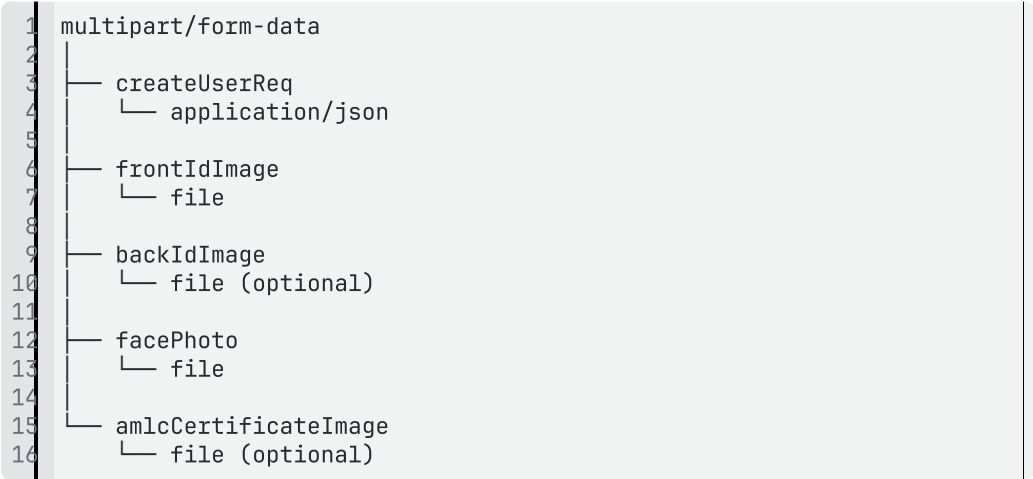

form-data parts

Field	Type	Required	Description
createUserReq	JSON Object	Y	JSON object containing all non-file fields listed in the createUserReq JSON fields table below.
frontIdImage	File	Y	Front of ID, formats: jpg/png/jpeg, max 2M
backIdImage	File	N	Back of ID, formats:

			jpg/png/jpeg, max 2M
facePhoto	File	Y	Selfie photo, formats: jpg/png/jpeg, max 2M
amlcCertificateImage	File	N	Required when employmentStatus is covered_service

createUserReq JSON fields

Field	Type	Required	Description
requestId	String	Y	Unique order ID generated by merchant
customerId	String	Y	Customer ID on the merchant side
email	String	N	Customer's email, At least one of email or phone must be provided.
phone	String	N	The customer's mobile phone number must be formatted as [country code] [local number], for example: +63 9271234567.

customerIp	String	Y	Customer's own IP address
customerSource	String	Y	The source of the customer's device is enumerated as: WEB, IOS, ANDROID.
customerUserAgent	String	Y	Customer's user-agent
firstName	String	Y	
middleName	String	N	
lastName	String	Y	
gender	Integer	N	Gender, enumeration: 0 - Other, 1 - Male, 2 - Female
dateOfBirth	String	Y	Format: yyyy-MM-dd
country	String	Y	Current country of residence
nationality	String	Y	Nationality, refer to CountryEnum code field
state	String	Y	Current state (province) of residence
city	String	Y	Current city of residence
street	String	Y	Current residential

			address
postalCode	String	Y	Current residence postal code
employmentStatus	String	Y	Employment status, refer to EmploymentStatusEnum
industry	String	N	Required when employmentStatus is employed
sourceFunds	String	N	Required when employmentStatus is Unemployed
sourceFundsDescription	String	N	Required when sourceFunds is other
companyName	String	N	Required when employmentStatus is employed
jobTitle	String	N	Required when employmentStatus is employed
purposeOfAccount	String	Y	Account purposes: legal, crypto, both
idType	String	N	Type of ID, refer to IdTypeEnum
idNumber	String	N	ID number
expireDate	String	N	ID expiration date, format:

			yyyy-MM-dd
frontIdImageMd5	String	Y	MD5 of frontIdImage
backIdImageMd5	String	N	MD5 of backIdImage
facePhotoMd5	String	Y	MD5 of facePhoto
amlcCertificateImageMd5	String	N	MD5 of amlcCertificateImage
businessScenarios	String	Y	se
countryOfBirth	String	Y	Country where the customer was born

Response

Field	Type	Required	Description
status	String	Y	Status, reference StatusEnum
requestId	String	Y	requestId from request
customerId	String	Y	customerId from request
coinsUserId	Long	N	External user ID in Coins, available after successful registration
redirectUrl	String	Y	H5 verification page URL

rejectionReason	String	N	
-----------------	--------	---	--

Interface Call Description

The request body must be submitted as a single `multipart/form-data` payload.

The `createUserReq` part must be submitted as a JSON object with `Content-Type: application/json`. It contains all non-file fields defined in the `createUserReq` JSON fields table above.

The image parameters (`frontIdImage` , `backIdImage` , `facePhoto` , and `amlcCertificateImage`) must be submitted as file parts within the same `multipart/form-data` request.

`backIdImage` and `amlcCertificateImage` are optional at the multipart level, but `amlcCertificateImage` is required when `employmentStatus` is `covered_service`.

V2 API example

CURL :

```

1 curl --location 'https://api.9001.pl-
  qa.coinsxyz.me/openapi/v2/account/kyc/create-customer?
  recvWindow=6000&timestamp={timestamp}&signature={signature}' \
2 --header 'X-COINS-APIKEY: {API_KEY}' \
3 --header 'x-trace-id: coins-v2-timestamp' \
4 --form 'createUserReq="{\"requestId\": \"req-coins-
  timestamp\", \"customerId\": \"customer-coins-
  timestamp\", \"email\": \"timestamp@example.com\", \"customerIp\": \"192.16
  8.1.1\", \"customerSource\": \"WEB\", \"customerUserAgent\": \"Mozilla/5.0
  (Windows NT 10.0; Win64;
  x64)\", \"firstName\": \"AA0H\", \"lastName\": \"AAAB\", \"dateOfBirth\": \"1
  990-01-
  16\", \"gender\": 1, \"countryOfBirth\": \"PH\", \"country\": \"PH\", \"nation
  ality\": \"PH\", \"state\": \"Metro
  Manila\", \"city\": \"Manila\", \"street\": \"Rizal
  Avenue\", \"postalCode\": \"1000\", \"employmentStatus\": \"self_e\", \"indu
  stry\": \"Technology\", \"jobTitle\": \"Software
  Engineer\", \"purposeOfAccount\": \"both\", \"idType\": \"driver\", \"idNumb
  er\": \"A01-26-260729007\", \"expireDate\": \"2030-01-
  01\", \"frontIdImageMd5\": \"{frontIdImageMd5}\", \"facePhotoMd5\": \"
  {facePhotoMd5}\", \"businessScenarios\": \"se\"}";type=application/json' \
5 --form 'frontIdImage=@"postman-cloud:///1f179fe2-e92c-4220-8de0-
  55093613a405"' \
6 --form 'facePhoto=@"postman-cloud:///1f175f5f-d6f8-4ea0-8cd4-
  494896d0c7bc"'

```

Signature script demo

```

1 // =====
2 // Coins API - v2 create-customer multipart/form-data
3 // Body parts:

```

```

4 //   createUserReq = application/json
5 //   frontIdImage / facePhoto = required files
6 //   backIdImage / amlcCertificateImage = optional files
7 // Multipart auth: sign the URL auth params (`recvWindow` +
  `timestamp`)
8 //   + the raw contents of the `createUserReq` part (concatenated
  according to the backend `signParts` declaration)
9 // =====
10 const baseUrl = pm.collectionVariables.get('base_url');
11 const secretKey = pm.collectionVariables.get('secret_key');
12 const recvWindow = pm.collectionVariables.get('recv_window') ||
  '6000';
13 const timestamp = Date.now().toString();
14
15 if (!baseUrl) { throw new Error('Missing collection variable:
  base_url'); }
16 if (!secretKey) { throw new Error('Missing collection variable:
  secret_key'); }
17
18 // Extract the raw text of the `createUserReq` part from the body; it
  must exactly match the content actually sent
19 const createUserReqParam = pm.request.body.formdata.find(p => p.key
  === 'createUserReq');
20 if (!createUserReqParam || !createUserReqParam.value) {
21   throw new Error('Missing form-data part: createUserReq');
22 }
23 const createUserReqJson = createUserReqParam.value;
24
25 const signatureData = 'recvWindow=' + recvWindow + '&timestamp=' +
  timestamp + 'createUserReq=' + createUserReqJson;
26 const signature = CryptoJS.HmacSHA256(signatureData,
  secretKey).toString(CryptoJS.enc.Hex);
27
28 pm.collectionVariables.set('createUserReqParam', createUserReqParam);
29 pm.collectionVariables.set('timestamp', timestamp);
30 pm.collectionVariables.set('recv_window', recvWindow);
31 pm.collectionVariables.set('signature', signature);
32 pm.collectionVariables.set('signature_data', signatureData);
33
34 const url = pm.request.url;
35 url.query.clear();
36 url.addQueryParams([
37   { key: 'recvWindow', value: recvWindow },
38   { key: 'timestamp', value: timestamp },
39   { key: 'signature', value: signature }
40 ]);
41 pm.request.url = url;
42 pm.request.headers.upsert({ key: 'X-COINS-APIKEY', value:
  pm.collectionVariables.get('api_key') || '' });
43 pm.request.headers.upsert({ key: 'x-trace-id', value: 'coins-v2-' +
  timestamp });
44
45 // Do not set Content-Type manually for multipart/form-data; Postman
  must add the boundary.
46 pm.request.headers.remove('Content-Type');
47
48 console.log('[v2 create-customer multipart] createUserReqJson:',
  createUserReqJson);
49 console.log('[v2 create-customer multipart] signatureData:',
  signatureData);
50 console.log('[v2 create-customer multipart] signature:', signature);
51 console.log('[v2 create-customer multipart] URL:',
  pm.request.url.toString());

```