Gates & autonomy tiers — systems, not memory

left: what the two hooks do on every tool call · right: how much freedom Claude has per action

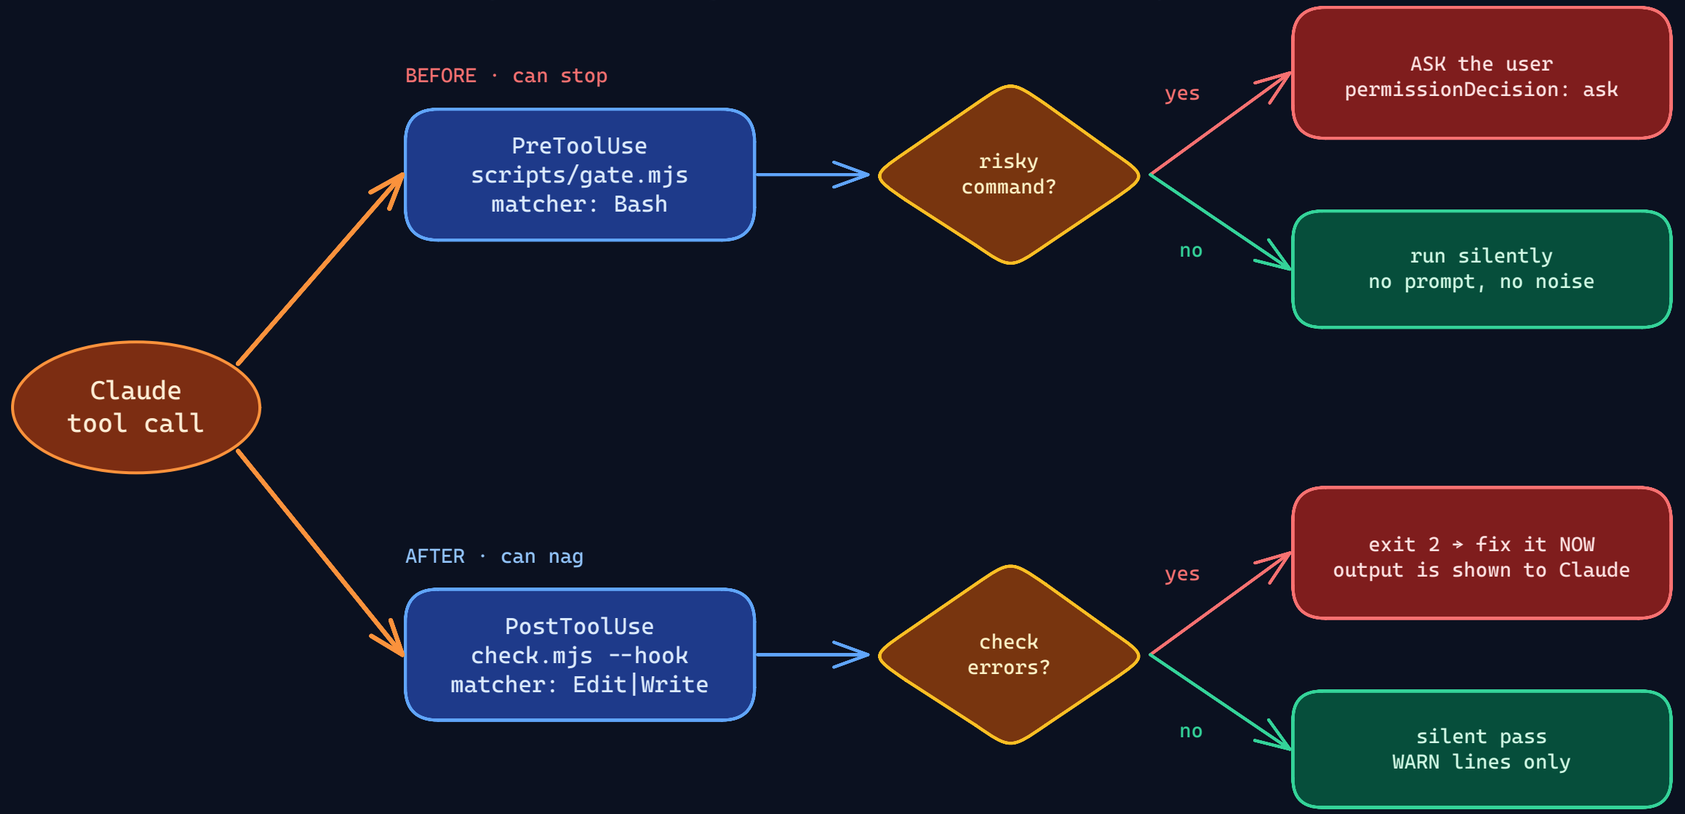

AUTONOMY TIERS

AUTONOMOUS
read · search · add entry · index/exports · rm out/

AUTONOMOUS + VERIFIER PASS
edit existing entry · change scripts · show result

ASK FIRST (gate.mjs)
rm · overwrite an entry · git push · npm publish

NEEDS AN ACCEPTED INTENT
new dependency · new hook · restructure

↑ top: Claude just does it
↓ bottom: I must say yes first (more human attention)

gate.mjs → asks (never silently allows, never hard-denies) when the Bash command matches:

```
rm ...                (safe: out/ and node_modules/ only)
git push | reset --hard | clean | checkout -- | branch -D
npm publish | unpublish
mv | cp   onto  md/  mermaid/  excalidraw/  entries
>  redirect into  md/  mermaid/  excalidraw/  entries
anything else  → passes silently
```

systems over vigilance:
if I had to remember
it twice, it becomes
a check, a hook
or a skill