




```
import matplotlib.pyplot as plt
import seaborn as sns
sns.histplot(df['Price'])
plt.show()
```

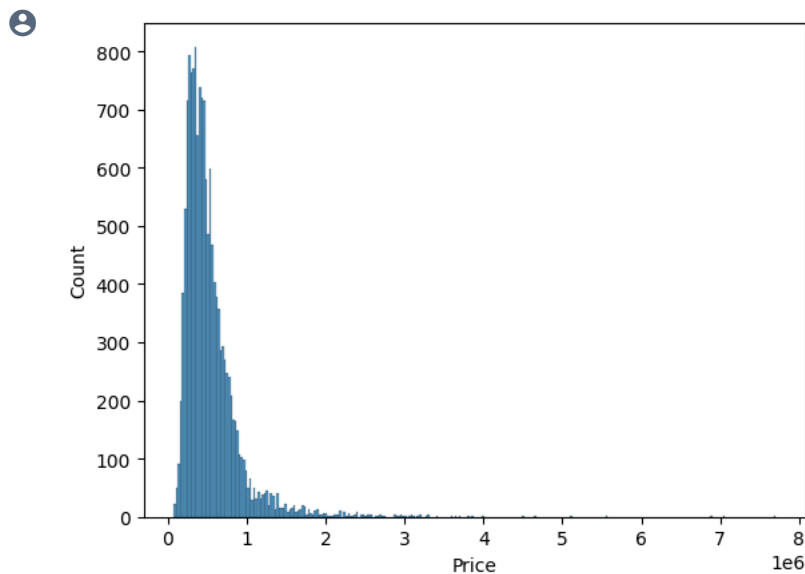


```
#Bi-Variate Analysis:
# Example: Scatter plot for two numerical features
sns.scatterplot(x='number of floors', y='Price', data=df)
plt.show()
```

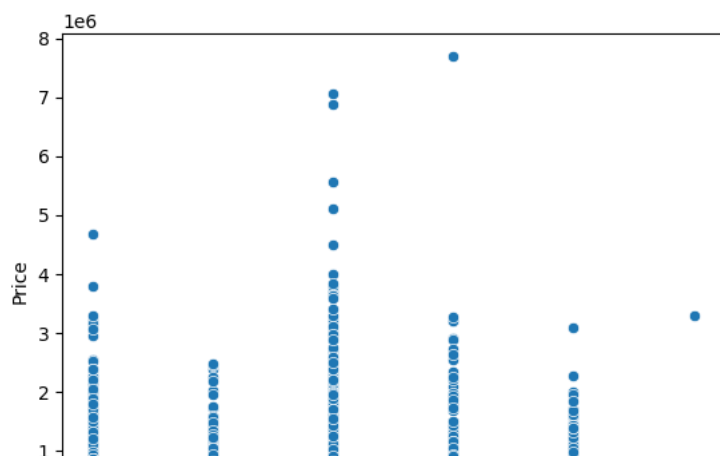

```
#Multi-Variate Analysis:
sns.pairplot(df[['Price', 'number of bedrooms', 'number of bathrooms']])
plt.show()
```

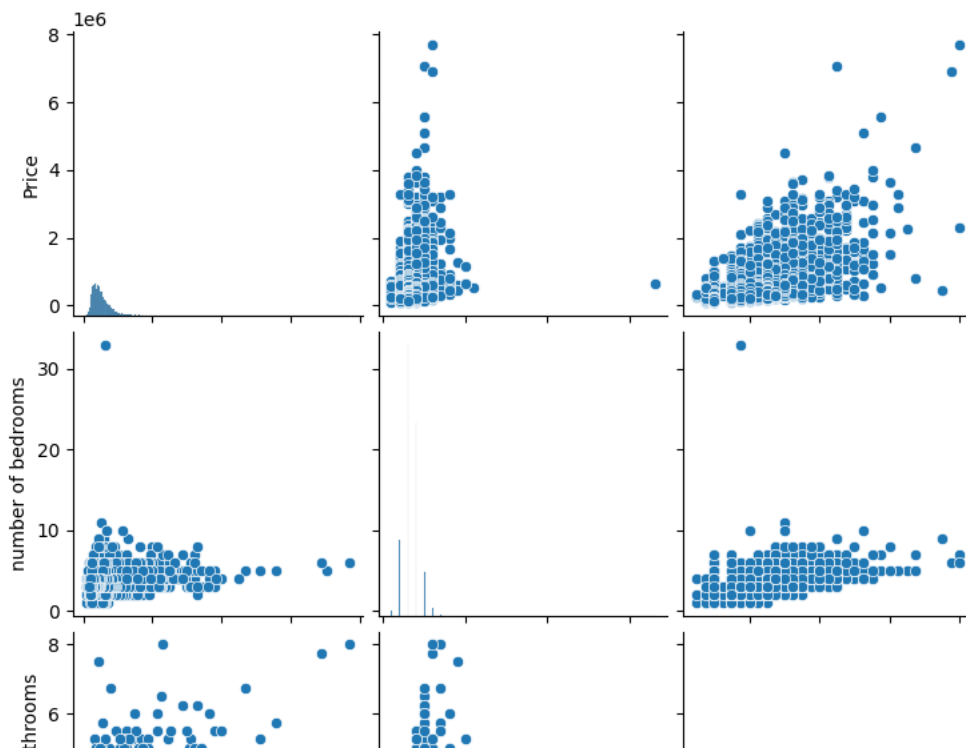

```
correlation_matrix = df[['Price', 'number of bedrooms', 'number of bathrooms']].corr()
sns.heatmap(correlation_matrix, annot=True, cmap="coolwarm")
plt.show()
```

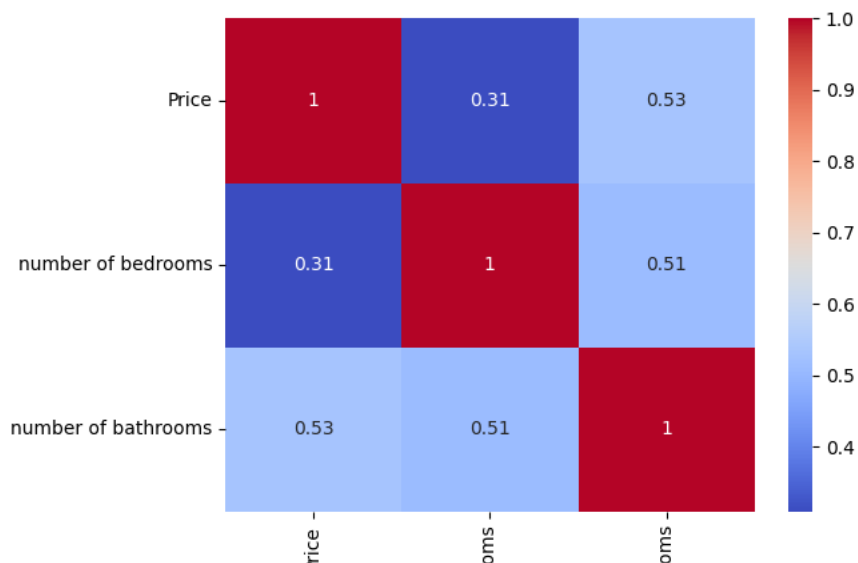

```
import networkx as nx
import matplotlib.pyplot as plt
from matplotlib.sankey import Sankey

G = nx.Graph()

# Add edges and nodes as appropriate

nx.draw(G, with_labels=True)
plt.show()
```

```
# Example: Summary statistics for the entire dataset
summary = df.describe()
print(summary)
```

	id	Date	number of bedrooms	number of bathrooms	\
count	1.462000e+04	14620.000000	14620.000000	14620.000000	
mean	6.762821e+09	42604.538646	3.379343	2.129583	
std	6.237575e+03	67.347991	0.938719	0.769934	
min	6.762810e+09	42491.000000	1.000000	0.500000	
25%	6.762815e+09	42546.000000	3.000000	1.750000	
50%	6.762821e+09	42600.000000	3.000000	2.250000	
75%	6.762826e+09	42662.000000	4.000000	2.500000	
max	6.762832e+09	42734.000000	33.000000	8.000000	

	living area	lot area	number of floors	waterfront present	\
count	14620.000000	1.462000e+04	14620.000000	14620.000000	
mean	2098.262996	1.509328e+04	1.502360	0.007661	
std	928.275721	3.791962e+04	0.540239	0.087193	
min	370.000000	5.200000e+02	1.000000	0.000000	
25%	1440.000000	5.010750e+03	1.000000	0.000000	
50%	1930.000000	7.620000e+03	1.500000	0.000000	
75%	2570.000000	1.080000e+04	2.000000	0.000000	
max	13540.000000	1.074218e+06	3.500000	1.000000	

	number of views	condition of the house	...	Built Year	\
count	14620.000000	14620.000000	...	14620.000000	
mean	0.233105	3.430506	...	1970.926402	
std	0.766259	0.664151	...	29.493625	
min	0.000000	1.000000	...	1900.000000	
25%	0.000000	3.000000	...	1951.000000	
50%	0.000000	3.000000	...	1975.000000	
75%	0.000000	4.000000	...	1997.000000	
max	4.000000	5.000000	...	2015.000000	

	Renovation Year	Postal Code	Latitude	Longitude	\
count	14620.000000	14620.000000	14620.000000	14620.000000	
mean	90.924008	122033.062244	52.792848	-114.404007	
std	416.216661	19.082418	0.137522	0.141326	
min	0.000000	122003.000000	52.385900	-114.709000	
25%	0.000000	122017.000000	52.707600	-114.519000	
50%	0.000000	122032.000000	52.806400	-114.421000	
75%	0.000000	122048.000000	52.908900	-114.315000	
max	2015.000000	122072.000000	53.007600	-113.505000	

	living_area_renov	lot_area_renov	Number of schools nearby	\
count	14620.000000	14620.000000	14620.000000	
mean	1996.702257	12753.500068	2.012244	
std	691.093366	26058.414467	0.817284	
min	460.000000	651.000000	1.000000	
25%	1490.000000	5097.750000	1.000000	
50%	1850.000000	7620.000000	2.000000	
75%	2380.000000	10125.000000	3.000000	
max	6110.000000	560617.000000	3.000000	

	Distance from the airport	Price
count	14620.000000	1.462000e+04
mean	64.950958	5.389322e+05
std	8.936008	3.675324e+05
min	50.000000	7.800000e+04
25%	57.000000	3.200000e+05
50%	65.000000	4.500000e+05
75%	73.000000	6.450000e+05

```
# Example: Check for missing values
missing_values = df.isnull().sum()
print(missing_values)
```

```
id                0
Date              0
number of bedrooms 0
number of bathrooms 0
living area       0
lot area          0
number of floors  0
waterfront present 0
number of views   0
condition of the house 0
grade of the house 0
Area of the house(excluding basement) 0
Area of the basement 0
Built Year        0
Renovation Year   0
Postal Code       0
Latitude          0
Longitude         0
living_area_renov 0
lot_area_renov    0
Number of schools nearby 0
Distance from the airport 0
Price            0
dtype: int64
```