

Lasso, Ridge and Elastic Net Regression

October 21, 2021

```
[3]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import statsmodels.api as sm

from sklearn.model_selection import train_test_split
from sklearn.metrics import r2_score
from sklearn.preprocessing import StandardScaler

from sklearn.linear_model import LinearRegression
from sklearn.linear_model import Ridge
from sklearn.linear_model import Lasso
from sklearn.linear_model import ElasticNet

from sklearn.linear_model import Lars
from sklearn.linear_model import SGDRegressor

from sklearn.svm import SVR
from sklearn.neighbors import KNeighborsRegressor
from sklearn.tree import DecisionTreeRegressor

from IPython.display import Image

'''
I've turned off warnings here in this Jupyter Notebook,
'''
import warnings
warnings.filterwarnings("ignore")
```

```
[4]: Image('/Users/subhasish/Documents/APPLE/SUBHASISH/Development/GIT/Interstellar/
↳SB-AI-DEV/ML/SB/LinerRegression/Images/2021-10-21_18-38-17.png')
```

[4]:

```
In [ ]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

import statsmodels.api as sm

from sklearn.model_selection import train_test_split
from sklearn.metrics import r2_score
from sklearn.preprocessing import StandardScaler

from sklearn.linear_model import LinearRegression
from sklearn.linear_model import Lasso
from sklearn.linear_model import Ridge
from sklearn.linear_model import ElasticNet
from sklearn.linear_model import Lars
from sklearn.linear_model import SGDRegressor
from sklearn.svm import SVR
from sklearn.neighbors import KNeighborsRegressor
from sklearn.tree import DecisionTreeRegressor

import warnings
warnings.filterwarnings("ignore")
```

```
[8]: '''
We'll build all of these models in the same notebook using a few helper
functions that we'll set up first.
'''

'''
Let's go ahead and use pandas to read in our dataset that has been cleaned and
↳preprocessed earlier.
This is in the auto-mpg- processed.csv file. Here is what the dataset looks
↳like,

We'll use all of the other features, cylinders, displacement, horsepower, and
↳so on,
to predict the mileage for the cars.
'''

automobile_df =pd.read_csv('data/auto-mpg-processed.csv')
automobile_df.sample(5)
```

```
[8]:      mpg  cylinders  displacement  horsepower  weight  acceleration  age
384  14.0         8         318.0         150    4077         14.0    49
278  22.0         4         140.0          72    2408         19.0    50
71   29.0         4         135.0          84    2525         16.0    39
300  15.0         8         318.0         150    4135         13.5    49
20   17.0         8         302.0         140    3449         10.5    51
```

```
[17]: '''
I'm going to instantiate a dictionary here called result_dict that will hold the
training and test scores from the different models that we build and train.

The keys will be meaningful names for the different models that we build and the
values will be their training and test R squares.
```

In this way, by simply doing the results stored in this dictionary, we'll be able to compare different models.

```
'''  
result_dict = {}
```

```
[18]: '''  
I'm going to define a helper function here called build_model that will allow  
→me to  
build and train the different regression models.  
'''  
'''  
:param regression_fn:  
    :param name_of_y_col:  
    :param names_of_x_cols:  
    :param dataset:  
    :param test_frac:  
    :param preprocess_fn:  
    :param show_plot_Y:  
    :param show_plot_scatter:
```

*The first argument here is the regression function. This is a function that
→takes in a training
data and corresponding target values. This will instantiate a particular ML
→regression model,
whether it's a linear regression model, a lasso model, a ridge or an elastic
→net model, anything.
And this function will train the model on our training data.*

*The name of y_col input argument specifies the column name in our data frame
→for the target
values that we should use for training.*

*The names_of_x_cols is a list of feature columns. These are the columns that
→we want to
include as features when we train our model.*

*The dataset is the original data frame that contains the features, as well as
→our target values.*

*The test_frac specifies how much of our dataset we should hold out to evaluate
→or measure our model,
that is the fraction of our data that will be used as test data.*

*If you want the data to be preprocessed in some way, standardized or scaled
→before you feed
it into your regression model, you can specify a preprocessed function.*

By default, it's set to None.

*Set show_plot_Y to True if you want to display a plot of actual versus predicted
→ Y values,*

*and set show_plot_scatter to true if you want to see how your regression line
→ fits on the training data.*

```
'''
def build_model(regression_fn,
                name_of_y_col,
                names_of_x_cols,
                dataset,
                test_frac=0.2,
                preprocess_fn=None,
                show_plot_Y=False,
                show_plot_scatter=False):

    '''
    Extract from the dataset the features that you want to train your model  
→ into the variable X
    and extract the target value into Y.
    '''
    X=dataset[names_of_x_cols]
    Y=dataset[name_of_y_col]

    '''
    If you've specified a function used to preprocess your model, apply this  
→ preprocessing
    function to your X values.
    The preprocessed features are stored once again in the X variable.
    '''
    if preprocess_fn is not None:
        X=preprocess_fn(X)

    '''
    Use scikit-learn's train_test_split function to split up your dataset into  
→ training and test data.
    '''
    x_train, x_test, y_train, y_test = train_test_split(X, Y,
    →test_size=test_frac)
    '''

    Once you have your training data, pass in the training data, as well as the  
corresponding labels to the regression function.
```

```

    The regression function is a wrapper that will instantiate a particular
    ↪ regression model and
    train on the dataset you've specified.

    The regression function will return the fully trained ML model, which you
    ↪ can then use
    for prediction, and store your predicted values in y_pred.
'''
model= regression_fn(x_train,y_train)
y_pred=model.predict(x_test)

'''
    You can then print out the R square values on the training data, as well as
    ↪ the test data
    for your model.
'''
print("Training_score : " , model.score(x_train, y_train))
print("Test_score : ", r2_score(y_test, y_pred))

'''
    If you've invoked the build model function with show_plot_Y is equal to
    ↪ True, plot the
    actual values versus predicted values in the form of a line chart
'''
if show_plot_Y == True:
    fig, ax = plt.subplots(figsize=(12, 8))

    plt.plot(y_pred, label='Predicted')
    plt.plot(y_test.values, label='Actual')

    plt.ylabel(name_of_y_col)

    plt.legend()
    plt.show()

'''
    if you've called it with show_plot_scatter equal to True, display a scatter
    ↪ plot in
    matplotlib with the original X and Y values of the test data and the
    ↪ predicted line.
'''
if show_plot_scatter == True:
    fig, ax = plt.subplots(figsize=(12, 8))

    plt.scatter(x_test, y_test)
    plt.plot(x_test, y_pred, 'r')

```

```

plt.legend(['Predicted line','Observed data'])
plt.show()

'''
we'll return from this build model function the training score and test Rsquare
score for this particular model.
'''
return {
    'training_score': model.score(x_train,y_train),
    'test_score': r2_score(y_test,y_pred)
}

```

```

[19]: '''
This is the compare_results function. This is the function that will quickly
print out the
training, as well as test scores for all of the regression models that we've
built so far.

This function uses a for loop to iterate through all of the keys in our result
dictionary
and then prints out the kind of regression that was performed, the training
score,
as well as the test score.
'''
def compare_results():
    for key in result_dict:
        print('Regression: ', key)
        print('Training score', result_dict[key]['training_score'])
        print('Test score', result_dict[key]['test_score'])
        print()


```

```

[20]: Image('/Users/subhasish/Documents/APPLE/SUBHASISH/Development/GIT/Interstellar/
SB-AI-DEV/ML/SB/LinerRegression/Images/2021-10-21_20-06-31.jpg')

```

[20]:

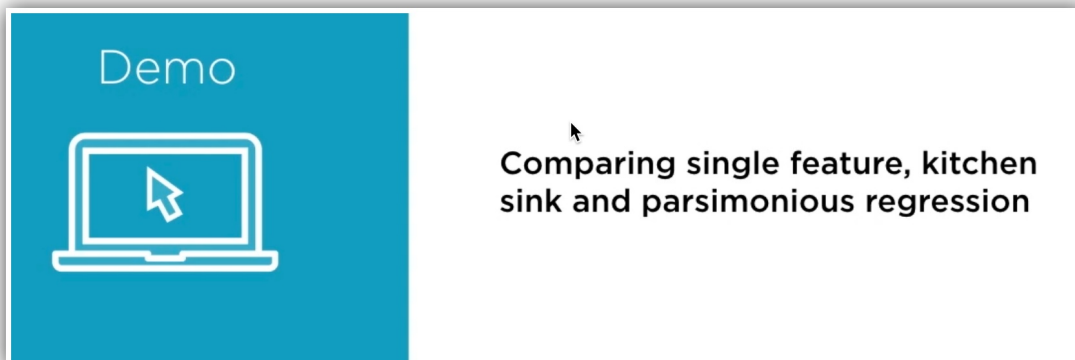

```
[21]: '''
This linear_reg function takes in training data, x_train, and target values,
↳y_train.

Within this function, we instantiate the LinearRegression estimator object with
↳normalize is equal
to True and call model.fit on this training data.

Once the model has been trained, we return an instance of this fully-trained
↳model
to the caller of this function.

This is the helper function that we'll pass in to build model
'''
def linear_reg(x_train,y_train):
    model=LinearRegression(normalize=True)
    model.fit(x_train,y_train)

    return model
```

```
[23]: '''
We invoke the build_model function that will train our regression model and
↳calculate
the training, as well as test scores and assign these results to the result
↳dictionary object.

We'll save the training and test score in the result dictionary with a
↳meaningful key.

So we have regressed to find the values of mpg, this is a single linear
↳regression.
Single linear, because we just use one feature for the regression,

and let's take a look at build_model for this.

The linear_reg function that we just defined is the first input argument,
that is our regression function.

The target value that we want to predict using this model is mpg,

the input feature that we use to train the model is just one, that is the
↳weight of the car,

the original dataset is automobile_df,
```

and we want to show Y values, actual versus predicted.

*Run Shift+Enter to build and train our linear regression model using our
↪helper function,
and here is the training and test scores for this model.*


*We also have a nice little line chart here with predicted values in blue and
↪actual values in orange.*

'''

```
result_dict ['mpg ~ single_linear'] =build_model(linear_reg,  
                                                'mpg',  
                                                ['weight'],  
                                                automobile_df,  
                                                show_plot_Y=True)
```

Training_score : 0.7100340034344681

Test_score : 0.5935058632293959

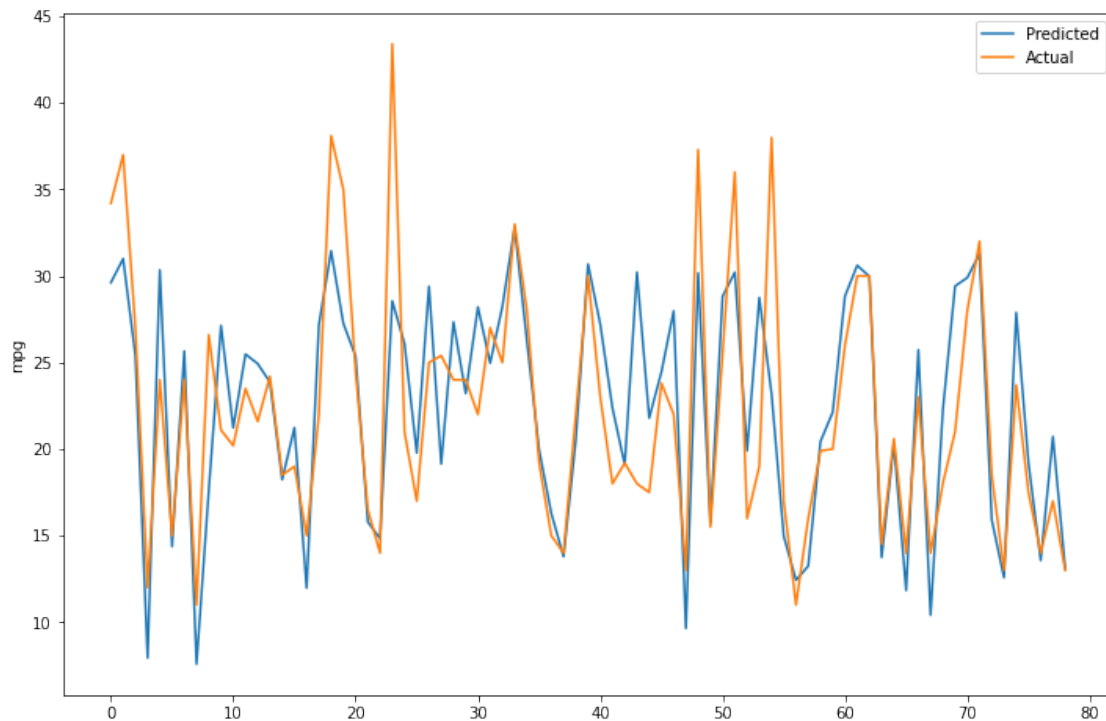

[24]: '''

*Let's try this once again. This time we'll perform our kitchen sink linear
↪regression with
all of the features as input.*

The result of this regression will be present in the `mpg - kitchen_sink_linear_`
→ `key`,

and the features we use in our training data are cylinders, displacement, horsepower, weight, and acceleration.


Our kitchen sink regression performed decently well this time around, training score of 70%, test score of around the same.

'''

```
result_dict ['mpg - kitchen_sink_linear'] =build_model(linear_reg,
                                                         'mpg',
                                                         ['cylinders',
                                                         'displacement',
                                                         'horsepower',
                                                         'weight',
                                                         'acceleration'],
                                                         automobile_df,
                                                         show_plot_Y=True)
```

Training_score : 0.6936497983094259

Test_score : 0.7564893536242068

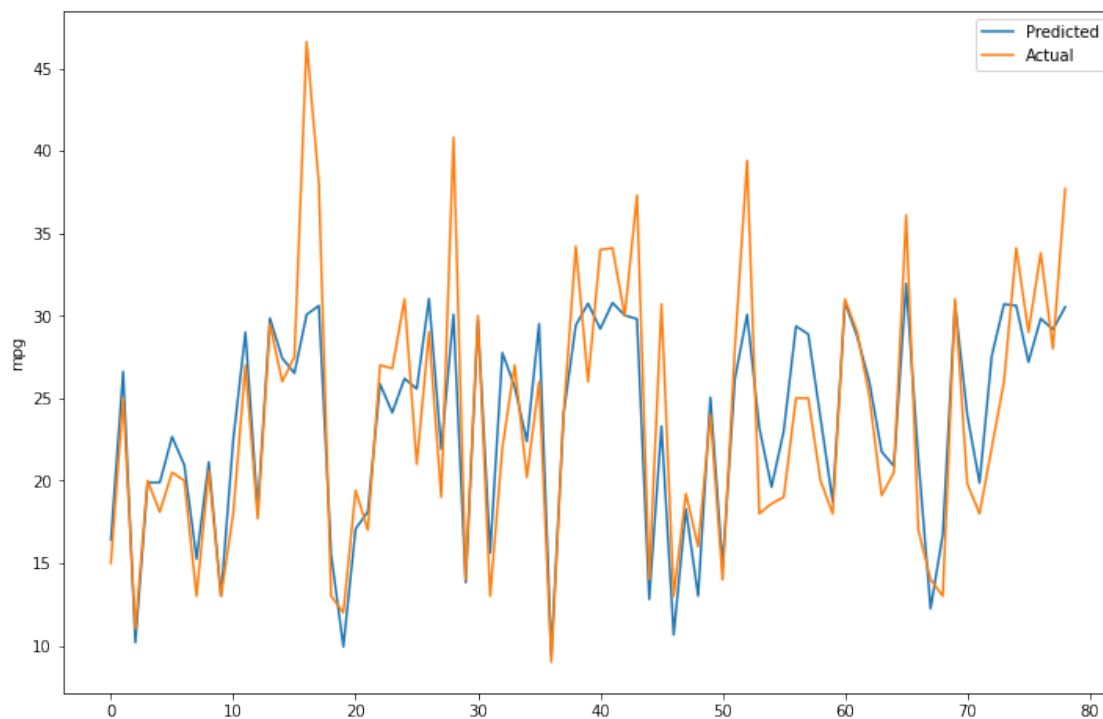

[28]: '''


*But you don't really need to throw the kitchen sink at your linear regressor,
→you'll find
that a more parsimonious regression with a few selected features performs just
→as well.*

*Here is a parsimonious regression using the same linear regressor estimator
→object,
we'll only use the horsepower and weight features in our training data.*

*We've dropped the number of features down from five to two, but because these
→were the
most significant features, we see that the training score and test scores for
→our
regression are still high.*

```
result_dict ['mpg - parsimonious_linear'] =build_model(linear_reg,
                                                         'mpg',
                                                         [
                                                         'horsepower',
                                                         'weight',
                                                         ],
                                                         automobile_df,
                                                         show_plot_Y=True)
```

Training_score : 0.7065034095101077
Test_score : 0.7003616677974658

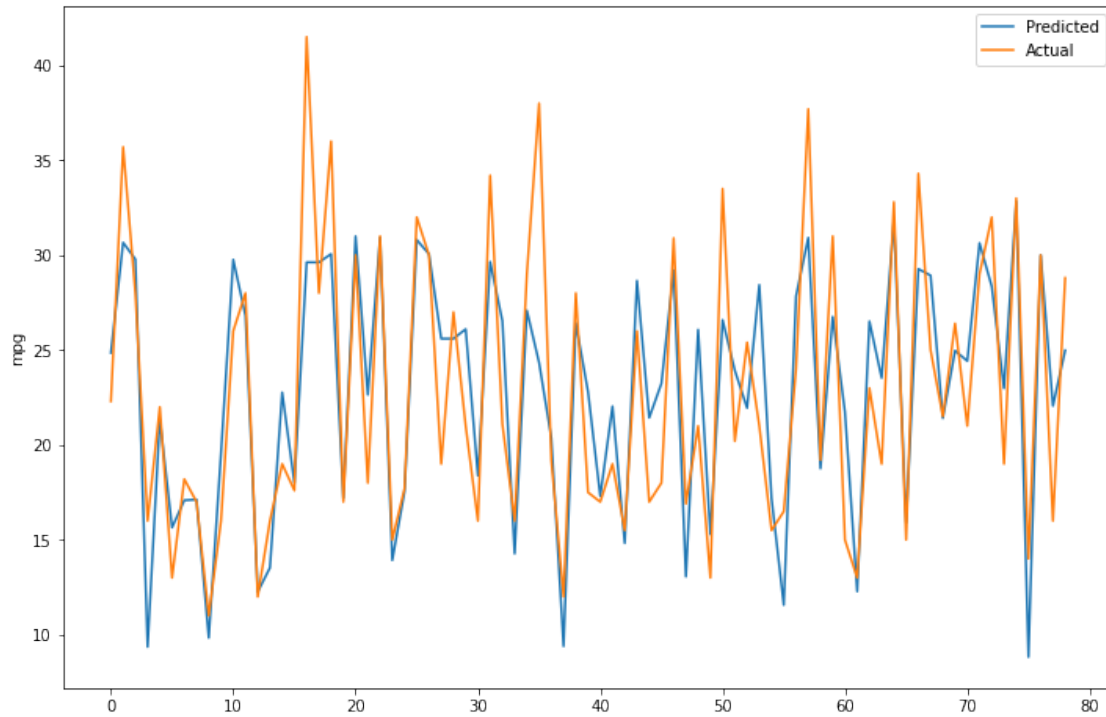

```
[29]: '''
      let's compare results and here are all of the training and testing scores for
      ↳all of the
      regression models that we've just built and trained right here for you, set up
      ↳side by side.

      This one screen allows us to quickly compare how the different models have done.
      '''
      compare_results()
```

```
Regression: mpg ~ single_linear
Training score 0.7100340034344681
Test score 0.5935058632293959
```

```
Regression: mpg - kitchen_sink_linear
Training score 0.6936497983094259
Test score 0.7564893536242068
```

```
Regression: mpg - parsimonious_linear
Training score 0.7065034095101077
Test score 0.7003616677974658
```

```
[ ]:
```