EXPERIMENT - 8

25/9/26 NMAP · HOST DISCOVERY

AIM :

To discover live hosts using NMAP scans (ARP, ICMP, TCP/UDP) on the TryHackMe Platform.

INTRODUCTION :

NMAP (Network Mapper) is a free and open source n/w scanning tool used to discover live hosts and identify services running on the network


NMAP HOST discovery using ARP :

ARP is used to discover hosts on the same local subnet NMAP sends ARP requests and live hosts respond with ARP replies. The PR is used for ARP based host discovery.




NMAP Host Discovery using ICMP :

ICMP provides different req/reply mechanisms for discovering live hosts. NMAP suggests ICMP Echo (-PE), Timestamp (-PP) and Address Mask (-PM) scans.

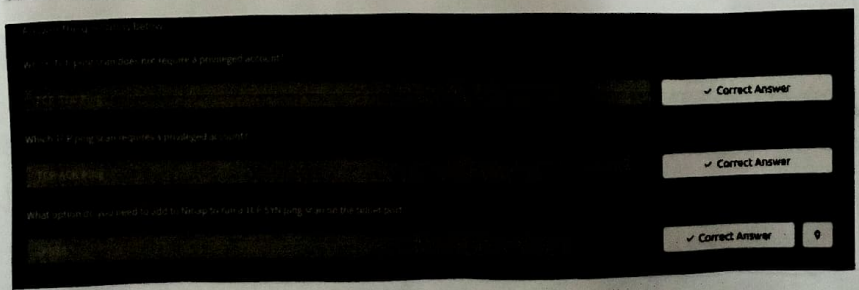

NMAP Host discovery using TCP and UDP.

When ICMP is filtered, NMAP can use TCP and UDP packet to determine whether a host is online. TCP host discovery includes TCP SYN Ping (-PS), and TCP ACK Ping (-PA), while UDP host discovery uses -PU.

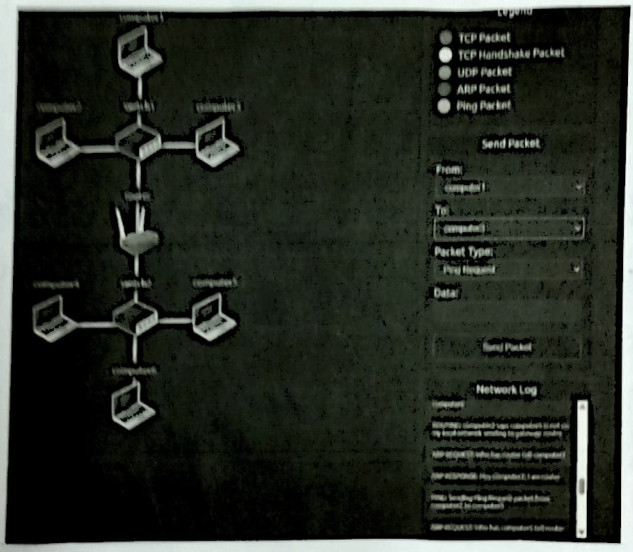

RESULTS:

Thus live hosts in the network were successfully discovered using NMAP host discovery techniques.