
Blood Bank Management System – Software Architecture

Layered client-server (3-tier) architecture – logical view

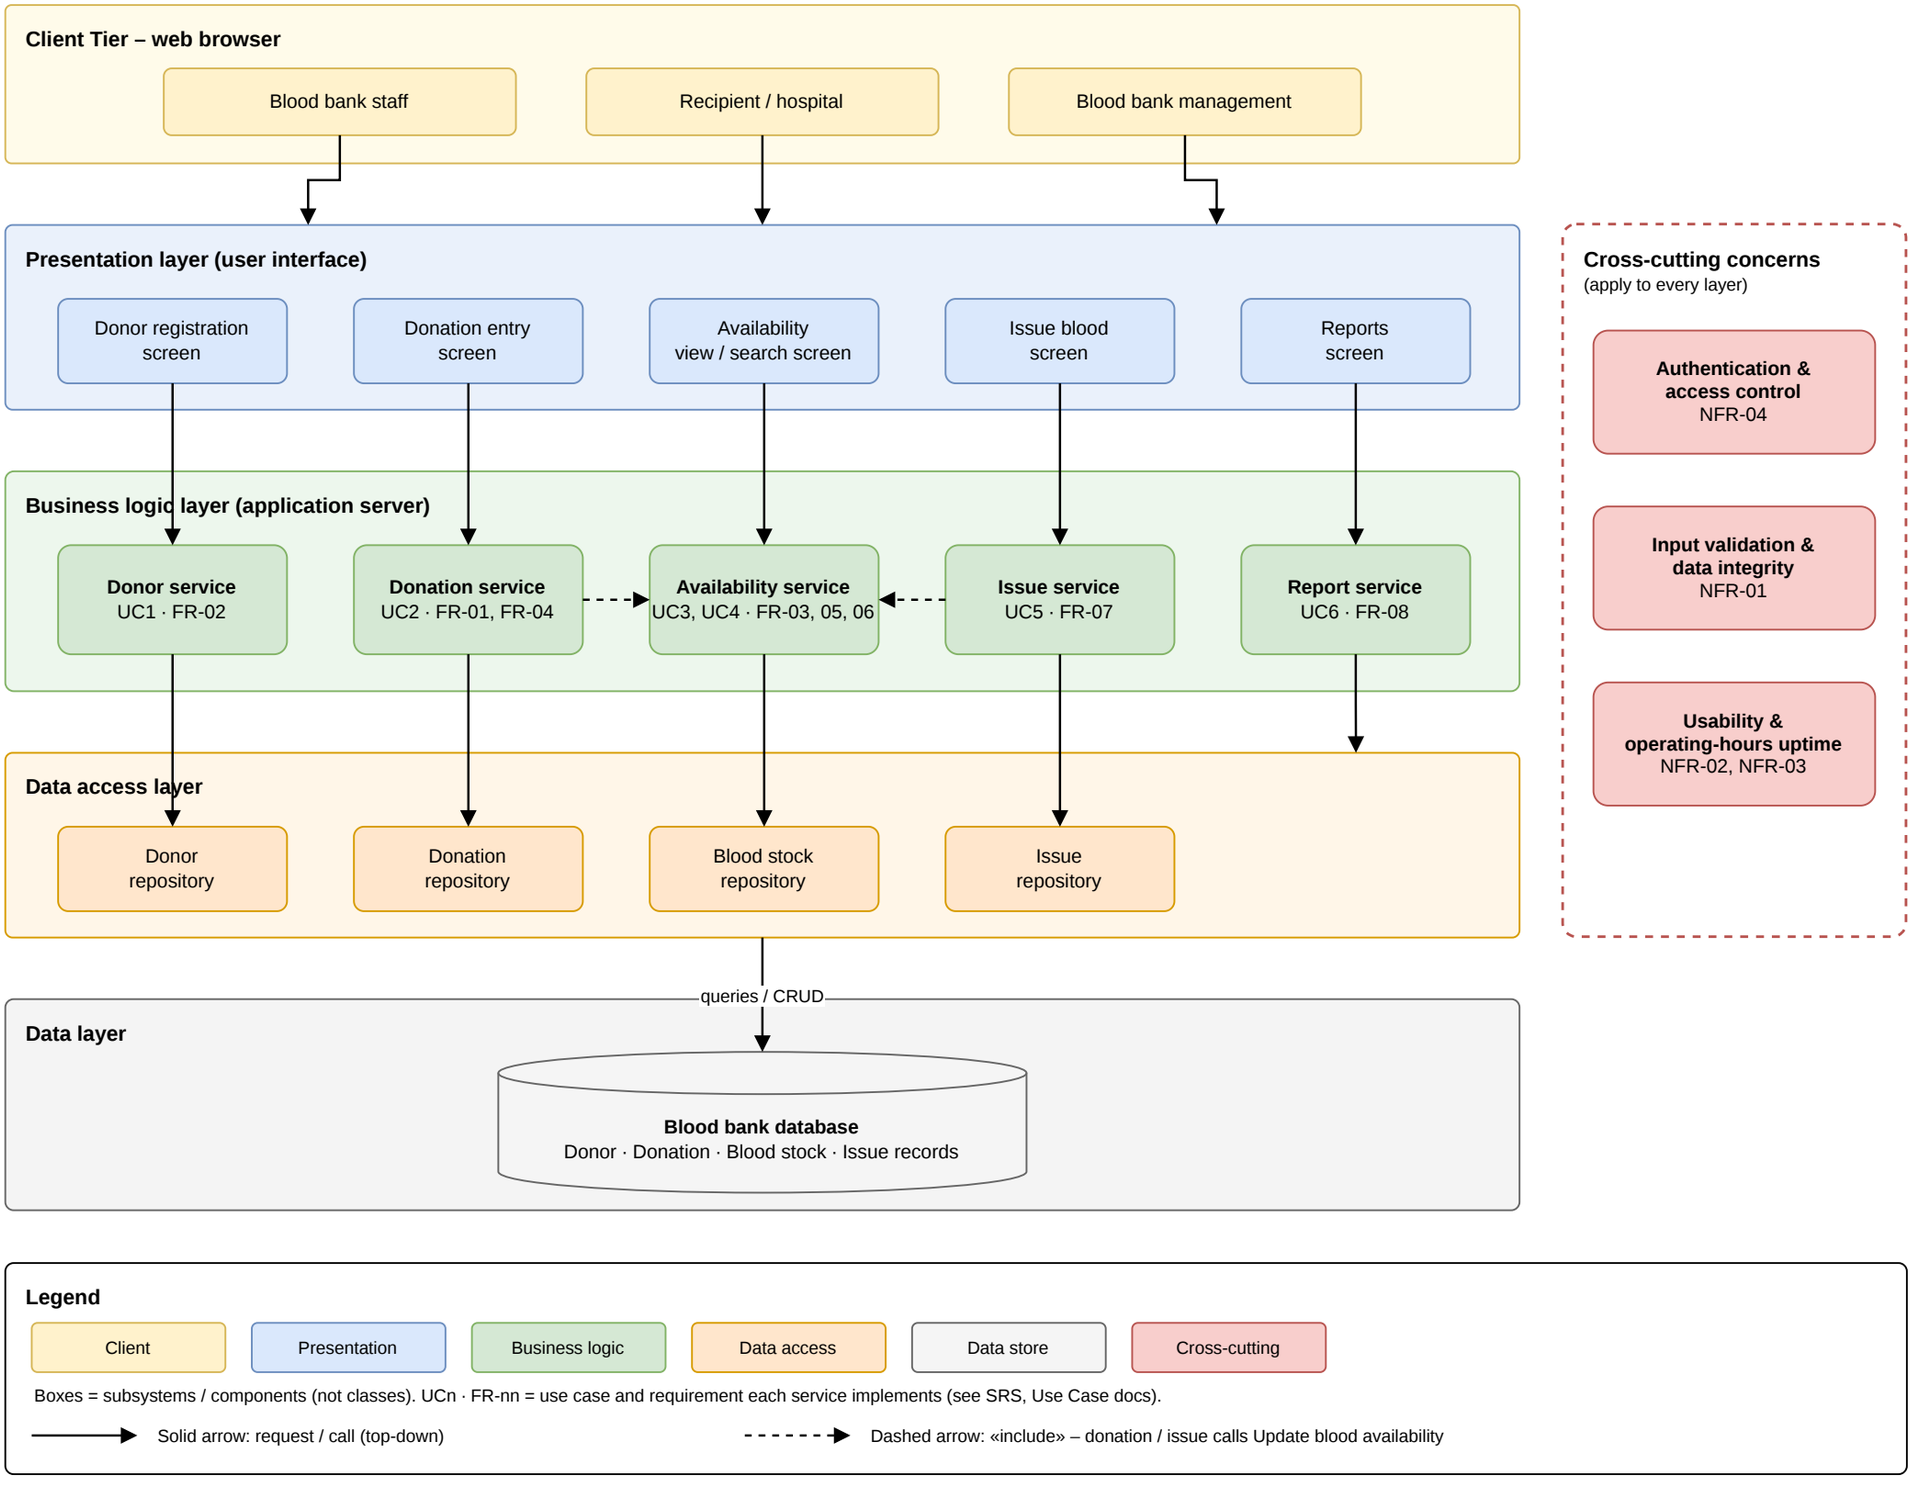

Legend

Client | Presentation | Business logic | Data access | Data store | Cross-cutting

Boxes = subsystems / components (not classes). UCn · FR-nn = use case and requirement each service implements (see SRS, Use Case docs).

Solid arrow: request / call (top-down)

Dashed arrow: «include» – donation / issue calls Update blood availability