

Input Format

First and only line contains the value of array separated by single space.

A00	A01	A02
4	6	9
A10	A11	A12
2	5	8
A20	A21	A22
1	3	7

Output Format

First line should print sum of A 0 0, A 0 2, A 1 1, A 2 0, A 2 2

Second line should print sum of A 0 1, A 1 0, A 1 2, A 2 1

SAMPLE INPUT

1 2 3 4 5 6 7 8 9

SAMPLE OUTPUT

25

20

Answer: (penalty regime: 0 %)

```
1 #include <stdio.h>
2
3 int main() {
4     int matrix[3][3];
5     int i, j;
6     int sum1 = 0, sum2 = 0;
7
8     // Input 3x3 matrix
9     for (i = 0; i < 3; i++) {
10        for (j = 0; j < 3; j++) {
11            scanf("%d", &matrix[i][j]);
12        }
13    }
14
15    // Calculate the sums
16    sum1 = matrix[0][0] + matrix[0][2] +
17    sum2 = matrix[0][1] + matrix[1][0] +
18
19    // Output the results
20    printf("%d\n", sum1);
21    printf("%d\n", sum2);
22
23    return 0;
24 }
```

	Input	Expected
✓	1 2 3 4 5 6 7 8 9	25 20
✓	21 422 423 443 586 645 657 846 904	2591 2356

Passed all tests! ✓

Microsoft has been a huge success story since its launch in 1981. The company has grown into a multinational corporation with a market cap of over \$1 trillion. As the company grows, it has become a global leader in software development. Microsoft wants to create the most talented team of developers for its next project. The company has a list of candidates, each with a talent level and a gender. The task is to create a team where the talent levels are sorted in a descending order and then male candidates are sorted in a descending order.

The task is to create a team where the talent levels are sorted in a descending order and then male candidates are sorted in a descending order.

Input Format

The first line contains an integer N denoting the number of students. Next N lines contain two space-separated integers: a_i and b_i .

The first integer, a_i will be either 1 (for a male candidate) or 0 (for female candidate).

The second integer, b_i will be the candidate's talent level.

Constraints

$$1 \leq N \leq 10^5$$

$$0 \leq a_i \leq 1$$

$$1 \leq b_i \leq 10^9$$

Output Format

Output space-separated integers, which first contains the talent levels of all female candidates sorted in descending order and then the talent levels of male candidates in descending order.

SAMPLE INPUT

```
5
0 3
1 6
0 2
0 7
1 15
```

SAMPLE OUTPUT

```
7 3 2 15 6
```

Answer: (penalty regime: 0 %)

```
1 #include <stdio.h>
2 #include <stdlib.h>
3
4 // Comparison function for sorting in descending order
5 int compare(const void *a, const void *b) {
6     return (*(int *)b - *(int *)a);
7 }
8
9 int main() {
10     int N;
11     scanf("%d", &N);
12
13     int females[105], males[105]; // Arrays to store talent levels
14     int fIndex = 0, mIndex = 0; // Indices for females and males
15
16     for (int i = 0; i < N; i++) {
17         int a, b;
18         scanf("%d %d", &a, &b);
19         if (a == 0) {
20             females[fIndex++] = b; // Store female talent level
```

Answer: (Priority regime 0.1)

```


1 // C++ program to find the priority of a person
2 #include <iostream>
3 using namespace std;
4
5 // Function to find the priority of a person
6 int compare(int a, int b) {
7     if (a < b) return 1;
8     if (a > b) return -1;
9     return 0;
10 }
11
12 // Function to find the priority of a person
13 int main() {
14     int N;
15     scanf("%d", &N);
16
17     int females[105], males[105];
18     int fIndex = 0, mIndex = 0;
19
20     for (int i = 0; i < N; i++) {
21         int a, b;
22         scanf("%d %d", &a, &b);
23         if (a == 0) {
24             females[fIndex++] = b; // Store female talent level
25         } else {
26             males[mIndex++] = b; // Store male talent level
27         }
28     }
29
30     // Sort the arrays in descending order
31     qsort(females, fIndex, sizeof(int), compare);
32     qsort(males, mIndex, sizeof(int), compare);
33
34     // Print all female talent levels
35     for (int i = 0; i < fIndex; i++) {
36         printf("%d ", females[i]);
37     }
38
39     // Print all male talent levels
40     for (int i = 0; i < mIndex; i++) {
41         printf("%d ", males[i]);
42     }
43
44     return 0;
45 }

```

Input	Expected
✓ 5 0 3 1 6 0 2 0 7 1 15	7 3 2 15 6
✓ 6 0 1 0 26 0 39 0 37 0 7 0 13	39 37 26 13 7 1
✓ 12 1 12 1 14 1 18 1 1 1 2 1 3 1 5 1 8 1 9 1 10 0 29 0 31	31 29 18 14 12 10 9 8 5 3 2 1
✓ 12 0 12 1 12 0 12 1 12 0 12 0 12 1 12 0 12 1 12 1 12 0 12 1 12	12 12 12 12 12 12 12 12 12 12 12 12 12

Passed all tests! ✓

Explanation

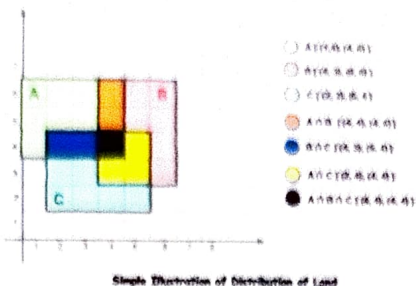

For given sample input (see given graph for reference), compensation money for different farmers is as follows:

Farmer with land area A: $C_1 = 5 * 1 = 5$

Farmer with land area B: $C_2 = 6 * 2 = 12$

Farmer with land area C: $C_3 = 6 * 3 = 18$

Total Compensation Money = $C_1 + C_2 + C_3 = 5 + 12 + 18 = 35$

Answer: (penalty regime: 0 %)

```

1 #include <stdio.h>
2 int main()
3 {
4     int i,j,n,x1,x2,y1,y2,t=0;
5     long long total=0;
6     int arr[1001][1001]={0};
7     scanf("%d",&n);
8     while(n-->0)
9     {
10         scanf("%d %d %d %d %d",&x1,&y1,&x2,&y2,&t);
11         for(i=x1;i<=x2;i++)
12         {
13             for(j=y1;j<=y2;j++)
14             {
15                 if(arr[i][j]==0)
16                     arr[i][j]=t;
17                 else if(arr[i][j]>0)
18                     arr[i][j]=(-1)*(arr[i][j]);
19                 else if(arr[i][j]<0)
20                     arr[i][j]=t;
21             }
22         }
23     }
24     for(i=1;i<1001;i++)
25     {
26         for(j=1;j<1001;j++)
27         {
28             if(arr[i][j]<0)
29                 total+=arr[i][j];
30         }
31     }
32     printf("%lld\n",(-1)*total);
33     return 0;
34 }
35

```

	Input	Expected	Got	
✓	3 1 4 4 6 1 4 3 6 6 2 2 2 5 4 3	35	35	✓
✓	1 48 12 49 27 8	0	0	✓
✓	3 88 34 99 76 44 82 65 94 100 81 58 16 65 66 7	10500	10500	✓

Passed all tests! ✓