


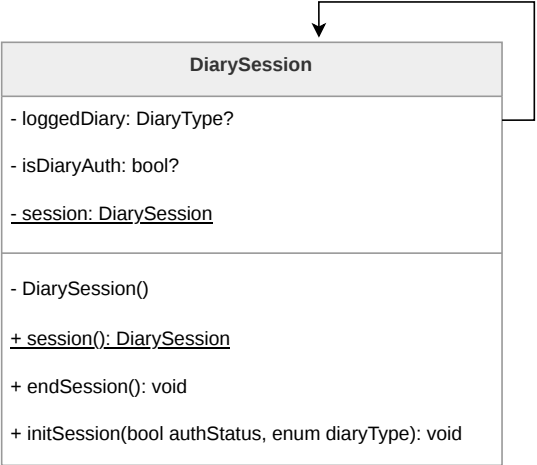

The diagram shows a class named **DiarySession**. It has three attributes: `- loggedDiary: DiaryType?`, `- isDiaryAuth: bool?`, and `- session: DiarySession`. It has four methods: `- DiarySession()`, `+ session(): DiarySession`, `+ endSession(): void`, and `+ initSession(bool authStatus, enum diaryType): void`. A self-referencing arrow points from the `session` attribute to the `session()` method.

DiarySession

- loggedDiary: DiaryType?

- isDiaryAuth: bool?

- session: DiarySession

- DiarySession()

+ session(): DiarySession

+ endSession(): void

+ initSession(bool authStatus, enum diaryType): void