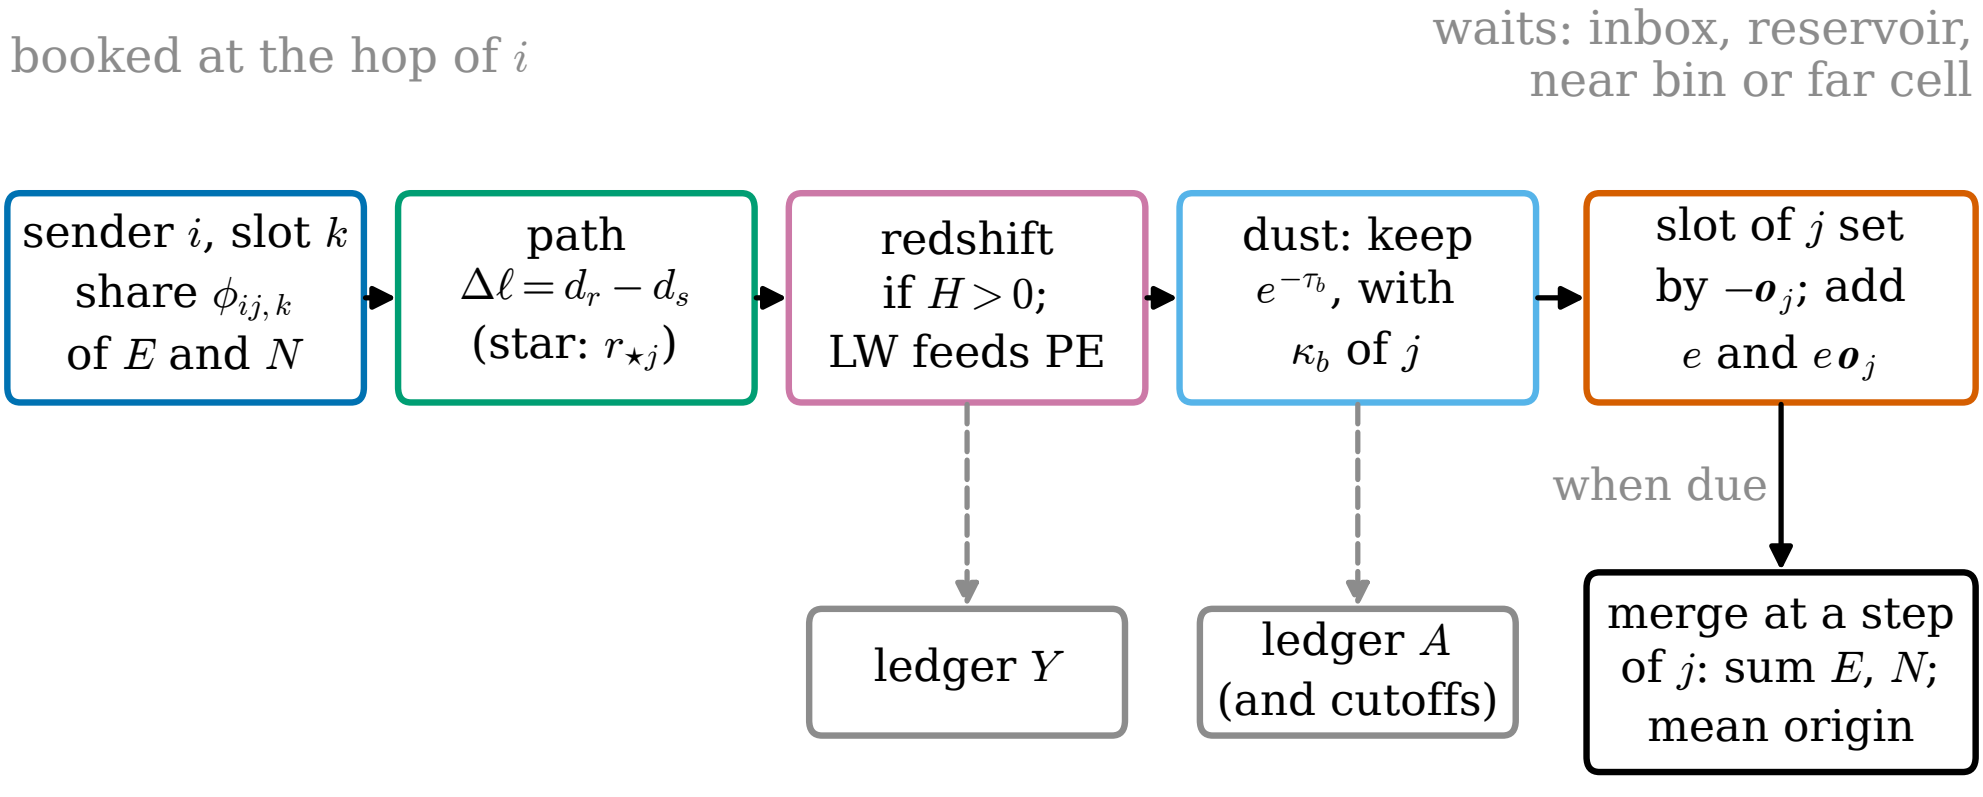
booked at the hop of i
waits: inbox, reservoir, near bin or far cell
sender i, slot k share $\phi_{ij,k}$ of E and N
path $\Delta\ell = d_r - d_s$ (star: $r_{\star j}$)
redshift if $H > 0$; LW feeds PE
dust: keep $e^{-\tau_b}$, with κ_b of j
slot of j set by $-\boldsymbol{o}_j$; add e and $e\,\boldsymbol{o}_j$
when due
ledger Y
ledger A (and cutoffs)
merge at a step of j: sum E, N; mean origin