


Fig. 3 -- Sorted scan against a non-adjacent receiver C
 adjacency is irrelevant: only window/d-range overlap on the global axis decides what is scanned

(a) non-wrapped: shift = 0, $di_star = si \rightarrow x$ directly



(b) periodic wrap: shift = $-L$ folds the star's real position (dashed star, right) onto the image used for di_star (solid, left)

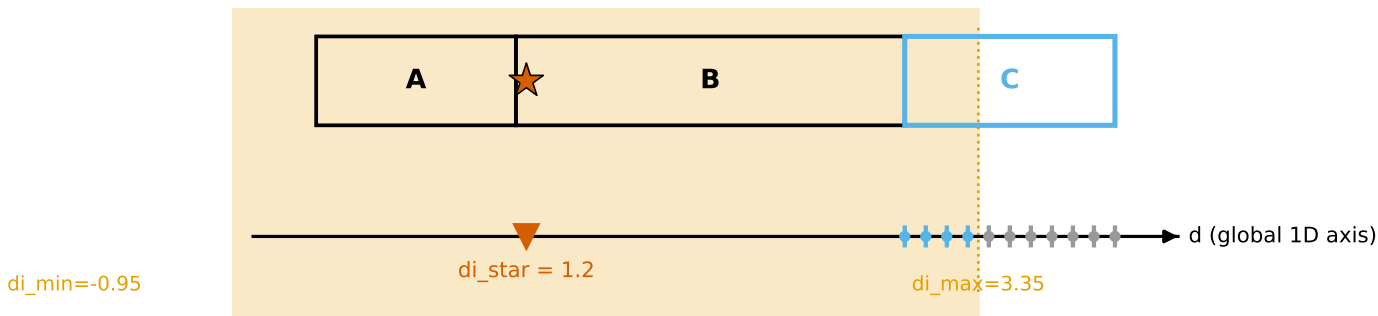