



Fig. 6 -- Two-sided lockstep vs one-sided star-centric scan

Classic DOPAIR (hydro)

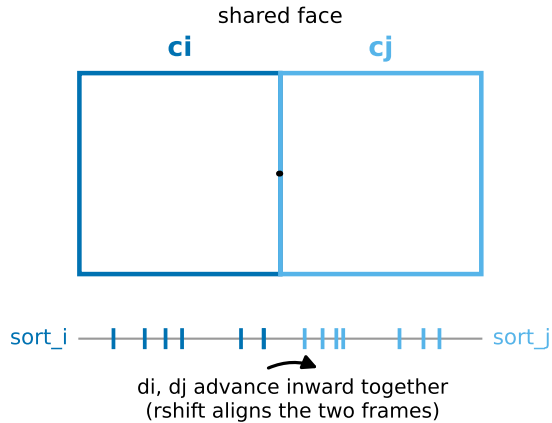

two-sided: BOTH sort_i and sort_j read;
only sorted along sides ci/cj's own pair tasks requested
-> adjacency-bound

Radiation gather (this code)

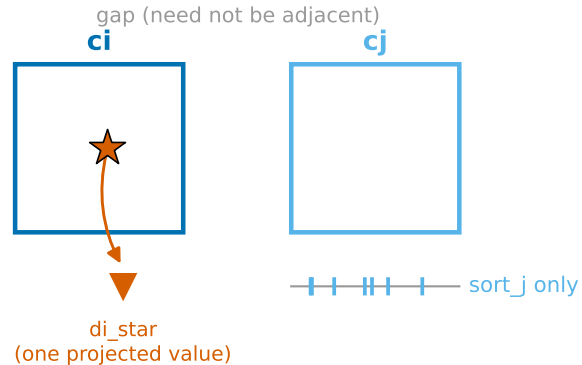

one-sided: only cj's sort array is read;
star contributes position + dx_max_sort only.
carried sid -> any sid cj is sorted along -> naive O(N)