DBL ASSIGNMENT

LAB TASKS

WEEK – 03

SUBMITTED TO: SIR WALEED

SUBMITTED BY: SYED MUHAMMAD HAAD

ROLL NO: 2026-S-CS-112

SECTION: B

Task-01:

List the names of products which priced within range 30 to 60 (ProductName).

```
create table Products (
ProductName varchar(50),
Price decimal(10,2)
);
insert into Products(ProductName, Price)
values
("Laptop", 54.67),
("Mouse", 30),
("PC", 65.9),
("Keyboard", 62),
("Charger", 10.55),
("Earbuds", 70);

select ProductName from Products where Price >= 30 and Price <= 60;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ProductName
Laptop
Mouse

Result Grid

Task-02:

Which employees are fluent in French? (EmployeeID, FirstName).

```sql
create table Employees (
EmployeeID int primary key,
FirstName varchar(50),
LastName varchar(50),
Language varchar(50)
);
insert into Employees(EmployeeID, FirstName, LastName, Language)
values
(1, "Steven", "King", "English"),
(2, "Sarah", "Connar", "French"),
(3, "John", "Smith", "German"),
(4, "David", "Lee", "French"),
(5, "Sophie", "Brown", "English");

select EmployeeID, FirstName from Employees where Language = "French";
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

EmployeeID	FirstName
2	Sarah
4	David
NULL	NULL

Task-03:

List employees who have completed a degree in psychology (FirstName, LastName).

```sql
create table EmployeesDegree (
EmployeeID int primary key,
FirstName varchar(50),
LastName varchar(50),
Degree varchar(50)
);
insert into EmployeesDegree(EmployeeID, FirstName, LastName, Degree)
values
(1, "Steven", "King", "CS"),
(2, "Sarah", "Connar", "MBBS"),
(3, "John", "Smith", "Psychology"),
(4, "David", "Lee", "SE"),
(5, "Sophie", "Brown", "CS"),
(6, "Stark", "Lannister", "Psychology");

select FirstName, LastName from EmployeesDegree where Degree = "Psychology";
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

FirstName	LastName
John	Smith
Stark	Lannister

Task-04:

Display employees whose FirstName starts with ‘S’ and Title contains ‘Manager’ (EmployeeID, FirstName).

```sql
create table EmployeesTitle (
EmployeeID int primary key,
FirstName varchar(50),
LastName varchar(50),
Title varchar(50)
);
insert into EmployeesTitle(EmployeeID, FirstName, LastName, Title)
values
(1, "Steven", "King", "Developer"),
(2, "Sarah", "Connar", "Sales Manager"),
(3, "John", "Smith", "HR Manager"),
(4, "David", "Lee", "Accountant"),
(5, "Sophie", "Brown", "Sales Representative"),
(6, "Stark", "Lannister", "Assistant Manager");

select EmployeeID, FirstName from EmployeesTitle where FirstName like 'S%' and Title like '%Manager%';
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

EmployeeID	FirstName
2	Sarah
6	Stark
NULL	NULL

Task-05:

List all orders where the EmployeeID is assigned (OrderID, EmployeeID, ShipperID).

```sql
create table Orders (
OrderID int primary key,
EmployeeID int,
ShipperID int
);
insert into Orders(OrderID, EmployeeID, ShipperID)
values
(101, 1, 2),
(102, 2, 1),
(103, null, 3),
(104, 4, 1),
(105, null, 2),
(106, 6, 3);

select OrderID, EmployeeID, ShipperID from Orders where EmployeeID is not null;
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

OrderID	EmployeeID	ShipperID
101	1	2
102	2	1
104	4	1
106	6	3
NULL	NULL	NULL

Result Grid | Form Editor

Task-06:

Retrieve suppliers with a SupplierID in between 5 and 15 and Country is ‘USA’ (SupplierName, SupplierID).

```sql
create table Suppliers (
SupplierID int primary key,
SupplierName varchar(50),
Country varchar(50)
);
insert into Suppliers(SupplierID, SupplierName, Country)
values
(6, "John", "UK"),
(8, "Stark", "USA"),
(4, "Lannister", "Pakistan"),
(10, "Walter", "Japan"),
(15, "Bolton", "USA"),
(2, "Guss", "USA");

select SupplierID, SupplierName from Suppliers where SupplierID between 5 and 15 and Country = 'USA';
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

SupplierID	SupplierName
8	Stark
15	Bolton
NULL	NULL


Result Grid

Task-07:

Retrieve orders that are placed in the year ‘1996’ (OrderID, OrderDate).

```sql
create table OrderYear (
OrderID int primary key,
OrderDate date
);
insert into OrderYear(OrderID, OrderDate)
values
(101, '2000-02-20'),
(102, '2006-12-15'),
(103, '1996-08-2'),
(104, '1998-10-9'),
(105, '1996-05-23'),
(106, '1997-01-28');

select OrderID, OrderDate from OrderYear where year(OrderDate) = 1996;
```

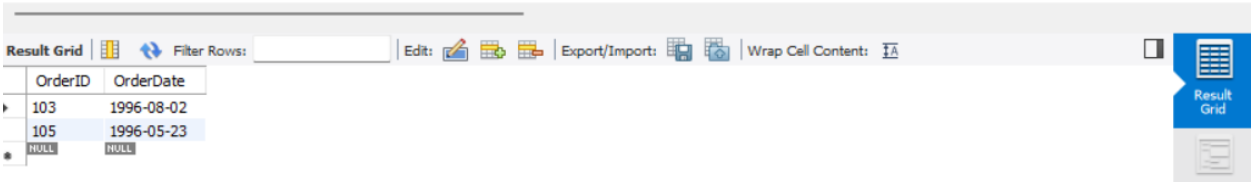

Task-08 & 09:

- Retrieve products where the ProductName ends with the letter "C" (ProductName, Price).
- List the products which are shipped in boxes. (ProductName)

```sql
create table ProductsGroccery (
ProductID int primary key,
ProductName varchar(50),
Price decimal(10,2),
Packaging varchar(50)
);
insert into ProductsGroccery(ProductID, ProductName, Price, Packaging)
values
(1, "Chai", 10.00, "12 bottels"),
(2, "Syrup", 20.10, "100 boxes"),
(3, "Vitamin C", 30.00, "100 tablets"),
(4, "Dark Chocolate", 35.55, "24 bars"),
(5, "Energy Mix C", 3.10, "1 gallon"),
(6, "Cereal C", 5.99, "12 boxes");

select ProductName, Price from ProductsGroccery where ProductName like '%C' and Packaging like '%boxes%';
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ProductName	Price
Cereal C	5.99

Task-10:

List the customers who do not live in Portland but belong to the USA (CustomerName, City).

```sql
create table Customers (
CustomerID int primary key,
CustomerName varchar(50),
City varchar(50),
Country varchar(50)
);
insert into Customers(CustomerID, CustomerName, City, Country)
values
(101, "Jesse", "Eugene", "USA"),
(102, "Pinkman", "Portland", "USA"),
(103, "Fring", "Seattle", "USA"),
(104, "Head", "Paris", "France"),
(105, "Maison", "Kirkland", "USA"),
(106, "Grejoy", "Elgin", "UK");

select CustomerName, City from Customers where City != "Portland" and Country = "USA";
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

CustomerName	City
Jesse	Eugene
Fring	Seattle
Maison	Kirkland