



**MALAD KANDIVALI EDUCATION SOCIETY'S**  
**NAGINDAS KHANDWALA COLLEGE OF COMMERCE, ARTS &**  
**MANAGEMENT STUDIES & SHANTABEN NAGINDAS KHANDWALA**  
**COLLEGE OF SCIENCE**  
**MALAD [W], MUMBAI – 64**  
**AUTONOMOUS INSTITUTION**  
(Affiliated To University Of Mumbai)  
Reaccredited 'A' Grade by NAAC | ISO 9001:2015 Certified

**CERTIFICATE**

Name: Mr./Ms. Surya Suresh

Roll No: 303 Programme: BSc CS Semester: III

This is certified to be a bonafide record of practical works done by the above student in the college laboratory for the course **Data Structures (Course Code: 2032UISPR)** for the partial fulfilment of Third Semester of BSc IT during the academic year 2020-21.

The journal work is the original study work that has been duly approved in the year 2020-21 by the undersigned.

\_\_\_\_\_  
External Examiner

\_\_\_\_\_  
Mr. Gangashankar Singh  
(Subject-In-Charge)

Date of Examination: (College Stamp)

**Subject: Data Structures****INDEX**

Sr No	Date	Topic	Sign
1	04/09/2020	Implement the following for Array: a) Write a program to store the elements in 1-D array and provide an option to perform the operations like searching, sorting, merging, reversing the elements. b) Write a program to perform the Matrix addition, Multiplication and Transpose Operation.	
2	11/09/2020	Implement Linked List. Include options for insertion, deletion and search of a number, reverse the list and concatenate two linked lists.	
3	18/09/2020	Implement the following for Stack: a) Perform Stack operations using Array implementation. b. b) Implement Tower of Hanoi. c) WAP to scan a polynomial using linked list and add two polynomials. d) WAP to calculate factorial and to compute the factors of a given no. (i) using recursion, (ii) using iteration	
4	25/09/2020	Perform Queues operations using Circular Array implementation.	
5	01/10/2020	Write a program to search an element from a list. Give user the option to perform Linear or Binary search.	
6	09/10/2020	WAP to sort a list of elements. Give user the option to perform sorting using Insertion sort, Bubble sort or Selection sort.	
7	16/10/2020	Implement the following for Hashing: a) Write a program to implement the collision technique. b) Write a program to implement the concept of linear probing.	
8	23/10/2020	Write a program for inorder, postorder and preorder traversal of tree.	

## PRACTICAL 1A

**Aim:** Implement the following array:- write a program to store the elements in 1-D array and provide an option to perform the operations like searching, sorting, merging, reversing the elements.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

**Searching:** You can search an array for a certain value, and return the indexes that get a match. To search an array, use the `where()` method.

**Sorting:** Sorting means putting elements in an ordered sequence. Ordered sequence is any sequence that has an order corresponding to elements, like numeric or alphabetical, ascending or descending. The NumPy ndarray object has a function called `sort()`, that will sort a specified array.

**Merging:** There are several ways to join, or concatenate, two or more lists in Python. One of the easiest ways are by using the `+` operator. Another way to join two lists are by appending all the items from `list2` into `list1`, one by one or you can use the `extend()` method, which purpose is to add elements from one list to another list.


**Reversing:** Using the `reversed()` built-in function.

In this method, we neither reverse a list in-place(modify the original list), nor we create any copy of the list. Instead, we get a reverse iterator which we use to cycle through the list.

Using the `reverse()` built-in function.

Using the `reverse()` method we can reverse the contents of the list object in-place i.e., we don't need to create a new list instead we just copy the existing elements to the original list in reverse order. This method directly modifies the original list.


### Code:

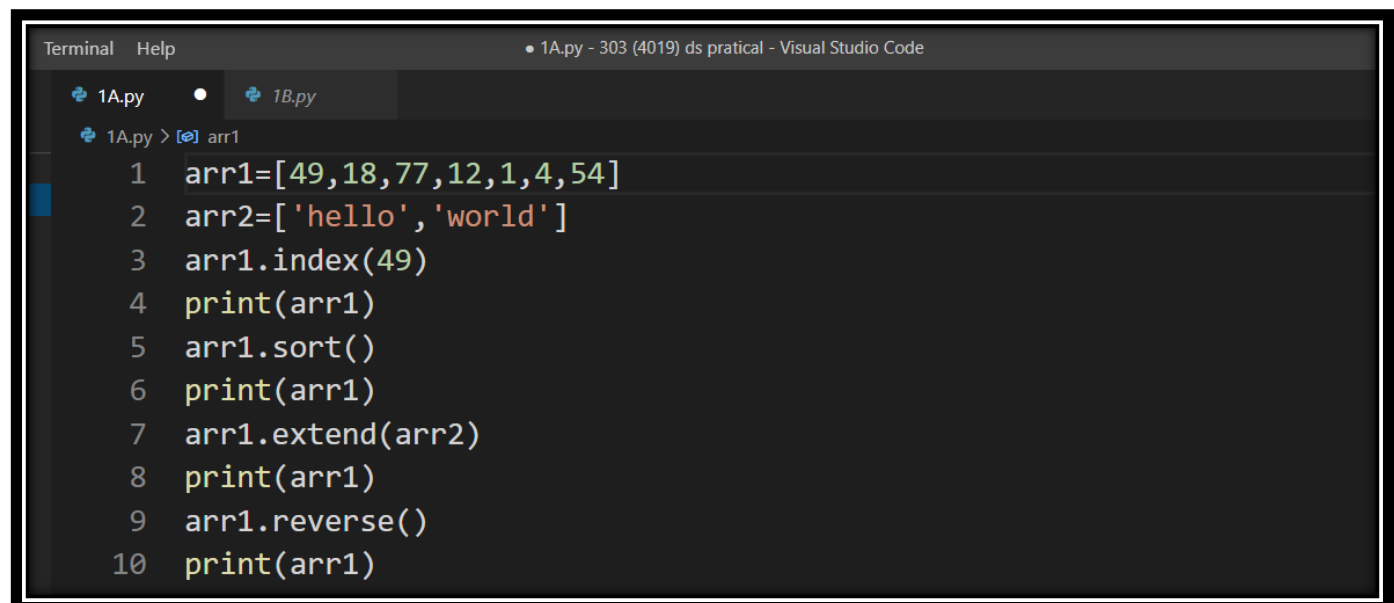

```
Terminal  Help  • 1A.py - 303 (4019) ds pratical - Visual Studio Code

1A.py 1B.py
1A.py > [arr1]
1 arr1=[49,18,77,12,1,4,54]
2 arr2=['hello','world']
3 arr1.index(49)
4 print(arr1)
5 arr1.sort()
6 print(arr1)
7 arr1.extend(arr2)
8 print(arr1)
9 arr1.reverse()
10 print(arr1)
```

## Output:

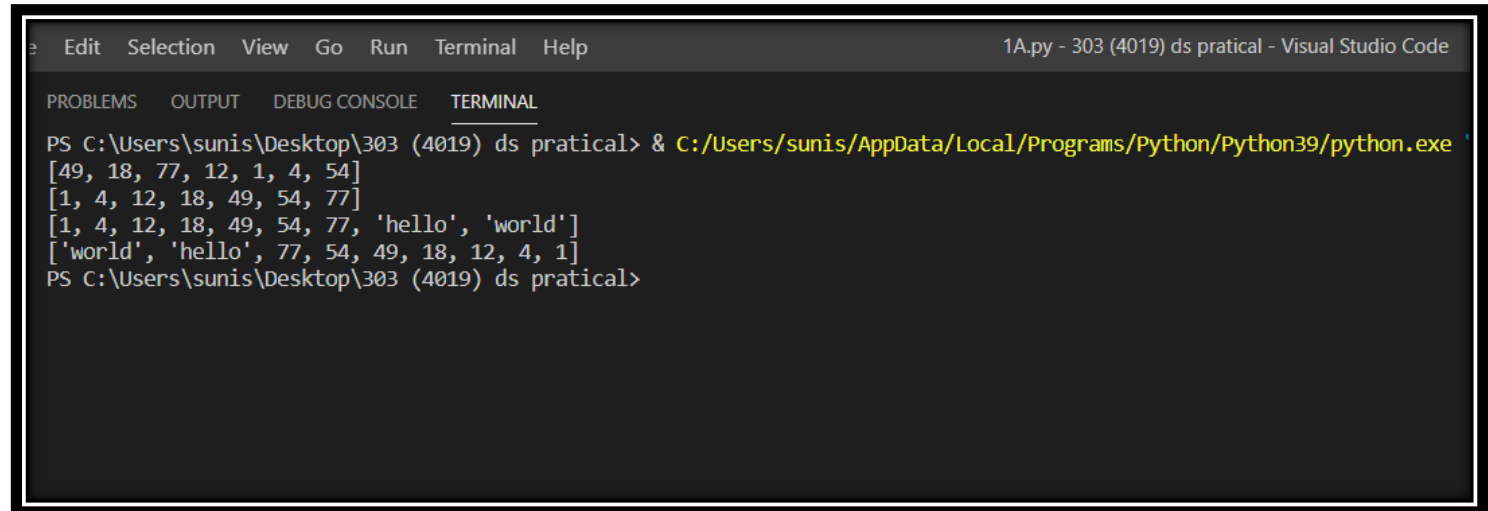

The screenshot shows a Visual Studio Code interface with a terminal window open. The terminal title bar reads "1A.py - 303 (4019) ds pratical - Visual Studio Code". The terminal content shows a command prompt session where a Python script is executed. The output of the script is displayed on four lines: a list of integers, a list of integers, a list containing strings and integers, and a list containing strings and integers. The prompt "PS C:\Users\sunis\Desktop\303 (4019) ds pratical>" is shown at the end of the output.

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe '
[49, 18, 77, 12, 1, 4, 54]
[1, 4, 12, 18, 49, 54, 77]
[1, 4, 12, 18, 49, 54, 77, 'hello', 'world']
['world', 'hello', 77, 54, 49, 18, 12, 4, 1]
PS C:\Users\sunis\Desktop\303 (4019) ds pratical>
```

## PRACTICAL 1B

**Aim:** Write a program to perform a matrix addition, multiplication and transpose operation.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

**Matrix Addition:** In Python, we can implement a matrix as a nested list (list inside a list). We can treat each element as a row of the matrix.

For example  $X = [[1, 2], [4, 5], [3, 6]]$  would represent a 3x2 matrix. First row can be selected as  $X[0]$  and the element in first row, first column can be selected as  $X[0][0]$ .

We can perform matrix addition in various ways in Python:

1. Matrix Addition using Nested Loop.
2. Matrix Addition using Nested List Comprehension.

**Matrix Multiplication:** In Python, we can implement a matrix as nested list (list inside a list).

We can treat each element as a row of the matrix.

For example  $X = [[1, 2], [4, 5], [3, 6]]$  would represent a 3x2 matrix.

The first row can be selected as  $X[0]$ . And, the element in first row, first column can be selected as  $X[0][0]$ .

Multiplication of two matrices  $X$  and  $Y$  is defined only if the number of columns in  $X$  is equal to the number of rows  $Y$ .

If  $X$  is a  $n \times m$  matrix and  $Y$  is a  $m \times l$  matrix then,  $XY$  is defined and has the dimension  $n \times l$  (but  $YX$  is not defined). Here are a couple of ways to implement matrix multiplication in Python.

We can perform matrix multiplication in various ways in Python:

1. Matrix Multiplication using Nested Loop.
2. Matrix Multiplication using Nested List Comprehension.

**Matrix Transpose:** In Python, we can implement a matrix as a nested list (list inside a list). We can treat each element as a row of the matrix.

For example  $X = [[1, 2], [4, 5], [3, 6]]$  would represent a 3x2 matrix. The first row can be selected as  $X[0]$ . And, the element in the first-row first column can be selected as  $X[0][0]$ .

Transpose of a matrix is the interchanging of rows and columns. It is denoted as  $X'$ . The element at  $i$ th row and  $j$ th column in  $X$  will be placed at  $j$ th row and  $i$ th column in  $X'$ . So if  $X$  is a 3x2 matrix,  $X'$  will be a 2x3 matrix.

We can perform matrix transpose various ways in Python:

1. Matrix Transpose using Nested Loop.
2. Matrix Transpose using Nested List Comprehension.

Code:

```
1B.py > ...
1 #Addition
2 mat1 = [[29,18],[26,40]]
3 mat2 = [[14,12],[13,25]]
4 mat3 = [[0,0],[0,0]]
5 for i in range(0,2):
6     for j in range(0,2):
7         mat3[i][j] = mat1[i][j] + mat2[i][j]
8         print("Addition of two matrices")
9 for i in range(0,2):
10     for j in range(0,2):
11         print(mat3[i][j], end = "")
12         print()
13
14 #Multiplication
15 mat1 = [[9,18],[6,49]]
16 mat2 = [[60,51],[14,32]]
17 mat3 = [[0,0],[0,0]]
18 for i in range(0,2):
19     for j in range(0,2):
20         mat3[i][j] = mat1[i][j] * mat2[i][j]
21         print("Multiplication of two matrices")
22 for i in range(0,2):
23     for j in range(0,2):
24         print(mat3[i][j], end = "")
```

```

25         print()
26
27     #Tranpose
28     X = [[40,19],
29          [81,37]]
30     result = [[0,0],
31               [0,0]]
32     for i in range(len(X)):
33         for j in range(len(X[0])):
34             result[j][i] = X[i][j]
35             print("Transpose Of Two Matrices")
36     for r in result:
37         print(r)

```

Output:

```

PS C:\Users\sunis\Desktop\303 (4019) ds pratical>
Addition of two matrices
Addition of two matrices
Addition of two matrices
Addition of two matrices
43
30
39
65
Multiplication of two matrices
Multiplication of two matrices
Multiplication of two matrices
Multiplication of two matrices
540
918
84
1568
Transpose Of Two Matrices
Transpose Of Two Matrices
Transpose Of Two Matrices
Transpose Of Two Matrices
[40, 81]
[19, 37]

```

## PRACTICAL 2

**Aim:** Implement Linked List. Include options for insertion, deletion and search of a number, reverse the list and concatenate the two linked list.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

Inserting element in the linked list involves reassigning the pointers from the existing nodes to the newly inserted node. Depending on whether the new data element is getting inserted at the beginning or at the middle or at the end of the linked list, we have the below scenarios.

#### Inserting at the Beginning of the Linked List

This involves pointing the next pointer of the new data node to the current head of the linked list. So the current head of the linked list becomes the second data element and the new node becomes the head of the linked list.

#### Inserting at the End of the Linked List

This involves pointing the next pointer of the the current last node of the linked list to the new data node. So the current last node of the linked list becomes the second last data node and the new node becomes the last node of the linked list.

We can remove an existing node using the key for that node. In the below program we locate the previous node of the node which is to be deleted. Then point the next pointer of this node to the next node of the node to be deleted.

Singly linked lists can be traversed in only forward direction starting from the first data element. We simply print the value of the next data element by assigning the pointer of the next node to the current data element.





## Code:

2.py > Stack > peek

```
1 class Stack():
2     def __init__(self):
3         self.items = ['2', '0', '4', '9', 'BATCHER']
4     def end(self, item):
5         self.items.append(item)
6         print(item)
7     def peek(self):
8         if self.items:
9             return self.items[-1]
10        else:
11            return None
12    def size(self):
13        if self.items:
14            return len(self.items)
15        else:
16            return None
17    def display(self):
18        for i in self.items:
19            print(i)
20    def start(self, i):
21        self.items.insert(0, i)
22    def search(self, a):
23        l = self.items
24        for i in l:
```

```
24  ✓         for i in l:
25  ✓             if i == a:
26  ✓                 print("found Value : ", a)
27  ✓                 break
28  ✓         else:
29  ✓             print("not found")
30  ✓ def traverse(self):
31  ✓     a = []
32  ✓     l = self.items
33  ✓     for i in l:
34  ✓         a.append(i)
35  ✓     print(a)
36  ✓ def shoting_element(self):
37  ✓     #bubble shotting
38  ✓     nums=self.items
39  ✓     def sort(nums):
40  ✓         for i in range(len(nums) - 1, 0, -1):
41  ✓             for j in range(i):
42  ✓                 if nums[j] > nums[j + 1]:
43  ✓                     temp = nums[j]
44  ✓                     nums[j] = nums[j + 1]
45  ✓                     nums[j + 1] = temp
46  ✓     sort(nums)
47  ✓     print(nums)
48  ✓ #reverse
49  ✓ def reverse(self):
50  ✓     l=self.items
51  ✓     print(l[::-1])
52  ✓ def remove_value_from_particular_index(self,a):
```

2.py >  Stack >  peek

```
52     def remove_value_from_particular_index(self,a):
53         l=self.items
54         l.pop(a)
55         print(l)
56 class merge1(Stack):
57     #inheritance
58     def __init__(self):
59         Stack.__init__(self)
60         self.items1 = ['2','0','4','9','8']
61     def merge(self):
62         l = self.items
63         l1=self.items1
64         a=(l+l1)
65         a.sort()
66         print(a)
67 s = Stack()
68 # Inserting the values
69 s.end('-1')
70 s.start('-2')
71 s.start('5')
72 s.end('6')
73 s.end('7')
74 s.start('-1')
75 s.start('-2')
76 print("searching the specific value : ")
77 s.search('-2')
78
79 print("Display the values one by one :")
80 s.display()
```

```

81 print("peek (End Value) :", s.peek())
82 print("treverse the values : ")
83 s.traverse()
84 #Sorting element
85 print("Sorting the values : ")
86 s.shoting_element()
87 #reversing the list
88 print("Reversing the values : ")
89 s.reverse()
90
91 print("remove value from particular index which is defined earlier")
92 s.remove_value_from_particular_index(0)
93
94 s1=merge1()
95 print("merge")
96 s1.merge()
97

```

## Output:

```

PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/P
-1
6
7
searching the specific value :
found Value : -2
Display the values one by one :
-2
-1
5
-2
2
0
4
9
BATCHER
-1
6
7
peek (End Value) : 7
treverse the values :
['-2', '-1', '5', '-2', '2', '0', '4', '9', 'BATCHER', '-1', '6', '7']
Sorting the values :
['-1', '-1', '-2', '-2', '0', '2', '4', '5', '6', '7', '9', 'BATCHER']
Reversing the values :
['BATCHER', '9', '7', '6', '5', '4', '2', '0', '-2', '-2', '-1', '-1']
remove value from particular index which is defined earlier
['-1', '-2', '-2', '0', '2', '4', '5', '6', '7', '9', 'BATCHER']
merge
['0', '0', '2', '2', '4', '4', '8', '9', '9', 'BATCHER']

```

## PRACTICAL 3A

**Aim:** Implement the following for stack :- Perform stack operations using Array implementation.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

A stack data structure can be implemented using a one-dimensional array. But stack implemented using array stores only a fixed number of data values. This implementation is very simple. Just define a one dimensional array of specific size and insert or delete the values into that array by using LIFO principle with the help of a variable called 'top'. Initially, the top is set to -1. Whenever we want to insert a value into the stack, increment the top value by one and then insert. Whenever we want to delete a value from the stack, then delete the top value and decrement the top value by one.

**push(value)** - Inserting value into the stack

In a stack, push() is a function used to insert an element into the stack. In a stack, the new element is always inserted at top position. Push function takes one integer value as parameter and inserts that value into the stack. We can use the following steps to push an element on to the stack...

- **Step 1** - Check whether stack is FULL. (top == SIZE-1)
- **Step 2** - If it is FULL, then display "Stack is FULL!!! Insertion is not possible!!!" and terminate the function.
- **Step 3** - If it is NOT FULL, then increment top value by one (top++) and set stack[top] to value (stack[top] = value).

**pop()** - Delete a value from the Stack

In a stack, pop() is a function used to delete an element from the stack. In a stack, the element is always deleted from top position. Pop function does not take any value as parameter. We can use the following steps to pop an element from the stack...

- **Step 1** - Check whether stack is EMPTY. (top == -1)
- **Step 2** - If it is EMPTY, then display "Stack is EMPTY!!! Deletion is not possible!!!" and terminate the function.
- **Step 3** - If it is NOT EMPTY, then delete stack[top] and decrement top value by one (top--).

**display()** - Displays the elements of a Stack

We can use the following steps to display the elements of a stack...

- **Step 1** - Check whether stack is EMPTY. (top == -1)
- **Step 2** - If it is EMPTY, then display "Stack is EMPTY!!!" and terminate the function.
- **Step 3** - If it is NOT EMPTY, then define a variable 'i' and initialize with top. Display stack[i] value and decrement i value by one (i--).
- **Step 3** - Repeat above step until i value becomes '0'.

## Code:

```
3A.py x
3A.py > ...
1  from sys import maxsize
2  def createStack():
3      stack = []
4      return stack
5  def isEmpty(stack):
6      return len(stack) == 0
7  def push(stack, item):
8      stack.append(item)
9      print(item + " pushed to stack ")
10 def pop(stack):
11     if (isEmpty(stack)):
12         return str(-maxsize -1)
13     return stack.pop()
14 def peek(stack):
15     if (isEmpty(stack)):
16         return str(-maxsize -1)
17     return stack[len(stack) - 1]
18 stack = createStack()
19 push(stack, str(3))
20 push(stack, str(3))
21 push(stack, str(1))
22 print(pop(stack) + " popped from stack")
```

## Output:

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> python 3A.py
3 pushed to stack
3 pushed to stack
1 pushed to stack
1 popped from stack
```

## PRACTICAL 3B

**Aim:** Implement Tower of Hanoi.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

Tower of Hanoi is a mathematical puzzle where we have three rods and  $n$  disks. The objective of the puzzle is to move the entire stack to another rod, obeying the following simple rules:

- 1) Only one disk can be moved at a time.
- 2) Each move consists of taking the upper disk from one of the stacks and placing it on top of another stack i.e. a disk can only be moved if it is the uppermost disk on a stack.
- 3) No disk may be placed on top of a smaller disk.

Note: Transferring the top  $n-1$  disks from source rod to Auxiliary rod can again be thought of as a fresh problem and can be solved in the same manner.

### Code:

```
3B.py X
3B.py > hanoi
1 def hanoi(disks, source, auxiliary, target):
2     if disks == 1:
3         print('Move disk 1 from peg {} to peg {}'.format(source, target))
4         return
5
6     hanoi(disks - 1, source, target, auxiliary)
7     print('Move disk {} from peg {} to peg {}'.format(disks, source, target))
8     hanoi(disks - 1, auxiliary, source, target)
9
10
11 disks = int(input('Enter number of disks: '))
12 hanoi(disks, 'A', 'B', 'C')
```

### Output:

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> &
Enter number of disks: 2
Move disk 1 from peg A to peg B.
Move disk 2 from peg A to peg C.
Move disk 1 from peg B to peg C.
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> &
Enter number of disks: 3
Move disk 1 from peg A to peg C.
Move disk 2 from peg A to peg B.
Move disk 1 from peg C to peg B.
Move disk 3 from peg A to peg C.
Move disk 1 from peg B to peg A.
Move disk 2 from peg B to peg C.
Move disk 1 from peg A to peg C.
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> |
```

## PRACTICAL 3C

**Aim:** WAP to scan a polynomial using linked list and add two polynomial.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

A linked list is a sequence of data elements, which are connected together via links. Each data element contains a connection to another data element in form of a pointer. Python does not have linked lists in its standard library. We implement the concept of linked lists using the concept of nodes as discussed in the previous chapter. We have already seen how we create a node class and how to traverse the elements of a node. In this chapter we are going to study the types of linked lists known as singly linked lists. In this type of data structure there is only one link between any two data elements. We create such a list and create additional methods to insert, update and remove elements from the list.

### Code:

```
3C.py > add
1  def add(A, B, m, n):
2      size = max(m, n);
3      sum = [0 for i in range(size)]
4      for i in range(0, m, 1):
5          sum[i] = A[i]
6      for i in range(n):
7          sum[i] += B[i]
8      return sum
9
10 def printPoly(poly, n):
11     for i in range(n):
12         print(poly[i], end = "")
13         if (i != 0):
14             print("x^", i, end = "")
15         if (i != n - 1):
16             print(" + ", end = "")
17
18 if __name__ == '__main__':
19     A = [6,1,11,7]
20     B = [2,3,5]
21     m = len(A)
22     n = len(B)
23     print("First polynomial is")
24     printPoly(A, m)
25     print("\n", end = "")
26     print("Second polynomial is")
27     printPoly(B, n)
28     print("\n", end = "")
29     sum = add(A, B, m, n)
30     size = max(m, n)
31
32     print("sum polynomial is")
33     printPoly(sum, size)
```



## Output:

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python
First polynomial is
6 + 1x^ 1 + 11x^ 2 + 7x^ 3
Second polynomial is
2 + 3x^ 1 + 5x^ 2
sum polynomial is
8 + 4x^ 1 + 16x^ 2 + 7x^ 3
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> 
```

## PRACTICAL 3D

**Aim** WAP to calculate factorial and to compute the factors of a given no.(i) using recursion, (ii) using iteration.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

The factorial of a number is the product of all the integers from 1 to that number.

For example, the factorial of 6 is  $1*2*3*4*5*6 = 720$ . Factorial is not defined for negative numbers and the factorial of zero is one,  $0! = 1$ .

Iterative Solution:

Factorial can also be calculated iteratively as recursion can be costly for large numbers. Here we have shown the iterative approach using both for and while loop. Using For loop

### Code:

```
3D.py x
3D.py > factorial
1 def recur_factorial(n):
2     if n == 1:
3         return n
4     else:
5         return n*recur_factorial(n-1)
6
7 num = int(input("Enter a number: "))
8
9 if num < 0:
10     print("Sorry, factorial does not exist for negative numbers")
11 elif num == 0:
12     print("The factorial of 0 is 1")
13 else:
14     print("The factorial of",num,"is",recur_factorial(num))
15
16 def factorial(n):
17
18     fact = 1
19     for i in range(1, n + 1):
20         fact = fact * i
21
22     return fact
23
24
25 if __name__ == '__main__':
26     print("The Factorial of", n, "is", factorial(n))
27
28 #using iteration
29 def fact(number):
30
31     fact = 1
32
33     for number in range(5, 1,-1):
34
35         fact = fact * number
36     return fact
```

```
40 factorial = fact(number)
41 print("Factorial is "+str(factorial))
```

### Output:

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe
Enter a number: 65
The factorial of 65 is 824765059208247066672317030678549625218625855134543749292212313438895577497600000000000000
Enter a number for iteration : 2
Factorial is 120
```

## PRACTICAL 4

**Aim** Perform Queues operations using Circular array implementation.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

A Circular Queue is a queue data structure but circular in shape, therefore after the last position, the next place in the queue is the first position.

We recommend you to first go through the Linear Queue tutorial before Circular queue, as we will be extending the same implementation.

In case of Linear queue, we did not had the head and tail pointers because we used python List for implementing it. But in case of a circular queue, as the size of the queue is fixed, hence we will set a max size for our list used for queue implementation.

### Code:

```
4.py > Stack
1 class Stack():
2     def __init__(self):
3         self.items = [4,3,2,4,3,0,9]
4     def enqueue(self,item):
5         self.items.append(item)
6         print(item)
7     def deque(self):
8         b= self.items
9         b.pop()
10        print(b)
11    def traverse(self):
12        a = []
13        l = self.items
14        for i in l:
15            a.append(i)
16        print(a)
17 s=Stack()
18 print("Adding the element in the queue : ")
19 s.enqueue(5)
20 print("initial queue : ")
21 s.traverse()
22 print("After removing an element from the queue : ")
23 s.deque()
```

### Output:

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe
Adding the element in the queue :
6
initial queue :
[4, 3, 2, 4, 3, 0, 9, 6]
After removing an element from the queue :
[4, 3, 2, 4, 3, 0, 9]
```

## PRACTICAL 5

**Aim** Write a program to search an element from a list. Give user the option to perform Linear or binary search.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

Searching is a very basic necessity when you store data in different data structures. The simplest approach is to go across every element in the data structure and match it with the value you are searching for. This is known as Linear search. It is inefficient and rarely used, but creating a program for it gives an idea about how we can implement some advanced search algorithms.

#### Linear Search:

In this type of search, a sequential search is made over all items one by one. Every item is checked and if a match is found then that particular item is returned, otherwise the search continues till the end of the data structure.

#### Binary Search:

Search a sorted array by repeatedly dividing the search interval in half. Begin with an interval covering the whole array. If the value of the search key is less than the item in the middle of the interval, narrow the interval to the lower half. Otherwise narrow it to the upper half. Repeatedly check until the value is found or the interval is empty.

### Code:

```
5.py > list1
1 list1 = [42,49,54,60,64,20,10,62,71,25,41,24,87]
2 print("List = ",list1)
3 size = len(list1)
4 def binary_search(x):
5     print("BINARY SEARCHING")
6     low = 0
7     high = len(list1) - 1
8     mid = 0
9     while low <= high:
10         mid = (high + low) // 2
11         if list1[mid] < x:
12             low = mid + 1
13         elif list1[mid] > x:
14             high = mid - 1
15         else:
16             return mid
17     return -1
```

```

19 def lsearching(n):
20     print("LINEAR SEARCHING")
21     if n not in list1:
22         print(n,"not in the list")
23     else:
24         for i in range(size):
25             if list1[i]==n:
26                 print("index of ", n," is ",i)
27
28 n = input("Enter(L)for Linear Search and(B)for Binary Search\n")
29 if n=="L" or n=="l":
30     v = int(input("Enter a no. from the list1"))
31     lsearching(v)
32 elif n=="B" or n=="b":
33     v = int(input("Enter a no. from the list1"))
34     print("Index of ",v," is ",binary_search(v))
35 else:
36     print("Invalid input")

```

### Output:

```

PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python
List = [42, 49, 54, 60, 64, 20, 10, 62, 71, 25, 41, 24, 87]
Enter(L)for Linear Search and(B)for Binary Search
b
Enter a no. from the list124
BINARY SEARCHING
Index of 24 is -1
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python
List = [42, 49, 54, 60, 64, 20, 10, 62, 71, 25, 41, 24, 87]
Enter(L)for Linear Search and(B)for Binary Search
L
Enter a no. from the list171
LINEAR SEARCHING
index of 71 is 8
PS C:\Users\sunis\Desktop\303 (4019) ds pratical>

```

## PRACTICAL 6

**Aim** WAP to sort a list of elements. Give user the option to perform sorting using Insertion sort, Bubble sort or selection sort.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

Sorting refers to arranging data in a particular format. Sorting algorithm specifies the way to arrange data in a particular order. Most common orders are in numerical or lexicographical order.

The importance of sorting lies in the fact that data searching can be optimized to a very high level, if data is stored in a sorted manner. Sorting is also used to represent data in more readable formats. Below we see five such implementations of sorting in python.

#### Bubble Sort

It is a comparison-based algorithm in which each pair of adjacent elements is compared and the elements are swapped if they are not in order.

#### Insertion Sort

Insertion sort involves finding the right place for a given element in a sorted list. So in beginning we compare the first two elements and sort them by comparing them. Then we pick the third element and find its proper position among the previous two sorted elements. This way we gradually go on adding more elements to the already sorted list by putting them in their proper position.

#### Selection Sort

In selection sort we start by finding the minimum value in a given list and move it to a sorted list. Then we repeat the process for each of the remaining elements in the unsorted list. The next element entering the sorted list is compared with the existing elements and placed at its correct position. So at the end all the elements from the unsorted list are sorted.

### Code:

```
1 class Sorting:
2
3     def __init__(self,lst):
4         self.lst = lst
5
6     def bubble_sort(self,lst):
7         for i in range(len(lst)):
8             for j in range(len(lst)):
9                 if lst[i] < lst[j]:
10                    lst[i],lst[j] = lst[j],lst[i]
11            else:
12                pass
13        return lst
14
15    def selection_sort(self,lst):
16        for i in range(len(lst)):
17            smallest_element = i
18            for j in range(i+1,len(lst)):
19                if lst[smallest_element] > lst[j]:
20                    smallest_element = j
21            lst[i],lst[smallest_element] = lst[smallest_element],lst[i]
22        return lst
```

```
24     def insertion_sort(self, lst):
25         for i in range(1, len(lst)):
26             index = lst[i]
27             j = i-1
28             while j >= 0 and index < lst[j] :
29                 lst[j + 1] = lst[j]
30                 j -= 1
31             lst[j + 1] = index
32         return lst
33
34     def run_sort(self):
35         while True:
36             print('Select the sorting algorithm:')
37             print('1. Bubble Sort.')
38             print('2. Selection Sort.')
39             print('3. Insertion Sort.')
40             print('4. Quit')
41             opt = int(input('Option: '))
42             if opt == 1:
43                 print(sort.bubble_sort(self.lst))
44             elif opt == 2:
45                 print(sort.selection_sort(self.lst))
46             elif opt == 3:
47                 print(sort.insertion_sort(self.lst))
48             else:
49                 break
50 lst = [4,2,3,9,12,1]
51 sort = Sorting(lst)
52 sort.run_sort()
```



## Output: -

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe
Select the sorting algorithm:
1. Bubble Sort.
3. Insertion Sort.
4. Quit
Option: 1
[1, 2, 3, 4, 9, 12]
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 2
[1, 2, 3, 4, 9, 12]
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 3
[1, 2, 3, 4, 9, 12]
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 4
```

## PRACTICAL 7A

**Aim** Implement the following for Hashing :- write a program to implement the collision technique.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

**Collision Techniques:** When one or more hash values compete with a single hash table slot, collisions occur. To resolve this, the next available empty slot is assigned to the current hash value. The most common methods are open addressing, chaining, probabilistic hashing, perfect hashing and coalesced hashing technique.

### Code:

```
1 class Hash:
2     def __init__(self, keys, lowerrange, higherrange):
3         self.value = self.hashfunction(keys, lowerrange, higherrange)
4
5     def get_key_value(self):
6         return self.value
7
8     def hashfunction(self, keys, lowerrange, higherrange):
9         if lowerrange == 0 and higherrange > 0:
10            return keys%(higherrange)
11
12 if __name__ == '__main__':
13     list_of_keys = [23, 43, 1, 87]
14     list_of_list_index = [None, None, None, None]
15     print("Before : " + str(list_of_list_index))
16     for value in list_of_keys:
17         #print(Hash(value, 0, len(list_of_keys)).get_key_value())
18         list_index = Hash(value, 0, len(list_of_keys)).get_key_value()
19         if list_of_list_index[list_index]:
20             print("Collision detected")
21         else:
22             list_of_list_index[list_index] = value
23
24     print("After: " + str(list_of_list_index))
```

### Output:

```
PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe
Before : [None, None, None, None]
Collision detected
Collision detected
After: [None, 1, None, 23]
```

## PRACTICAL 7B

**Aim:** write a program to implement the concept of linear probing.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

Linear probing is a component of open addressing schemes for using a hash table to solve the dictionary problem. In the dictionary problem, a data structure should maintain a collection of key–value pairs subject to operations that insert or delete pairs from the collection or that search for the value associated with a given key. In open addressing solutions to this problem, the data structure is an array  $T$  (the hash table) whose cells  $T_i$  (when nonempty) each store a single key–value pair. A hash function is used to map each key into the cell of  $T$  where that key should be stored, typically scrambling the keys so that keys with similar values are not placed near each other in the table. A hash collision occurs when the hash function maps a key into a cell that is already occupied by a different key. Linear probing is a strategy for resolving collisions, by placing the new key into the closest following empty cell.

### Code:

```
1 class Hash:
2     def __init__(self, keys, lowerrange, higherrange):
3         self.value = self.hashfunction(keys, lowerrange, higherrange)
4
5     def get_key_value(self):
6         return self.value
7
8     def hashfunction(self, keys, lowerrange, higherrange):
9         if lowerrange == 0 and higherrange > 0:
10             return keys % (higherrange)
11
12 if __name__ == '__main__':
13     linear_probing = True
14     list_of_keys = [43, 1, 87, 32, 34, 67, 30, 32, 46, 49, 24, 80, 72, 66, 56]
15     list_of_list_index = [None]*len(list_of_keys)
16     print("Before : " + str(list_of_list_index))
17     for value in list_of_keys:
18         # print(Hash(value,0,len(list_of_keys)).get_key_value())
19         list_index = Hash(value, 0, len(list_of_keys)).get_key_value()
20         print("hash value for " + str(value) + " is : " + str(list_index))
21         if list_of_list_index[list_index]:
22             print("Collission detected for " + str(value))
```

```

23         if linear_probing:
24             old_list_index = list_index
25             if list_index == len(list_of_list_index)-1:
26                 list_index = 0
27             else:
28                 list_index += 1
29                 list_full = False
30
31             while list_of_list_index[list_index]:
32
33                 if list_index == old_list_index:
34                     list_full = True
35                     break
36                 if list_index+1 == len(list_of_list_index):
37                     list_index = 0
38                 else:
39                     list_index += 1
40             if list_full:
41                 print("List was full . Could not save")
42             else:
43                 list_of_list_index[list_index] = value
44
45         else:
46             list_of_list_index[list_index] = value
47
48     print("After: " + str(list_of_list_index))

```

## Output:

```

PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe
Before : [None, None, None, None, None, None, None, None, None, None, None, None, None, None, None]
hash value for 43 is :13
hash value for 1 is :1
hash value for 87 is :12
hash value for 32 is :2
hash value for 34 is :4
hash value for 67 is :7
hash value for 30 is :0
hash value for 32 is :2
Collision detected for 32
hash value for 46 is :1
Collision detected for 46
hash value for 49 is :4
Collision detected for 49
hash value for 24 is :9
hash value for 80 is :5
Collision detected for 80
hash value for 72 is :12
Collision detected for 72
hash value for 66 is :6
Collision detected for 66
hash value for 56 is :11
After: [30, 1, 32, 32, 34, 46, 49, 67, 80, 24, 66, 56, 87, 43, 72]

```

## PRACTICAL 8

**Aim:** Write a program for inorder, preorder and postorder traversal of tree.

**Repository Link:** <https://github.com/SYKON77/303-4019-DS-practicals.git>

### Theory:

Unlike linear data structures (Array, Linked List, Queues, Stacks, etc) which have only one logical way to traverse them, trees can be traversed in different ways. Following are the generally used ways for traversing trees.

#### Uses of Inorder

In case of binary search trees (BST), Inorder traversal gives nodes in non-decreasing order. To get nodes of BST in non-increasing order, a variation of Inorder traversal where Inorder traversal is reversed can be used.

#### Uses of Preorder

Preorder traversal is used to create a copy of the tree. Preorder traversal is also used to get prefix expression on of an expression tree.

#### Uses of Postorder

Postorder traversal is used to delete the tree. Please see the question for deletion of tree for details. Postorder traversal is also useful to get the postfix expression of an expression tree.

### Code:

```
1 import random
2 random.seed(36)
3 class Node:
4     def __init__(self, val):
5         self.val = val
6         self.leftChild = None
7         self.rightChild = None
8
9 def insert(root, key):
10     if root is None:
11         return Node(key)
12     else:
13         if root.val == key:
14             return root
15         elif root.val < key:
16             root.rightChild = insert(root.rightChild, key)
17         else:
18             root.leftChild = insert(root.leftChild, key)
19     return root
```

```

21 def PrintInorder(root):
22     if root:
23         PrintInorder(root.leftChild)
24         print(root.val, end=" ")
25         PrintInorder(root.rightChild)
26
27 def printPreorder(root):
28     if root:
29         print(root.val, end=" ")
30         printPreorder(root.leftChild)
31         printPreorder(root.rightChild)
32
33 def printPostorder(root):
34     if root:
35         printPostorder(root.leftChild)
36         printPostorder(root.rightChild)
37         print(root.val, end=" ")
38
39 tree = Node(30)
40 for i in range(20):
41     insert(tree, random.randint(2, 100))
42
43 if __name__ == "__main__":
44     print("inorder")
45     PrintInorder(tree)
46     print("\n")
47     print("preorder")
48     printPreorder(tree)
49     print("\n")

```

```

50     print("postorder")
51     printPostorder(tree)

```

### Output:

```

PS C:\Users\sunis\Desktop\303 (4019) ds pratical> & C:/Users/sunis/AppData/Local/Programs/Python/Python39/python.exe
inorder
2 4 9 11 12 24 30 33 36 38 44 48 57 66 71 73 75 82 85 95

preorder
30 9 4 2 12 11 24 44 38 33 36 66 57 48 82 73 71 75 95 85

postorder
2 4 11 24 12 9 36 33 38 48 57 71 75 73 85 95 82 66 44 30

```