<create> Client

<u>Typical RRQ</u>

<create>
ListenerServer

RRQ(source = Client, dest = 69)

Establish Connection

<create>
ReadThread
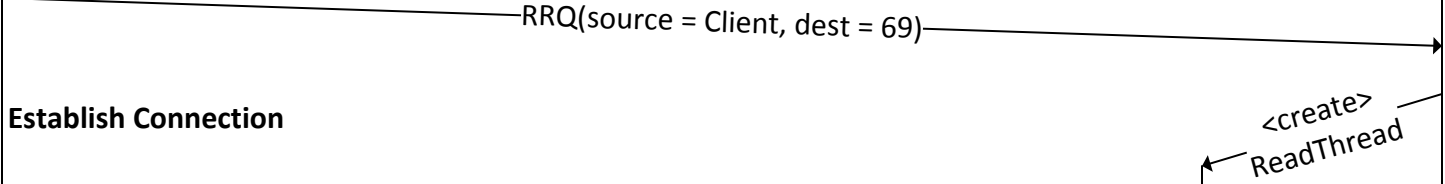
DATA(blk#=1, source = ReadThread, dest = Client)

ACK(blk# = 1, source = Client, dest = ReadThread)

File Transfer

DATA(blk#=n, source = ReadThread, dest = Client)
(Data packet contains 0..511 bytes of data)

ACK(blk# = n, source = ReadThread, dest = Client)
(Final ACK)

<close>
ReadThread