


2520030405 Sashank Chivukula

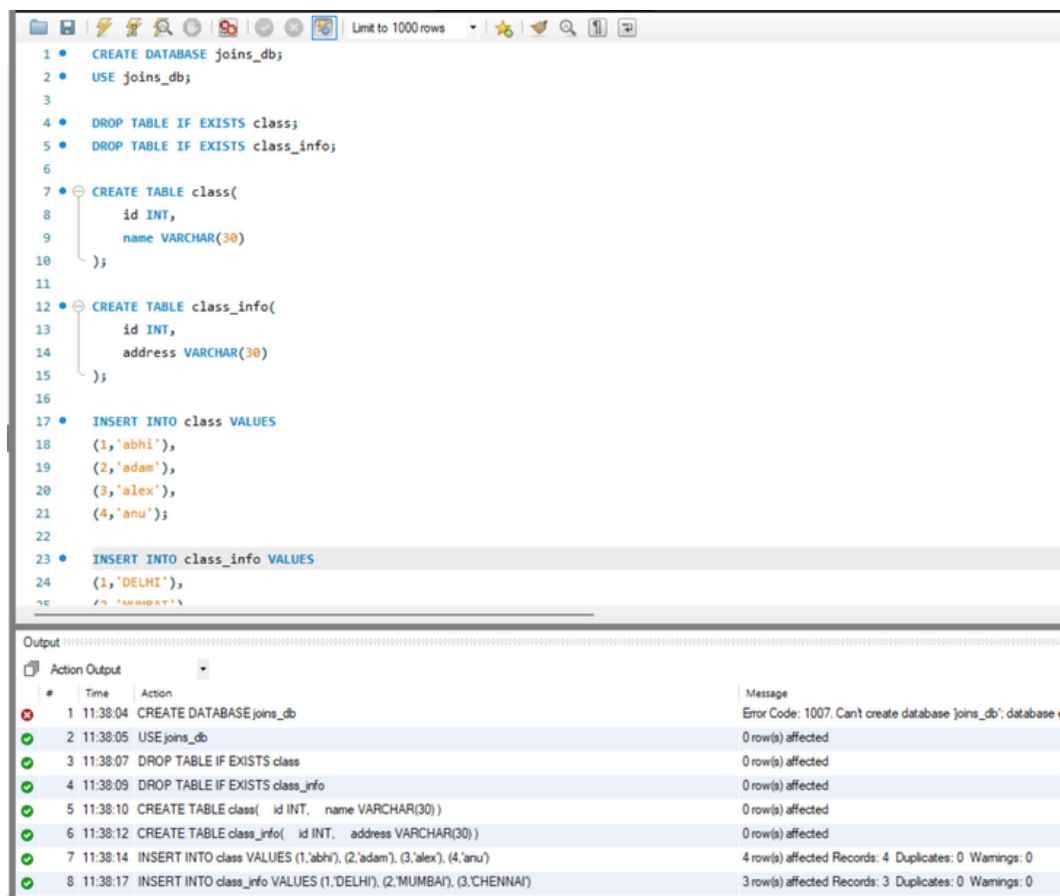


The screenshot shows the SQL Developer interface with a script editor and an output window. The script contains SQL commands to create a database, tables, and insert data. The output window shows the execution results for the first eight statements.

```
1 • CREATE DATABASE joins_db;
2 • USE joins_db;
3
4 • DROP TABLE IF EXISTS class;
5 • DROP TABLE IF EXISTS class_info;
6
7 • CREATE TABLE class(
8     id INT,
9     name VARCHAR(30)
10 );
11
12 • CREATE TABLE class_info(
13     id INT,
14     address VARCHAR(30)
15 );
16
17 • INSERT INTO class VALUES
18     (1,'abhi'),
19     (2,'adam'),
20     (3,'alex'),
21     (4,'anu');
22
23 • INSERT INTO class_info VALUES
24     (1,'DELHI'),
25     (2,'MUMBAI'),
26     (3,'CHENNAI');
```

Output:

#	Time	Action	Message
1	11:38:04	CREATE DATABASE joins_db	Error Code: 1007. Can't create database 'joins_db'; database already exists
2	11:38:05	USE joins_db	0 row(s) affected
3	11:38:07	DROP TABLE IF EXISTS class	0 row(s) affected
4	11:38:09	DROP TABLE IF EXISTS class_info	0 row(s) affected
5	11:38:10	CREATE TABLE class(id INT, name VARCHAR(30))	0 row(s) affected
6	11:38:12	CREATE TABLE class_info(id INT, address VARCHAR(30))	0 row(s) affected
7	11:38:14	INSERT INTO class VALUES (1,'abhi'), (2,'adam'), (3,'alex'), (4,'anu')	4 row(s) affected Records: 4 Duplicates: 0 Warnings: 0
8	11:38:17	INSERT INTO class_info VALUES (1,'DELHI'), (2,'MUMBAI'), (3,'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0

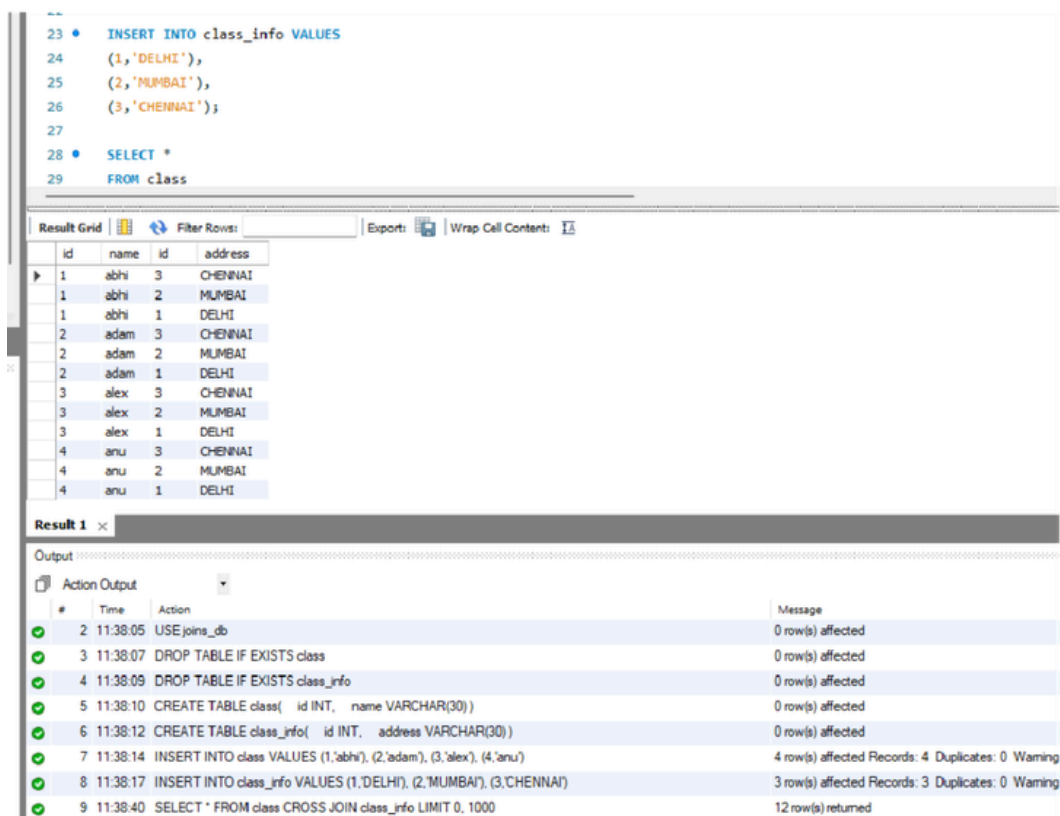

The screenshot shows the SQL Developer interface with a script editor and an output window. The script contains SQL commands to insert data and a query to select all data from the 'class' table. The output window shows the execution results for the first nine statements.

```
23 • INSERT INTO class_info VALUES
24     (1,'DELHI'),
25     (2,'MUMBAI'),
26     (3,'CHENNAI');
27
28 • SELECT *
29 FROM class
```

Result Grid:

	id	name	id	address
1	abhi	3	CHENNAI	
1	abhi	2	MUMBAI	
1	abhi	1	DELHI	
2	adam	3	CHENNAI	
2	adam	2	MUMBAI	
2	adam	1	DELHI	
3	alex	3	CHENNAI	
3	alex	2	MUMBAI	
3	alex	1	DELHI	
4	anu	3	CHENNAI	
4	anu	2	MUMBAI	
4	anu	1	DELHI	

Result 1

Output:

#	Time	Action	Message
2	11:38:05	USE joins_db	0 row(s) affected
3	11:38:07	DROP TABLE IF EXISTS class	0 row(s) affected
4	11:38:09	DROP TABLE IF EXISTS class_info	0 row(s) affected
5	11:38:10	CREATE TABLE class(id INT, name VARCHAR(30))	0 row(s) affected
6	11:38:12	CREATE TABLE class_info(id INT, address VARCHAR(30))	0 row(s) affected
7	11:38:14	INSERT INTO class VALUES (1,'abhi'), (2,'adam'), (3,'alex'), (4,'anu')	4 row(s) affected Records: 4 Duplicates: 0 Warnings: 0
8	11:38:17	INSERT INTO class_info VALUES (1,'DELHI'), (2,'MUMBAI'), (3,'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0
9	11:38:40	SELECT * FROM class CROSS JOIN class_info LIMIT 0, 1000	12 row(s) returned

```

44 FROM class
45 NATURAL JOIN class_info;
46
47 • INSERT INTO class VALUES
48 (5,'ashish');
49
50 • INSERT INTO class_info VALUES
51 (7,'NOIDA'),
52 (8,'PANIPAT');
53

```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

	name	address
▶	abhi	DELHI
	adam	MUMBAI
	alex	CHENNAI

Result 3

Output

Action Output

#	Time	Action	Message
✓ 4	11:38:09	DROP TABLE IF EXISTS class_info	0 row(s) affected
✓ 5	11:38:10	CREATE TABLE class(id INT, name VARCHAR(30))	0 row(s) affected
✓ 6	11:38:12	CREATE TABLE class_info(id INT, address VARCHAR(30))	0 row(s) affected
✓ 7	11:38:14	INSERT INTO class VALUES (1,'abhi'), (2,'adam'), (3,'alex'), (4,'anu')	4 row(s) affected Records: 4 Duplicates: 0 Warnings: 0
✓ 8	11:38:17	INSERT INTO class_info VALUES (1,DELHI), (2,MUMBAI), (3,CHENNAI)	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0
✓ 9	11:38:40	SELECT * FROM class CROSS JOIN class_info LIMIT 0, 1000	12 row(s) returned
✓ 10	11:39:52	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	3 row(s) returned
✓ 11	11:39:54	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id L...	3 row(s) returned

```

51 (7,'NOIDA'),
52 (8,'PANIPAT');
53
54 • SELECT *
55 FROM class

```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

	id	name	id	address
▶	1	abhi	1	DELHI
	2	adam	2	MUMBAI
	3	alex	3	CHENNAI
	4	anu	HOLE	HOLE
	5	ashish	HOLE	HOLE

Result 4

Output

Action Output

#	Time	Action	Message
✓ 7	11:38:14	INSERT INTO class VALUES (1,'abhi'), (2,'adam'), (3,'alex'), (4,'anu')	4 row(s) affected Records: 4 Duplicates: 0 Warnings: 0
✓ 8	11:38:17	INSERT INTO class_info VALUES (1,DELHI), (2,MUMBAI), (3,CHENNAI)	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0
✓ 9	11:38:40	SELECT * FROM class CROSS JOIN class_info LIMIT 0, 1000	12 row(s) returned
✓ 10	11:39:52	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	3 row(s) returned
✓ 11	11:39:54	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id L...	3 row(s) returned
✓ 12	11:40:12	INSERT INTO class VALUES (5,'ashish')	1 row(s) affected
✓ 13	11:40:13	INSERT INTO class_info VALUES (7,NOIDA), (8,PANIPAT)	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0
✓ 14	11:40:16	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned

```

70 • SELECT *
71 FROM class
72 RIGHT JOIN class_info
73 ON class.id = class_info.id
74 WHERE class.id IS NULL;
75
76 • DROP TABLE IF EXISTS first_table;
77 • DROP TABLE IF EXISTS second_table;
78
79 • CREATE TABLE first_table(
80     id INT,
81     name VARCHAR(30)
82 );

```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name	id	address
NULL	NULL	7	NOIDA
NULL	NULL	8	PANIPAT

Result 6 ×

Output

Action Output

#	Time	Action	Message
✓ 9	11:38:40	SELECT * FROM class CROSS JOIN class_info LIMIT 0, 1000	12 row(s) returned
✓ 10	11:39:52	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	3 row(s) returned
✓ 11	11:39:54	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id L...	3 row(s) returned
✓ 12	11:40:12	INSERT INTO class VALUES (5,'ashish')	1 row(s) affected
✓ 13	11:40:13	INSERT INTO class_info VALUES (7,'NOIDA'), (8,'PANIPAT')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0
✓ 14	11:40:16	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned
✓ 15	11:40:29	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned
✓ 16	11:40:32	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, ...	2 row(s) returned

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name
1	abhi

first_table 8 ×

Output

Action Output

#	Time	Action	Message
✓ 17	11:40:51	DROP TABLE IF EXISTS first_table	0 row(s) affected
✓ 18	11:40:53	DROP TABLE IF EXISTS second_table	0 row(s) affected
✓ 19	11:40:56	CREATE TABLE first_table(id INT, name VARCHAR(30))	0 row(s) affected
✓ 20	11:40:58	CREATE TABLE second_table(id INT, name VARCHAR(30))	0 row(s) affected
✓ 21	11:41:01	INSERT INTO first_table VALUES (1,'abhi'), (2,'adam')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0
✓ 22	11:41:03	INSERT INTO second_table VALUES (2,'adam'), (3,'chester')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0
✓ 23	11:41:06	SELECT * FROM first_table UNION SELECT * FROM second_table	3 row(s) returned
✓ 24	11:43:09	SELECT * FROM first_table WHERE id NOT IN (SELECT id FROM second_table) LIMIT 0, 1000	1 row(s) returned

```

164
165
166 • SELECT c.id,
167         c.name,
168         CASE

```

Result Grid Filter Rows: Export: Wrap Cell Content:

	id	name	Status
▶	1	abhi	Address Available
	2	adam	Address Available
	3	alex	Address Available
	4	anu	Address Missing
	5	ashish	Address Missing

Result 9

Output

Action Output

#	Time	Action	Message
✓ 18	11:40:53	DROP TABLE IF EXISTS second_table	0 row(s) affected
✓ 19	11:40:56	CREATE TABLE first_table(id INT, name VARCHAR(30))	0 row(s) affected
✓ 20	11:40:58	CREATE TABLE second_table(id INT, name VARCHAR(30))	0 row(s) affected
✓ 21	11:41:01	INSERT INTO first_table VALUES (1,'abhi'), (2,'adam')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0
✓ 22	11:41:03	INSERT INTO second_table VALUES (2,'adam'), (3,'chester')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0
✓ 23	11:41:06	SELECT * FROM first_table UNION SELECT * FROM second_table	3 row(s) returned
✓ 24	11:43:09	SELECT * FROM first_table WHERE id NOT IN (SELECT id FROM second_table) LIMIT 0, 1000	1 row(s) returned
✓ 25	11:43:37	SELECT c.id, c.name, CASE WHEN ci.address IS NULL THEN 'Address Missing' ...	5 row(s) returned