


Experiment 3: across the public Internet

This is the same protocol, with two new requirements:

- both nodes must use long names: `--name`, not `--sname`;
- the remote firewall must allow raw TCP to EPMD and the pinned distribution port.

```
# Remote node
iex --name cthulu@REMOTE_PUBLIC_NAME \
  --cookie hp --erl "-kernel \
    inet_dist_listen_min 5000 \
    inet_dist_listen_max 5000"

# Local node: also --name
iex --name lovecraft@LOCAL_PUBLIC_NAME \
  --cookie hp
```

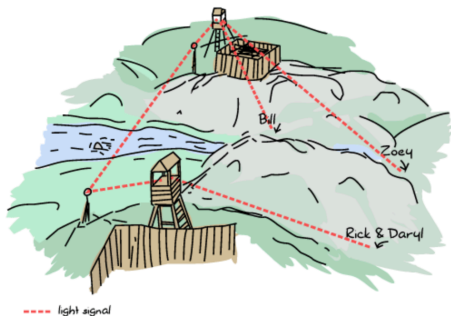

The Internet is just a longer, less forgiving route between camps.