INTRODUCTION



Course Instructor: Dr.V.S.Felix Enigo



GENISIS

- Social Network Analysis convergence of applied research in sociology + social psychology + anthropology
- Developed independently by various researchers through empirical studies of various social settings
- Formal description of social groups found by many social psychologists of the 1940s
- Anthropologists found network representations useful in generalizing actual field observations



- Some of the concepts of network analysis have come naturally from social studies
- 1950s network analysis began converge to a view that distinguishes network analysis from other approaches to sociological research
- Convergence facilitated by the adoption of a graph representation of social networks by Moreno



- Moreno called a sociogram was a visual representation of social networks as a set of nodes connected by directed links
- Explored how relations are beneficial and limitations for psychological behavior
- His journal sociometry investigated the relationship between psychological well-being and "social configurations"



- John Barnes first introduced the term "Social network" (Barnes, 1954),
 did formal development of the analysis of social structures
- Barnes was the first to use the concept of social networks in a scientific context – political system, pattern of life, system of kinship and affinity
- In 1954, he published the article "Class and Committees in a Norwegian Island Parish"
- Tremendous increase in the capabilities of network analysis mostly through new applications and the vocabulary, models and methods of network analysis



Two developments led to an explosion of SNA

- First, advances in information technology brought a wealth of electronic data
- Second, Methods of SNA applied to networks other than social networks
 E.g. Hyperlink structure on the Web or the electric grid
- The reason for adoption in other networks, share a number of commonalities with social networks



What is Social Network?

- It is the study of social relations among a set of actors
- ■Focus is on relationships between actors than actors itself

Example: Performance of a researcher assessed by count of publications than attributes like grant possessed, age, size of team...




- A statistical analysis relates attributes to outcome variable (the number of publications)
- Analysing social structures identifies presence / absence of relationship patterns
- Example: For researcher, arrangement of relationship in certain pattern is good to his performance than pattern not present



- ■SNA needs new concepts and methods for data collection and analysis
- Methods of analysis originate from graph theory as social network data represented as graph
- ■A social network can be represented as a graph G = (V, E), V denotes the finite set of vertices and E denotes a finite set of edges such that $E \subseteq V \times V$

Characteristic matrix of the graph
$$M \coloneqq (m_{i,j})_{n*n} m_{i,j} = \begin{cases} 1 \mid (v_i, v_j) \in E \\ 0 \mid otherwise \end{cases}$$



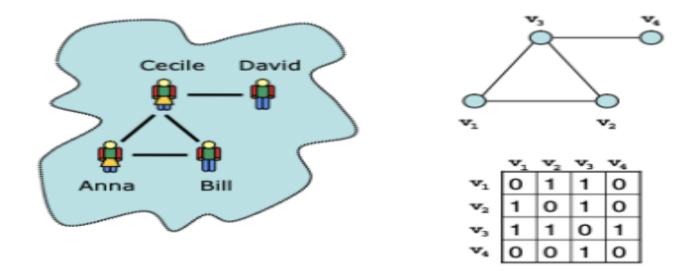

- •Loops are not excluded rarely in occur in practical social network data sets (diagonal of matrix is empty)
- In case of multiple component in a graph, one component is chosen for analysis



The global structure of network

Most real world network are represented as abstract graph representation

Questions:

Are there any interesting feature in social network could impose on existing graph models?

Are there any kind of special graph occur in social network?



- American psychologist Stanley Milgram experimented on the structure of social network
- Milgram found that the world around us to be small

"we routinely encounter persons not known to us who turn out to be the friends of our friends"

• Milgram's *Six degrees of separation* gives *Average distance between any two individuals in the world*



Graph measures of Milgram


characteristic path length - average shortest path of the network


Geodesic - The shortest path between two vertices is also called a *geodesic*

Diameter of the graph - The longest geodesic in the graph

Average shortest path not possible for weakly connected graph



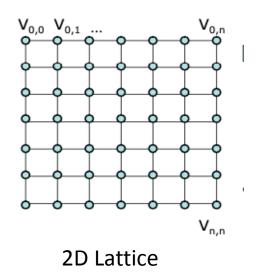



Tree Graph

Milligram excluded certain structures as models for social graph E.g. 2D Lattice, tree graph

In tree graph all nodes have exactly one edge connected and no loops

In real life people socialize in group but Tree graph shows no clustering




Clustering of single vertex =
$$\frac{\text{actual no. of edges between the neighbors of a vertex}}{\text{possible number of edges between the neighbors}}$$

- Clustering coefficient is the average of clustering of all vertex
- Clustering coefficient of a tree is zero (no triads in a graph)




Random Graph Model

- Generative graph proposed by Hungarian mathematicians Erdo's and Re'nyi
- Initially start with set of vertices with no edges connected
- Subsequently add edges picking pair of nodes with certain probability
- Increasing the probability, results in small characteristics path and exhibits some clustering







p = 0.5



- Random graph model failed as unlikely to make friends completely in random from anywhere in the world
- Yet random graphs are used to study complex structures emerges through elementary Interactions



Alpha Model

- Proposed by Steven Strogatz and Duncan Watts in 1999 in a seminal paper
- No. of mutual friends shared by any two nodes determines the likelihood of a new tie
- Parameter alpha fine-tunes the influence of the number of friends on the probability of a tie
- It successfully generates graphs with small path lengths and large clustering coefficients



Beta Model

The beta-model is also generative model

It starts with a one-dimensional torroidal lattice

Every node is connected to its neighbors and the neighbors of its neighbors

One end edge fixed and the other end reassigned randomly selected node

Process continued and rewires every link with a probability of a parameter beta

Choosing appropriate beta, model generates networks with small path lengths and relatively large clustering coefficients

Rewired







Scale-free graphs

- Proposed by Hungarian physicist Albert-L'aszl'o Barab'asi
- Alpha and beta model failed to recreate scale-free characteristic of the degree distribution
- Distribution is normal in alpha and beta models and random graphs
- Real social networks, nodes with highest degree is less than nodes with small degree




• Exactly correlates power law, i.e. $p(d) = d^{-k}$ where k > 0 is a parameter of the distribution

• i.e. a small amount of occurrences is common, while larger occurrences are rare

Example: Co-author network, few researchers have more co-authors and most have

one or two co-authors

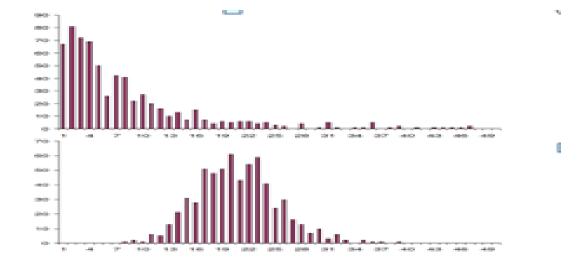



- Small world phenomenon and scale-free characteristics found in many networks in nature
- Wikipedia, gene network, internet, hyperlink structure of the WWW or the electrical transport network exhibit scale-free characteristics
- The rich get richer logic creates scale-free structures
- By analyzing the model instead of particular instances of it allows scientists to formulate general claims about these networks

Example: vulnerability to specific kind of attacks or the possibility for the spread of viruses or failures across them



Summary

- Social Network is amalgamation of sociology + social psychology + anthropology
- Breakthrough in Social Network adoption of a graph representation of social networks by Moreno
- Social Network Analysis is the study of social relations among a set of actors
- Various models developed to represent the behaviour of social network Random,
 Alpha, Beta models
- Scale free graphs by Albert-L'aszl'o Barab'asi able to explain exact nature of social network (power law)