

Deployment on Huroku

```
sabyr@sabyr-GS-5587: ~/Desktop/HerokuApplication-main/new_model
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git lfs track "*.pkl"
Tracking "*.pkl"
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git add .gitattributes
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git add --all
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git commit -m "Init"

*** Please tell me who you are.


Run

git config --global user.email "you@example.com"
git config --global user.name "Your Name"

to set your account's default identity.
Omit --global to set the identity only in this repository.

fatal: unable to auto-detect email address (got 'sabyr@sabyr-GS-5587.(none)')
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git config --global user.email "skabylbek777@gmail.com"
git: 'config' is not a git command. See 'git --help'.

The most similar command is
config
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git config --global user.email "skabylbek777@gmail.com"
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git config --global user.name "Sabyr777"
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git commit -m "Init"
[master (root-commit) 9e68c83] Init
10 files changed, 216 insertions(+)
create mode 100644 .gitattributes
create mode 100644 Procfile.txt
create mode 100644 app.py
create mode 100644 model.pkl
create mode 100644 model.py
create mode 100644 request.py
create mode 100644 requirements.txt
create mode 100644 sales.csv
create mode 100644 static/css/style.css
create mode 100644 templates/index.html
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git remote add origin https://github.com/Sabyr777/lfs.git
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git branch -M main
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$ git push -u origin main
Username for 'https://github.com': Sabyr777
Password for 'https://github.com': skabylbek777@gmail.com
Username for 'https://github.com': skabylbek777@gmail.com
Password for 'https://github.com': skabylbek777@gmail.com
Uploading LFS objects: 100% (1/1), 33 MB | 2.9 MB/s, done.
Enumerating objects: 15, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 8 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (15/15), 4.58 KiB | 937.00 KiB/s, done.
Total 15 (delta 0), reused 0 (delta 0)
To https://github.com/Sabyr777/lfs.git
 * [new branch] main -> main
Branch 'main' set up to track remote branch 'main' from 'origin'.
sabyr@sabyr-GS-5587:~/Desktop/HerokuApplication-main/new_model$
```

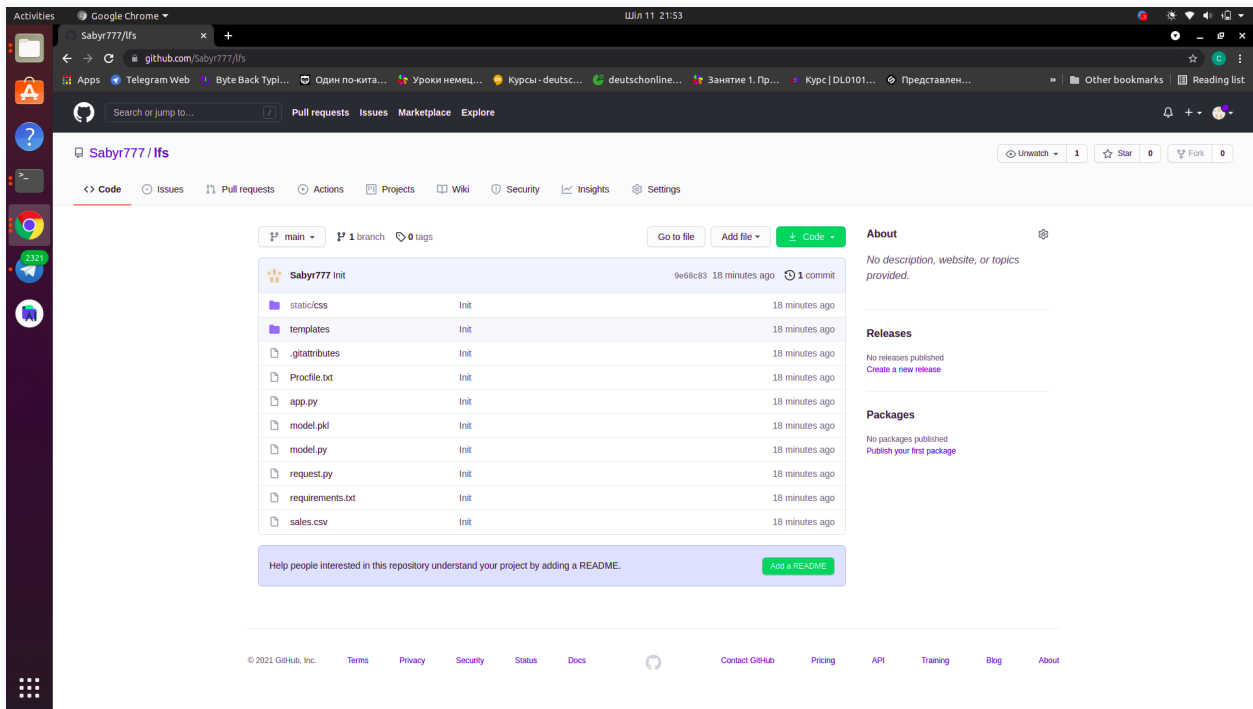

HEROKU

Jump to Favorites, Apps, Pipelines, Spaces...

Personal > > sabyr777

GitHub Sabyr777/lfs

Overview Resources **Deploy** Metrics Activity Access Settings

Add this app to a pipeline

Create a new pipeline or choose an existing one and add this app to a stage in it.

Add this pipeline to a stage in a pipeline to enable additional features

Pipelines let you connect multiple apps together and **promote code** between them. [Learn more](#)

Pipelines connected to GitHub can enable **review apps** and create apps for new pull requests. [Learn more](#)

Choose a pipeline

Deployment method

Heroku Git Use Heroku CLI

GitHub **Connected**

Container Registry Use Heroku CLI

App connected to GitHub

Code diffs, manual and auto deploys are available for this app.

Connected to Sabyr777/lfs by Sabyr777

Disconnect...

Releases in the [activity feed](#) link to GitHub to view commit diffs

Automatic deploys

Enables a chosen branch to be automatically deployed to this app.

You can now change your main deploy branch from "master" to "main" for both manual and automatic deploys, please follow the instructions [here](#).

Enable automatic deploys from GitHub

Every push to the branch you specify here will deploy a new version of this app. **Deploys happen automatically:** be sure that this branch is always in a deployable state and any tests have passed before you push. [Learn more](#)

HEROKU

Jump to Favorites, Apps, Pipelines, Spaces...

Automatic deploys

Enables a chosen branch to be automatically deployed to this app.

You can now change your main deploy branch from "master" to "main" for both manual and automatic deploys, please follow the instructions [here](#).

Enable automatic deploys from GitHub

Every push to the branch you specify here will deploy a new version of this app. **Deploys happen automatically:** be sure that this branch is always in a deployable state and any tests have passed before you push. [Learn more](#)

Choose a branch to deploy

main

☐ Wait for CI to pass before deploy

Only enable this option if you have a Continuous Integration service configured on your repo.

Enable Automatic Deploys

Manual deploy

Deploy the current state of a branch to this app.

Deploy a GitHub branch

This will deploy the current state of the branch you specify below. [Learn more](#)

Choose a branch to deploy

main **Deploy Branch**

Receive code from GitHub

Build main 9e68c836

There was an issue deploying your app. View the [build log](#) for details.

```
-----> Installing SQLite3
-----> Installing requirements with pip
ERROR: Could not find a version that satisfies the requirement apur==0.5.2 (from -r
/tmp/build_08bbeba/requirements.txt (line 1)) (from versions: none)
ERROR: No matching distribution found for apur==0.5.2 (from -r /tmp/build_08bbeba/requirements.txt (line
1))
! Push rejected, failed to compile Python app.
! Push failed

Build finished
```

[View build log](#)

Activities

Google Chrome

WJA 11 21:49

sabyr777 - GitHub | Heroku

sabyr777 - Build | Heroku

+

← → ↻

dashboard.heroku.com/apps/sabyr777/deploy/github

☆ ⓘ

Apps

Understandin...

IELTS Listenin...

Time series fo...

Useful Websit...

IELTS_WRITIN...

IELTS_WRITIN...

IELTS Exam LI...

Gmail

YouTube

Maps

Translate

Удивительны...

Reading list

Salesforce Platform

HEROKU

Jump to Favorites, Apps, Pipelines, Spaces...

main

☐ Wait for CI to pass before deploy
Only enable this option if you have a Continuous Integration service configured on your repo.

Enable Automatic Deploys

Manual deploy

Deploy the current state of a branch to this app.

Deploy a GitHub branch

This will deploy the current state of the branch you specify below. [Learn more](#)

Choose a branch to deploy

main

Deploy Branch

Receive code from GitHub

Build main: 9e68c836

There was an issue deploying your app. View the [build log](#) for details.

```
-----> Installing SQLites
-----> Installing requirements with pip
ERROR: Could not find a version that satisfies the requirement apturl==0.5.2 (from -r
/tmp/build_88bbeb3a/requirements.txt (line 1)) (from versions: none)
ERROR: no matching distribution found for apturl==0.5.2 (from -r /tmp/build_88bbeb3a/requirements.txt (line
1))
! Push rejected, failed to compile Python app.
! Push failed
```

Build finished

[View build log](#)

Release phase

Deploy to Heroku

heroku.com

Blogs

Careers

Documentation

Support

Terms of Service

Privacy

Cookies

© 2021 Salesforce.com