

[Open in Colab](#)

Introduction to Regression with Neural Networks in TensorFlow Tutorial

There are many definitions for a [regression problem](#) but in our case, we're going to simplify it to be: predicting a number.

For example, you might want to:

- Predict the selling price of houses given information about them (such as number of rooms, size, number of bathrooms).
- Predict the coordinates of a bounding box of an item in an image.
- Predict the cost of medical insurance for an individual given their demographics (age, sex, gender, race).

In this notebook, we're going to set the foundations for how you can take a sample of inputs (this is your data), build a neural network to discover patterns in those inputs and then make a prediction (in the form of a number) based on those inputs.

What we're going to cover

Specifically, we're going to go through doing the following with TensorFlow:

- Architecture of a regression model
- Input shapes and output shapes
 - X : features/data (inputs)
 - y : labels (outputs)
- Creating custom data to view and fit
- Steps in modelling
 - Creating a model
 - Compiling a model
 - Defining a loss function
 - Setting up an optimizer
 - Creating evaluation metrics
 - Fitting a model (getting it to find patterns in our data)
- Evaluating a model
 - Visualizing the model ("visualize, visualize, visualize")
 - Looking at training curves
 - Compare predictions to ground truth (using our evaluation metrics)
- Saving a model (so we can use it later)
- Loading a model

Don't worry if none of these make sense now, we're going to go through each.

How you can use this notebook

You can read through the descriptions and the code (it should all run), but there's a better option.

Write all of the code yourself.

Yes. I'm serious. Create a new notebook, and rewrite each line by yourself. Investigate it, see if you can break it, why does it break?

You don't have to write the text descriptions but writing the code yourself is a great way to get hands-on experience.

Don't worry if you make mistakes, we all do. The way to get better and make less mistakes is to **write more code**.

Typical architecture of a regression neural network

The word *typical* is on purpose.

Why?

Because there are many different ways (actually, there's almost an infinite number of ways) to write neural networks.

But the following is a generic setup for ingesting a collection of numbers, finding patterns in them and then outputting some kind of target number.

Yes, the previous sentence is vague but we'll see this in action shortly.

Hyperparameter	Typical value
Input layer shape	Same shape as number of features (e.g. 3 for # bedrooms, # bathrooms, # car spaces in housing price prediction)
Hidden layer(s)	Problem specific, minimum = 1, maximum = unlimited
Neurons per hidden layer	Problem specific, generally 10 to 100
Output layer shape	Same shape as desired prediction shape (e.g. 1 for house price)
Hidden activation	Usually ReLU (rectified linear unit)
Output activation	None, ReLU, logistic/tanh
Loss function	MSE (mean square error) or MAE (mean absolute error)/Huber (combination of MAE/MSE) if outliers
Optimizer	SGD (stochastic gradient descent), Adam

Table 1: Typical architecture of a regression network. **Source:** Adapted from page 293 of [Hands-On Machine Learning with Scikit-Learn, Keras & TensorFlow Book by Aurélien Géron](#)

Again, if you're new to neural networks and deep learning in general, much of the above table won't make sense. But don't worry, we'll be getting hands-on with all of it soon.

 **Note:** A **hyperparameter** in machine learning is something a data analyst or developer can set themselves, where as a **parameter** usually describes something a model learns on its own (a value not explicitly set by an analyst).

Okay, enough talk, let's get started writing code.

To use TensorFlow, we'll import it as the common alias `tf` (short for TensorFlow).

In [1]:

```
import tensorflow as tf
print(tf.__version__) # check the version (should be 2.x+)
```

2.7.0

Creating data to view and fit

Since we're working on a **regression problem** (predicting a number) let's create some linear data (a straight line) to model.


In [2]:

```
import numpy as np
import matplotlib.pyplot as plt

# Create features
X = np.array([-7.0, -4.0, -1.0, 2.0, 5.0, 8.0, 11.0, 14.0])

# Create labels
y = np.array([3.0, 6.0, 9.0, 12.0, 15.0, 18.0, 21.0, 24.0])

# Visualize it
plt.scatter(X, y);
```

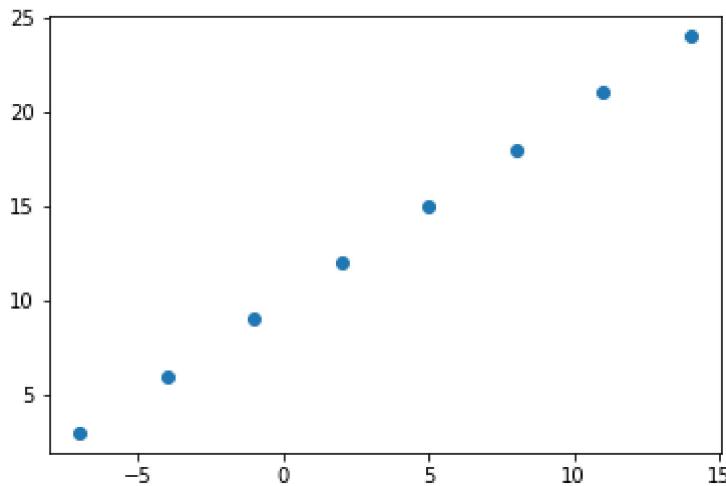

Before we do any modelling, can you calculate the pattern between `X` and `y`?

For example, say I asked you, based on this data what the `y` value would be if `X` was 17.0?

Or how about if X was -10.0?

This kind of pattern discover is the essence of what we'll be building neural networks to do for us.

Input shapes and output shapes

One of the most important concepts when working with neural networks are the input and output shapes.

The **input shape** is the shape of your data that goes into the model.

The **output shape** is the shape of your data you want to come out of your model.

These will differ depending on the problem you're working on.

Neural networks accept numbers and output numbers. These numbers are typically represented as tensors (or arrays).

Before, we created data using NumPy arrays, but we could do the same with tensors.

```
In [3]: # This is one input data
house_info = tf.constant(["bedroom", "bathroom", "garage"])
# This is one output data
house_price = tf.constant([939700])
house_info, house_price

Out[3]: (<tf.Tensor: shape=(3,), dtype=string, numpy=array([b'bedroom', b'bathroom', b'garage']),  
          dtype=object)>,  
        <tf.Tensor: shape=(1,), dtype=int32, numpy=array([939700])>

In [4]: house_info.shape


Out[4]: TensorShape([3])

In [5]: import numpy as np
import matplotlib.pyplot as plt

# Create features (using tensors)
X = tf.constant([-7.0, -4.0, -1.0, 2.0, 5.0, 8.0, 11.0, 14.0])

# Create labels (using tensors)
y = tf.constant([3.0, 6.0, 9.0, 12.0, 15.0, 18.0, 21.0, 24.0])

# Visualize it
plt.scatter(X, y);
```

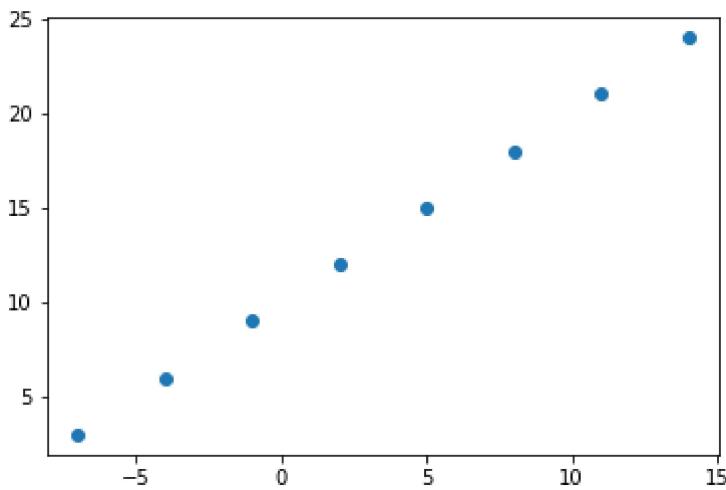

Our goal here will be to use `X` to predict `y`.

So our **input** will be `X` and our **output** will be `y`.

Knowing this, what do you think our input and output shapes will be?

Let's take a look.

```
In [6]: # Take a single example of X
input_shape = X[0].shape

# Take a single example of y
output_shape = y[0].shape

input_shape, output_shape # these are both scalars (no shape)
```

```
Out[6]: (TensorShape([]), TensorShape([]))
```

Huh?

From this it seems our inputs and outputs have no shape?

How could that be?

It's because no matter what kind of data we pass to our model, it's always going to take as input and return as output some kind of tensor.

But in our case because of our dataset (only 2 small lists of numbers), we're looking at a special kind of tensor, more specifically a rank 0 tensor or a scalar.

```
In [7]: # Let's take a look at the single examples individually
X[0], y[0]
```

```
Out[7]: (<tf.Tensor: shape=(), dtype=float32, numpy=-7.0>,
          <tf.Tensor: shape=(), dtype=float32, numpy=3.0>)
```

In our case, we're trying to build a model to predict the pattern between `X[0]` equalling `-7.0` and `y[0]` equalling `3.0`.

So now we get our answer, we're trying to use 1 X value to predict 1 y value.


You might be thinking, "this seems pretty complicated for just predicting a straight line..." .

And you'd be right.

But the concepts we're covering here, the concepts of input and output shapes to a model are fundamental.

In fact, they're probably two of the things you'll spend the most time on when you work with neural networks: **making sure your input and outputs are in the correct shape**.

If it doesn't make sense now, we'll see plenty more examples later on (soon you'll notice the input and output shapes can be almost anything you can imagine).

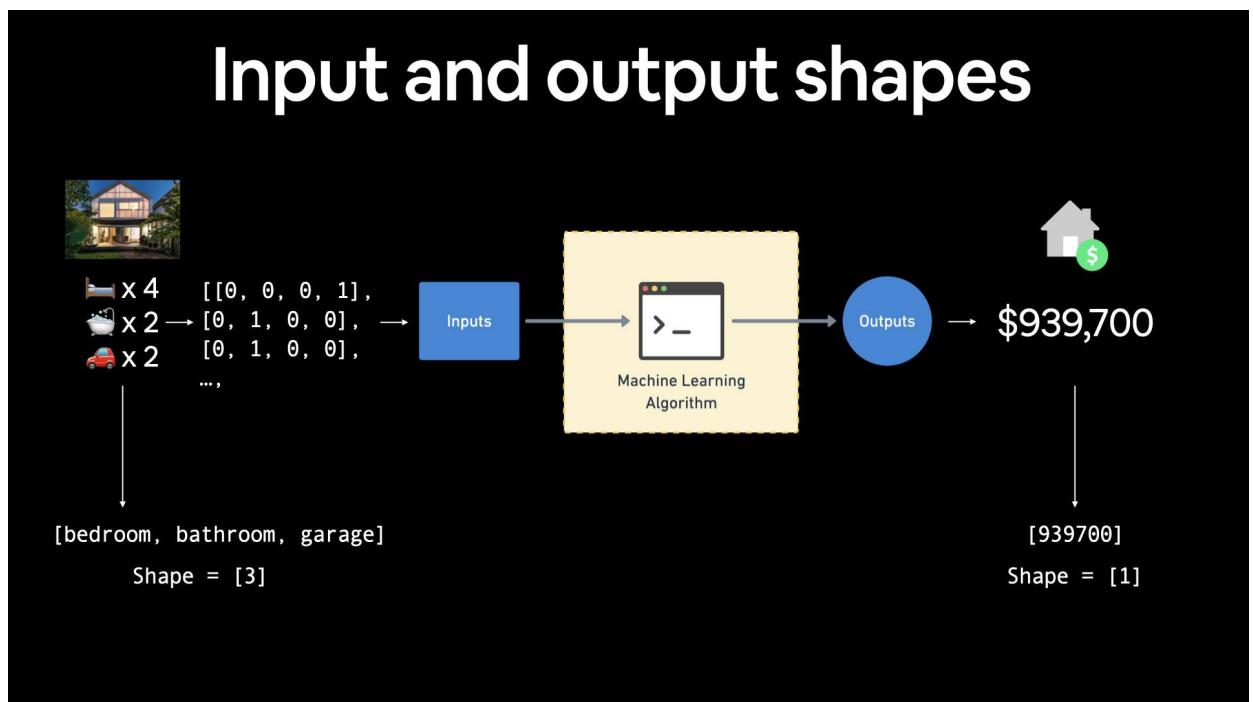

If you were working on building a machine learning algorithm for predicting housing prices, your inputs may be number of bedrooms, number of bathrooms and number of garages, giving you an input shape of 3 (3 different features). And since you're trying to predict the price of the house, your output shape would be 1.

Steps in modelling

Now we know what data we have as well as the input and output shapes, let's see how we'd build a neural network to model it.

In TensorFlow, there are typically 3 fundamental steps to creating and training a model.

1. **Creating a model** - piece together the layers of a neural network yourself (using the [Functional API](#) or [Sequential API](#)) or import a previously built model (known as transfer learning).

2. **Compiling a model** - defining how a models performance should be measured (loss/metrics) as well as defining how it should improve (optimizer).
3. **Fitting a model** - letting the model try to find patterns in the data (how does X get to y).

Let's see these in action using the [Keras Sequential API](#) to build a model for our regression data. And then we'll step through each.

In [8]:

```
# Set random seed
tf.random.set_seed(42)

# Create a model using the Sequential API
model = tf.keras.Sequential([
    tf.keras.layers.Dense(1) # Layers
])

# Compile the model
# MAE = mean(abs(y_true - y_pred))
model.compile(loss=tf.keras.losses.mae, # mae is short for mean absolute error
              optimizer=tf.keras.optimizers.SGD(), # SGD is short for stochastic gradie
              metrics=["mae"])

# tf.keras.Losses.mae = "mae" (Can use any way)

# Fit the model
# Input shape should be greater than 1 (So we need to expand the dimensions)
# Each input data should not be scalar
model.fit(tf.expand_dims(X, axis=1), y, epochs=5) # epochs => Number of rounds
```

Epoch 1/5

1/1 [=====] - 0s 283ms/step - loss: 11.5048 - mae: 11.5048

Epoch 2/5

1/1 [=====] - 0s 2ms/step - loss: 11.3723 - mae: 11.3723

Epoch 3/5

1/1 [=====] - 0s 2ms/step - loss: 11.2398 - mae: 11.2398

Epoch 4/5

1/1 [=====] - 0s 1ms/step - loss: 11.1073 - mae: 11.1073

Epoch 5/5

1/1 [=====] - 0s 2ms/step - loss: 10.9748 - mae: 10.9748

Out[8]: <keras.callbacks.History at 0x230a89a8610>

In [9]:

```
# Input data before expanding the dimension
X
```

Out[9]:

```
<tf.Tensor: shape=(8,), dtype=float32, numpy=array([-7., -4., -1., 2., 5., 8., 11., 14.], dtype=float32)>
```

In [10]:

```
# Input data after expanding the dimension
tf.expand_dims(X, axis=1)
```

Out[10]:

```
<tf.Tensor: shape=(8, 1), dtype=float32, numpy=
array([[-7.],
       [-4.],
       [-1.],
       [ 2.],
       [ 5.],
```

```
[ 8.],
[11.],
[14.]], dtype=float32)>
```

Boom!

We've just trained a model to figure out the patterns between `X` and `y`.

How do you think it went?

```
In [11]: # Check out X and y
X, y
```

```
Out[11]: (<tf.Tensor: shape=(8,), dtype=float32, numpy=array([-7., -4., -1., 2., 5., 8., 11.,
14.], dtype=float32)>,
<tf.Tensor: shape=(8,), dtype=float32, numpy=array([ 3.,  6.,  9., 12., 15., 18., 21.,
24.], dtype=float32)>)
```

What do you think the outcome should be if we passed our model an `X` value of 17.0?

```
In [12]: # Make a prediction with the model
model.predict([17.0])
```

```
Out[12]: array([[12.716021]], dtype=float32)
```

It doesn't go very well... it should've output something close to 27.0.

 **Question:** What's Keras? I thought we were working with TensorFlow but every time we write TensorFlow code, keras comes after tf (e.g. `tf.keras.layers.Dense()`)?

Before TensorFlow 2.0+, [Keras](#) was an API designed to be able to build deep learning models with ease. Since TensorFlow 2.0+, its functionality has been tightly integrated within the TensorFlow library.

Improving a model

How do you think you'd improve upon our current model?

If you guessed by tweaking some of the things we did above, you'd be correct.

To improve our model, we alter almost every part of the 3 steps we went through before.

1. **Creating a model** - here you might want to add more layers, increase the number of hidden units (also called neurons) within each layer, change the activation functions of each layer.
2. **Compiling a model** - you might want to choose optimization function or perhaps change the **learning rate** of the optimization function.
3. **Fitting a model** - perhaps you could fit a model for more **epochs** (leave it training for longer) or on more data (give the model more examples to learn from).

Woah. We just introduced a bunch of possible steps. The important thing to remember is how you alter each of these will depend on the problem you're working on.

And the good thing is, over the next few problems, we'll get hands-on with all of them.

For now, let's keep it simple, all we'll do is train our model for longer (everything else will stay the same).

In [13]:

```
# Set random seed
tf.random.set_seed(42)

# Create a model (same as above)
model = tf.keras.Sequential([
    tf.keras.layers.Dense(1)
])

# Compile model (same as above)
model.compile(loss=tf.keras.losses.mae,
               optimizer=tf.keras.optimizers.SGD(),
               metrics=["mae"])

# Fit model (this time we'll train for Longer)
model.fit(tf.expand_dims(X, axis=1), y, epochs=100) # train for 100 epochs not 10
```

```
Epoch 1/100
1/1 [=====] - 0s 120ms/step - loss: 11.5048 - mae: 11.5048
Epoch 2/100
1/1 [=====] - 0s 2ms/step - loss: 11.3723 - mae: 11.3723
Epoch 3/100
1/1 [=====] - 0s 997us/step - loss: 11.2398 - mae: 11.2398
Epoch 4/100
1/1 [=====] - 0s 2ms/step - loss: 11.1073 - mae: 11.1073
Epoch 5/100
1/1 [=====] - 0s 6ms/step - loss: 10.9748 - mae: 10.9748
Epoch 6/100
1/1 [=====] - 0s 997us/step - loss: 10.8423 - mae: 10.8423
Epoch 7/100
1/1 [=====] - 0s 997us/step - loss: 10.7098 - mae: 10.7098
Epoch 8/100
1/1 [=====] - 0s 998us/step - loss: 10.5773 - mae: 10.5773
Epoch 9/100
1/1 [=====] - 0s 3ms/step - loss: 10.4448 - mae: 10.4448
Epoch 10/100
1/1 [=====] - 0s 6ms/step - loss: 10.3123 - mae: 10.3123
Epoch 11/100
1/1 [=====] - 0s 2ms/step - loss: 10.1798 - mae: 10.1798
Epoch 12/100
1/1 [=====] - 0s 998us/step - loss: 10.0473 - mae: 10.0473
Epoch 13/100
1/1 [=====] - 0s 997us/step - loss: 9.9148 - mae: 9.9148
Epoch 14/100
1/1 [=====] - 0s 2ms/step - loss: 9.7823 - mae: 9.7823
Epoch 15/100
1/1 [=====] - 0s 999us/step - loss: 9.6498 - mae: 9.6498
Epoch 16/100
1/1 [=====] - 0s 6ms/step - loss: 9.5173 - mae: 9.5173
Epoch 17/100
```

```
1/1 [=====] - 0s 4ms/step - loss: 9.3848 - mae: 9.3848
Epoch 18/100
1/1 [=====] - 0s 4ms/step - loss: 9.2523 - mae: 9.2523
Epoch 19/100
1/1 [=====] - 0s 997us/step - loss: 9.1198 - mae: 9.1198
Epoch 20/100
1/1 [=====] - 0s 997us/step - loss: 8.9873 - mae: 8.9873
Epoch 21/100
1/1 [=====] - 0s 997us/step - loss: 8.8548 - mae: 8.8548
Epoch 22/100
1/1 [=====] - 0s 3ms/step - loss: 8.7223 - mae: 8.7223
Epoch 23/100
1/1 [=====] - 0s 2ms/step - loss: 8.5898 - mae: 8.5898
Epoch 24/100
1/1 [=====] - 0s 2ms/step - loss: 8.4573 - mae: 8.4573
Epoch 25/100
1/1 [=====] - 0s 2ms/step - loss: 8.3248 - mae: 8.3248
Epoch 26/100
1/1 [=====] - 0s 2ms/step - loss: 8.1923 - mae: 8.1923
Epoch 27/100
1/1 [=====] - 0s 3ms/step - loss: 8.0598 - mae: 8.0598
Epoch 28/100
1/1 [=====] - 0s 2ms/step - loss: 7.9273 - mae: 7.9273
Epoch 29/100
1/1 [=====] - 0s 3ms/step - loss: 7.7948 - mae: 7.7948
Epoch 30/100
1/1 [=====] - 0s 2ms/step - loss: 7.6623 - mae: 7.6623
Epoch 31/100
1/1 [=====] - 0s 7ms/step - loss: 7.5298 - mae: 7.5298
Epoch 32/100
1/1 [=====] - 0s 998us/step - loss: 7.3973 - mae: 7.3973
Epoch 33/100
1/1 [=====] - 0s 2ms/step - loss: 7.2648 - mae: 7.2648
Epoch 34/100
1/1 [=====] - 0s 2ms/step - loss: 7.2525 - mae: 7.2525
Epoch 35/100
1/1 [=====] - 0s 2ms/step - loss: 7.2469 - mae: 7.2469
Epoch 36/100
1/1 [=====] - 0s 997us/step - loss: 7.2413 - mae: 7.2413
Epoch 37/100
1/1 [=====] - 0s 2ms/step - loss: 7.2356 - mae: 7.2356
Epoch 38/100
1/1 [=====] - 0s 2ms/step - loss: 7.2300 - mae: 7.2300
Epoch 39/100
1/1 [=====] - 0s 6ms/step - loss: 7.2244 - mae: 7.2244
Epoch 40/100
1/1 [=====] - 0s 2ms/step - loss: 7.2188 - mae: 7.2188
Epoch 41/100
1/1 [=====] - 0s 2ms/step - loss: 7.2131 - mae: 7.2131
Epoch 42/100
1/1 [=====] - 0s 2ms/step - loss: 7.2075 - mae: 7.2075
Epoch 43/100
1/1 [=====] - 0s 4ms/step - loss: 7.2019 - mae: 7.2019
Epoch 44/100
1/1 [=====] - 0s 3ms/step - loss: 7.1963 - mae: 7.1963
Epoch 45/100
1/1 [=====] - 0s 2ms/step - loss: 7.1906 - mae: 7.1906
Epoch 46/100
1/1 [=====] - 0s 997us/step - loss: 7.1850 - mae: 7.1850
Epoch 47/100
```

```
1/1 [=====] - 0s 6ms/step - loss: 7.1794 - mae: 7.1794
Epoch 48/100
1/1 [=====] - 0s 2ms/step - loss: 7.1738 - mae: 7.1738
Epoch 49/100
1/1 [=====] - 0s 3ms/step - loss: 7.1681 - mae: 7.1681
Epoch 50/100
1/1 [=====] - 0s 5ms/step - loss: 7.1625 - mae: 7.1625
Epoch 51/100
1/1 [=====] - 0s 997us/step - loss: 7.1569 - mae: 7.1569
Epoch 52/100
1/1 [=====] - 0s 2ms/step - loss: 7.1512 - mae: 7.1512
Epoch 53/100
1/1 [=====] - 0s 2ms/step - loss: 7.1456 - mae: 7.1456
Epoch 54/100
1/1 [=====] - 0s 4ms/step - loss: 7.1400 - mae: 7.1400
Epoch 55/100
1/1 [=====] - 0s 994us/step - loss: 7.1344 - mae: 7.1344
Epoch 56/100
1/1 [=====] - 0s 4ms/step - loss: 7.1287 - mae: 7.1287
Epoch 57/100
1/1 [=====] - 0s 996us/step - loss: 7.1231 - mae: 7.1231
Epoch 58/100
1/1 [=====] - 0s 995us/step - loss: 7.1175 - mae: 7.1175
Epoch 59/100
1/1 [=====] - 0s 5ms/step - loss: 7.1119 - mae: 7.1119
Epoch 60/100
1/1 [=====] - 0s 996us/step - loss: 7.1063 - mae: 7.1063
Epoch 61/100
1/1 [=====] - 0s 997us/step - loss: 7.1006 - mae: 7.1006
Epoch 62/100
1/1 [=====] - 0s 996us/step - loss: 7.0950 - mae: 7.0950
Epoch 63/100
1/1 [=====] - 0s 2ms/step - loss: 7.0894 - mae: 7.0894
Epoch 64/100
1/1 [=====] - 0s 2ms/step - loss: 7.0838 - mae: 7.0838
Epoch 65/100
1/1 [=====] - 0s 2ms/step - loss: 7.0781 - mae: 7.0781
Epoch 66/100
1/1 [=====] - 0s 996us/step - loss: 7.0725 - mae: 7.0725
Epoch 67/100
1/1 [=====] - 0s 7ms/step - loss: 7.0669 - mae: 7.0669
Epoch 68/100
1/1 [=====] - 0s 2ms/step - loss: 7.0613 - mae: 7.0613
Epoch 69/100
1/1 [=====] - 0s 997us/step - loss: 7.0556 - mae: 7.0556
Epoch 70/100
1/1 [=====] - 0s 997us/step - loss: 7.0500 - mae: 7.0500
Epoch 71/100
1/1 [=====] - 0s 997us/step - loss: 7.0444 - mae: 7.0444
Epoch 72/100
1/1 [=====] - 0s 3ms/step - loss: 7.0388 - mae: 7.0388
Epoch 73/100
1/1 [=====] - 0s 2ms/step - loss: 7.0331 - mae: 7.0331
Epoch 74/100
1/1 [=====] - 0s 3ms/step - loss: 7.0275 - mae: 7.0275
Epoch 75/100
1/1 [=====] - 0s 2ms/step - loss: 7.0219 - mae: 7.0219
Epoch 76/100
1/1 [=====] - 0s 2ms/step - loss: 7.0163 - mae: 7.0163
Epoch 77/100
```

```

1/1 [=====] - 0s 5ms/step - loss: 7.0106 - mae: 7.0106
Epoch 78/100
1/1 [=====] - 0s 2ms/step - loss: 7.0050 - mae: 7.0050
Epoch 79/100
1/1 [=====] - 0s 2ms/step - loss: 6.9994 - mae: 6.9994
Epoch 80/100
1/1 [=====] - 0s 997us/step - loss: 6.9938 - mae: 6.9938
Epoch 81/100
1/1 [=====] - 0s 2ms/step - loss: 6.9881 - mae: 6.9881
Epoch 82/100
1/1 [=====] - 0s 2ms/step - loss: 6.9825 - mae: 6.9825
Epoch 83/100
1/1 [=====] - 0s 997us/step - loss: 6.9769 - mae: 6.9769
Epoch 84/100
1/1 [=====] - 0s 996us/step - loss: 6.9713 - mae: 6.9713
Epoch 85/100
1/1 [=====] - 0s 997us/step - loss: 6.9656 - mae: 6.9656
Epoch 86/100
1/1 [=====] - 0s 2ms/step - loss: 6.9600 - mae: 6.9600
Epoch 87/100
1/1 [=====] - 0s 2ms/step - loss: 6.9544 - mae: 6.9544
Epoch 88/100
1/1 [=====] - 0s 3ms/step - loss: 6.9488 - mae: 6.9488
Epoch 89/100
1/1 [=====] - 0s 2ms/step - loss: 6.9431 - mae: 6.9431
Epoch 90/100
1/1 [=====] - 0s 5ms/step - loss: 6.9375 - mae: 6.9375
Epoch 91/100
1/1 [=====] - 0s 2ms/step - loss: 6.9319 - mae: 6.9319
Epoch 92/100
1/1 [=====] - 0s 997us/step - loss: 6.9263 - mae: 6.9263
Epoch 93/100
1/1 [=====] - 0s 997us/step - loss: 6.9206 - mae: 6.9206
Epoch 94/100
1/1 [=====] - 0s 997us/step - loss: 6.9150 - mae: 6.9150
Epoch 95/100
1/1 [=====] - 0s 997us/step - loss: 6.9094 - mae: 6.9094
Epoch 96/100
1/1 [=====] - 0s 2ms/step - loss: 6.9038 - mae: 6.9038
Epoch 97/100
1/1 [=====] - 0s 3ms/step - loss: 6.8981 - mae: 6.8981
Epoch 98/100
1/1 [=====] - 0s 996us/step - loss: 6.8925 - mae: 6.8925
Epoch 99/100
1/1 [=====] - 0s 997us/step - loss: 6.8869 - mae: 6.8869
Epoch 100/100
1/1 [=====] - 0s 997us/step - loss: 6.8813 - mae: 6.8813
<keras.callbacks.History at 0x230afeaf640>

```

Out[13]:

You might've noticed the loss value decrease from before (and keep decreasing as the number of epochs gets higher).

What do you think this means for when we make a prediction with our model?

How about we try predict on 17.0 again?

In [14]:

```
# Remind ourselves of what X and y are
X, y
```

```
Out[14]: (<tf.Tensor: shape=(8,), dtype=float32, numpy=array([-7., -4., -1., 2., 5., 8., 11., 14.], dtype=float32>),
<tf.Tensor: shape=(8,), dtype=float32, numpy=array([ 3.,  6.,  9., 12., 15., 18., 21., 24.], dtype=float32>)
```

```
In [15]: # Try and predict what y would be if X was 17.0
model.predict([17.0]) # the right answer is 27.0 (y = X + 10)
```

```
Out[15]: array([[30.158512]], dtype=float32)
```

Much better!

We got closer this time. But we could still be better.

Lets Try another change

```
In [16]: # Set random seed
tf.random.set_seed(42)

# Create a model (same as above)
model = tf.keras.Sequential([
    # Extra hidden layer with 100 neurons and use activation function
    tf.keras.layers.Dense(100, activation="relu"),
    tf.keras.layers.Dense(1),

])

# Compile model (same as above)
model.compile(loss=tf.keras.losses.mae,
              optimizer=tf.keras.optimizers.SGD(),
              metrics=["mae"])

model.fit(tf.expand_dims(X, axis=1), y, epochs=100)
```

```
Epoch 1/100
1/1 [=====] - 0s 249ms/step - loss: 12.3185 - mae: 12.3185
Epoch 2/100
1/1 [=====] - 0s 2ms/step - loss: 11.7696 - mae: 11.7696
Epoch 3/100
1/1 [=====] - 0s 998us/step - loss: 11.2132 - mae: 11.2132
Epoch 4/100
1/1 [=====] - 0s 2ms/step - loss: 10.6444 - mae: 10.6444
Epoch 5/100
1/1 [=====] - 0s 2ms/step - loss: 10.0534 - mae: 10.0534
Epoch 6/100
1/1 [=====] - 0s 998us/step - loss: 9.4344 - mae: 9.4344
Epoch 7/100
1/1 [=====] - 0s 997us/step - loss: 8.7821 - mae: 8.7821
Epoch 8/100
1/1 [=====] - 0s 2ms/step - loss: 8.0881 - mae: 8.0881
Epoch 9/100
1/1 [=====] - 0s 2ms/step - loss: 7.3552 - mae: 7.3552
Epoch 10/100
1/1 [=====] - 0s 2ms/step - loss: 6.5787 - mae: 6.5787
Epoch 11/100
1/1 [=====] - 0s 996us/step - loss: 5.7437 - mae: 5.7437
Epoch 12/100
```

```
1/1 [=====] - 0s 997us/step - loss: 4.8395 - mae: 4.8395
Epoch 13/100
1/1 [=====] - 0s 998us/step - loss: 4.1104 - mae: 4.1104
Epoch 14/100
1/1 [=====] - 0s 997us/step - loss: 4.0143 - mae: 4.0143
Epoch 15/100
1/1 [=====] - 0s 7ms/step - loss: 3.9156 - mae: 3.9156
Epoch 16/100
1/1 [=====] - 0s 2ms/step - loss: 3.9722 - mae: 3.9722
Epoch 17/100
1/1 [=====] - 0s 982us/step - loss: 3.9044 - mae: 3.9044
Epoch 18/100
1/1 [=====] - 0s 995us/step - loss: 3.9636 - mae: 3.9636
Epoch 19/100
1/1 [=====] - 0s 2ms/step - loss: 3.9191 - mae: 3.9191
Epoch 20/100
1/1 [=====] - 0s 3ms/step - loss: 3.9452 - mae: 3.9452
Epoch 21/100
1/1 [=====] - 0s 5ms/step - loss: 3.9259 - mae: 3.9259
Epoch 22/100
1/1 [=====] - 0s 997us/step - loss: 3.9194 - mae: 3.9194
Epoch 23/100
1/1 [=====] - 0s 996us/step - loss: 3.9328 - mae: 3.9328
Epoch 24/100
1/1 [=====] - 0s 2ms/step - loss: 3.8934 - mae: 3.8934
Epoch 25/100
1/1 [=====] - 0s 2ms/step - loss: 3.9399 - mae: 3.9399
Epoch 26/100
1/1 [=====] - 0s 5ms/step - loss: 3.8726 - mae: 3.8726
Epoch 27/100
1/1 [=====] - 0s 2ms/step - loss: 3.9469 - mae: 3.9469
Epoch 28/100
1/1 [=====] - 0s 2ms/step - loss: 3.8875 - mae: 3.8875
Epoch 29/100
1/1 [=====] - 0s 5ms/step - loss: 3.9223 - mae: 3.9223
Epoch 30/100
1/1 [=====] - 0s 997us/step - loss: 3.8945 - mae: 3.8945
Epoch 31/100
1/1 [=====] - 0s 997us/step - loss: 3.8962 - mae: 3.8962
Epoch 32/100
1/1 [=====] - 0s 2ms/step - loss: 3.9016 - mae: 3.9016
Epoch 33/100
1/1 [=====] - 0s 3ms/step - loss: 3.8700 - mae: 3.8700
Epoch 34/100
1/1 [=====] - 0s 5ms/step - loss: 3.9089 - mae: 3.9089
Epoch 35/100
1/1 [=====] - 0s 2ms/step - loss: 3.8473 - mae: 3.8473
Epoch 36/100
1/1 [=====] - 0s 996us/step - loss: 3.9242 - mae: 3.9242
Epoch 37/100
1/1 [=====] - 0s 997us/step - loss: 3.8570 - mae: 3.8570
Epoch 38/100
1/1 [=====] - 0s 3ms/step - loss: 3.8981 - mae: 3.8981
Epoch 39/100
1/1 [=====] - 0s 6ms/step - loss: 3.8642 - mae: 3.8642
Epoch 40/100
1/1 [=====] - 0s 2ms/step - loss: 3.8718 - mae: 3.8718
Epoch 41/100
1/1 [=====] - 0s 995us/step - loss: 3.8715 - mae: 3.8715
Epoch 42/100
```

```
1/1 [=====] - 0s 6ms/step - loss: 3.8453 - mae: 3.8453
Epoch 43/100
1/1 [=====] - 0s 996us/step - loss: 3.8800 - mae: 3.8800
Epoch 44/100
1/1 [=====] - 0s 2ms/step - loss: 3.8260 - mae: 3.8260
Epoch 45/100
1/1 [=====] - 0s 2ms/step - loss: 3.8944 - mae: 3.8944
Epoch 46/100
1/1 [=====] - 0s 999us/step - loss: 3.8276 - mae: 3.8276
Epoch 47/100
1/1 [=====] - 0s 6ms/step - loss: 3.8726 - mae: 3.8726
Epoch 48/100
1/1 [=====] - 0s 995us/step - loss: 3.8350 - mae: 3.8350
Epoch 49/100
1/1 [=====] - 0s 998us/step - loss: 3.8461 - mae: 3.8461
Epoch 50/100
1/1 [=====] - 0s 997us/step - loss: 3.8426 - mae: 3.8426
Epoch 51/100
1/1 [=====] - 0s 3ms/step - loss: 3.8194 - mae: 3.8194
Epoch 52/100
1/1 [=====] - 0s 5ms/step - loss: 3.8563 - mae: 3.8563
Epoch 53/100
1/1 [=====] - 0s 991us/step - loss: 3.7997 - mae: 3.7997
Epoch 54/100
1/1 [=====] - 0s 2ms/step - loss: 3.8659 - mae: 3.8659
Epoch 55/100
1/1 [=====] - 0s 995us/step - loss: 3.7994 - mae: 3.7994
Epoch 56/100
1/1 [=====] - 0s 1000us/step - loss: 3.8460 - mae: 3.8460
Epoch 57/100
1/1 [=====] - 0s 2ms/step - loss: 3.8070 - mae: 3.8070
Epoch 58/100
1/1 [=====] - 0s 997us/step - loss: 3.8191 - mae: 3.8191
Epoch 59/100
1/1 [=====] - 0s 997us/step - loss: 3.8148 - mae: 3.8148
Epoch 60/100
1/1 [=====] - 0s 995us/step - loss: 3.7959 - mae: 3.7959
Epoch 61/100
1/1 [=====] - 0s 3ms/step - loss: 3.8305 - mae: 3.8305
Epoch 62/100
1/1 [=====] - 0s 996us/step - loss: 3.7721 - mae: 3.7721
Epoch 63/100
1/1 [=====] - 0s 996us/step - loss: 3.8384 - mae: 3.8384
Epoch 64/100
1/1 [=====] - 0s 997us/step - loss: 3.7722 - mae: 3.7722
Epoch 65/100
1/1 [=====] - 0s 996us/step - loss: 3.8180 - mae: 3.8180
Epoch 66/100
1/1 [=====] - 0s 996us/step - loss: 3.7800 - mae: 3.7800
Epoch 67/100
1/1 [=====] - 0s 2ms/step - loss: 3.7908 - mae: 3.7908
Epoch 68/100
1/1 [=====] - 0s 4ms/step - loss: 3.7888 - mae: 3.7888
Epoch 69/100
1/1 [=====] - 0s 997us/step - loss: 3.7707 - mae: 3.7707
Epoch 70/100
1/1 [=====] - 0s 2ms/step - loss: 3.8038 - mae: 3.8038
Epoch 71/100
1/1 [=====] - 0s 6ms/step - loss: 3.7432 - mae: 3.7432
Epoch 72/100
```

```
1/1 [=====] - 0s 2ms/step - loss: 3.8120 - mae: 3.8120
Epoch 73/100
1/1 [=====] - 0s 2ms/step - loss: 3.7460 - mae: 3.7460
Epoch 74/100
1/1 [=====] - 0s 996us/step - loss: 3.7888 - mae: 3.7888
Epoch 75/100
1/1 [=====] - 0s 3ms/step - loss: 3.7540 - mae: 3.7540
Epoch 76/100
1/1 [=====] - 0s 997us/step - loss: 3.7613 - mae: 3.7613
Epoch 77/100
1/1 [=====] - 0s 997us/step - loss: 3.7677 - mae: 3.7677
Epoch 78/100
1/1 [=====] - 0s 996us/step - loss: 3.7409 - mae: 3.7409
Epoch 79/100
1/1 [=====] - 0s 995us/step - loss: 3.7782 - mae: 3.7782
Epoch 80/100
1/1 [=====] - 0s 5ms/step - loss: 3.7131 - mae: 3.7131
Epoch 81/100
1/1 [=====] - 0s 996us/step - loss: 3.7865 - mae: 3.7865
Epoch 82/100
1/1 [=====] - 0s 997us/step - loss: 3.7208 - mae: 3.7208
Epoch 83/100
1/1 [=====] - 0s 999us/step - loss: 3.7583 - mae: 3.7583
Epoch 84/100
1/1 [=====] - 0s 4ms/step - loss: 3.7290 - mae: 3.7290
Epoch 85/100
1/1 [=====] - 0s 2ms/step - loss: 3.7335 - mae: 3.7335
Epoch 86/100
1/1 [=====] - 0s 997us/step - loss: 3.7451 - mae: 3.7451
Epoch 87/100
1/1 [=====] - 0s 2ms/step - loss: 3.7097 - mae: 3.7097
Epoch 88/100
1/1 [=====] - 0s 3ms/step - loss: 3.7536 - mae: 3.7536
Epoch 89/100
1/1 [=====] - 0s 2ms/step - loss: 3.6883 - mae: 3.6883
Epoch 90/100
1/1 [=====] - 0s 2ms/step - loss: 3.7544 - mae: 3.7544
Epoch 91/100
1/1 [=====] - 0s 2ms/step - loss: 3.6966 - mae: 3.6966
Epoch 92/100
1/1 [=====] - 0s 2ms/step - loss: 3.7264 - mae: 3.7264
Epoch 93/100
1/1 [=====] - 0s 6ms/step - loss: 3.7051 - mae: 3.7051
Epoch 94/100
1/1 [=====] - 0s 2ms/step - loss: 3.7057 - mae: 3.7057
Epoch 95/100
1/1 [=====] - 0s 997us/step - loss: 3.7214 - mae: 3.7214
Epoch 96/100
1/1 [=====] - 0s 2ms/step - loss: 3.6772 - mae: 3.6772
Epoch 97/100
1/1 [=====] - 0s 996us/step - loss: 3.7300 - mae: 3.7300
Epoch 98/100
1/1 [=====] - 0s 4ms/step - loss: 3.6649 - mae: 3.6649
Epoch 99/100
1/1 [=====] - 0s 995us/step - loss: 3.7216 - mae: 3.7216
Epoch 100/100
1/1 [=====] - 0s 2ms/step - loss: 3.6734 - mae: 3.6734
<keras.callbacks.History at 0x230aff56520>
```

Out[16]:

In [17]: `model.predict([17.0]) # Previous model was better`

Out[17]: `array([[31.382648]], dtype=float32)`

In [18]:

```
# Set random seed
tf.random.set_seed(42)

# Create a model (same as above)
model = tf.keras.Sequential([
    # Remove the activation function and change neurons
    tf.keras.layers.Dense(51, activation=None),
    tf.keras.layers.Dense(1),

])

# Use Adam optimizer with 0.01 Learning rate
model.compile(loss=tf.keras.losses.mae,
               optimizer=tf.keras.optimizers.Adam(learning_rate=0.01),
               metrics=["mae"])

model.fit(tf.expand_dims(X, axis=1), y, epochs=100)
```

Epoch 1/100

1/1 [=====] - 0s 194ms/step - loss: 13.2396 - mae: 13.2396

Epoch 2/100

1/1 [=====] - 0s 996us/step - loss: 12.5599 - mae: 12.5599

Epoch 3/100

1/1 [=====] - 0s 5ms/step - loss: 11.8769 - mae: 11.8769

Epoch 4/100

1/1 [=====] - 0s 998us/step - loss: 11.1886 - mae: 11.1886

Epoch 5/100

1/1 [=====] - 0s 2ms/step - loss: 10.4925 - mae: 10.4925

Epoch 6/100

1/1 [=====] - 0s 997us/step - loss: 9.7854 - mae: 9.7854

Epoch 7/100

1/1 [=====] - 0s 2ms/step - loss: 9.0639 - mae: 9.0639

Epoch 8/100

1/1 [=====] - 0s 996us/step - loss: 8.3247 - mae: 8.3247

Epoch 9/100

1/1 [=====] - 0s 998us/step - loss: 7.5646 - mae: 7.5646

Epoch 10/100

1/1 [=====] - 0s 2ms/step - loss: 6.7806 - mae: 6.7806

Epoch 11/100

1/1 [=====] - 0s 4ms/step - loss: 6.7100 - mae: 6.7100

Epoch 12/100

1/1 [=====] - 0s 984us/step - loss: 6.9891 - mae: 6.9891

Epoch 13/100

1/1 [=====] - 0s 2ms/step - loss: 7.1516 - mae: 7.1516

Epoch 14/100

1/1 [=====] - 0s 997us/step - loss: 7.2149 - mae: 7.2149

Epoch 15/100

1/1 [=====] - 0s 997us/step - loss: 7.2340 - mae: 7.2340

Epoch 16/100

1/1 [=====] - 0s 996us/step - loss: 7.0646 - mae: 7.0646

Epoch 17/100

1/1 [=====] - 0s 3ms/step - loss: 6.8875 - mae: 6.8875

Epoch 18/100

1/1 [=====] - 0s 6ms/step - loss: 6.6727 - mae: 6.6727

Epoch 19/100
1/1 [=====] - 0s 2ms/step - loss: 6.4278 - mae: 6.4278
Epoch 20/100
1/1 [=====] - 0s 2ms/step - loss: 6.1595 - mae: 6.1595
Epoch 21/100
1/1 [=====] - 0s 3ms/step - loss: 5.9963 - mae: 5.9963
Epoch 22/100
1/1 [=====] - 0s 3ms/step - loss: 5.9421 - mae: 5.9421
Epoch 23/100
1/1 [=====] - 0s 6ms/step - loss: 5.9849 - mae: 5.9849
Epoch 24/100
1/1 [=====] - 0s 8ms/step - loss: 6.0186 - mae: 6.0186
Epoch 25/100
1/1 [=====] - 0s 2ms/step - loss: 5.9389 - mae: 5.9389
Epoch 26/100
1/1 [=====] - 0s 3ms/step - loss: 5.7606 - mae: 5.7606
Epoch 27/100
1/1 [=====] - 0s 3ms/step - loss: 5.5277 - mae: 5.5277
Epoch 28/100
1/1 [=====] - 0s 3ms/step - loss: 5.4188 - mae: 5.4188
Epoch 29/100
1/1 [=====] - 0s 2ms/step - loss: 5.3063 - mae: 5.3063
Epoch 30/100
1/1 [=====] - 0s 3ms/step - loss: 5.2114 - mae: 5.2114
Epoch 31/100
1/1 [=====] - 0s 3ms/step - loss: 5.1718 - mae: 5.1718
Epoch 32/100
1/1 [=====] - 0s 2ms/step - loss: 5.0845 - mae: 5.0845
Epoch 33/100
1/1 [=====] - 0s 3ms/step - loss: 4.9539 - mae: 4.9539
Epoch 34/100
1/1 [=====] - 0s 3ms/step - loss: 4.7837 - mae: 4.7837
Epoch 35/100
1/1 [=====] - 0s 2ms/step - loss: 4.6770 - mae: 4.6770
Epoch 36/100
1/1 [=====] - 0s 6ms/step - loss: 4.5743 - mae: 4.5743
Epoch 37/100
1/1 [=====] - 0s 2ms/step - loss: 4.4637 - mae: 4.4637
Epoch 38/100
1/1 [=====] - 0s 3ms/step - loss: 4.3608 - mae: 4.3608
Epoch 39/100
1/1 [=====] - 0s 6ms/step - loss: 4.2079 - mae: 4.2079
Epoch 40/100
1/1 [=====] - 0s 2ms/step - loss: 4.0631 - mae: 4.0631
Epoch 41/100
1/1 [=====] - 0s 997us/step - loss: 3.9105 - mae: 3.9105
Epoch 42/100
1/1 [=====] - 0s 2ms/step - loss: 3.7500 - mae: 3.7500
Epoch 43/100
1/1 [=====] - 0s 3ms/step - loss: 3.5812 - mae: 3.5812
Epoch 44/100
1/1 [=====] - 0s 3ms/step - loss: 3.4038 - mae: 3.4038
Epoch 45/100
1/1 [=====] - 0s 3ms/step - loss: 3.2767 - mae: 3.2767
Epoch 46/100
1/1 [=====] - 0s 5ms/step - loss: 3.1025 - mae: 3.1025
Epoch 47/100
1/1 [=====] - 0s 2ms/step - loss: 2.8683 - mae: 2.8683
Epoch 48/100
1/1 [=====] - 0s 996us/step - loss: 2.6776 - mae: 2.6776

```
Epoch 49/100
1/1 [=====] - 0s 2ms/step - loss: 2.5071 - mae: 2.5071
Epoch 50/100
1/1 [=====] - 0s 5ms/step - loss: 2.2744 - mae: 2.2744
Epoch 51/100
1/1 [=====] - 0s 2ms/step - loss: 2.0329 - mae: 2.0329
Epoch 52/100
1/1 [=====] - 0s 2ms/step - loss: 1.9018 - mae: 1.9018
Epoch 53/100
1/1 [=====] - 0s 9ms/step - loss: 1.7160 - mae: 1.7160
Epoch 54/100
1/1 [=====] - 0s 2ms/step - loss: 1.4562 - mae: 1.4562
Epoch 55/100
1/1 [=====] - 0s 3ms/step - loss: 1.0805 - mae: 1.0805
Epoch 56/100
1/1 [=====] - 0s 3ms/step - loss: 0.9960 - mae: 0.9960
Epoch 57/100
1/1 [=====] - 0s 3ms/step - loss: 0.8376 - mae: 0.8376
Epoch 58/100
1/1 [=====] - 0s 6ms/step - loss: 0.4877 - mae: 0.4877
Epoch 59/100
1/1 [=====] - 0s 3ms/step - loss: 0.0389 - mae: 0.0389
Epoch 60/100
1/1 [=====] - ETA: 0s - loss: 0.2946 - mae: 0.294 - 0s 6ms/step
- loss: 0.2946 - mae: 0.2946
Epoch 61/100
1/1 [=====] - 0s 3ms/step - loss: 0.4481 - mae: 0.4481
Epoch 62/100
1/1 [=====] - 0s 6ms/step - loss: 0.5642 - mae: 0.5642
Epoch 63/100
1/1 [=====] - 0s 3ms/step - loss: 0.5774 - mae: 0.5774
Epoch 64/100
1/1 [=====] - 0s 2ms/step - loss: 0.6134 - mae: 0.6134
Epoch 65/100
1/1 [=====] - 0s 997us/step - loss: 0.5967 - mae: 0.5967
Epoch 66/100
1/1 [=====] - 0s 3ms/step - loss: 0.5449 - mae: 0.5449
Epoch 67/100
1/1 [=====] - 0s 2ms/step - loss: 0.4259 - mae: 0.4259
Epoch 68/100
1/1 [=====] - 0s 7ms/step - loss: 0.3735 - mae: 0.3735
Epoch 69/100
1/1 [=====] - 0s 3ms/step - loss: 0.1900 - mae: 0.1900
Epoch 70/100
1/1 [=====] - 0s 3ms/step - loss: 0.0714 - mae: 0.0714
Epoch 71/100
1/1 [=====] - 0s 6ms/step - loss: 0.3464 - mae: 0.3464
Epoch 72/100
1/1 [=====] - 0s 2ms/step - loss: 0.3780 - mae: 0.3780
Epoch 73/100
1/1 [=====] - 0s 2ms/step - loss: 0.4136 - mae: 0.4136
Epoch 74/100
1/1 [=====] - 0s 6ms/step - loss: 0.5232 - mae: 0.5232
Epoch 75/100
1/1 [=====] - 0s 2ms/step - loss: 0.4498 - mae: 0.4498
Epoch 76/100
1/1 [=====] - 0s 2ms/step - loss: 0.4793 - mae: 0.4793
Epoch 77/100
1/1 [=====] - 0s 3ms/step - loss: 0.4891 - mae: 0.4891
Epoch 78/100
```

```

1/1 [=====] - 0s 7ms/step - loss: 0.3155 - mae: 0.3155
Epoch 79/100
1/1 [=====] - 0s 2ms/step - loss: 0.3489 - mae: 0.3489
Epoch 80/100
1/1 [=====] - 0s 997us/step - loss: 0.3928 - mae: 0.3928
Epoch 81/100
1/1 [=====] - 0s 996us/step - loss: 0.1827 - mae: 0.1827
Epoch 82/100
1/1 [=====] - 0s 996us/step - loss: 0.3470 - mae: 0.3470
Epoch 83/100
1/1 [=====] - 0s 6ms/step - loss: 0.4960 - mae: 0.4960
Epoch 84/100
1/1 [=====] - 0s 3ms/step - loss: 0.4008 - mae: 0.4008
Epoch 85/100
1/1 [=====] - 0s 2ms/step - loss: 0.2049 - mae: 0.2049
Epoch 86/100
1/1 [=====] - 0s 2ms/step - loss: 0.3206 - mae: 0.3206
Epoch 87/100
1/1 [=====] - 0s 6ms/step - loss: 0.2022 - mae: 0.2022
Epoch 88/100
1/1 [=====] - 0s 996us/step - loss: 0.1863 - mae: 0.1863
Epoch 89/100
1/1 [=====] - 0s 996us/step - loss: 0.1715 - mae: 0.1715
Epoch 90/100
1/1 [=====] - 0s 2ms/step - loss: 0.1388 - mae: 0.1388
Epoch 91/100
1/1 [=====] - 0s 2ms/step - loss: 0.1766 - mae: 0.1766
Epoch 92/100
1/1 [=====] - 0s 4ms/step - loss: 0.0999 - mae: 0.0999
Epoch 93/100
1/1 [=====] - 0s 3ms/step - loss: 0.0647 - mae: 0.0647
Epoch 94/100
1/1 [=====] - 0s 996us/step - loss: 0.0131 - mae: 0.0131
Epoch 95/100
1/1 [=====] - 0s 997us/step - loss: 0.1916 - mae: 0.1916
Epoch 96/100
1/1 [=====] - 0s 2ms/step - loss: 0.1766 - mae: 0.1766
Epoch 97/100
1/1 [=====] - 0s 5ms/step - loss: 0.2485 - mae: 0.2485
Epoch 98/100
1/1 [=====] - 0s 2ms/step - loss: 0.2318 - mae: 0.2318
Epoch 99/100
1/1 [=====] - 0s 3ms/step - loss: 0.1824 - mae: 0.1824
Epoch 100/100
1/1 [=====] - 0s 2ms/step - loss: 0.1759 - mae: 0.1759
<keras.callbacks.History at 0x230b0ffe8b0>

```

Out[18]:

```
In [19]: model.predict([17.0]) # This is the best model so far
```

Out[19]: array([[26.913584]], dtype=float32)

Now we've trained a model, how could we evaluate it?

Evaluating a model

A typical workflow you'll go through when building neural networks is:

Build a model -> evaluate it -> build (tweak) a model -> evaluate it -> build (tweak) a model -> evaluate it...

The tweaking comes from maybe not building a model from scratch but adjusting an existing one.

Visualize, visualize, visualize

When it comes to evaluation, you'll want to remember the words: "visualize, visualize, visualize."

This is because you're probably better looking at something (doing) than you are thinking about something.

It's a good idea to visualize:

- **The data** - what data are you working with? What does it look like?
- **The model itself** - what does the architecture look like? What are the different shapes?
- **The training of a model** - how does a model perform while it learns?
- **The predictions of a model** - how do the predictions of a model line up against the ground truth (the original labels)?

Let's start by visualizing the model.

But first, we'll create a little bit of a bigger dataset and a new model we can use (it'll be the same as before, but the more practice the better).

In [20]:

```
# Make a bigger dataset
X = np.arange(-100, 100, 4)
X
```

Out[20]:

```
array([-100, -96, -92, -88, -84, -80, -76, -72, -68, -64, -60,
       -56, -52, -48, -44, -40, -36, -32, -28, -24, -20, -16,
       -12, -8, -4,  0,   4,   8,  12,  16,  20,  24,  28,
       32,  36,  40,  44,  48,  52,  56,  60,  64,  68,  72,
       76,  80,  84,  88,  92,  96])
```

In [21]:

```
# Make Labels for the dataset (adhering to the same pattern as before)
y = np.arange(-90, 110, 4)
y
```

Out[21]:

```
array([-90, -86, -82, -78, -74, -70, -66, -62, -58, -54, -50, -46, -42,
       -38, -34, -30, -26, -22, -18, -14, -10, -6, -2,  2,   6,  10,
       14,  18,  22,  26,  30,  34,  38,  42,  46,  50,  54,  58,  62,
       66,  70,  74,  78,  82,  86,  90,  94,  98, 102, 106])
```

Since $y = X + 10$, we could make the labels like so:

In [22]:

```
# Same result as above
# This is the pattern we are looking for
y = X + 10
y
```

Out[22]:

```
array([-90, -86, -82, -78, -74, -70, -66, -62, -58, -54, -50, -46, -42,
```

```
-38, -34, -30, -26, -22, -18, -14, -10, -6, -2, 2, 6, 10,
14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62,
66, 70, 74, 78, 82, 86, 90, 94, 98, 102, 106])
```

Split data into training/test set

One of the other most common and important steps in a machine learning project is creating a training and test set (and when required, a validation set).

Each set serves a specific purpose:

- **Training set** - the model learns from this data, which is typically 70-80% of the total data available (like the course materials you study during the semester).
- **Validation set** - the model gets tuned on this data, which is typically 10-15% of the total data available (like the practice exam you take before the final exam).
- **Test set** - the model gets evaluated on this data to test what it has learned, it's typically 10-15% of the total data available (like the final exam you take at the end of the semester).

For now, we'll just use a training and test set, this means we'll have a dataset for our model to learn on as well as be evaluated on.

We can create them by splitting our `X` and `y` arrays.

 **Note:** When dealing with real-world data, this step is typically done right at the start of a project (the test set should always be kept separate from all other data). We want our model to learn on training data and then evaluate it on test data to get an indication of how well it **generalizes** to unseen examples.

In [23]:

```
# Check how many samples we have
len(X)
```

Out[23]:

In [24]:

```
# Split data into train and test sets

# first 40 examples (80% of data)
X_train = X[:40] # Training features
y_train = y[:40] # Training labels

# Last 10 examples (20% of data)
X_test = X[40:] # Testing features
y_test = y[40:] # Testing labels

len(X_train), len(X_test)
```

Out[24]:


Visualizing the data

Now we've got our training and test data, it's a good idea to visualize it.

Let's plot it with some nice colours to differentiate what's what.

In [25]:

```
plt.figure(figsize=(10, 7))
# Plot training data in blue
plt.scatter(X_train, y_train, c='b', label='Training data')
# Plot test data in green
plt.scatter(X_test, y_test, c='g', label='Testing data')
# Show the legend
plt.legend();
```

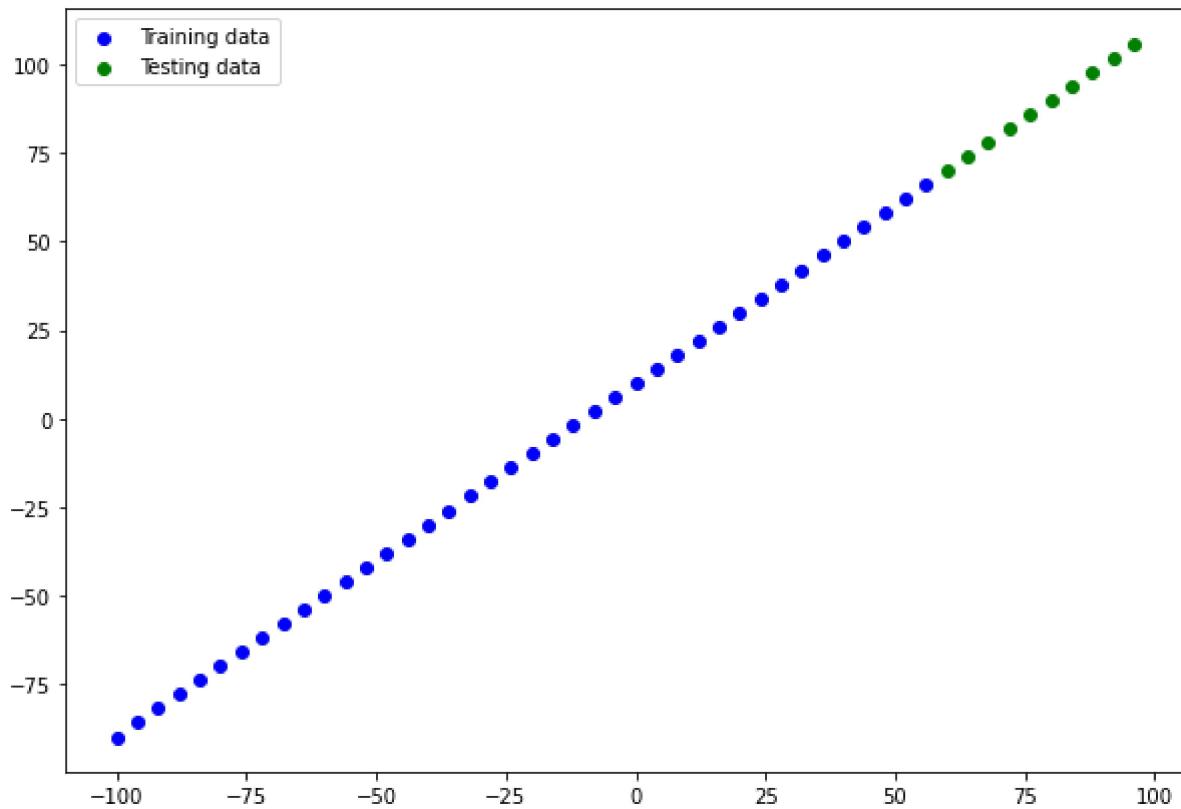

Beautiful! Any time you can visualize your data, your model, your anything, it's a good idea.

With this graph in mind, what we'll be trying to do is build a model which learns the pattern in the blue dots (`X_train`) to draw the green dots (`X_test`).

Time to build a model. We'll make the exact same one from before (the one we trained for longer).

In [26]:

```
# Set random seed
tf.random.set_seed(42)

# Create a model (same as above)
model = tf.keras.Sequential([
    tf.keras.layers.Dense(1)
])

# Compile model (same as above)
model.compile(loss=tf.keras.losses.mae,
              optimizer=tf.keras.optimizers.SGD(),
              metrics=["mae"])
```

```
# Before fitting the model, lets visualize

# Fit model (same as above)
#model.fit(X_train, y_train, epochs=100) # commented out on purpose (not fitting it just
```

Visualizing the model

After you've built a model, you might want to take a look at it (especially if you haven't built many before).

You can take a look at the layers and shapes of your model by calling `summary()` on it.

 **Note:** Visualizing a model is particularly helpful when you run into input and output shape mismatches.

In [27]:

```
# Doesn't work (model not fit/built)
model.summary()
```

```
ValueError                                                 Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_432\2120490204.py in <module>
      1 # Doesn't work (model not fit/built)
----> 2 model.summary()

~\anaconda3\lib\site-packages\keras\engine\training.py in summary(self, line_length, pos
itions, print_fn, expand_nested)
    2577     """
    2578     if not self.built:
-> 2579         raise ValueError(
    2580             'This model has not yet been built. '
    2581             'Build the model first by calling `build()` or by calling '
```

ValueError: This model has not yet been built. Build the model first by calling ``build()`` or by calling the model on a batch of data.

Ahh, the cell above errors because we haven't fit our built our model.

We also haven't told it what input shape it should be expecting.

Remember above, how we discussed the input shape was just one number?

We can let our model know the input shape of our data using the `input_shape` parameter to the first layer (usually if `input_shape` isn't defined, Keras tries to figure it out automatically).

In [28]:

```
# Set random seed
tf.random.set_seed(42)

# Create a model (same as above)
model = tf.keras.Sequential([
    tf.keras.layers.Dense(1, input_shape=[1]) # define the input_shape to our model (1 Fe
])

# Compile model (same as above)
```

```
model.compile(loss=tf.keras.losses.mae,
              optimizer=tf.keras.optimizers.SGD(),
              metrics=["mae"])

# Does not fit data (Later)
```

In [29]:

```
# This will work after specifying the input shape
# Will show the layers that it contains
model.summary()
```

Model: "sequential_5"

Layer (type)	Output Shape	Param #
dense_7 (Dense)	(None, 1)	2
<hr/>		
Total params: 2		
Trainable params: 2		
Non-trainable params: 0		

Calling `summary()` on our model shows us the layers it contains, the output shape and the number of parameters.

- **Total params** - total number of parameters in the model.
- **Trainable parameters** - these are the parameters (patterns) the model can update as it trains.
- **Non-trainable parameters** - these parameters aren't updated during training (this is typical when you bring in the already learned patterns from other models during transfer learning).

 **Resource:** For a more in-depth overview of the trainable parameters within a layer, check out [MIT's introduction to deep learning video](#).

 **Exercise:** Try playing around with the number of hidden units in the Dense layer (e.g. `Dense(2)`, `Dense(3)`). How does this change the Total/Trainable params? Investigate what's causing the change.

Total params = 2 * Dense

For now, all you need to think about these parameters is that their learnable patterns in the data.

Let's fit our model to the training data.

In [30]:

```
# Fit the model to the training data
model.fit(X_train, y_train, epochs=100, verbose=0) # verbose controls how to get the ou
# If verbose = 0, does not show the details of each epoch round
```

Out[30]:

```
<keras.callbacks.History at 0x230b134c610>
```

In [31]:

```
# Check the model summary
model.summary()
```

Model: "sequential_5"

Layer (type)	Output Shape	Param #
<hr/>		
dense_7 (Dense)	(None, 1)	2
<hr/>		
Total params: 2		
Trainable params: 2		
Non-trainable params: 0		


Alongside summary, you can also view a 2D plot of the model using `plot_model()`.

In [32]:

```
from tensorflow.keras.utils import plot_model

plot_model(model, show_shapes=True)
# Will display the layers graphically
# First 1 is the input layer
```

Out[32]:

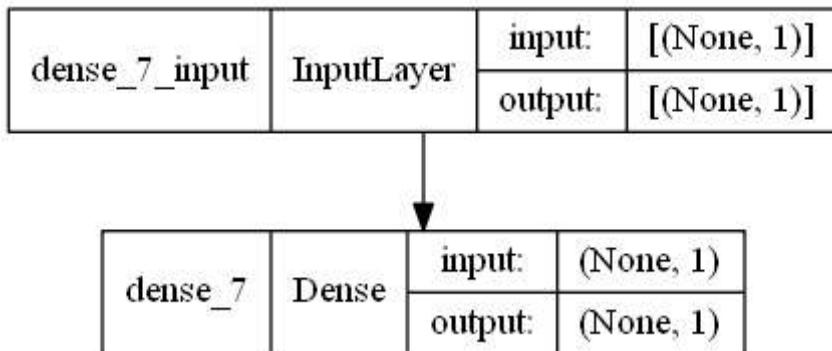

In our case, the model we used only has an input and an output but visualizing more complicated models can be very helpful for debugging.

In [33]:

```
# Set random seed
tf.random.set_seed(42)

# Create a model (same as above)
temp_model = tf.keras.Sequential([
    tf.keras.layers.Dense(10, input_shape=[1], name="input_layer"), # define shape of the
    tf.keras.layers.Dense(1, name="output_layer") # Give name to the layer
], name = "model_title") # Title of the model

# Compile model (same as above)
temp_model.compile(loss=tf.keras.losses.mae,
                    optimizer=tf.keras.optimizers.SGD(),
                    metrics=["mae"])

# Does not fit data (Later)

# See the details of each layer
temp_model.summary()
```

Model: "model_title"

Layer (type)	Output Shape	Param #
<hr/>		

```

input_layer (Dense)      (None, 10)      20
output_layer (Dense)     (None, 1)       11
=====
Total params: 31
Trainable params: 31
Non-trainable params: 0

```

In [34]:


```

# Show the diagram
# See how the shape of the layers change
from tensorflow.keras.utils import plot_model

plot_model(temp_model, show_shapes=True)

```

Out[34]:

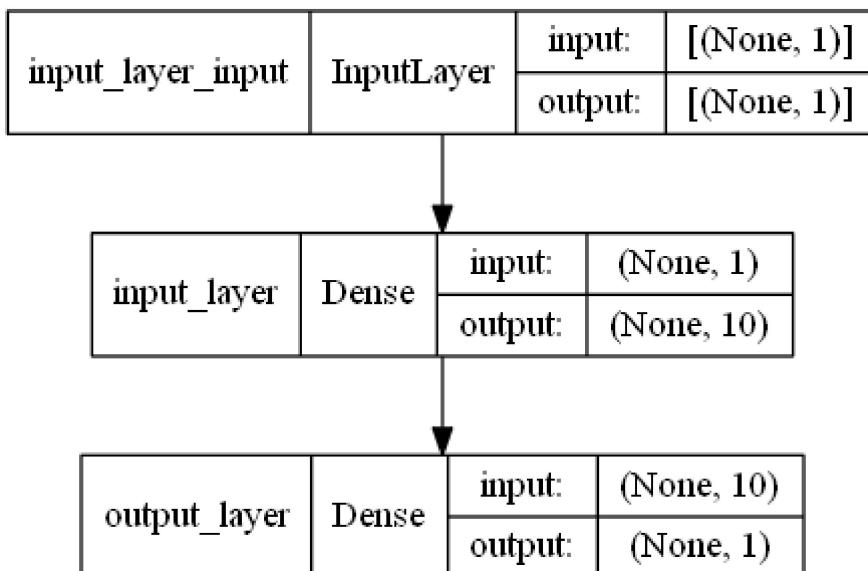

Visualizing the predictions

Now we've got a trained model, let's visualize some predictions.

To visualize predictions, it's always a good idea to plot them against the ground truth labels.

Often you'll see this in the form of `y_test` vs. `y_pred` (ground truth vs. predictions).

First, we'll make some predictions on the test data (`X_test`), remember the model has never seen the test data.

In [35]:

```

# Make predictions
y_preds = model.predict(X_test)

```

WARNING:tensorflow:5 out of the last 5 calls to <function Model.make_predict_function.<locals>.predict_function at 0x00000230B2428310> triggered tf.function retracing. Tracing is expensive and the excessive number of tracings could be due to (1) creating @tf.function repeatedly in a loop, (2) passing tensors with different shapes, (3) passing Python objects instead of tensors. For (1), please define your @tf.function outside of the loop. For (2), @tf.function has experimental_relax_shapes=True option that relaxes argument shapes that can avoid unnecessary retracing. For (3), please refer to <https://www.tensorflow.org>

[flow.org/guide/function#controlling_retracing](https://www.tensorflow.org/guide/function#controlling_retracing) and https://www.tensorflow.org/api_docs/python/tf/function for more details.

In [36]:

```
# View the predictions
y_preds
```

Out[36]:

```
array([[53.57109 ],
       [57.05633 ],
       [60.541573],
       [64.02681 ],
       [67.512054],
       [70.99729 ],
       [74.48254 ],
       [77.96777 ],
       [81.45301 ],
       [84.938255]], dtype=float32)
```

Okay, we get a list of numbers but how do these compare to the ground truth labels?

Let's build a plotting function to find out.


 **Note:** If you think you're going to be visualizing something a lot, it's a good idea to functionize it so you can use it later.

In [37]:

```
# Arguments with default values
def plot_predictions(train_data=X_train,
                     train_labels=y_train,
                     test_data=X_test,
                     test_labels=y_test,
                     predictions=y_preds):
    """
    Plots training data, test data and compares predictions.
    """
    plt.figure(figsize=(10, 7))
    # Plot training data in blue
    plt.scatter(train_data, train_labels, c="b", label="Training data")
    # Plot test data in green
    plt.scatter(test_data, test_labels, c="g", label="Testing data")
    # Plot the predictions in red (predictions were made on the test data)
    plt.scatter(test_data, predictions, c="r", label="Predictions")
    # Show the legend
    plt.legend();
```

In [38]:

```
# Call the function to plot
plot_predictions(train_data=X_train,
                 train_labels=y_train,
                 test_data=X_test,
                 test_labels=y_test,
                 predictions=y_preds)
```

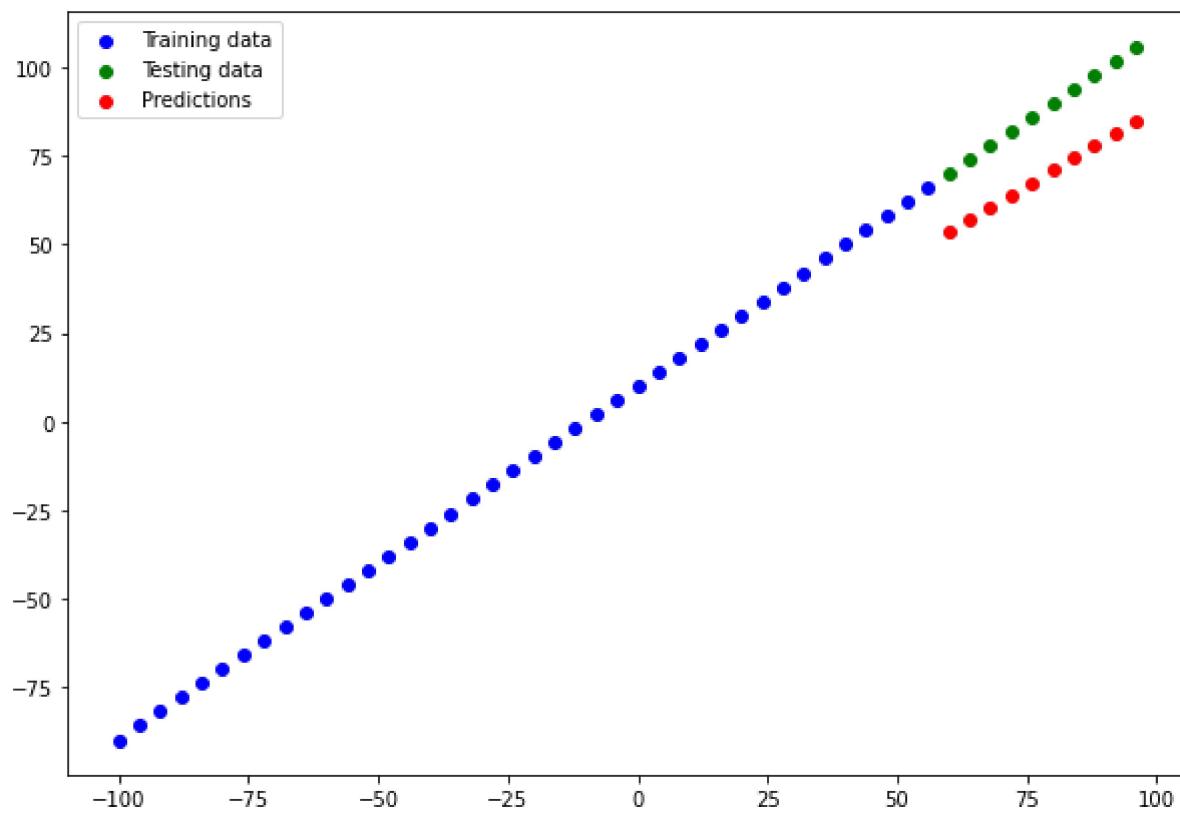

From the plot we can see our predictions aren't totally outlandish but they definitely aren't anything special either.

Evaluating predictions

Alongside visualizations, evaluation metrics are your alternative best option for evaluating your model.

Depending on the problem you're working on, different models have different evaluation metrics.

Two of the main metrics used for regression problems are:

- **Mean absolute error (MAE)** - the mean difference between each of the predictions.
- **Mean squared error (MSE)** - the squared mean difference between the predictions (use if larger errors are more detrimental than smaller errors).

The lower each of these values, the better.

You can also use `model.evaluate()` which will return the loss of the model as well as any metrics setup during the compile step.

In [39]:

```
tf.random.set_seed(42)

# Create a model (same as above)
model = tf.keras.Sequential([
    tf.keras.layers.Dense(1, input_shape=[1])
])

# Compile model
```

```

model.compile(loss=tf.keras.losses.mae, # Use mae as the loss function
              optimizer=tf.keras.optimizers.SGD(),
              metrics=["mae"]) # Use mae as evaluation matrix

model.fit(X_train, y_train, epochs=100, verbose=0)

# Evaluate the model on the test set
# Pass inputs and labels as arguments
model.evaluate(X_test, y_test)

# Will display the loss value and evaluation matrix
# In here both are same, because we are using mae for both of them

```

Out[39]:

```
1/1 [=====] - 0s 61ms/step - loss: 18.7453 - mae: 18.7453
[18.74532699584961, 18.74532699584961]
```

In our case, since we used MAE for the loss function as well as MAE for the metrics, `model.evaluate()` returns them both.

TensorFlow also has built in functions for MSE and MAE.

For many evaluation functions, the premise is the same: compare predictions to the ground truth labels.

In [40]:

```
# Calculate the mean absolute error manually
mae = tf.metrics.mean_absolute_error(y_true=y_test,
                                      y_pred=y_preds)
mae
```

Out[40]:

```
<tf.Tensor: shape=(10,), dtype=float32, numpy=
array([34.42891 , 30.943668, 27.45843 , 23.97319 , 20.487946, 17.202168,
       14.510478, 12.419336, 11.018796, 10.212349], dtype=float32)>
```

Huh? That's strange, MAE should be a single output.

Instead, we get 10 values.

This is because our `y_test` and `y_preds` tensors are different shapes.

In [41]:

```
# Check the test label tensor values
y_test
```

Out[41]:

```
array([ 70,  74,  78,  82,  86,  90,  94,  98, 102, 106])
```

In [42]:

```
# Check the predictions tensor values (notice the extra square brackets)
y_preds
```

Out[42]:

```
array([[53.57109 ],
       [57.05633 ],
       [60.541573],
       [64.02681 ],
       [67.512054],
       [70.99729 ],
       [74.48254 ],
       [77.96777 ],
```

```
[81.45301 ],
[84.938255]], dtype=float32)
```

In [43]:

```
# Check the tensor shapes
y_test.shape, y_preds.shape
```

Out[43]:

```
((10,), (10, 1))
```

Remember how we discussed dealing with different input and output shapes is one the most common issues you'll come across, this is one of those times.

But not to worry.

We can fix it using `squeeze()`, it'll remove the the `1` dimension from our `y_preds` tensor, making it the same shape as `y_test`.

 **Note:** If you're comparing two tensors, it's important to make sure they're the right shape(s) (you won't always have to manipulate the shapes, but always be on the look out, many errors are the result of mismatched tensors, especially mismatched input and output shapes).

In [44]:

```
# Shape before squeeze()
y_preds.shape
```

Out[44]:

```
(10, 1)
```

In [45]:

```
# Shape after squeeze()
y_preds.squeeze().shape
```

Out[45]:

```
(10,)
```

In [46]:

```
# What do they look like?
y_test, y_preds.squeeze()
```

Out[46]:

```
(array([ 70,  74,  78,  82,  86,  90,  94,  98, 102, 106]),
 array([53.57109 , 57.05633 , 60.541573, 64.02681 , 67.512054, 70.99729 ,
        74.48254 , 77.96777 , 81.45301 , 84.938255], dtype=float32))
```

Okay, now we know how to make our `y_test` and `y_preds` tenors the same shape, let's use our evaluation metrics.

In [47]:

```
# Calculate the MAE
mae = tf.metrics.mean_absolute_error(y_true=y_test,
                                      y_pred=y_preds.squeeze()) # use squeeze() to make
mae
```

Out[47]:

```
<tf.Tensor: shape=(), dtype=float32, numpy=18.745327>
```

In [48]:

```
# Calculate the MSE
mse = tf.metrics.mean_squared_error(y_true=y_test,
```

```
y_pred=y_preds.squeeze()
```

```
mse
```

```
Out[48]: <tf.Tensor: shape=(), dtype=float32, numpy=353.57336>
```

We can also calculate the MAE using pure TensorFlow functions.

```
In [49]:
```

```
# Returns the same as tf.metrics.mean_absolute_error()
tf.reduce_mean(tf.abs(y_test-y_preds.squeeze()))
```

```
Out[49]: <tf.Tensor: shape=(), dtype=float64, numpy=18.745327377319335>
```

Again, it's a good idea to functionize anything you think you might use over again (or find yourself using over and over again).

Let's make functions for our evaluation metrics.

```
In [50]:
```

```
def mae(y_test, y_pred):
    """
    Calculates mean absolute error between y_test and y_preds.
    """
    return tf.metrics.mean_absolute_error(y_test,
                                          y_pred)

def mse(y_test, y_pred):
    """
    Calculates mean squared error between y_test and y_preds.
    """
    return tf.metrics.mean_squared_error(y_test,
                                         y_pred)
```

Running experiments to improve a model

After seeing the evaluation metrics and the predictions your model makes, it's likely you'll want to improve it.

Again, there are many different ways you can do this, but 3 of the main ones are:

1. **Get more data** - get more examples for your model to train on (more opportunities to learn patterns).
2. **Make your model larger (use a more complex model)** - this might come in the form of more layers or more hidden units in each layer.
3. **Train for longer** - give your model more of a chance to find the patterns in the data.

Since we created our dataset, we could easily make more data but this isn't always the case when you're working with real-world datasets.

So let's take a look at how we can improve our model using 2 and 3.

To do so, we'll build 3 models and compare their results:

1. model_1 - same as original model, 1 layer, trained for 100 epochs.
2. model_2 - 2 layers, trained for 100 epochs.
3. model_3 - 2 layers, trained for 500 epochs.

Build model_1

In [51]:

```
# Set random seed
tf.random.set_seed(42)

# Replicate original model
model_1 = tf.keras.Sequential([
    tf.keras.layers.Dense(1)
])

# Compile the model
model_1.compile(loss=tf.keras.losses.mae,
                 optimizer=tf.keras.optimizers.SGD(),
                 metrics=['mae'])

# Fit the model (Expand the dimension of input, because it cannot be a scalar)
model_1.fit(tf.expand_dims(X_train, axis=1), y_train, epochs=100)
```

Epoch 1/100
 2/2 [=====] - 0s 998us/step - loss: 15.9024 - mae: 15.9024
 Epoch 2/100
 2/2 [=====] - 0s 996us/step - loss: 11.2837 - mae: 11.2837
 Epoch 3/100
 2/2 [=====] - 0s 997us/step - loss: 11.1075 - mae: 11.1075
 Epoch 4/100
 2/2 [=====] - 0s 997us/step - loss: 9.2990 - mae: 9.2990
 Epoch 5/100
 2/2 [=====] - 0s 996us/step - loss: 10.1677 - mae: 10.1677
 Epoch 6/100
 2/2 [=====] - 0s 1ms/step - loss: 9.4303 - mae: 9.4303
 Epoch 7/100
 2/2 [=====] - 0s 996us/step - loss: 8.5704 - mae: 8.5704
 Epoch 8/100
 2/2 [=====] - 0s 2ms/step - loss: 9.0442 - mae: 9.0442
 Epoch 9/100
 2/2 [=====] - 0s 997us/step - loss: 18.7517 - mae: 18.7517
 Epoch 10/100
 2/2 [=====] - 0s 997us/step - loss: 10.1142 - mae: 10.1142
 Epoch 11/100
 2/2 [=====] - 0s 998us/step - loss: 8.3980 - mae: 8.3980
 Epoch 12/100
 2/2 [=====] - 0s 1ms/step - loss: 10.6639 - mae: 10.6639
 Epoch 13/100
 2/2 [=====] - 0s 995us/step - loss: 9.7977 - mae: 9.7977
 Epoch 14/100
 2/2 [=====] - 0s 996us/step - loss: 16.0103 - mae: 16.0103
 Epoch 15/100
 2/2 [=====] - 0s 996us/step - loss: 11.4068 - mae: 11.4068
 Epoch 16/100
 2/2 [=====] - 0s 2ms/step - loss: 8.5393 - mae: 8.5393
 Epoch 17/100
 2/2 [=====] - 0s 997us/step - loss: 13.6348 - mae: 13.6348
 Epoch 18/100
 2/2 [=====] - 0s 998us/step - loss: 11.4629 - mae: 11.4629

```
Epoch 19/100
2/2 [=====] - 0s 1ms/step - loss: 17.9148 - mae: 17.9148
Epoch 20/100
2/2 [=====] - 0s 996us/step - loss: 15.0494 - mae: 15.0494
Epoch 21/100
2/2 [=====] - 0s 984us/step - loss: 11.0216 - mae: 11.0216
Epoch 22/100
2/2 [=====] - 0s 996us/step - loss: 8.1558 - mae: 8.1558
Epoch 23/100
2/2 [=====] - 0s 997us/step - loss: 9.5138 - mae: 9.5138
Epoch 24/100
2/2 [=====] - 0s 3ms/step - loss: 7.6617 - mae: 7.6617
Epoch 25/100
2/2 [=====] - 0s 997us/step - loss: 13.1859 - mae: 13.1859
Epoch 26/100
2/2 [=====] - 0s 996us/step - loss: 16.4211 - mae: 16.4211
Epoch 27/100
2/2 [=====] - 0s 997us/step - loss: 13.1660 - mae: 13.1660
Epoch 28/100
2/2 [=====] - 0s 4ms/step - loss: 14.2559 - mae: 14.2559
Epoch 29/100
2/2 [=====] - 0s 997us/step - loss: 10.0670 - mae: 10.0670
Epoch 30/100
2/2 [=====] - 0s 997us/step - loss: 16.3409 - mae: 16.3409
Epoch 31/100
2/2 [=====] - 0s 996us/step - loss: 23.6444 - mae: 23.6444
Epoch 32/100
2/2 [=====] - 0s 3ms/step - loss: 7.6215 - mae: 7.6215
Epoch 33/100
2/2 [=====] - 0s 995us/step - loss: 9.3221 - mae: 9.3221
Epoch 34/100
2/2 [=====] - 0s 997us/step - loss: 13.7313 - mae: 13.7313
Epoch 35/100
2/2 [=====] - 0s 996us/step - loss: 11.1276 - mae: 11.1276
Epoch 36/100
2/2 [=====] - 0s 984us/step - loss: 13.3222 - mae: 13.3222
Epoch 37/100
2/2 [=====] - 0s 996us/step - loss: 9.4763 - mae: 9.4763
Epoch 38/100
2/2 [=====] - 0s 997us/step - loss: 10.1381 - mae: 10.1381
Epoch 39/100
2/2 [=====] - 0s 997us/step - loss: 10.1793 - mae: 10.1793
Epoch 40/100
2/2 [=====] - 0s 3ms/step - loss: 10.9137 - mae: 10.9137
Epoch 41/100
2/2 [=====] - 0s 997us/step - loss: 7.9063 - mae: 7.9063
Epoch 42/100
2/2 [=====] - 0s 2ms/step - loss: 10.0914 - mae: 10.0914
Epoch 43/100
2/2 [=====] - 0s 2ms/step - loss: 8.7006 - mae: 8.7006
Epoch 44/100
2/2 [=====] - 0s 999us/step - loss: 12.2046 - mae: 12.2046
Epoch 45/100
2/2 [=====] - 0s 999us/step - loss: 13.7970 - mae: 13.7970
Epoch 46/100
2/2 [=====] - 0s 997us/step - loss: 8.4687 - mae: 8.4687
Epoch 47/100
2/2 [=====] - 0s 997us/step - loss: 9.1330 - mae: 9.1330
Epoch 48/100
2/2 [=====] - 0s 2ms/step - loss: 10.6190 - mae: 10.6190
```

Epoch 49/100
2/2 [=====] - 0s 998us/step - loss: 7.7503 - mae: 7.7503
Epoch 50/100
2/2 [=====] - 0s 997us/step - loss: 9.5407 - mae: 9.5407
Epoch 51/100
2/2 [=====] - 0s 3ms/step - loss: 9.1584 - mae: 9.1584
Epoch 52/100
2/2 [=====] - 0s 3ms/step - loss: 16.3630 - mae: 16.3630
Epoch 53/100
2/2 [=====] - 0s 994us/step - loss: 14.1299 - mae: 14.1299
Epoch 54/100
2/2 [=====] - 0s 997us/step - loss: 21.1247 - mae: 21.1247
Epoch 55/100
2/2 [=====] - 0s 2ms/step - loss: 16.3961 - mae: 16.3961
Epoch 56/100
2/2 [=====] - 0s 998us/step - loss: 9.9806 - mae: 9.9806
Epoch 57/100
2/2 [=====] - 0s 0s/step - loss: 9.9606 - mae: 9.9606
Epoch 58/100
2/2 [=====] - 0s 996us/step - loss: 9.2209 - mae: 9.2209
Epoch 59/100
2/2 [=====] - 0s 983us/step - loss: 8.4239 - mae: 8.4239
Epoch 60/100
2/2 [=====] - 0s 998us/step - loss: 9.4869 - mae: 9.4869
Epoch 61/100
2/2 [=====] - 0s 1ms/step - loss: 11.4354 - mae: 11.4354
Epoch 62/100
2/2 [=====] - 0s 997us/step - loss: 11.6887 - mae: 11.6887
Epoch 63/100
2/2 [=====] - 0s 996us/step - loss: 7.0838 - mae: 7.0838
Epoch 64/100
2/2 [=====] - 0s 997us/step - loss: 16.9675 - mae: 16.9675
Epoch 65/100
2/2 [=====] - 0s 997us/step - loss: 12.4599 - mae: 12.4599
Epoch 66/100
2/2 [=====] - 0s 995us/step - loss: 13.0184 - mae: 13.0184
Epoch 67/100
2/2 [=====] - 0s 2ms/step - loss: 8.0600 - mae: 8.0600
Epoch 68/100
2/2 [=====] - 0s 4ms/step - loss: 10.1888 - mae: 10.1888
Epoch 69/100
2/2 [=====] - 0s 997us/step - loss: 12.3633 - mae: 12.3633
Epoch 70/100
2/2 [=====] - 0s 996us/step - loss: 9.0516 - mae: 9.0516
Epoch 71/100
2/2 [=====] - 0s 987us/step - loss: 10.0378 - mae: 10.0378
Epoch 72/100
2/2 [=====] - 0s 997us/step - loss: 10.0516 - mae: 10.0516
Epoch 73/100
2/2 [=====] - 0s 1ms/step - loss: 12.6151 - mae: 12.6151
Epoch 74/100
2/2 [=====] - 0s 997us/step - loss: 10.3819 - mae: 10.3819
Epoch 75/100
2/2 [=====] - 0s 997us/step - loss: 9.7229 - mae: 9.7229
Epoch 76/100
2/2 [=====] - 0s 986us/step - loss: 11.2252 - mae: 11.2252
Epoch 77/100
2/2 [=====] - 0s 996us/step - loss: 8.3642 - mae: 8.3642
Epoch 78/100
2/2 [=====] - 0s 997us/step - loss: 9.1274 - mae: 9.1274

```

Epoch 79/100
2/2 [=====] - 0s 997us/step - loss: 19.5039 - mae: 19.5039
Epoch 80/100
2/2 [=====] - 0s 0s/step - loss: 14.8945 - mae: 14.8945
Epoch 81/100
2/2 [=====] - 0s 997us/step - loss: 9.0034 - mae: 9.0034
Epoch 82/100
2/2 [=====] - 0s 1ms/step - loss: 13.0206 - mae: 13.0206
Epoch 83/100
2/2 [=====] - 0s 992us/step - loss: 7.9299 - mae: 7.9299
Epoch 84/100
2/2 [=====] - 0s 997us/step - loss: 7.6872 - mae: 7.6872
Epoch 85/100
2/2 [=====] - 0s 2ms/step - loss: 10.0328 - mae: 10.0328
Epoch 86/100
2/2 [=====] - 0s 2ms/step - loss: 9.2433 - mae: 9.2433
Epoch 87/100
2/2 [=====] - 0s 3ms/step - loss: 12.0209 - mae: 12.0209
Epoch 88/100
2/2 [=====] - 0s 2ms/step - loss: 10.6389 - mae: 10.6389
Epoch 89/100
2/2 [=====] - 0s 2ms/step - loss: 7.2667 - mae: 7.2667
Epoch 90/100
2/2 [=====] - 0s 998us/step - loss: 12.7786 - mae: 12.7786
Epoch 91/100
2/2 [=====] - 0s 995us/step - loss: 7.3481 - mae: 7.3481
Epoch 92/100
2/2 [=====] - 0s 998us/step - loss: 7.7175 - mae: 7.7175
Epoch 93/100
2/2 [=====] - 0s 2ms/step - loss: 7.1263 - mae: 7.1263
Epoch 94/100
2/2 [=====] - 0s 996us/step - loss: 12.6190 - mae: 12.6190
Epoch 95/100
2/2 [=====] - 0s 2ms/step - loss: 10.0912 - mae: 10.0912
Epoch 96/100
2/2 [=====] - 0s 996us/step - loss: 9.3558 - mae: 9.3558
Epoch 97/100
2/2 [=====] - 0s 2ms/step - loss: 12.6834 - mae: 12.6834
Epoch 98/100
2/2 [=====] - 0s 997us/step - loss: 8.6762 - mae: 8.6762
Epoch 99/100
2/2 [=====] - 0s 996us/step - loss: 9.4693 - mae: 9.4693
Epoch 100/100
2/2 [=====] - 0s 2ms/step - loss: 8.7067 - mae: 8.7067
<keras.callbacks.History at 0x230b24914f0>

```

Out[51]:

In [52]:

```


# Make and plot predictions for model_1
y_preds_1 = model_1.predict(X_test)

# plot_predictions function defined previously
# Only needs to pass predictions, other values are given as default values
plot_predictions(predictions=y_preds_1)

```

WARNING:tensorflow:6 out of the last 6 calls to <function Model.make_predict_function.<l
ocalvars>.predict_function at 0x00000230B256D160> triggered tf.function retracing. Tracing
is expensive and the excessive number of tracings could be due to (1) creating @tf.function
repeatedly in a loop, (2) passing tensors with different shapes, (3) passing Python
objects instead of tensors. For (1), please define your @tf.function outside of the loo

p. For (2), `@tf.function` has `experimental_relax_shapes=True` option that relaxes argument shapes that can avoid unnecessary retracing. For (3), please refer to https://www.tensorflow.org/guide/function#controlling_retracing and https://www.tensorflow.org/api_docs/python/tf/function for more details.

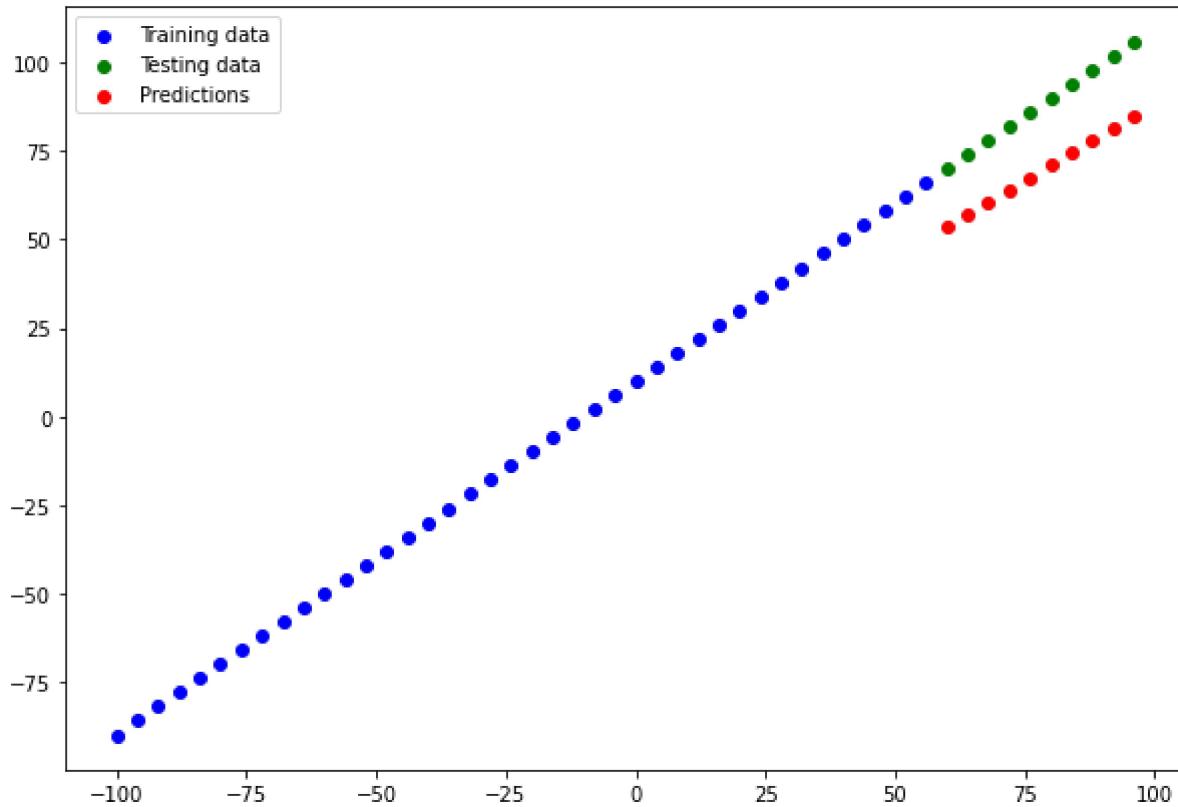

In [53]:

```
# Calculate model_1 metrics
mae_1 = mae(y_test, y_preds_1.squeeze()).numpy()
mse_1 = mse(y_test, y_preds_1.squeeze()).numpy()
mae_1, mse_1
```

Out[53]:

(18.745327, 353.57336)

Build model_2

This time we'll add an extra dense layer (so now our model will have 2 layers) whilst keeping everything else the same.

In [54]:

```
# Set random seed
tf.random.set_seed(42)

# Replicate model_1 and add an extra Layer
model_2 = tf.keras.Sequential([
    tf.keras.layers.Dense(1),
    tf.keras.layers.Dense(1) # add a second layer
])


# Compile the model
model_2.compile(loss=tf.keras.losses.mae,
                 optimizer=tf.keras.optimizers.SGD(),
                 metrics=['mae']) # can use mse, if we want mean square error
```

```
# Fit the model
model_2.fit(tf.expand_dims(X_train, axis=1), y_train, epochs=100, verbose=0) # set verb
```

Out[54]: <keras.callbacks.History at 0x230b269e430>

In [55]:

```
# Make and plot predictions for model_2
y_preds_2 = model_2.predict(X_test)
plot_predictions(predictions=y_preds_2)
```

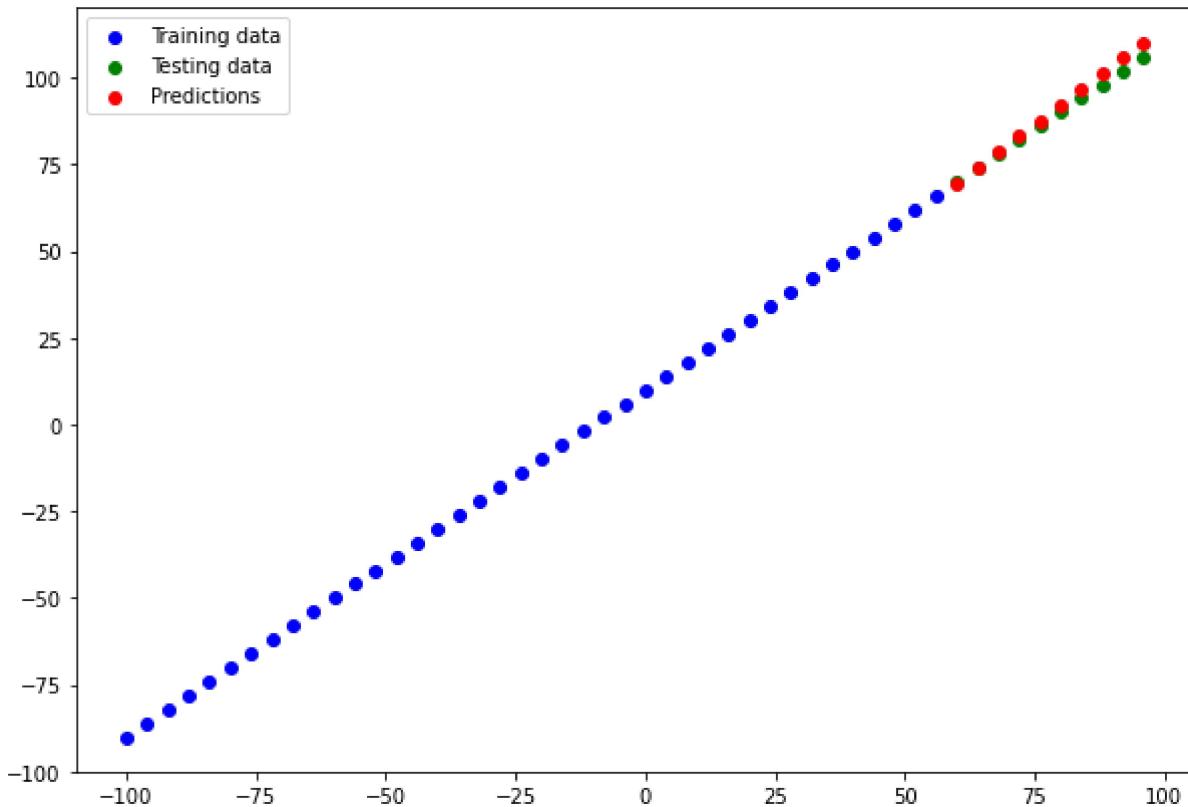

Woah, that's looking better already! And all it took was an extra layer.

In [56]:

```
# Calculate model_2 metrics
mae_2 = mae(y_test, y_preds_2.squeeze()).numpy()
mse_2 = mse(y_test, y_preds_2.squeeze()).numpy()
mae_2, mse_2
```

Out[56]: (1.9097328, 5.45877)

Build model_3

For our 3rd model, we'll keep everything the same as `model_2` except this time we'll train for longer (500 epochs instead of 100).

This will give our model more of a chance to learn the patterns in the data.

In [57]:

```
# Set random seed
tf.random.set_seed(42)

# Replicate model_2
```

```

model_3 = tf.keras.Sequential([
    tf.keras.layers.Dense(1),
    tf.keras.layers.Dense(1)
])

# Compile the model
model_3.compile(loss=tf.keras.losses.mae,
                  optimizer=tf.keras.optimizers.SGD(),
                  metrics=['mae'])

# Fit the model (this time for 500 epochs, not 100)
model_3.fit(tf.expand_dims(X_train, axis=1), y_train, epochs=500, verbose=0) # set verb

```


Out[57]: <keras.callbacks.History at 0x230b240a5e0>

In [58]:

```

# Make and plot predictions for model_3
y_preds_3 = model_3.predict(X_test)
plot_predictions(predictions=y_preds_3)

```

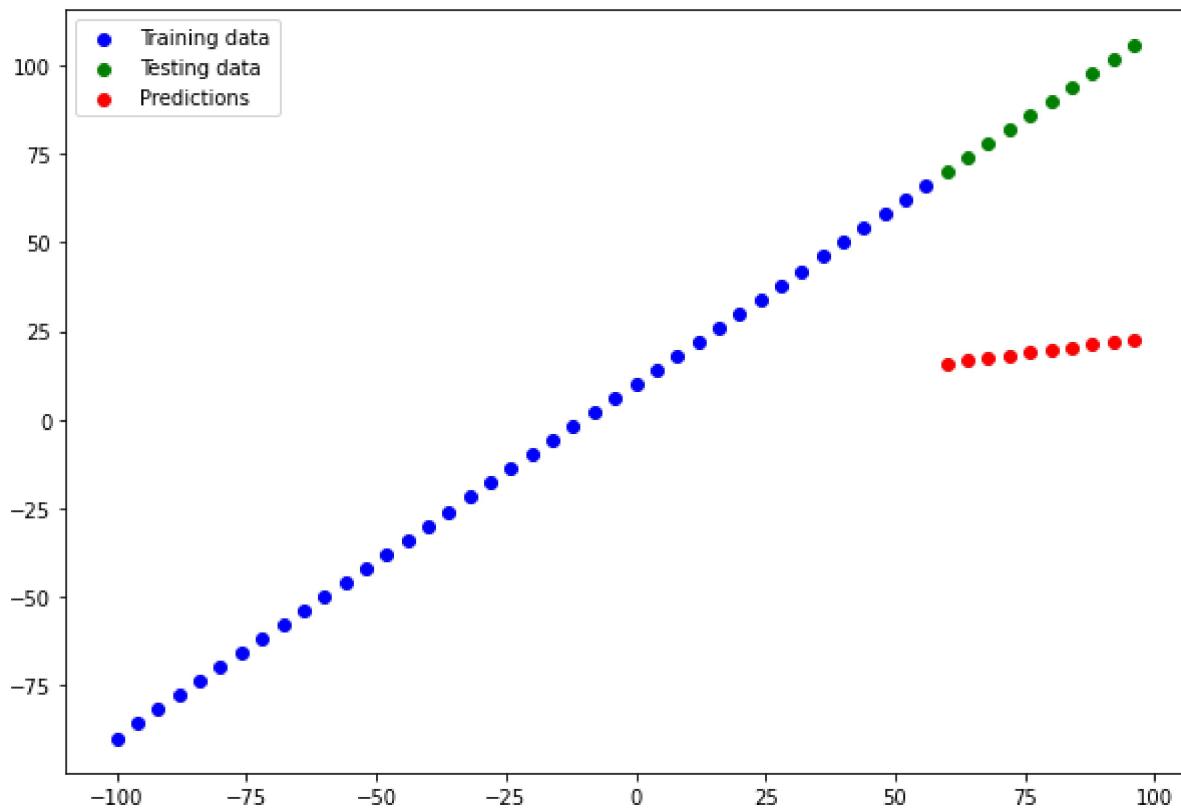

Strange, we trained for longer but our model performed worse?

As it turns out, our model might've trained too long and has thus resulted in worse results (we'll see ways to prevent training for too long later on).

In [59]:

```

# Calculate model_3 metrics
mae_3 = mae(y_test, y_preds_3.squeeze()).numpy()
mse_3 = mse(y_test, y_preds_3.squeeze()).numpy()
mae_3, mse_3

```

Out[59]: (68.68784, 4804.469)

Comparing results

Now we've got results for 3 similar but slightly different results, let's compare them.

In [60]:

```
model_results = [[ "model_1", mae_1, mse_1],
                  [ "model_2", mae_2, mse_2],
                  [ "model_3", mae_3, mse_3]]
```

In [61]:

```
# Create pandas DataFrame using the model results
import pandas as pd
all_results = pd.DataFrame(model_results, columns=["model", "mae", "mse"]) # columns ->
all_results
```

Out[61]:

	model	mae	mse
0	model_1	18.745327	353.573364
1	model_2	1.909733	5.458770
2	model_3	68.687843	4804.469238

From our experiments, it looks like `model_2` performed the best.

And now, you might be thinking, "wow, comparing models is tedious..." and it definitely can be, we've only compared 3 models here.

But this is part of what machine learning modelling is about, trying many different combinations of models and seeing which performs best.

Each model you build is a small experiment.

 **Note:** One of your main goals should be to minimize the time between your experiments. The more experiments you do, the more things you'll figure out which don't work and in turn, get closer to figuring out what does work. Remember the machine learning practitioner's motto: "experiment, experiment, experiment".

Another thing you'll also find is what you thought may work (such as training a model for longer) may not always work and the exact opposite is also often the case.

Tracking your experiments

One really good habit to get into is tracking your modelling experiments to see which perform better than others.

We've done a simple version of this above (keeping the results in different variables).

 **Resource:** But as you build more models, you'll want to look into using tools such as:

- **TensorBoard** - a component of the TensorFlow library to help track modelling experiments (we'll see this later).
- **Weights & Biases** - a tool for tracking all kinds of machine learning experiments (the good news for Weights & Biases is it plugs into TensorBoard).

Saving a model

Once you've trained a model and found one which performs to your liking, you'll probably want to save it for use elsewhere (like a web application or mobile device).

You can save a TensorFlow/Keras model using `model.save()`.

There are two ways to save a model in TensorFlow:

1. The [SavedModel format](#) (default).
2. The [HDF5 format](#).

The main difference between the two is the SavedModel is automatically able to save custom objects (such as special layers) without additional modifications when loading the model back in.

Which one should you use?

It depends on your situation but the SavedModel format will suffice most of the time.
If you want to use the model outside the tensorflow, HDF5 format is the best way.

Both methods use the same method call.

In [62]:

```
# Save a model using the SavedModel format
model_2.save('best_model_SavedModel_format')

# Will generate folder contains multiple files
```

INFO:tensorflow:Assets written to: best_model_SavedModel_format\assets

In [63]:

```
# Check it out - outputs a protobuf binary file (.pb) as well as other files
!ls best_model_SavedModel_format
```

```
assets
keras_metadata.pb
saved_model.pb
variables
```

Now let's save the model in the HDF5 format, we'll use the same method but with a different filename.

In [64]:

```
# Save a model using the HDF5 format
model_2.save("best_model_HDF5_format.h5") # note the addition of '.h5' on the end

# Only generate 1 file called "best_model_HDF5_format.h5"
```

```
In [65]: # Check it out
!ls best_model_HDF5_format.h5
```

best_model_HDF5_format.h5

Loading a model

We can load a saved model using the `load_model()` method.

Loading a model for the different formats (SavedModel and HDF5) is the same (as long as the pathnames to the particular formats are correct).

```
In [66]: # Load a model from the SavedModel format
loaded_saved_model = tf.keras.models.load_model("best_model_SavedModel_format")
loaded_saved_model.summary()
```

Model: "sequential_8"

Layer (type)	Output Shape	Param #
<hr/>		
dense_10 (Dense)	(None, 1)	2
dense_11 (Dense)	(None, 1)	2
<hr/>		
Total params: 4		
Trainable params: 4		
Non-trainable params: 0		

Now let's test it out.

```
In [67]: # Compare model_2 with the SavedModel version (should return True)
model_2_preds = model_2.predict(X_test)
saved_model_preds = loaded_saved_model.predict(X_test)
mae(y_test, saved_model_preds.squeeze()).numpy() == mae(y_test, model_2_preds.squeeze())
```

Out[67]: True

Loading in from the HDF5 is much the same.

```
In [68]: # Load a model from the HDF5 format
loaded_h5_model = tf.keras.models.load_model("best_model_HDF5_format.h5")
loaded_h5_model.summary()
```

Model: "sequential_8"

Layer (type)	Output Shape	Param #
<hr/>		
dense_10 (Dense)	(None, 1)	2
dense_11 (Dense)	(None, 1)	2
<hr/>		
Total params: 4		

```
Trainable params: 4
Non-trainable params: 0
```

In [69]:

```
# Compare model_2 with the Loaded HDF5 version (should return True)
h5_model_preds = loaded_h5_model.predict(X_test)
mae(y_test, h5_model_preds.squeeze()).numpy() == mae(y_test, model_2_preds.squeeze()).n
```

Out[69]:

Downloading a model (from Google Colab)

Say you wanted to get your model from Google Colab to your local machine, you can do one of the following things:

- Right click on the file in the files pane and click 'download'.
- Use the code below.

In [70]:

```
# Download the model (or any file) from Google Colab
from google.colab import files
files.download("best_model_HDF5_format.h5")
```

```
ModuleNotFoundError Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_432/3458631277.py in <module>
      1 # Download the model (or any file) from Google Colab
----> 2 from google.colab import files
      3 files.download("best_model_HDF5_format.h5")

ModuleNotFoundError: No module named 'google.colab'
```

A larger example

Alright, we've seen the fundamentals of building neural network regression models in TensorFlow.

Let's step it up a notch and build a model for a more feature rich dataset.

More specifically we're going to try predict the cost of medical insurance for individuals based on a number of different parameters such as, `age`, `sex`, `bmi`, `children`, `smoking_status` and `residential_region`.

To do, we'll leverage the publicly available [Medical Cost dataset](#) available from Kaggle and [hosted on GitHub](#).

 **Note:** When learning machine learning paradigms, you'll often go through a series of foundational techniques and then practice them by working with open-source datasets and examples. Just as we're doing now, learn foundations, put them to work with different problems. Every time you work on something new, it's a good

I idea to search for something like "problem X example with Python/TensorFlow" where you substitute X for your problem.

In [71]:

```
# Import required libraries
import tensorflow as tf
import pandas as pd
import matplotlib.pyplot as plt
```

In [72]:

```
# Read in the insurance dataset
insurance = pd.read_csv("https://raw.githubusercontent.com/stedy/Machine-Learning-with-
```

In [73]:

```
# Check out the insurance dataset
insurance.head()
```

Out[73]:

	age	sex	bmi	children	smoker	region	charges
0	19	female	27.900	0	yes	southwest	16884.92400
1	18	male	33.770	1	no	southeast	1725.55230
2	28	male	33.000	3	no	southeast	4449.46200
3	33	male	22.705	0	no	northwest	21984.47061
4	32	male	28.880	0	no	northwest	3866.85520

We're going to have to turn the non-numerical columns into numbers (because a neural network can't handle non-numerical inputs).

To do so, we'll use the `get_dummies()` method in pandas.

It converts categorical variables (like the `sex`, `smoker` and `region` columns) into numerical variables using one-hot encoding.

In [74]:

```
# Turn all categories into numbers
insurance_one_hot = pd.get_dummies(insurance)
insurance_one_hot.head() # view the converted columns
```

Out[74]:

	age	bmi	children	charges	sex_female	sex_male	smoker_no	smoker_yes	region_northeast
0	19	27.900	0	16884.92400	1	0	0	1	0
1	18	33.770	1	1725.55230	0	1	1	0	0
2	28	33.000	3	4449.46200	0	1	1	0	0
3	33	22.705	0	21984.47061	0	1	1	0	0
4	32	28.880	0	3866.85520	0	1	1	0	0

Now we'll split data into features (`X`) and labels (`y`).

```
In [75]: # Create X & y values
X = insurance_one_hot.drop("charges", axis=1) # Drop charges column
y = insurance_one_hot["charges"]
```

```
In [76]: # View features
X.head()
```

	age	bmi	children	sex_female	sex_male	smoker_no	smoker_yes	region_northeast	region_north
0	19	27.900	0	1	0	0	1	0	0
1	18	33.770	1	0	1	1	0	0	0
2	28	33.000	3	0	1	1	0	0	0
3	33	22.705	0	0	1	1	0	0	0
4	32	28.880	0	0	1	1	0	0	0

And create training and test sets. We could do this manually, but to make it easier, we'll leverage the already available `train_test_split` function available from Scikit-Learn.

```
In [77]: # Create training and test sets
from sklearn.model_selection import train_test_split

# Split data to train and test data (will shuffle before splitting)
X_train, X_test, y_train, y_test = train_test_split(X,
                                                    y,
                                                    test_size=0.2, # Get 20% of data to
                                                    random_state=42) # set random state
```

Now we can build and fit a model (we'll make it the same as `model_2`).

```
In [78]: # Set random seed
tf.random.set_seed(42)

# Create a new model (same as model_2)
insurance_model = tf.keras.Sequential([
    tf.keras.layers.Dense(1),
    tf.keras.layers.Dense(1)
])

# Compile the model
insurance_model.compile(loss=tf.keras.losses.mae,
                        optimizer=tf.keras.optimizers.SGD(),
                        metrics=['mae'])

# Fit the model
insurance_model.fit(X_train, y_train, epochs=100)
```

```
Epoch 1/100
34/34 [=====] - 0s 423us/step - loss: 8868.5928 - mae: 8868.5928
Epoch 2/100
34/34 [=====] - 0s 513us/step - loss: 7887.1606 - mae: 7887.1606
```

6
Epoch 3/100
34/34 [=====] - 0s 544us/step - loss: 7537.0947 - mae: 7537.094
7
Epoch 4/100
34/34 [=====] - 0s 574us/step - loss: 7859.4346 - mae: 7859.434
6
Epoch 5/100
34/34 [=====] - 0s 544us/step - loss: 7639.6699 - mae: 7639.669
9
Epoch 6/100
34/34 [=====] - 0s 604us/step - loss: 7578.0850 - mae: 7578.085
0
Epoch 7/100
34/34 [=====] - 0s 393us/step - loss: 7514.6162 - mae: 7514.616
2
Epoch 8/100
34/34 [=====] - 0s 467us/step - loss: 7694.1343 - mae: 7694.134
3
Epoch 9/100
34/34 [=====] - 0s 664us/step - loss: 7595.9141 - mae: 7595.914
1
Epoch 10/100
34/34 [=====] - 0s 725us/step - loss: 7735.9126 - mae: 7735.912
6
Epoch 11/100
34/34 [=====] - 0s 453us/step - loss: 7444.4194 - mae: 7444.419
4
Epoch 12/100
34/34 [=====] - 0s 604us/step - loss: 7678.0332 - mae: 7678.033
2
Epoch 13/100
34/34 [=====] - 0s 592us/step - loss: 7681.5850 - mae: 7681.585
0
Epoch 14/100
34/34 [=====] - 0s 544us/step - loss: 7702.2866 - mae: 7702.286
6
Epoch 15/100
34/34 [=====] - 0s 574us/step - loss: 7585.8950 - mae: 7585.895
0
Epoch 16/100
34/34 [=====] - 0s 513us/step - loss: 7689.5386 - mae: 7689.538
6
Epoch 17/100
34/34 [=====] - 0s 423us/step - loss: 7509.2051 - mae: 7509.205
1
Epoch 18/100
34/34 [=====] - 0s 604us/step - loss: 7695.0103 - mae: 7695.010
3
Epoch 19/100
34/34 [=====] - 0s 544us/step - loss: 7669.3755 - mae: 7669.375
5
Epoch 20/100
34/34 [=====] - 0s 695us/step - loss: 7901.1372 - mae: 7901.137
2
Epoch 21/100
34/34 [=====] - 0s 574us/step - loss: 7552.4844 - mae: 7552.484
4
Epoch 22/100
34/34 [=====] - 0s 634us/step - loss: 7844.9980 - mae: 7844.998

0
Epoch 23/100
34/34 [=====] - 0s 544us/step - loss: 7642.2515 - mae: 7642.251
5
Epoch 24/100
34/34 [=====] - 0s 513us/step - loss: 7515.3101 - mae: 7515.310
1
Epoch 25/100
34/34 [=====] - 0s 453us/step - loss: 7678.3530 - mae: 7678.353
0
Epoch 26/100
34/34 [=====] - 0s 513us/step - loss: 7653.0293 - mae: 7653.029
3
Epoch 27/100
34/34 [=====] - 0s 966us/step - loss: 7559.5479 - mae: 7559.547
9
Epoch 28/100
34/34 [=====] - 0s 634us/step - loss: 7459.9419 - mae: 7459.941
9
Epoch 29/100
34/34 [=====] - 0s 725us/step - loss: 7618.6201 - mae: 7618.620
1
Epoch 30/100
34/34 [=====] - 0s 906us/step - loss: 7628.6255 - mae: 7628.625
5
Epoch 31/100
34/34 [=====] - 0s 634us/step - loss: 7540.4917 - mae: 7540.491
7
Epoch 32/100
34/34 [=====] - 0s 544us/step - loss: 7486.0186 - mae: 7486.018
6
Epoch 33/100
34/34 [=====] - 0s 423us/step - loss: 7418.6636 - mae: 7418.663
6
Epoch 34/100
34/34 [=====] - 0s 513us/step - loss: 7480.7334 - mae: 7480.733
4
Epoch 35/100
34/34 [=====] - 0s 574us/step - loss: 7615.3125 - mae: 7615.312
5
Epoch 36/100
34/34 [=====] - 0s 634us/step - loss: 7566.7925 - mae: 7566.792
5
Epoch 37/100
34/34 [=====] - 0s 483us/step - loss: 7661.0898 - mae: 7661.089
8
Epoch 38/100
34/34 [=====] - 0s 604us/step - loss: 7522.6846 - mae: 7522.684
6
Epoch 39/100
34/34 [=====] - 0s 815us/step - loss: 7556.0703 - mae: 7556.070
3
Epoch 40/100
34/34 [=====] - 0s 2ms/step - loss: 7433.5688 - mae: 7433.5688
Epoch 41/100
34/34 [=====] - 0s 695us/step - loss: 7722.4346 - mae: 7722.434
6
Epoch 42/100
34/34 [=====] - 0s 513us/step - loss: 7344.2700 - mae: 7344.270
0

```
Epoch 43/100
34/34 [=====] - 0s 453us/step - loss: 7597.4341 - mae: 7597.434
1
Epoch 44/100
34/34 [=====] - 0s 514us/step - loss: 7338.0137 - mae: 7338.013
7
Epoch 45/100
34/34 [=====] - 0s 544us/step - loss: 7510.3472 - mae: 7510.347
2
Epoch 46/100
34/34 [=====] - 0s 513us/step - loss: 7413.5815 - mae: 7413.581
5
Epoch 47/100
34/34 [=====] - 0s 574us/step - loss: 7451.0391 - mae: 7451.039
1
Epoch 48/100
34/34 [=====] - 0s 664us/step - loss: 7340.5396 - mae: 7340.539
6
Epoch 49/100
34/34 [=====] - 0s 423us/step - loss: 7481.9980 - mae: 7481.998
0
Epoch 50/100
34/34 [=====] - 0s 574us/step - loss: 7468.2852 - mae: 7468.285
2
Epoch 51/100
34/34 [=====] - 0s 453us/step - loss: 7411.3418 - mae: 7411.341
8
Epoch 52/100
34/34 [=====] - 0s 453us/step - loss: 7460.0801 - mae: 7460.080
1
Epoch 53/100
34/34 [=====] - 0s 513us/step - loss: 7601.6611 - mae: 7601.661
1
Epoch 54/100
34/34 [=====] - 0s 725us/step - loss: 7241.2549 - mae: 7241.254
9
Epoch 55/100
34/34 [=====] - 0s 484us/step - loss: 7539.6968 - mae: 7539.696
8
Epoch 56/100
34/34 [=====] - 0s 453us/step - loss: 7293.2012 - mae: 7293.201
2
Epoch 57/100
34/34 [=====] - 0s 453us/step - loss: 7417.9727 - mae: 7417.972
7
Epoch 58/100
34/34 [=====] - 0s 453us/step - loss: 7353.0625 - mae: 7353.062
5
Epoch 59/100
34/34 [=====] - 0s 453us/step - loss: 7643.8252 - mae: 7643.825
2
Epoch 60/100
34/34 [=====] - 0s 483us/step - loss: 7410.4014 - mae: 7410.401
4
Epoch 61/100
34/34 [=====] - 0s 453us/step - loss: 7612.8345 - mae: 7612.834
5
Epoch 62/100
34/34 [=====] - 0s 513us/step - loss: 7387.9082 - mae: 7387.908
2
```

```
Epoch 63/100
34/34 [=====] - 0s 513us/step - loss: 7359.5625 - mae: 7359.562
5
Epoch 64/100
34/34 [=====] - 0s 513us/step - loss: 7109.0889 - mae: 7109.088
9
Epoch 65/100
34/34 [=====] - 0s 483us/step - loss: 7396.3228 - mae: 7396.322
8
Epoch 66/100
34/34 [=====] - 0s 453us/step - loss: 7179.8618 - mae: 7179.861
8
Epoch 67/100
34/34 [=====] - 0s 453us/step - loss: 7289.7729 - mae: 7289.772
9
Epoch 68/100
34/34 [=====] - 0s 483us/step - loss: 7523.6987 - mae: 7523.698
7
Epoch 69/100
34/34 [=====] - 0s 453us/step - loss: 7442.6172 - mae: 7442.617
2
Epoch 70/100
34/34 [=====] - 0s 453us/step - loss: 7673.4849 - mae: 7673.484
9
Epoch 71/100
34/34 [=====] - 0s 423us/step - loss: 7276.0342 - mae: 7276.034
2
Epoch 72/100
34/34 [=====] - 0s 393us/step - loss: 7246.3726 - mae: 7246.372
6
Epoch 73/100
34/34 [=====] - 0s 483us/step - loss: 7372.0728 - mae: 7372.072
8
Epoch 74/100
34/34 [=====] - 0s 453us/step - loss: 7512.0762 - mae: 7512.076
2
Epoch 75/100
34/34 [=====] - 0s 483us/step - loss: 7269.7456 - mae: 7269.745
6
Epoch 76/100
34/34 [=====] - 0s 453us/step - loss: 7199.5059 - mae: 7199.505
9
Epoch 77/100
34/34 [=====] - 0s 483us/step - loss: 7261.2935 - mae: 7261.293
5
Epoch 78/100
34/34 [=====] - 0s 453us/step - loss: 7185.7646 - mae: 7185.764
6
Epoch 79/100
34/34 [=====] - 0s 453us/step - loss: 7301.7510 - mae: 7301.751
0
Epoch 80/100
34/34 [=====] - 0s 453us/step - loss: 7002.6313 - mae: 7002.631
3
Epoch 81/100
34/34 [=====] - 0s 483us/step - loss: 7289.1377 - mae: 7289.137
7
Epoch 82/100
34/34 [=====] - 0s 453us/step - loss: 7155.3960 - mae: 7155.396
0
```

```
Epoch 83/100
34/34 [=====] - 0s 513us/step - loss: 7475.1719 - mae: 7475.171
9
Epoch 84/100
34/34 [=====] - 0s 755us/step - loss: 7387.3691 - mae: 7387.369
1
Epoch 85/100
34/34 [=====] - 0s 997us/step - loss: 7289.9463 - mae: 7289.946
3
Epoch 86/100
34/34 [=====] - 0s 634us/step - loss: 7268.0957 - mae: 7268.095
7
Epoch 87/100
34/34 [=====] - 0s 483us/step - loss: 7238.5894 - mae: 7238.589
4
Epoch 88/100
34/34 [=====] - 0s 453us/step - loss: 7201.7363 - mae: 7201.736
3
Epoch 89/100
34/34 [=====] - 0s 483us/step - loss: 7538.0771 - mae: 7538.077
1
Epoch 90/100
34/34 [=====] - 0s 574us/step - loss: 6967.1187 - mae: 6967.118
7
Epoch 91/100
34/34 [=====] - 0s 453us/step - loss: 7314.1299 - mae: 7314.129
9
Epoch 92/100
34/34 [=====] - 0s 634us/step - loss: 7192.3140 - mae: 7192.314
0
Epoch 93/100
34/34 [=====] - 0s 634us/step - loss: 7530.8784 - mae: 7530.878
4
Epoch 94/100
34/34 [=====] - 0s 695us/step - loss: 7187.3594 - mae: 7187.359
4
Epoch 95/100
34/34 [=====] - 0s 725us/step - loss: 7561.5645 - mae: 7561.564
5
Epoch 96/100
34/34 [=====] - 0s 815us/step - loss: 7263.4648 - mae: 7263.464
8
Epoch 97/100
34/34 [=====] - 0s 785us/step - loss: 7146.2900 - mae: 7146.290
0
Epoch 98/100
34/34 [=====] - 0s 483us/step - loss: 7247.9253 - mae: 7247.925
3
Epoch 99/100
34/34 [=====] - 0s 483us/step - loss: 7200.6689 - mae: 7200.668
9
Epoch 100/100
34/34 [=====] - 0s 483us/step - loss: 7301.6880 - mae: 7301.688
0
<keras.callbacks.History at 0x230b55c0130>
```

Out[78]:

```
In [79]: # Check the results of the insurance model
insurance_model.evaluate(X_test, y_test)
```

```
9/9 [=====] - 0s 623us/step - loss: 8628.2520 - mae: 8628.2520
Out[79]: [8628.251953125, 8628.251953125]
```

Our model didn't perform very well, let's try a bigger model.

We'll try 3 things:

- Increasing the number of layers (2 -> 3).
- Increasing the number of units in each layer (except for the output layer).
- Changing the optimizer (from SGD to Adam).

Everything else will stay the same.

In [80]:

```
# Set random seed
tf.random.set_seed(42)

# Add an extra layer and increase number of units
insurance_model_2 = tf.keras.Sequential([
    tf.keras.layers.Dense(100), # 100 units
    tf.keras.layers.Dense(10), # 10 units
    tf.keras.layers.Dense(1) # 1 unit (important for output layer)
])

# Compile the model
insurance_model_2.compile(loss=tf.keras.losses.mae,
                           optimizer=tf.keras.optimizers.Adam(), # Adam works but SGD do
                           metrics=['mae'])

# Fit the model and save the history (we can plot this)
history = insurance_model_2.fit(X_train, y_train, epochs=100, verbose=0)

# Fitting model will return a history
```

In [81]:

```
# Evaluate our larger model
insurance_model_2.evaluate(X_test, y_test)
```

```
9/9 [=====] - 0s 624us/step - loss: 4924.5093 - mae: 4924.5093
Out[81]: [4924.50927734375, 4924.50927734375]
```


Much better! Using a larger model and the Adam optimizer results in almost half the error as the previous model.

 **Note:** For many problems, the [Adam optimizer](#) is a great starting choice. See Andrei Karpathy's "Adam is safe" point from [A Recipe for Training Neural Networks](#) for more.

Let's check out the loss curves of our model, we should see a downward trend.

In [82]:

```
# Plot history (also known as a Loss curve)
pd.DataFrame(history.history).plot()
plt.ylabel("loss")
plt.xlabel("epochs");
```

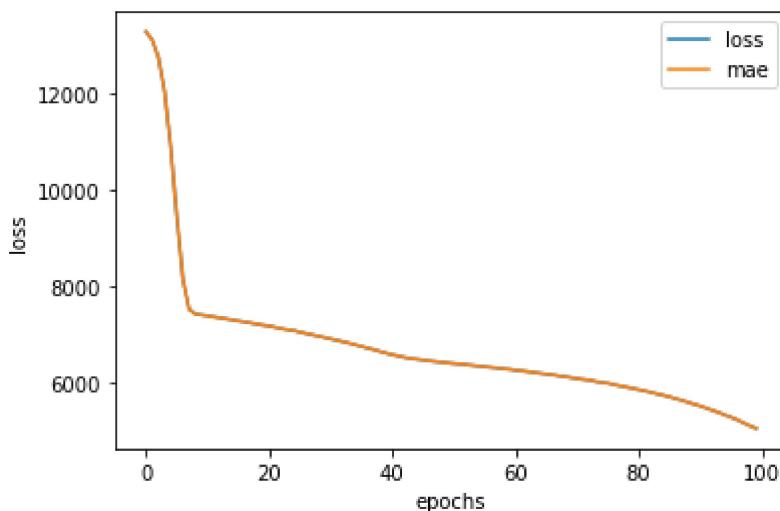

From this, it looks like our model's loss (and MAE) were both still decreasing (in our case, MAE and loss are the same, hence the lines in the plot overlap eachother).

What this tells us is the loss might go down if we try training it for longer.

Question: How long should you train for?

It depends on what problem you're working on. Sometimes training won't take very long, other times it'll take longer than you expect. A common method is to set your model training for a very long time (e.g. 1000's of epochs) but set it up with an [EarlyStopping callback](#) so it stops automatically when it stops improving. We'll see this in another module.

Let's train the same model as above for a little longer. We can do this by calling `fit` on it again.

In [83]:

```
# Try training for a little longer (100 more epochs)
history_2 = insurance_model_2.fit(X_train, y_train, epochs=100, verbose=0)
```

How did the extra training go?

In [84]:

```
# Evaluate the model trained for 200 total epochs
insurance_model_2_loss, insurance_model_2_mae = insurance_model_2.evaluate(X_test, y_te
insurance_model_2_loss, insurance_model_2_mae
```

Out[84]:


```
9/9 [=====] - 0s 623us/step - loss: 3495.8054 - mae: 3495.8054
(3495.805419921875, 3495.805419921875)
```

Boom! Training for an extra 100 epochs we see about a 10% decrease in error.

How does the visual look?

In [85]:

```
# Plot the model trained for 200 total epochs Loss curves
pd.DataFrame(history_2.history).plot()
plt.ylabel("loss")
plt.xlabel("epochs"); # note: epochs will only show 100 since we overrid the history va
```

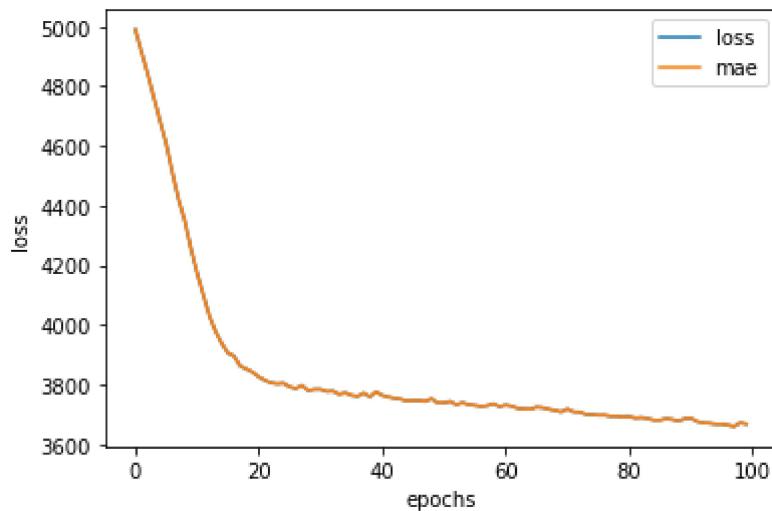

Preprocessing data (normalization and standardization)

A common practice when working with neural networks is to make sure all of the data you pass to them is in the range 0 to 1.

This practice is called **normalization** (scaling all values from their original range to, e.g. between 0 and 100,000 to be between 0 and 1).

There is another process call **standardization** which converts all of your data to unit variance and 0 mean.

These two practices are often part of a preprocessing pipeline (a series of functions to prepare your data for use with neural networks).

Knowing this, some of the major steps you'll take to preprocess your data for a neural network include:

- Turning all of your data to numbers (a neural network can't handle strings).
- Making sure your data is in the right shape (verifying input and output shapes).
- **Feature scaling:**
 - Normalizing data (making sure all values are between 0 and 1). This is done by subtracting the minimum value then dividing by the maximum value minus the minimum. This is also referred to as min-max scaling.
 - Standardization (making sure all values have a mean of 0 and a variance of 1). This is done by subtracting the mean value from the target feature and then dividing it by the standard deviation.
 - Which one should you use?
 - **With neural networks you'll tend to favour normalization** as they tend to prefer values between 0 and 1 (you'll see this especially with image processing), however, you'll often find a neural network can perform pretty well with minimal feature scaling.

 **Resource:** For more on preprocessing data, I'd recommend reading the following resources:

- [Scikit-Learn's documentation on preprocessing data.](#)
- [Scale, Standardize or Normalize with Scikit-Learn by Jeff Hale.](#)

We've already turned our data into numbers using `get_dummies()`, let's see how we'd normalize it as well.

In [86]:

```
import pandas as pd
import matplotlib.pyplot as plt
import tensorflow as tf

# Read in the insurance dataset
insurance = pd.read_csv("https://raw.githubusercontent.com/stedy/Machine-Learning-with-
```

In [87]:

```
# Check out the data
insurance.head()
```

Out[87]:

	age	sex	bmi	children	smoker	region	charges
0	19	female	27.900	0	yes	southwest	16884.92400
1	18	male	33.770	1	no	southeast	1725.55230
2	28	male	33.000	3	no	southeast	4449.46200
3	33	male	22.705	0	no	northwest	21984.47061
4	32	male	28.880	0	no	northwest	3866.85520

Now, just as before, we need to transform the non-numerical columns into numbers and this time we'll also be normalizing the numerical columns with different ranges (to make sure they're all between 0 and 1).

To do this, we're going to use a few classes from Scikit-Learn:

- `make_column_transformer` - build a multi-step data preprocessing function for the following transformations:
 - `MinMaxScaler` - make sure all numerical columns are normalized (between 0 and 1).
 - `OneHotEncoder` - one hot encode the non-numerical columns.

Let's see them in action.

In [88]:

```
from sklearn.compose import make_column_transformer
from sklearn.preprocessing import MinMaxScaler, OneHotEncoder

# Create column transformer (this will help us normalize/preprocess our data)
# This is just a blueprint (No data is given yet)
ct = make_column_transformer(
    (MinMaxScaler(), ["age", "bmi", "children"]), # get all values between 0 and 1
    (OneHotEncoder(handle_unknown="ignore"), ["sex", "smoker", "region"]) # Use 1 hot encoding
)

# Create X & y
X = insurance.drop("charges", axis=1)
```

```

y = insurance["charges"]

# Build our train and test sets (use random state to ensure same split as before)
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=4)

# Fit column transformer on the training data only (doing so on test data would result
# Add data to the ct blueprint for fitting
ct.fit(X_train)

# Transform training and test data with normalization (MinMaxScalar) and one hot encoding
X_train_normal = ct.transform(X_train)
X_test_normal = ct.transform(X_test)

```

Now we've normalized it and one-hot encoding it, what does our data look like now?

In [89]:

```
# Non-normalized and non-one-hot encoded data example
X_train.loc[0]
```

Out[89]:

age	19
sex	female
bmi	27.9
children	0
smoker	yes
region	southwest
Name:	0, dtype: object

In [90]:

```
# Normalized and one-hot encoded example
X_train_normal[0]
```

Out[90]:

```
array([0.60869565, 0.10734463, 0.4         , 1.         , 0.         ,
       1.         , 0.         , 0.         , 1.         , 0.         ,
       0.         ])
```

How about the shapes?

In [91]:

```
# Notice the normalized/one-hot encoded shape is larger because of the extra columns
X_train_normal.shape, X_train.shape
```

Out[91]:

```
((1070, 11), (1070, 6))
```

Our data is normalized and numerical, let's model it.

We'll use the same model as `insurance_model_2`.

In [92]:

```

# Set random seed
tf.random.set_seed(42)

# Build the model (3 Layers, 100, 10, 1 units)
insurance_model_3 = tf.keras.Sequential([
    tf.keras.layers.Dense(100),
    tf.keras.layers.Dense(10),
    tf.keras.layers.Dense(1)
])

# Compile the model
insurance_model_3.compile(loss=tf.keras.losses.mae,
```

```
optimizer=tf.keras.optimizers.Adam(),
metrics=['mae'])

# Fit the model for 200 epochs (same as insurance_model_2)
insurance_model_3.fit(X_train_normal, y_train, epochs=200, verbose=0)
```

Out[92]: <keras.callbacks.History at 0x230b57b3be0>

Let's evaluate the model on normalized test set.

In [93]:

```
# Evaluate 3rd model
insurance_model_3_loss, insurance_model_3_mae = insurance_model_3.evaluate(X_test_norma
```

9/9 [=====] - 0s 498us/step - loss: 3171.5774 - mae: 3171.5774

And finally, let's compare the results from `insurance_model_2` (trained on non-normalized data) and `insurance_model_3` (trained on normalized data).

In [94]:

```
# Compare modelling results from non-normalized data and normalized data
insurance_model_2_mae, insurance_model_3_mae
```

Out[94]: (3495.805419921875, 3171.577392578125)

From this we can see normalizing the data results in 10% less error using the same model than not normalizing the data.

This is **one of the main benefits of normalization: faster convergence time** (a fancy way of saying, your model gets to better results faster).

`insurance_model_2` may have eventually achieved the same results as `insurance_model_3` if we left it training for longer.

Also, the results may change if we were to alter the architectures of the models, e.g. more hidden units per layer or more layers.

But since our main goal as neural network practitioners is to decrease the time between experiments, anything that helps us get better results sooner is a plus.

Exercises

We've covered a whole lot pretty quickly.

So now it's time to have a **play around** with a few things and start to build up your intuition.

I emphasise the words play around because that's very important. Try a few things out, run the code and see what happens.

1. Create your own regression dataset (or make the one we created in "Create data to view and fit" bigger) and build fit a model to it.

2. Try building a neural network with 4 Dense layers and fitting it to your own regression dataset, how does it perform?
3. Try and improve the results we got on the insurance dataset, some things you might want to try include:
 - Building a larger model (how does one with 4 dense layers go?).
 - Increasing the number of units in each layer.
 - Lookup the documentation of [Adam](#) and find out what the first parameter is, what happens if you increase it by 10x?
 - What happens if you train for longer (say 300 epochs instead of 200)?
4. Import the [Boston pricing dataset](#) from TensorFlow `tf.keras.datasets` and model it.

Extra curriculum

If you're looking for extra materials relating to this notebook, I'd check out the following:

- [MIT introduction deep learning lecture 1](#) - gives a great overview of what's happening behind all of the code we're running.
- Reading: 1-hour of [Chapter 1 of Neural Networks and Deep Learning](#) by Michael Nielson - a great in-depth and hands-on example of the intuition behind neural networks.

To practice your regression modelling with TensorFlow, I'd also encourage you to look through [Lion Bridge's collection of datasets](#) or [Kaggle's datasets](#), find a regression dataset which sparks your interest and try to model.