
SOFTWARE TESTING & QUALITY ASSURANCE

Practical No - 1


Creation of Test Suite Using Selenium IDE
Tools: Selenium IDE (Chrome/Firefox Extension)
Aim: Install Selenium IDE and create a test suite containing a minimum of 4 test cases for different web page formats (e.g., HTML, XML, JSON, etc.).

Selenium DE Demo Installation

1. Launch Mozilla Firefox Browser.
2. Type URL https://www.selenium.dev/selenium-ide/.

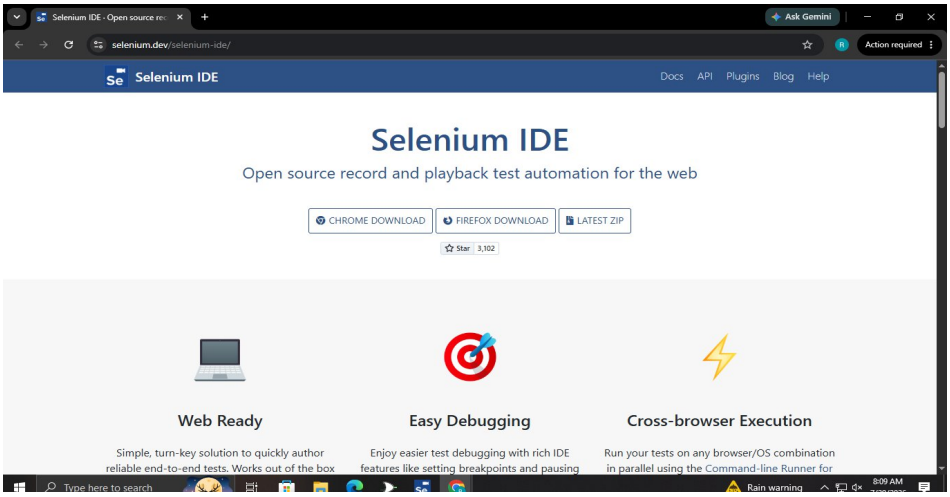

3. Selenium IDE Add-ons page will get open then Click on Add to Firefox button.
4. Firefox will show one popup saying do you want to allow Mozilla Firefox to install Selenium IDE Add-ons or not. Click on Install button.

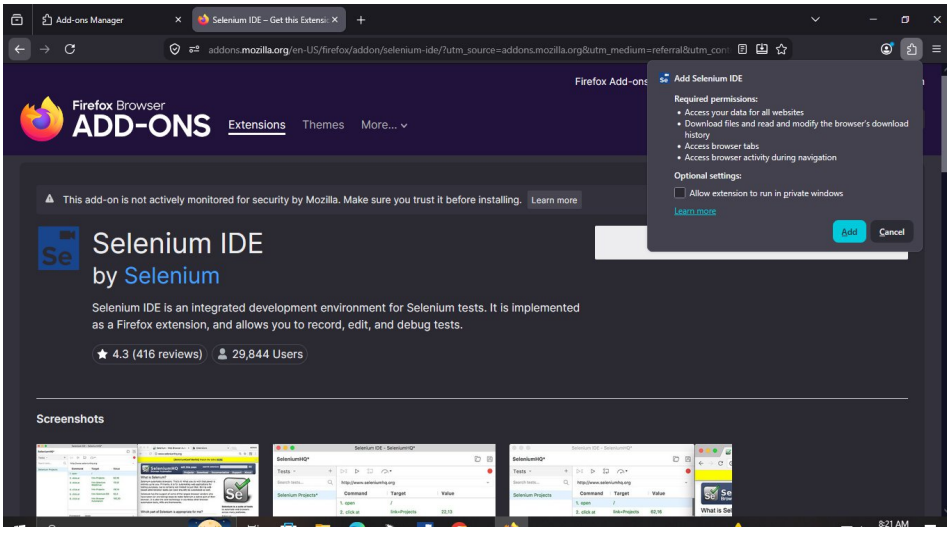


Name : Sadan Saravanan Acharya Roll No : 53

Firefox will automatically install Selenium IDE software. After the installation is completed, a pop-up window appears asking to re-start the Firefox. Click on the "Restart Now' button to reflect the Selenium IDE installation. Click on Restart Now button.

7. On clicking on the Restart Now button, Firefox will restart automatically. in case you missed the pop-up, simply close the Firefox and launch again.


8. Once the Firefox is booted and started again, we can see selenium IDE under the tool's menu list. Selenium IDE icon will be displayed in the Firefox toolbar.

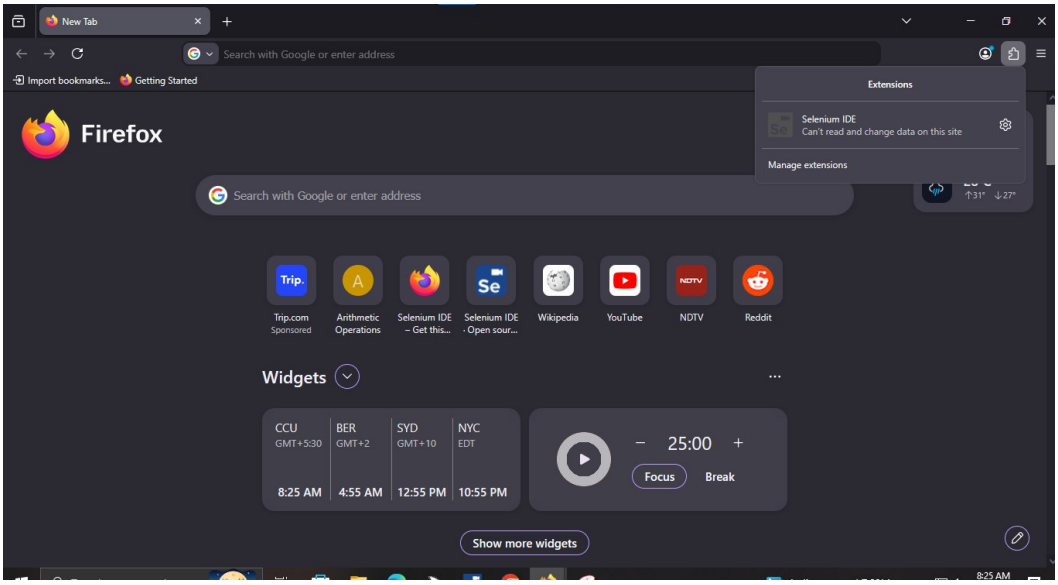


Test Case 1:

Step 1 :


- Launch Firefox and Selenium IDE.
- Click on the Create new project.

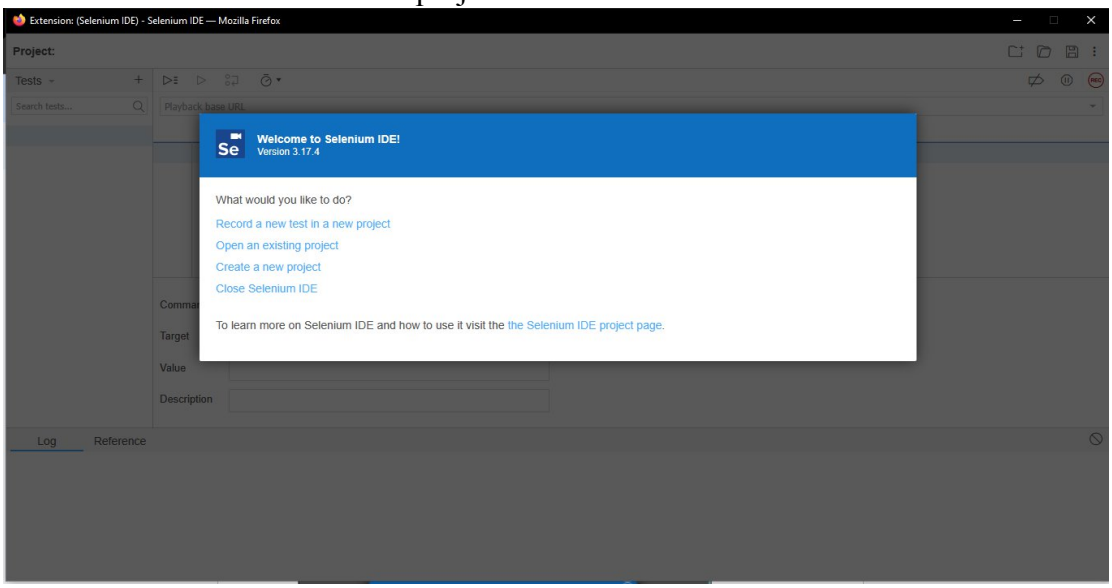

Name : Sadan Saravanan Acharya Roll No : 53

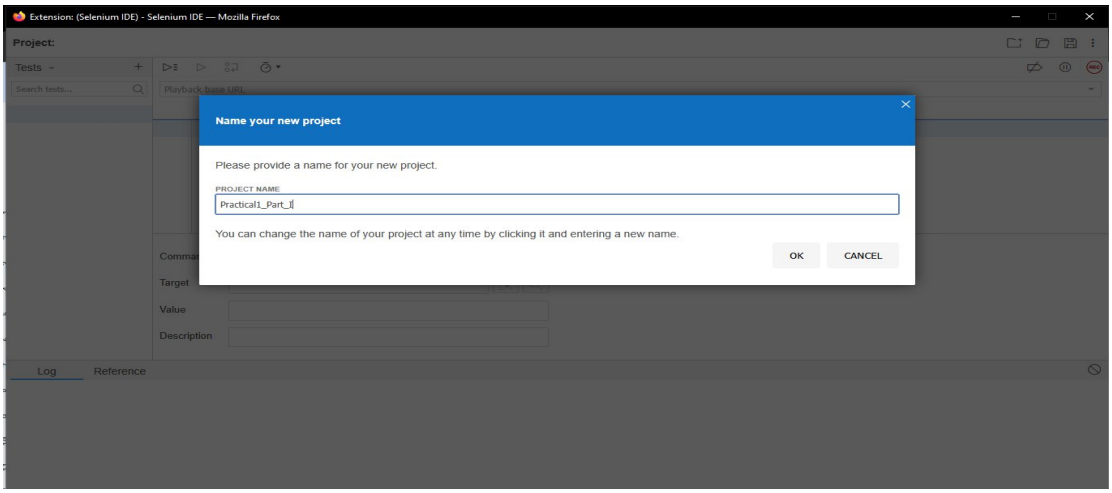


- Type the value for our Base URL : https://www.google.com/
- Toggle the Record button on (if it is not yet toggled on by default).

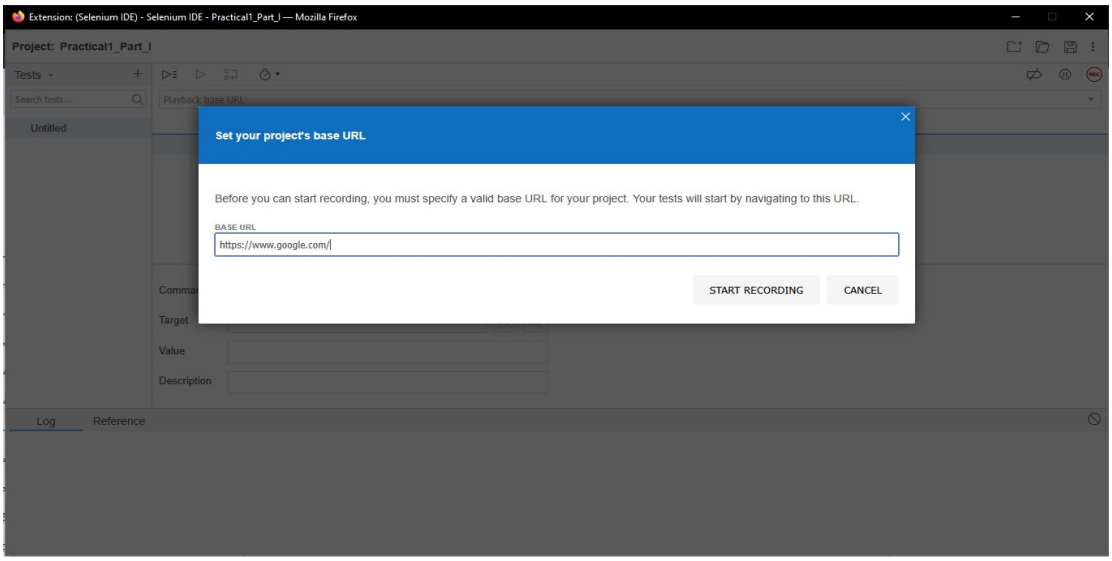


Step 2 : In Firefox, navigate to https://www.google.com/.
Step 3:

- Right-click on any blank space within the page. This will bring up the Selenium IDE context menu.
- **Note: Do not click on any hyperlinked objects or images.**
- Then, select "assertTitle". This is a command that makes sure that the page title is correct.

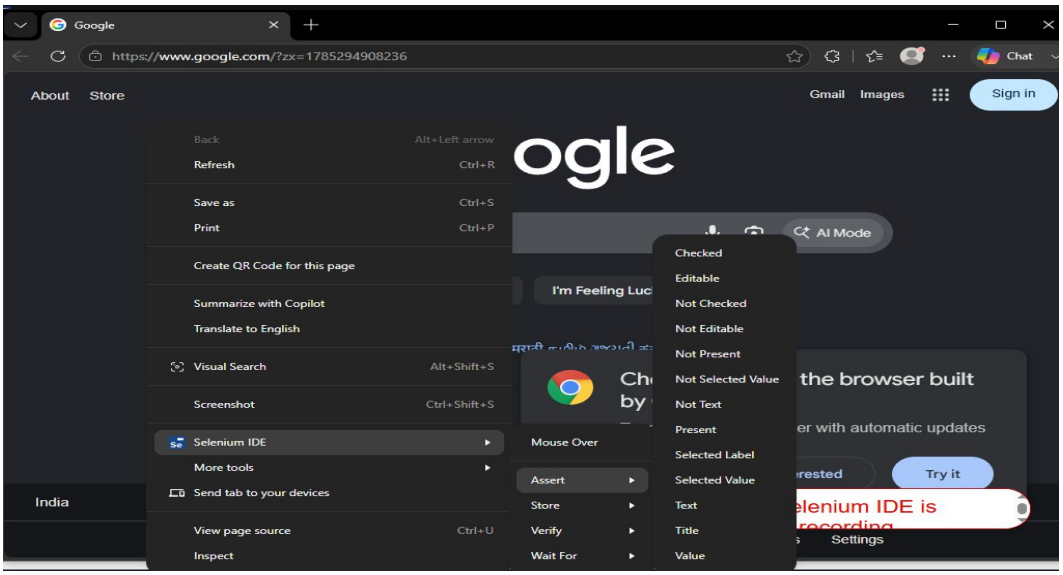

Step 4: Toggle. the record button off to stop recording.
Step 5: Now that we are done with our test script, we shall save it in a test case.

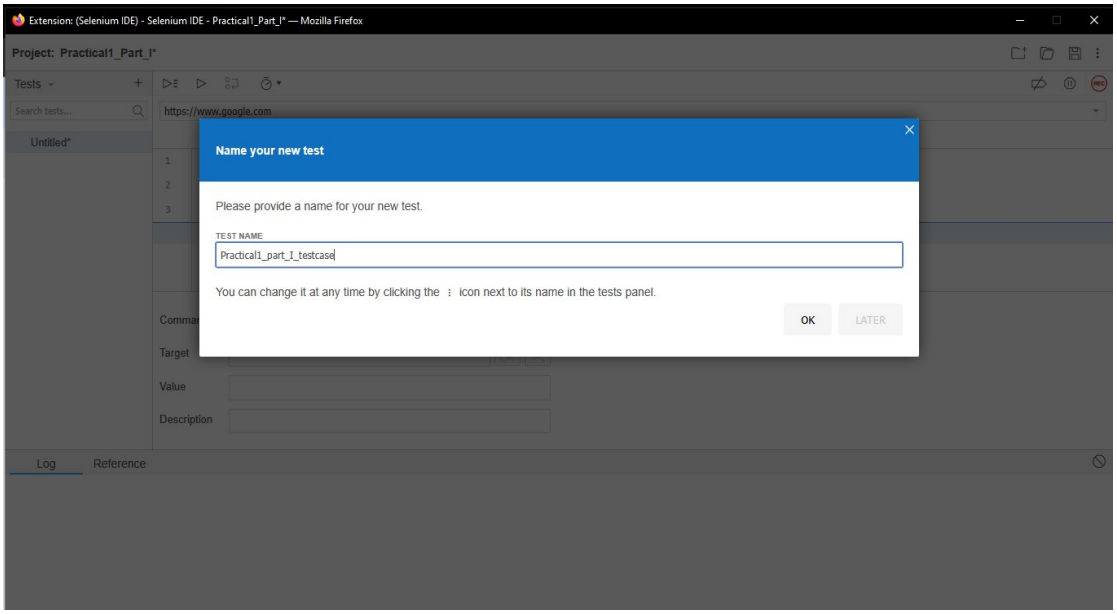


Step 6:

- Choose your desired location, and then name the Test Case as "Invalid login".
- Click the "Save" button.

Step 7:

- Go back to Selenium IDE and click the Playback button to execute the whole script. Selenium
- IDE should be able to replicate everything properly.

Name : Sadan Saravanan Acharya Roll No : 53

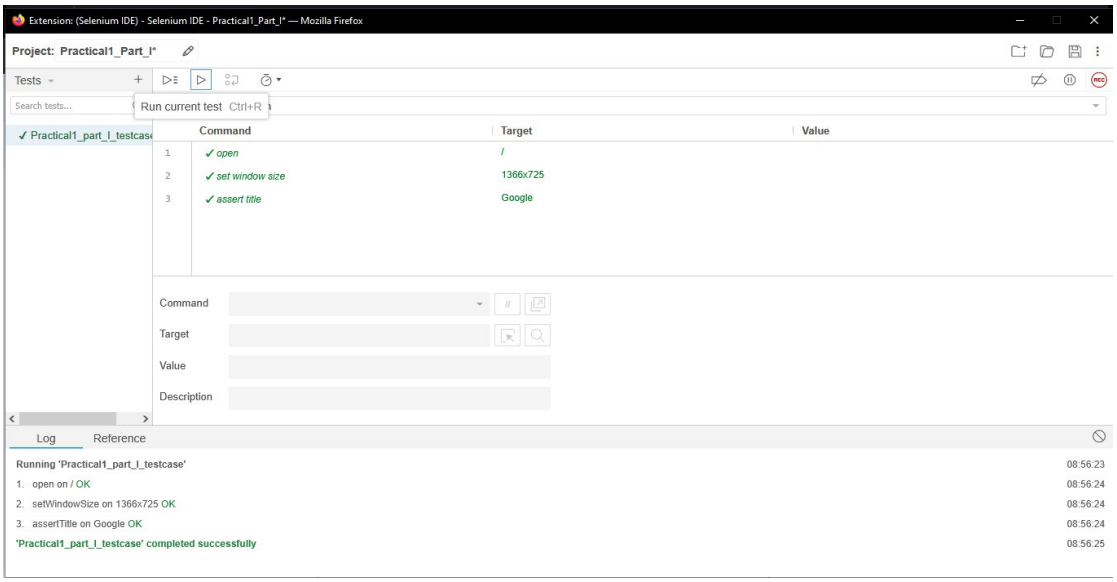

Step 8:Repeat the above procedure for 3 more test cases with different test name on different websites.

- https://www.yahoo.com
- https://www.flipkart.com
- https://www.amazon.in
- https://www.swiggy.com

SOFTWARE TESTING & QUALITY ASSURANCE

Practical No - 2

Cross-Website Functional Testing Using Selenium IDE
Tool: Selenium IDE
Aim: Install Selenium IDE and create a test suite containing a minimum of four test cases to validate different web page formats (HTML page, XML response, JSON API output, and a dynamic form page). Execute the suite and export the automation script in WebDriver format.

Step1: Install Selenium IDE and create a test suite containing a minimum of four test cases to validate different web page formats (HTML page, XML response, JSON API output, and a dynamic form page). Execute the suite and export the automation script in WebDriver format.

Step 2: We are going to use NetBeans IDE, where we will execute the following code:

.

```
<html>
<head>
   <title>Arithmetic Operations</title>
   <script>
      function add()
      {
         var n1 = parseInt(document.getElementById("num1").value);
         var n2 = parseInt(document.getElementById("num2").value);
         document.getElementById("result").value = n1 + n2;
      }

      function subtract()
      {
         var n1 = parseInt(document.getElementById("num1").value);
         var n2 = parseInt(document.getElementById("num2").value);
         document.getElementById("result").value = n1 - n2;
      }


      function multiply()
      {
         var n1 = parseInt(document.getElementById("num1").value);
         var n2 = parseInt(document.getElementById("num2").value);
         document.getElementById("result").value = n1 * n2;
      }


      function divide()
      {
         var n1 = parseInt(document.getElementById("num1").value);
         var n2 = parseInt(document.getElementById("num2").value);
         if (n2 == 0) {
```


```
            alert("Division by zero is not allowed!");
            return;
        }


        document.getElementById("result").value = n1 / n2;
    }
  </script>
</head>
<body>
<form>
  <h2>Arithmetic Operations</h2>
  <table border="1" cellpadding="5">
    <tr>
      <td>Number 1:</td>
      <td><input type="text" id="num1"></td>
    </tr>
    <tr>
      <td>Number 2:</td>
      <td><input type="text" id="num2"></td>
    </tr>
    <tr>
      <td colspan="2" align="center">
        <input type="button" value="Add" onclick="add()">
        <input type="button" value="Subtract" onclick="subtract()">
        <input type="button" value="Multiply" onclick="multiply()">
        <input type="button" value="Divide" onclick="divide()">
      </td>
    </tr>
    <tr>
      <td>Result:</td>
      <td><input type="text" id="result" readonly></td>
    </tr>
  </table>
</form>
</body>
</html>
```

Output:

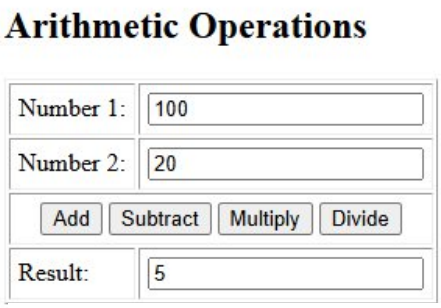


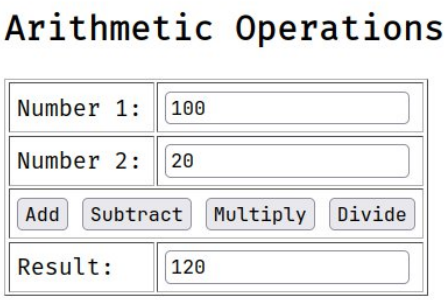

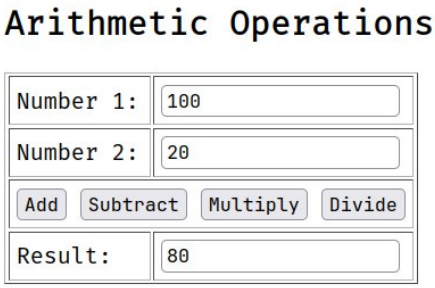

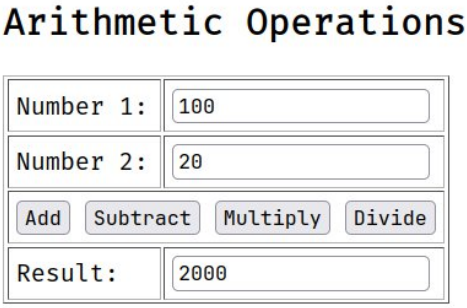


Step 3: Copy the URL and open Selenium IDE. Click on Create a new project, then provide the project name and paste the URL in the Playback Base URL

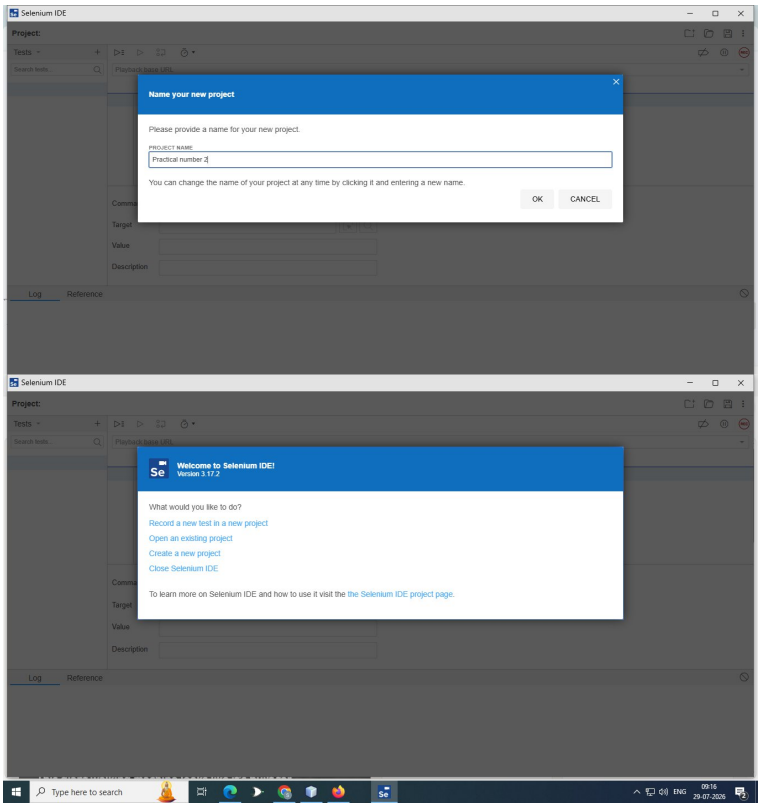


Name : Sadan Saravanan Acharya Roll No : 53


Screenshot from 2026-10-12 20-21-40Once done, it will look like this:

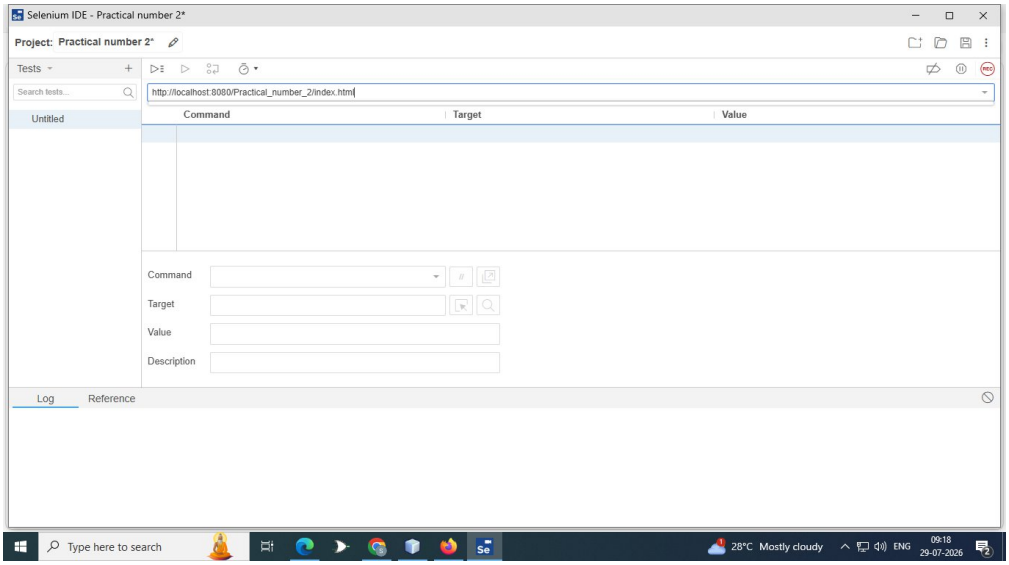


Step 4: Enter an appropriate test case name, then click ADD. Then click on Rec.

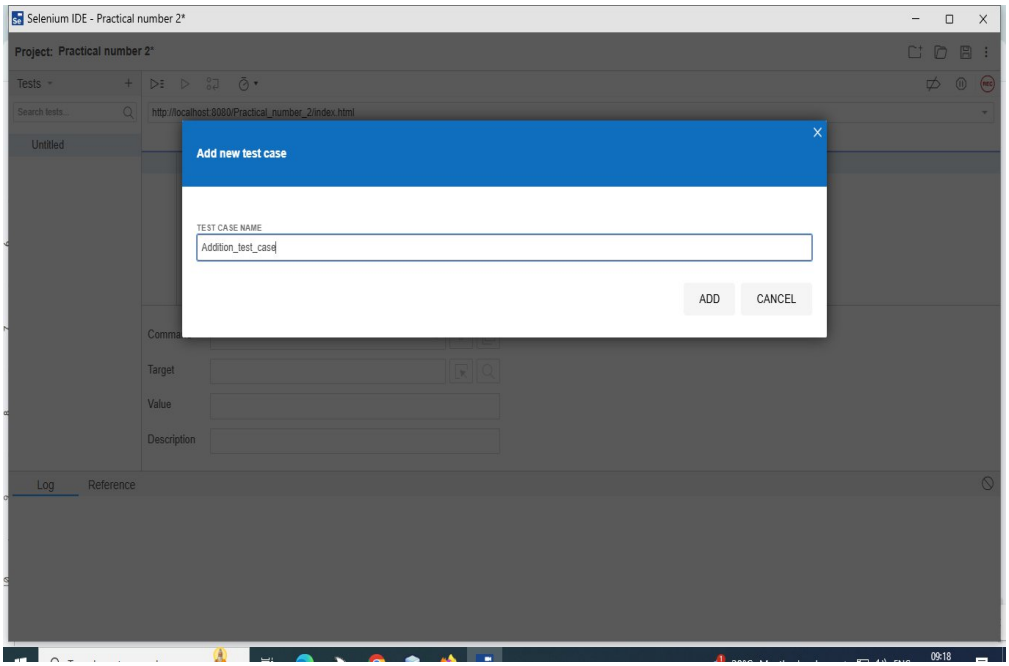

It will provide us with the following output, where we have to enter the input and click on any one operation, i.e., Add, Subtract, Multiply, or Divide. Then click on Stop Rec in Selenium IDE.

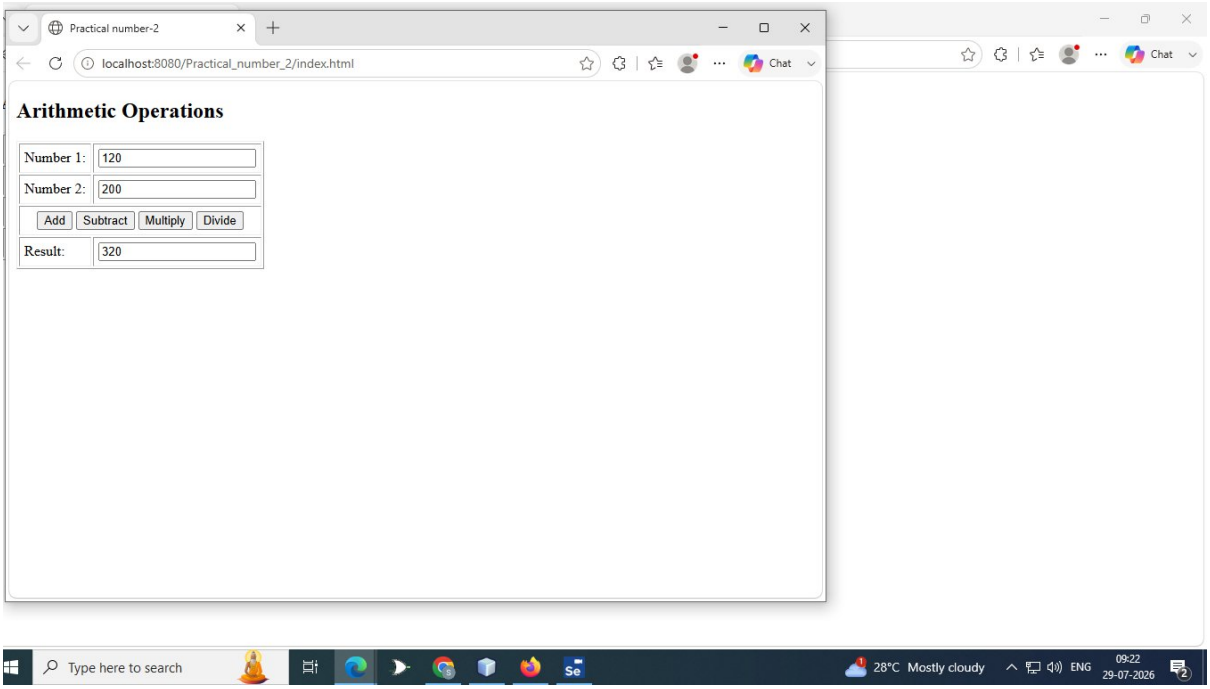

Click on Run current test to see the test case execution.

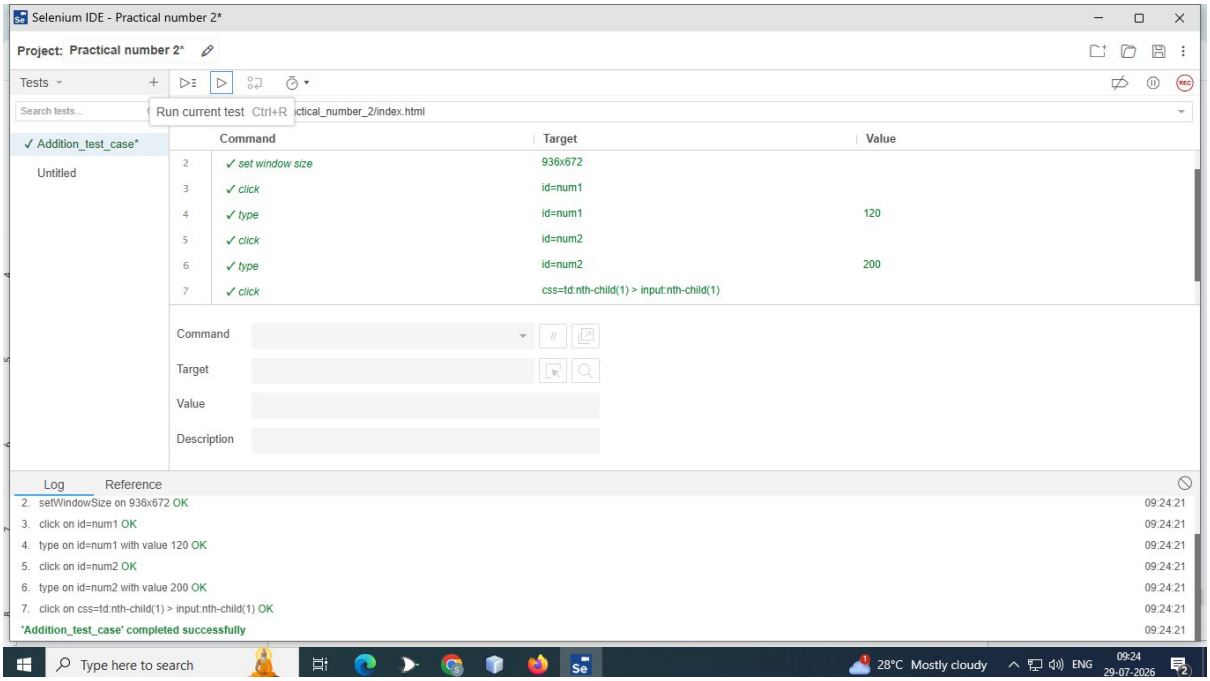

Similarly, we will perform other operations.

Name : Sadan Saravanan Acharya Roll No : 53

SOFTWARE TESTING & QUALITY ASSURANCE

Practical No - 3

Manual Test Case Design and Execution
Tool: MS Excel / Google Sheets
Aim: Prepare a Test Plan, Test Scenarios, and Test Cases for a given web application. Execute test cases manually and prepare a Test Execution Report and Defect Report as per STLC process.

1 . Test Plan

Project Name	**Flipkart E-Commerce Website**
Module	Login & Search
Tester Name	Sadan Acharya
Test Date	05/08/2026
Test Type	Manual Testing
Browser	Google Chrome/Microsoft Edge
Operating System	Windows 11
Objective	To verify the Login and Product Search functionality of Flipkart
Environment	Production

2.Test Scenarioes

Scenario ID	**Test Scenario**
TS001	Verify Flipkart homepage loads successfully
TS002	Verify product search with a valid keyword
TS003	Verify product search with an invalid keyword
TS004	Verify search using an empty search box
TS005	Verify login page opens successfully
TS006	Verify login with invalid mobile number/email
TS007	Verify shopping cart opens correctly
TS008	Verify product details page opens

3.Test Case

SOFTWARE TESTING & QUALITY ASSURANCE

TC ID	Scenario ID	Test Case	Test Steps	Test Data	Expected Result	Actual Result	Status
TC001	TS001	Verify Homepage	Open https://www.flipkart.com	URL	Homepage should load successfully	Homepage loaded successfully	Pass
TC002	TS002	Search Valid Product	Enter Laptop and click Search	Laptop	Laptop products should be displayed	Products displayed	Pass
TC003	TS003	Search Invalid Product	Enter xyz123abc and click Search	xyz123abc	No matching products or relevant message should appear	No matching products displayed	Pass
TC004	TS004	Empty Search	Leave search box empty and click Search	Blank	Search should not proceed or prompt user	Search not executed	Pass
TC005	TS005	Open Login Page	Click Login	-	Login page should open	Login page opened	Pass
TC006	TS006	Invalid Login	Enter invalid mobile number/email	1234567890	Error message should be displayed	Error message displayed	Pass
TC007	TS007	Open Cart	Click Cart icon	-	Cart page should open	Cart page opened	Pass
TC008	TS008	Open Product Details	Click any product from search results	Laptop	Product details page should open	Product page opened	Pass

Name : Sadan Saravanan Acharya Roll No : 53

SOFTWARE TESTING & QUALITY ASSURANCE

4 Test Execution Report

Test Case ID	Executed By	Execution Date	Status	Remarks
TC001	Sadan Acharya	24/07/2026	Pass	Homepage loaded successfully
TC002	Sadan Acharya	24/07/2026	Pass	Search working correctly
TC003	Sadan Acharya	24/07/2026	Pass	Invalid search handled correctly
TC004	Sadan Acharya	24/07/2026	Pass	Empty search handled correctly
TC005	Sadan Acharya	24/07/2026	Pass	Login page opened
TC006	Sadan Acharya	24/07/2026	Pass	Error message displayed
TC007	Sadan Acharya	24/07/2026	Pass	Cart page opened
TC008	Sadan Acharya	24/07/2026	Pass	Product details displayed

5 Summary

Total Test Cases	Passed	Failed	Blocked
8	8	0	0

6 Defect Report

Defect ID	Module	Description	Severity	Priority	Status
D001	Search	No defects found during testing	Low	Low	Closed

Name : Sadan Saravanan Acharya Roll No : 53

SOFTWARE TESTING & QUALITY ASSURANCE

Practical no - 4

Object Identification and Counting on Web Page
Tool: Selenium WebDriver
Aim: Write a program to identify and count the total number of objects present on a web page including links, images, buttons, and input elements. Display categorized counts.

Steps:1 Create Create a Java Project

1. Open Eclipse.
2. Go to File → New → Java Project.
3. Enter the project name: ObjectCount
4. Click Finish

Step2: Add Selenium Library

1. Download Selenium Java from the Selenium website.
2. Extract the ZIP file.
3. In Eclipse:
    - Right-click the project.
    - Select Build Path → Configure Build Path.
    - Click Libraries.
    - Click Add External JARs.
    - Select all JAR files from:
        - selenium-java
        - lib folder
    - Click Apply and Close.

Step 3: Create Package

1. Right-click src.
2. Select New → Package.
3. Package name: selenium
4. Click Finish.

Step 4: Create Java Class

1. Right-click the package.
2. Select New → Class.
3. Class name:**ObjectCount**
4. Check public static void main(String[] args).

5.Click Finish.


Name : Sadan Saravanan Acharya Roll No : 53

Step5: Now write the code in object_count class

Source Code:

```
package selenium;
import java.util.List;
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.firefox.FirefoxDriver;
import org.openqa.selenium.firefox.FirefoxOptions;
public class object_count {
  public static void main(String[] args) {
     System.out.println("===== Starting Firefox Selenium =====");
     FirefoxOptions options = new FirefoxOptions();
     WebDriver driver = new FirefoxDriver(options);
     driver.manage().window().maximize();
     driver.get("https://www.saucedemo.com/");
     List<WebElement> links = driver.findElements(By.tagName("a"));
     List<WebElement> images = driver.findElements(By.tagName("img"));
     List<WebElement> buttons = driver.findElements(By.tagName("button"));
     List<WebElement> inputs = driver.findElements(By.tagName("input"));
     System.out.println("===== Object Count =====");
     System.out.println("Links : " + links.size());
     System.out.println("Images : " + images.size());
     System.out.println("Buttons : " + buttons.size());
     System.out.println("Input Elements : " + inputs.size());
     driver.quit();
  }
}
```

Output:

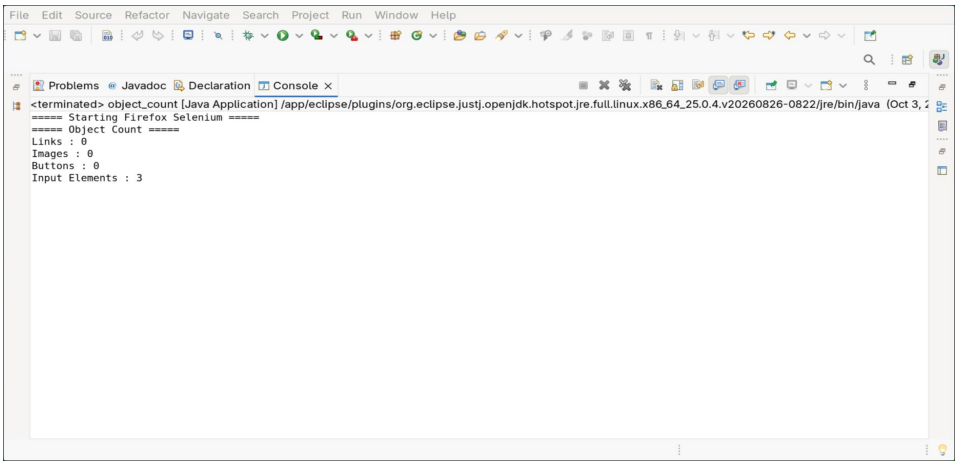

SOFTWARE TESTING & QUALITY ASSURANCE

PRACTICAL No - 5

List and Combo Box Item Verification
Tool: Selenium WebDriver
Aim: Automate the process of identifying a list or dropdown box on a web page and determine the total number of items. Validate default-selected value and perform selection testing.

Step 1: Open Eclipse

1. Open **Eclipse IDE**.
2. Select your workspace.
3. Click **Launch**.

Step 2: Create a Java Project

1. Click **File → New → Java Project**.
2. Enter the project name:
   Practical7
3. Click **Finish**.

Step 3: Add Selenium Libraries

1. Right-click the project.
2. Select **Build Path → Configure Build Path**.
3. Open the **Libraries** tab.
4. Click **Add External JARs**.
5. Select all Selenium JAR files.
6. Click **Apply and Close**.

Step 4: Create a Package

1. Right-click **src**.
2. Click **New → Package**.
3. Enter: selenium
4. Click **Finish**.

Step 5: Create a Java Class

1. Right-click the package.
2. Click **New → Class**.
3. Enter: DropdownTest
4. Check **public static void main(String[] args)**.
5. Click **Finish**.

Step 6: Open the Test Website

Use the Selenium Practice Page:
Select Menu
This page contains dropdown menus suitable for Selenium practice.

Source Code:

```
package selenium;

import java.time.Duration;
import java.util.List;

import org.openqa.selenium.By;
import org.openqa.selenium.JavascriptExecutor;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.firefox.FirefoxDriver;
import org.openqa.selenium.support.ui.Select;

public class list {

    public static void main(String[] args) throws InterruptedException {

        System.out.println("Hello World");

        WebDriver driver = new FirefoxDriver();

        driver.manage().window().maximize();

        driver.manage().timeouts().implicitlyWait(Duration.ofSeconds(10));

        // Open Website
        driver.get("https://demoqa.com/select-menu");

        // Locate Standard Select Dropdown
        WebElement dropdownElement =
                driver.findElement(By.id("oldSelectMenu"));

        // Scroll dropdown into the center of the screen
        JavascriptExecutor js = (JavascriptExecutor) driver;
```

```
js.executeScript(
        "arguments[0].scrollIntoView({block: 'center'});",
        dropdownElement
);

// Create Select Object
Select dropdown = new Select(dropdownElement);

// Count Total Items
List<WebElement> options = dropdown.getOptions();

System.out.println("Total Number of Items: " + options.size());

// Display All Items
System.out.println("\nDropdown Items:");

for (WebElement option : options) {
    System.out.println(option.getText());
}

// Verify Default Selected Item
String defaultValue =
        dropdown.getFirstSelectedOption().getText();

System.out.println(
        "\nDefault Selected Item: " + defaultValue
);

// Select by Visible Text
dropdown.selectByVisibleText("Blue");

System.out.println(
        "Selected by Visible Text: "
        + dropdown.getFirstSelectedOption().getText()
);

Thread.sleep(5000);
 // Select by Value
dropdown.selectByValue("5");
```


```
        System.out.println(
                "Selected by Value: "
                + dropdown.getFirstSelectedOption().getText()
        );

        Thread.sleep(5000);
        // Select by Index
        dropdown.selectByIndex(2);

        System.out.println(
                "Selected by Index: "
                + dropdown.getFirstSelectedOption().getText()
        );

        Thread.sleep(5000);
        driver.quit();
    }
}
```

Output:

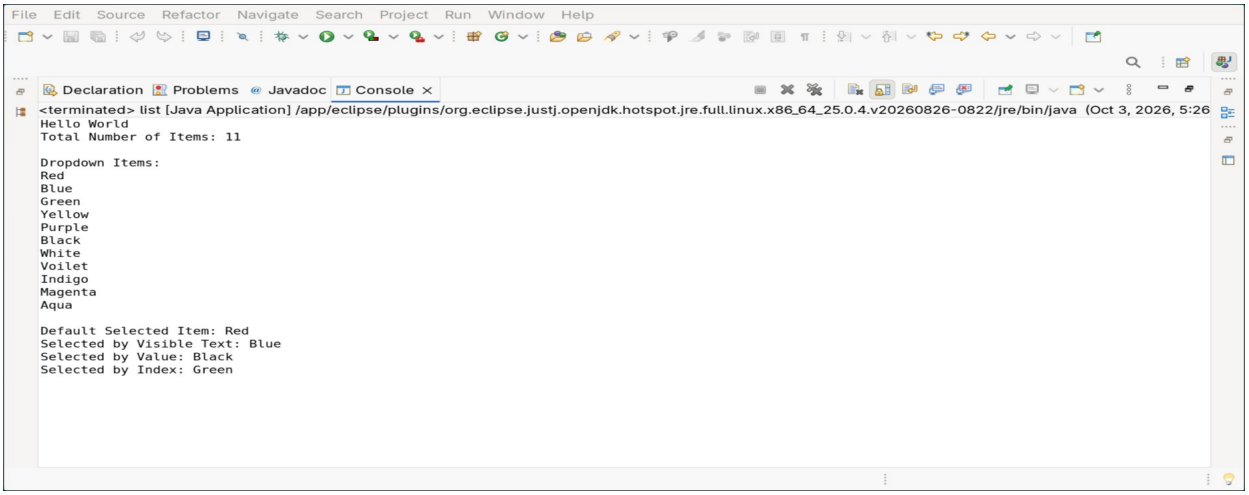

SOFTWARE TESTING & QUALITY ASSURANCE

PRACTICAL NO - 6

Data-Driven Testing Using Excel Integration

Tool: Selenium WebDriver

Aim: Write a program to update 10 student records in an Excel file and validate changes on the web application. Perform data reading, writing, and verification.

package P4;

```
import jxl.*;
import jxl.write.*;
import jxl.write.Number;
import java.io.*;
import java.util.Locale;

public class Student_Data
{
        public static void main(String[] args) throws IOException, WriteException
        {

        int r = 0, c = 0;

        String header[] = {
            "Student Name",
            "Subject1",
            "Subject2",
            "Subject3",
            "Total"
    };

    String sname[] = {
            "Carls",
            "James",
            "Paul",
            "Philip",
            "Smith",
            "Thomson",
            "Rhodey",
            "Stark",
            "Gary",
            "AnneMarie"
    };

    int marks[] = {
            50,
```

```
        45,
        60,
        55,
        70,
        45,
        67,
        78,
        89,
        90
};

File file = new File("student.xls");

WorkbookSettings wbSettings = new WorkbookSettings();

wbSettings.setLocale(new Locale("en", "EN"));

WritableWorkbook workbook = Workbook.createWorkbook(file, wbSettings);

workbook.createSheet("Report", 0);

WritableSheet excelSheet = workbook.getSheet(0);

// Header Row
for (r = 0; r < 1; r++) {

   for (c = 0; c < header.length; c++) {

      Label l = new Label(c, r, header[c]);

      excelSheet.addCell(l);

   }

}

// Student Names
for (r = 1; r <= sname.length; r++) {


   Label l = new Label(0, r, sname[r - 1]);

   excelSheet.addCell(l);

}
// Subject Marks
for (r = 1; r <= sname.length; r++) {
```

```
            for (c = 1; c < 4; c++) {
                Number num = new Number(c, r, marks[r - 1]);
                excelSheet.addCell(num);
            }
        }
        // Total
        for (r = 1; r <= sname.length; r++) {
            int total = marks[r - 1] * 3;
            Number num = new Number(4, r, total);
            excelSheet.addCell(num);
        }
        workbook.write();
        workbook.close();
        System.out.println("Excel File Created!!!!!");
    }
}
```

Output:

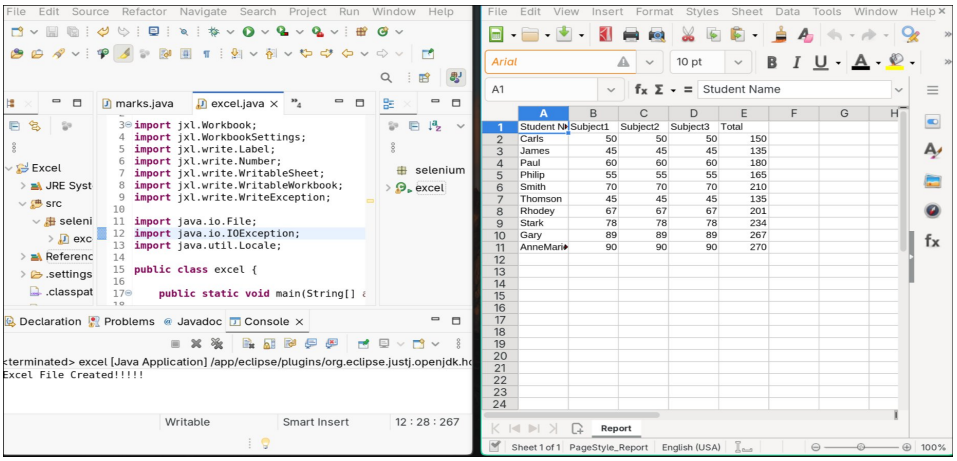

Name : Sadan Saravanan Acharya Roll No : 53

SOFTWARE TESTING & QUALITY ASSURANCE

PRACTICAL NO-7


Login Automation and Validation

Tool: Selenium WebDriver (Java/PHP)

Aim: Write an automation script to perform login on a specified web page. Verify successful login using assertions such as URL validation, welcome message validation, and logout visibility check.

```
package selenium;
import java.time.Duration;
import org.openqa.selenium.By;
import org.openqa.selenium.Keys;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.firefox.FirefoxDriver;
import org.openqa.selenium.support.ui.WebDriverWait;
public class login {
	public static void main(String[] args) throws InterruptedException
	{
		WebDriver driver = new FirefoxDriver();
		System.out.println("Hello World");
		driver.get("http://the-internet.herokuapp.com/login");
		driver.manage().window().maximize();
		Thread.sleep(2000);
		driver.findElement(By.id("username")).sendKeys("tomsmith");
		//driver.findElement(By.id("password")).sendKeys("SuperSecretPassword!");
		driver.findElement(By.className("radius")).click();
		driver.findElement(By.id("username")).sendKeys("tomsmith");
	driver.findElement(By.id("username")).sendKeys(Keys.TAB+"SuperSecretPassw
ord!"+Keys.TAB+Keys.ENTER);
	}
}
```

Output:

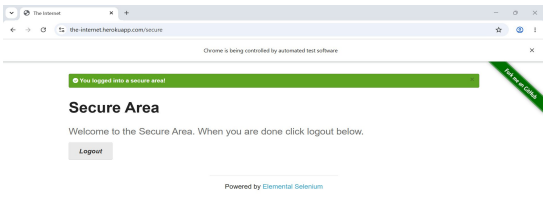

Name : Sadan Saravanan Acharya Roll No : 53

PRACTICAL NO - 8

Web Element Interaction and Synchronization Handling

Tool: Selenium WebDriver (Java)

Aim: Develop a script to automate interaction with various web elements (textbox, radio button, checkbox, dropdown, alert, and frames). Implement implicit and explicit waits for synchronization handling.

Steps1: Create Project: Practical_Number8
Step2: Create Class: webElementInteraction
Step3: Package Name: web.java

Step4: create WebElements.html File

```
<html>
<head>
<title>Student Data</title>
</head>
<body>
<input type="text" id="name">
<input type="radio" name="gender" value="male">
<input type="radio" name="gender" value="female">
<input type="checkbox" id="java">
<input type="checkbox" id="selenium">
<select id="course">
   <option>Java</option>
   <option>Selenium</option>
   <option>Python</option>
</select>
<button onclick="alert('Registration Successful!')">
   Submit
</button>
<iframe src="frame.html"></iframe>
</body>
<html>
```

Step5: Write the Following code under the : WebElementInteraction Class File

```
package web_java;
import java.time.Duration;
import org.openqa.selenium.Alert;
```

```
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.firefox.FirefoxDriver;
import org.openqa.selenium.support.ui.ExpectedConditions;
import org.openqa.selenium.support.ui.Select;
import org.openqa.selenium.support.ui.WebDriverWait;

public class webElement {


        public static void main(String[] args) throws InterruptedException {
            System.out.println("Welcome to Web Element Practical");
            // TODO Auto-generated method stub

            // Launch Chrome
    WebDriver driver = new FirefoxDriver();
    // Maximize browser
    driver.manage().window().maximize();
    // Implicit Wait
    driver.manage().timeouts().implicitlyWait(Duration.ofSeconds(10));
    // Explicit Wait
    WebDriverWait wait =
        new WebDriverWait(driver, Duration.ofSeconds(10));
    // Open webpage
    driver.get("file:///home/manglesh/test/webelements.html");
    // 1. Textbox
    WebElement name = wait.until(ExpectedConditions.visibilityOfElementLocated(
            By.id("name")));
    //name.sendKeys("Quadir");
    // 2. Radio Button
    WebElement maleRadio =driver.findElement(By.cssSelector( "input[value='male']"));
    maleRadio.click();
    // 3. Checkbox
    WebElement javaCheckbox = driver.findElement(By.id("java"));
    if (!javaCheckbox.isSelected()) {
       javaCheckbox.click();
    }
    // 4. Dropdown
    WebElement courseElement =
        driver.findElement(By.id("course"));
```

```
        Select course = new Select(courseElement);
        course.selectByVisibleText("Java");
        // 5. Alert
        driver.findElement(By.xpath("//button")).click();
        Alert alert = wait.until(ExpectedConditions.alertIsPresent());
        System.out.println("Alert Message: " + alert.getText());
        alert.accept();
        // 6. Frame
        driver.switchTo().frame(driver.findElement(By.tagName("iframe")));
        System.out.println("Inside Frame");
        // Switch back to main page
        driver.switchTo().defaultContent();
        System.out.println("Returned to Main Page");
        Thread.sleep(8000);
        // Close browser
        driver.quit();
                }

}
```

Output:

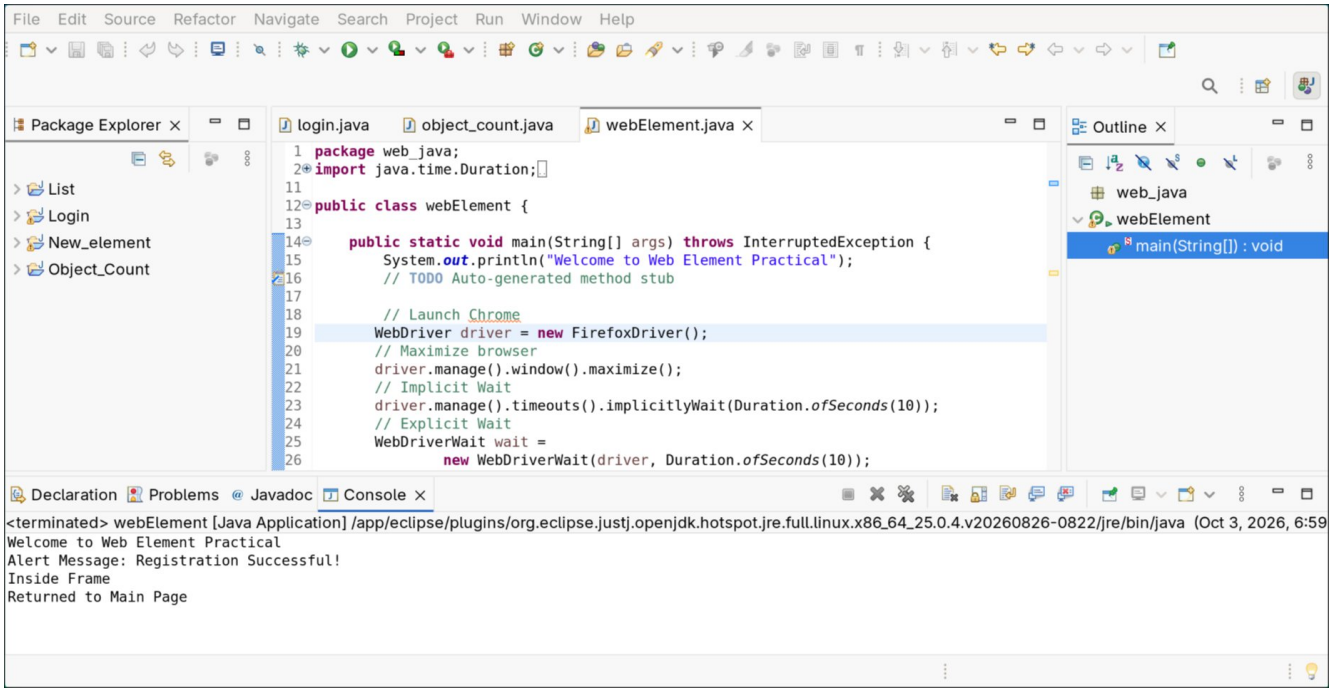

SOFTWARE TESTING & QUALITY ASSURANCE

PRACTICAL NO - 9

Data Extraction and Score Analysis from Web Table

Tool: Selenium WebDriver

Aim: Automate extraction of student marks from a dynamic web table and determine the number of students scoring above 60 in at least one subject. Compute total count and percentage. give me the steps to perform this practical

Steps1: Create Project: Practical_Number8
Step2: Create Class: webElementInteraction
Step3: Package Name: web.java
Step4: create StudentMarks.html .html File

```
<html>
<head>
<title>Student Data</title>
</head>
<body>
<table id="marksTable" border="2">
  <tr>
    <th>Roll No</th>
    <th>Name</th>
    <th>Java</th>
    <th>Python</th>
    <th>DBMS</th>
  </tr>

  <tr>
    <td>1</td>
    <td>Amit</td>
    <td>55</td>
    <td>48</td>
    <td>52</td>
  </tr>

  <tr>
    <td>2</td>
    <td>Rahul</td>
    <td>72</td>
    <td>55</td>
```

```
    <td>61</td>
  </tr>

  <tr>
    <td>3</td>
    <td>Sneha</td>
    <td>45</td>
    <td>68</td>
    <td>58</td>
  </tr>

  <tr>
    <td>4</td>
    <td>Priya</td>
    <td>40</td>
    <td>52</td>
    <td>49</td>
  </tr>

  <tr>
    <td>5</td>
    <td>Neha</td>
    <td>80</td>
    <td>75</td>
    <td>65</td>
  </tr>
</table>
</body>
<html>
```

Step5: Write the Following code under the : Table_Data Class File

```
package selenium;
import java.util.List;
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.WebElement;
import org.openqa.selenium.firefox.FirefoxDriver;
public class marks {
        public static void main(String[] args)
        {
          WebDriver driver = new FirefoxDriver();
```

```
// Maximize browser
driver.manage().window().maximize();
// Open Web Table
driver.get("file:///home/manglesh/test/marks.html");
// Locate Table
WebElement table =
        driver.findElement(By.id("marksTable"));
// Get all rows
List<WebElement> rows =
        table.findElements(By.tagName("tr"));
// Calculate total students
int totalStudents = rows.size() - 1;
int above60Count = 0;
System.out.println("Student Marks Details");
System.out.println("---------------------");
// Start from 1 because row 0 contains headings
for (int i = 1; i < rows.size(); i++) {
    List<WebElement> cells =
            rows.get(i).findElements(By.tagName("td"));
    String rollNo = cells.get(0).getText();
    String name = cells.get(1).getText();
    int javaMarks =
            Integer.parseInt(cells.get(2).getText());
    int pythonMarks =
            Integer.parseInt(cells.get(3).getText());
    int dbmsMarks =
            Integer.parseInt(cells.get(4).getText());
    System.out.println(
            rollNo + "  " +
            name + "  " +
            javaMarks + "  " +
            pythonMarks + "  " +
            dbmsMarks
    );
    // Check whether at least one subject > 60
    if (javaMarks > 60 ||
        pythonMarks > 60 ||
        dbmsMarks > 60) {
        above60Count++;
        System.out.println(
```

```
                    name + " -> Above 60"
                );
            }
        }
        // Calculate percentage
        double percentage =
                ((double) above60Count / totalStudents) * 100;
        // Display results
        System.out.println();
        System.out.println("----------------------");
        System.out.println(
                "Total Students: " + totalStudents
        );
        System.out.println(
                "Students scoring above 60: "
                + above60Count
        );
        System.out.println(
                "Percentage: " + percentage + "%"
        );
        // Close browser
        driver.quit();
            }
}
```

Output:

