

Lecture 7

The Standard Template Library



EECS 281: Data Structures & Algorithms



What is STL?



- STL = Standard Template Library
- Included in C++, expanded in C++11
 - Part of stdlibc++ (not stdlibc)
 - Well-documented
 - High-quality implementations of best algorithms and data structs at your fingertips
- All implementations are entirely in headers
 - No linking necessary
 - All code is available (take a look at it!)

3

Contents of STL

- Containers and iterators
- Memory allocators
- Utilities and function objects
- Algorithms



http://en.wikipedia.org/wiki/Standard_Template_Library

4

Using Libraries vs. Do-it-Yourself Cons

- Libraries only contain general-purpose implementations
- Specialized code may run faster
 - Your own code may be able to skip unnecessary checks on input

Using Libraries vs. Do-it-Yourself Trade-offs

Need to understand a library well to fully utilize it

- Data structures
- Algorithms
- Complexities of operations



Need to know algorithmic details

- STL `std::sort()`
 - Implemented with $O(n \log n)$ worst-case time
 - In practice is typically faster than quicksort
- STL `std::nth_element()`
 - Implemented in average-case linear time
- In older STL, linked lists did not store their size!

7

C++ Features that STL Relies On

- Type `bool`
- const-correctness and const-casts
- Namespaces
 - using namespace std;
 - using std::vector;
- Templates
- Inline functions
- Exception handling
- Implicit initialization
- Operator overloading
- Extended syntax for `new()`
- Keywords `explicit` and `mutable`

C++ features that are used to implement the STL

8

Some Explanations

- The keyword `explicit` should be used with 1-parameter constructors to prevent accidental conversion from another type
 - code:
`explicit FeetInches(int feet);
FeetInches a(3); // OK: 3 feet, 0 inches
FeetInches b = 3; // Error`
- A `mutable` member variable can be modified by a `const` member function

9

10

Pointers, Generic Programming

- STL helps minimize use of pointers and dynamic memory allocation
 - Debugging time is dramatically reduced
- Can reuse same algorithms with multiple data structures
 - This is much more difficult (and less type-safe) in pure C

```
Pointer++  
7 double *sptr = src_ar;  
8 double *dptr = dest_ar;  
9  
10 while(sptr != src_ar + SIZE)  
11     *dptr++ = *sptr++;
```

Why would you use pointers when the code seems simpler without them?

11

STL Containers

All basic containers are available in STL

- vector<> and deque<>
 - stack<> and queue<> are “adaptors”
- bit_vector is same as vector<bool>
- set<> and multi_set<> (plus unordered)
- map<> and multi_map<> (plus unordered)
- list<>
- array<> (Limited use, size fixed at compile time)

11

Performance and Big-O

- Most STL implementations have the best possible big-O complexities, given their interface
 - Example: std::sort() is $O(n \log n)$ worst case
- Some have surprising complexity
 - std::nth_element() is $O(n)$ average case
- Some have poor performance even with a good implementation (linked list)

Main priority in STL is time performance; it's very difficult to beat the STL's speed!

12

STL Linked List Containers

Container	Pointers	.size()
list<>	Doubly-linked	$O(1)$
slist<> [†]	Singly-linked	Can be $O(n)$
forward_list<>	Singly-linked	Does not exist

[†] Includes smart pointers

15

16

Using Iterators

- Iterators generalize pointers
- Allow for implementation of the same algorithm for multiple data structures
 - Compare: vector iterators to linked-list iterators (!)
- Support the concept of sequential containers
- Iterators help writing faster code for traversals
 - Compare: ar[i++] to *(it++)

```
1 template <class InputIterator>  
2 void genPrint(InputIterator begin, InputIterator end) {  
3  
4     while (begin != end)  
5         cout << *begin++ << " "; // may want cout << endl;  
6 } // genPrint()
```

17

Iterator Ranges

- All STL containers that support iterators support .begin(), .end(), .cbegin(), .cend(), .rbegin(), .rend()
 - “begin” is inclusive, “end” is exclusive (one past last)
- What about C arrays? - they are not classes!
 - C++14+ adds std::begin(), std::end(), std::cbegin(), ...
- STL operates on *iterators ranges*, not containers
 - A range can capture *any fraction* of a container
 - Iterator ranges (unlike indices) need no *random access*
 - *Faster traversal* than with indices

17

Types of Iterators

- Access members of a container class
- Similar to pointers; all can be copy-constructed

input_iterator	Read values with forward movement. No multiple passes. Can be incremented, compared, and dereferenced.
output_iterator	Write values with forward movement. No multiple passes. Can be incremented, and dereferenced.
forward_iterator	Read values with forward movement. Can be incremented, compared, dereferenced, and store the iterator's value. Can access the same value more than once.
bidirectional_iterator	Same as forward_iterator but can also decrement.
random_iterator	Same as bidirectional_iterator but can also do pointer arithmetic and pointer comparisons.
reverse_iterator	An iterator adaptor (that inherits from either a random_iterator or a bidirectional_iterator) whose ++ operation moves in reverse.

<https://en.cppreference.com/w/cpp/iterator>

18

Copying and Sorting (C++14+)

```
1 #include <vector>  
2 #include <algorithm>  
3 using namespace std;  
4 const size_t N = 100;  
5  
6 int main() {  
7     vector<int> v(N, -1);  
8     int a[N];  
9  
10    for (size_t j = 0; j != N; ++j)  
11        v[j] = (j * j * j) % N;  
12    copy(begin(v), end(v), begin(a)); // copy over  
13    copy(begin(a), end(a), begin(v)); // copy back  
14    sort(begin(a), end(a));  
15    sort(begin(v), end(v));  
16    vector<int> reversed(rbegin(v), rend(v));  
17 } // main()
```

19

20

(Not) Using Iterators

- You might be tempted to write a template version without iterators
- DON'T DO THIS: leads to multiple compiler errors due to ambiguity

```
template <class Container>
ostream& operator<<(ostream& out,
const Container& c) {
    auto it = begin(c);
    while (it != end(c))
        out << *it++ << " ";
    return out;
} // operator<<()
```

```
template <class Container>
ostream& operator<<(ostream& out,
const Container& c) {
    for (auto &x : c)
        out << x << endl;
    return out;
} // operator<<()
```

<http://en.cppreference.com/w/cpp/language/range-for>

22

A Better Method

```
1 // Overload for each container type you need to output
2 template <class T>
3 ostream &operator<<(ostream &out, const vector<T> &c) {
4     for (auto &x : c)
5         out << x << " ";
6     return out;
7 } // operator<<()
```

- This code compiles without ambiguities
- Needs multiple versions for `list<>`, `deque<>`, etc.

Memory Allocation & Initialization

- Initializing elements of a container
- Containers of pointers
- Behind-the-scenes memory allocation

Data structure	Memory overhead
<code>vector<></code>	Compact
<code>list<></code>	Not very compact
<code>unordered_map<></code>	Memory hog

new in C++11

10 x 20 array

```
1 vector<vector<int>> twoDimArray(10);
2 for (size_t i = 0; i < 10; ++i)
3     twoDimArray[i] = vector<int>(20, -1);
4 // or
5 for (size_t i = 0; i < 10; ++i)
6     twoDimArray[i].resize(20, -1);
```

streamlined

```
7 vector<vector<int>> twoDimArray(10, vector<int>(20, -1));
```

24

Using a Functor

Suppose a class `Employee` needs to be sorted

- Don't overload `operator<<()`
 - Employee objects may need sorting multiple ways
- Use helper class: a **functional object** or “functor”

```
1 struct SortByName {
2     bool operator()(const Employee &left,
3                      const Employee &right) const {
4         return left.getName() < right.getName();
5     } // operator(){}
6 }; // SortByName{}
```

28

std::vector<> Memory Overhead

- Three pointers ($3 * 8$ bytes) – **O(1)** space
 1. Begin allocated memory
 2. End allocated memory
 3. End used memory
 - `vector<SmallClass>` vs. `vector<LargeClass>`
 - Large overhead when using many small vectors
- `vector<vector<vector<T>>>` $a \geq b \geq c$
 - Overhead in terms of pointers: $3 + 3a + 3ab$
- Reorder dimensions to reduce overhead: $a < b < c$
 - Or ensure **O(1)** space overhead by arithmetic indexing

23

Index Sorting

```
1 class SortByCoord {
2     const vector<double> &_coords;
3
4 public:
5     SortByCoord(const vector<double> &z) : _coords{z} {}
6
7     bool operator()(size_t i, size_t j) const {
8         return _coords[i] < _coords[j];
9     } // operator(){}
10}; // SortByCoord{
```

Try this!

<https://bit.ly/3dDLSMS>

29

Filling a Container with Values

Instead of using a loop, there is a simple function `std::iota()` (since C++11)

```
// Fill a vector with values, starting at 0
#include <numeric>
vector<int> v(100);
iota(begin(v), end(v), 0);
// v contains {0, 1, 2, ..., 99}
```

Lambdas

- A **lambda** is an anonymous function object that can be defined on the fly, directly in the code where it is called
 - Improves code readability by keeping code localized (no need to name a function elsewhere that you will only ever use once)
 - Makes STL algorithms easier to use
 - Can be passed around and used as function arguments (e.g., callback functions)

30

31

Anatomy of a Lambda

- A lambda expression consists of the following:

```
[captures list] (parameter list) {function body}
```

 - The *captures list* specifies variables from the current scope that will be available inside the lambda
 - The *parameter list* specifies the argument names and types passed into the lambda
 - The *function body* defines the behavior of the lambda
- The following lambda takes in two integers and checks if their difference is greater than 5:

```
[] (int n1, int n2) { return abs(n1 - n2) > 5; }
```

32

Lambda Example

Find the first odd number in a vector

```
1 struct IsOddPred { // Returns true if number is odd
2     bool operator()(int n) {
3         return n % 2 == 1;
4     } // operator(){}
5 }; // IsOddPred{}
6
7 int main() {
8     vector<int> vec {24, 32, 54, 86, 53, 47, 92, 61};
9
10    // Using the functor defined above
11    auto it1 = find_if(begin(vec), end(vec), IsOddPred());
12
13    // Using a lambda defined in place
14    auto it2 = find_if(begin(vec), end(vec), [](int n) {
15        return n % 2 == 1;
16    }); // find_if()
17 } // main()
```

34

Lambda Variable Capture

There are several ways to capture variables in a lambda:

- [] captures no variables from the surrounding scope
- [=] captures all variables in the surrounding scope by value (i.e., a copy of each variable is made)
- [&] captures all variables in the surrounding scope by reference
- [foo] captures only the variable foo, by value
- [&foo] captures only the variable foo, by reference
- [foo, bar] captures only the variables foo and bar, by value
- [=, &foo] captures all variables in the surrounding scope by value except for foo, which is captured by reference
- [&, foo] captures all variables in the surrounding scope by reference except for foo, which is captured by value
- [this] captures the current object – needed if a lambda defined in an object's member function needs access to its member variables

36

Lambda Exercise Solution

- Solution:

```
1 bool msgPastThreshold(vector<Message> &msg, uint64_t threshold) {
2     return any_of(begin(msg), end(msg),
3                  [threshold](const Message &m) {
4                      return m.received - m.sent > threshold;
5                  });
6 } // msgPastThreshold()
```

- Bonus: sort Message objects in ascending order of total send duration (no need to define a separate comparator)

```
7 void sortMsgBySendDuration(vector<Message> &msg) {
8     sort(begin(msg), end(msg),
9          [](<const Message &lhs, <const Message &rhs) {
10             return (lhs.received - lhs.sent)
11                 < (rhs.received - rhs.sent);
12         });
13 } // sort()
14 } // sortMsgBySendDuration()
```

Anatomy of a Lambda

- Compiler will attempt to deduce the return type of a lambda function body whenever possible
- The arrow operator can be used to explicitly specify a return type
 - When type returned is different from args
 - When type returned cannot be implicitly deduced

```
[captures list] (parameter list) -> return_type {function body}
```

```
[] (double x, double y) -> int { return x + y; }
```

33

Lambda Variable Capture

- A lambda can use parameters and other variables in its function body
- To use variables from its surrounding scope, captures are required
- Variables placed within [] before the parameter list are captured (by value or reference with &)

```
1 int main() {
2     vector<int> vec {45, 63, 28, 21, 80, 91, 88, 72, 34, 57, 50, 69};
3     int factor;
4
5     cout << "Enter a number between 1 and 25: " << endl;
6     cin >> factor;
7     cout << "The first number that is a multiple of " << factor << " is: ";
8     cout << *find_if(begin(vec), end(vec), [&factor](int n) {
9         return n % factor == 0;
10    });
11 } // find_if()
12 } // main()
```

35

Lambda Exercise

- Given a vector of Message objects, where each Message stores a send time and a receive time:

```
struct Message {
    uint64_t sent;
    uint64_t received;
};
```

- Use lambdas and an STL algorithm to implement a function which takes in a threshold value and returns true if there exists a Message in the vector that took longer than threshold to send

```
bool msgPastThreshold(vector<Message> &msg, uint64_t threshold);
```

HINT: The std::any_of() function may be useful here.

```
bool any_of(InputIt first, InputIt last, UnaryPredicate p);
```

37

Q: Why C++?

A: The STL

"Nothing has made life easier to programmers using C++ than the Standard Template Library. Though Java, C# and .NET have their own libraries which are as good as C++'s STL (may be even better when it comes to certain aspects) the STL is simply inevitable. If you master the usage of STL and learn to write your own macros and libraries you're all set to rule the competitive programming world, provided your algorithmic knowledge is strong."

<http://www.quora.com/TopCoder/Why-most-people-on-TopCoder-use-C++-as-their-default-language>

38

41

Learning STL

- Online tutorials and examples
- <http://www.cplusplus.com/>
 - Discusses possible implementations of STL functions, including some subtle mistakes one can make
 - You can copy/modify examples and run them online
- Practice with small tester programs
 - Try algorithms with different data structures/input
- Detailed coverage in books
 - Josuttis, Stroustrup, recent edition algorithms books
- Read the STL card posted on Canvas
 - Files / Resources / algolist.pdf



Learning Software Libraries

- Nearly impossible to remember all of stdlibc and stdlibc++
- Not necessary to learn all functions by heart
- Ways to learn a library
 - Skim through documentation
 - Study what seems interesting
 - Learn how to use those pieces
 - Come back when you need something

familiarity and
lookup skill
versus
memorization

The most valuable skill is knowing how to look things up!

43

44

Debugging STL-heavy Code: Compiler Errors

- Compiler often *complains about STL headers*, not your code – **induced errors**
- You will need to sift through many lines of messages, to find line reference to your code
- Good understanding of type conversions in C++ is often required to fix problems
- Double-check *function signatures*

46

47

Randomization

- C++11 introduced the `<random>` library to support random number generation:
 - **Generators:** generate random numbers (e.g., `std::random_device`, `std::mt19937`, `std::mt19937_64`)
 - **Distributions:** convert generator output into statistical distributions (e.g. `std::normal_distribution`, `std::uniform_int_distribution`, `std::uniform_real_distribution`)
- Generally preferred over `rand()`
- <https://en.cppreference.com/w/cpp/numeric/random>
- Randomization is great for testing code

48

49


Generating Random Numbers (great for testing a program)

```
1 #include <iostream>
2 #include <random>           // Needed for random_device and mt19937_64
3 using namespace std;
4
5 int main() {
6     random_device rd;        // Create a device to start random # generation
7     mt19937_64 mt(rd());    // Create a Mersenne Twister to generate random #
8     int size = 10;           // Could also read size from cin
9
10    cout << size << '\n';
11    // Run a loop, generating random x/y coordinates; useful for Project 4!
12    for (int i = 0; i < size; ++i) {
13        // mt() generates a large random number, % limits the range, - makes
14        // about half the numbers negative; the range is -10 to 10 (inclusive)
15        int x = static_cast<int>(mt() % 21) - 10;
16        int y = static_cast<int>(mt() % 21) - 10;
17        cout << x << ' ' << y << '\n';
18    } // for
19    cout << endl;
20
21    return 0;
22} // main()
```

Filling an empty
container with
different values

vector_pre used
vector::resize()
(a single allocation)


Intel Core i7
Q820 @1.73GHz
GCC 4.7.2 (64b)
-O2 -std=c++11
-march=native

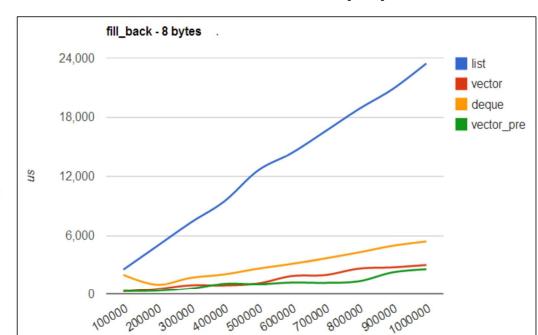

Relative Performance of STL Containers (2)

Fill the container with numbers $[0, N]$, shuffle at random;

search for each value using `std::find()`

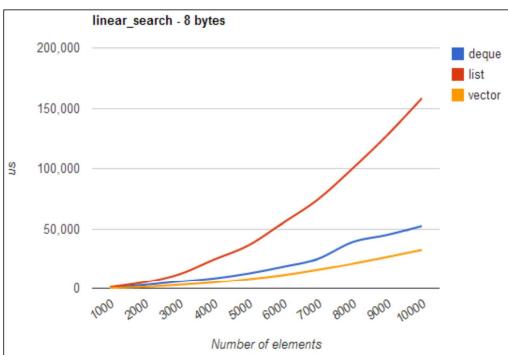

<http://www.baptiste-wicht.com/2012/12/cpp-benchmark-vector-list-deque>


54

Relative Performance of STL Containers (4)

Fill the container with numbers $[0, N]$, shuffle at random;

Pick a random position by linear search

Remove 1000 elements

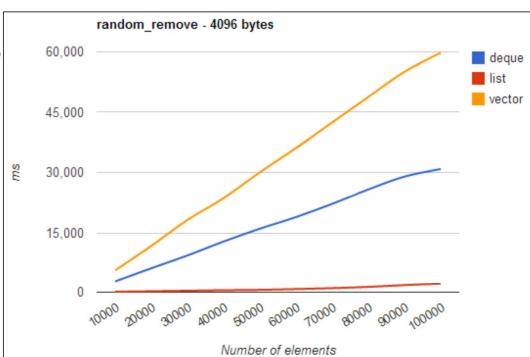

<http://www.baptiste-wicht.com/2012/12/cpp-benchmark-vector-list-deque>


56

Relative Performance of STL Containers (3)

Fill the container with numbers $[0, N]$, shuffle at random;

Pick a random position by linear search

Insert 1000 values

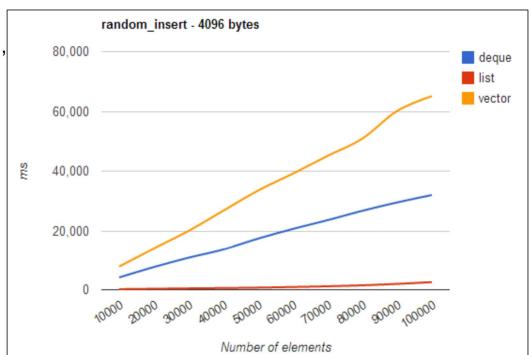


<http://www.baptiste-wicht.com/2012/12/cpp-benchmark-vector-list-deque>

55

Relative Performance of STL Containers (5)

Insert new values at the front

A vector needs to move all prior elts, but a list does not

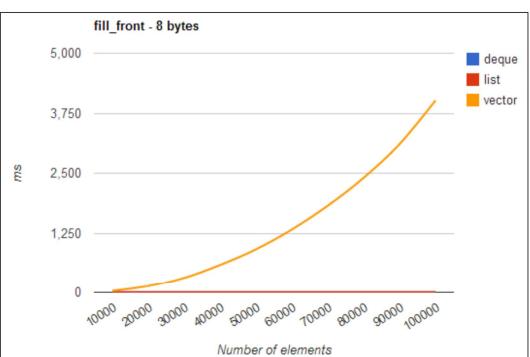

<http://www.baptiste-wicht.com/2012/12/cpp-benchmark-vector-list-deque>

57