Acme Deployment Guide

This guide explains how to deploy the Acme service to a new server.
It is written for engineers who have shell access to the target host.

1. Overview

The service has two parts: an API process and a background worker.
Both are configured through a single environment file.

Prerequisites

- A Linux server with 2 GB of RAM
- Docker 24 or newer
- A DNS record for the service

1. Create the deploy user
2. Copy the environment file
3. Open port 8080

WARNING: Never commit the environment file to version control.

2. Installation

Run the installer from the project root:

```
docker compose pull
docker compose up -d
    --scale worker=2
```

Supported environments

Name	Memory	Region
small	2 GB	eu-west
medium	8 GB	us-east
large	32 GB	ap-south

1. Verify the containers are healthy
2. Check the logs for errors

3. Screenshots

The dashboard should look like this after a successful deploy:

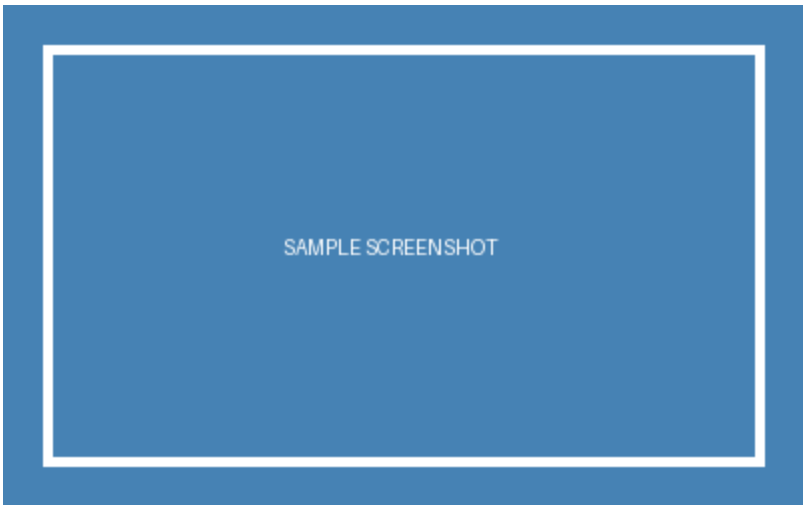

SCREENSHOT REQUIRED: capture the final state of the dashboard.

That completes the deployment.