


`i == 3?`

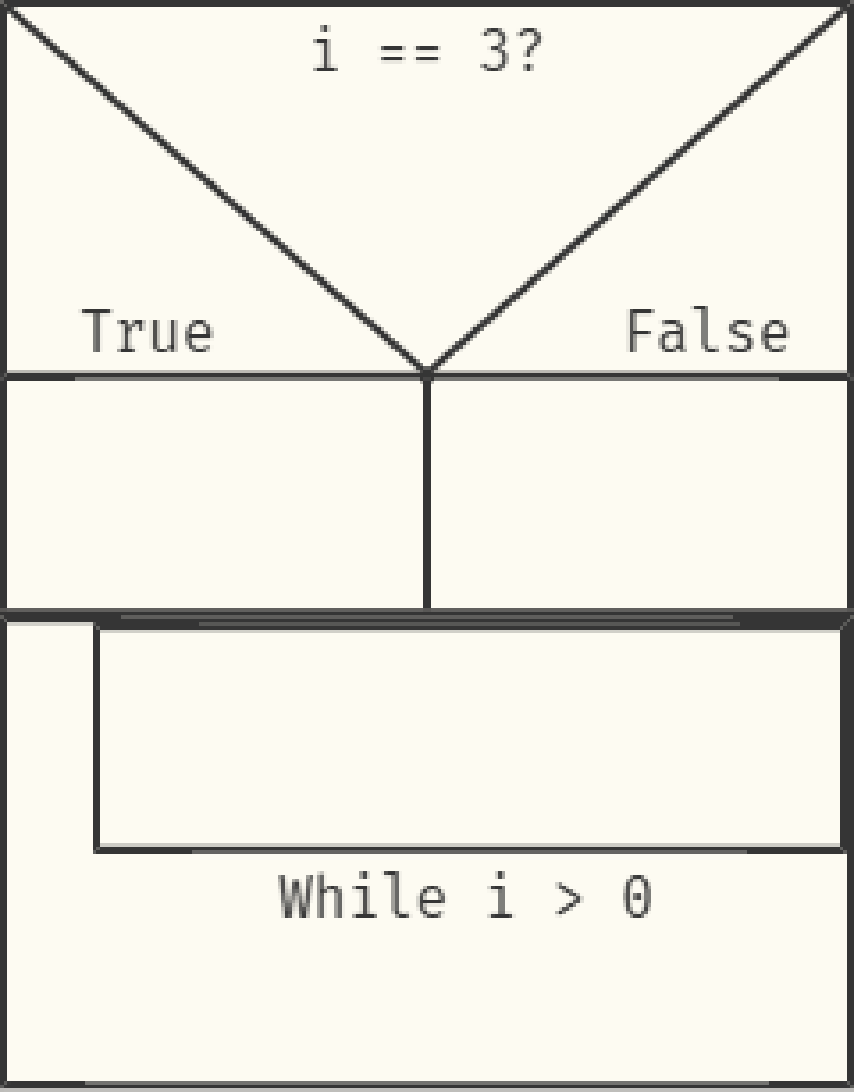

```
graph TD; A["i == 3?"] -- True --> B["While i > 0"]; A -- False --> C[" "]; B --> C; style C fill:none,stroke:none
```

The diagram is a flowchart for a while loop. At the top, a decision diamond contains the code `i == 3?`. Two arrows originate from the bottom of this diamond: one pointing left and down to a rectangular box labeled `True`, and another pointing right and down to a rectangular box labeled `False`. Below the `True` box is another rectangular box, which is connected to a third box below it. The `False` box is also connected to this third box. The third box is a wide rectangle that spans the width of both boxes above it and contains the code `While i > 0`.

`True`

`False`

`While i > 0`