Coding C++

Auto saved at 16:40:18

RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
char letter;
letter='A';
    cout <<letter<<'\n';
    letter='B';
    cout <<letter<<'\n';
    cin>>letter;
    return 0;
}
```

Tab {} “” ; = \ & ,

Compile Result

A
B

Coding C++

Auto saved at 16:52:52

RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
char letter;
letter='65';
    cout <<letter<<'\n';
    letter='66';
    cout <<letter<<'\n';
    cin>>letter;
    return 0;
}
```

Tab {} “” ; = \ & ,

4:53

Compile Result

```
5
6
```

Coding C++

Auto saved at 16:55:25

RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
int letter;
letter='A';
    cout <<letter<<'\n';
    letter='B';
    cout <<letter<<'\n';
    cin>>letter;
    return 0;
}
```

Tab {} “” ; = \ & ,

5:03

Compile Result

```
65
66
```

Coding C++

Auto saved at 17:26:24

RUN MENU

```cpp
#include<iostream>
using namespace std;
int main()
{
int num1, num2;
    cout <<"Enter first intger:";
    cin>> num1 ;
    cout << "Enter second intger:";
    cin>> num2;
    cout << "Addition=" << num1 + num2;
    cout << "Subtraction=" << num1-num2;
    cout << "Multiplication=" << num1*num2
   cout << "Division=" << num1/num2<< endl
    return 0;
}
```

Tab {} “” ; = \ & ,

5:27

Compile Result

```
Enter first intger:5
Enter second intger:7
Addition=12Subtraction=-2Multiplication=35D
ivision=0

[Process completed - press Enter]
```

5:50

Coding C++

Auto saved at 17:45:10

RUN MENU

```cpp
#include<iostream>
using namespace std;
int main()
{
int val1;
int val2;
int val3;
    cout <<"please enter your 3 number:";
    cin>> val1 >> val2 >> val3;
    cout << val1 <<"\n" <<val2 <<"\n" <<val3 <<"\n";

    cout << val3 <<"\n" <<val2 <<"\n" <<val1 <<"\n";
    system ("PAUSE");
    return 0;
}
```

+ − ! $ [] ‘’ ()
| ^ . # % < >

5:51

Compile Result

```
please enter your 3 number:123321
```

Coding C++

Auto saved at 19:10:40

RUN MENU

```cpp
#include <iostream>
#include <cmath>
using namespace std;

int main()
{
    double x1, y1, x2, y2, d;

    cout << "Enter x1 and y1: ";
    cin >> x1 >> y1;

    cout << "Enter x2 and y2: ";
    cin >> x2 >> y2;

    d = sqrt(pow(x2 - x1, 2) + pow(y2 - y1, 2));

    cout << "Distance = " << d << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

7:13

Compile Result

```
 enter x1 and y1:1 2
enter x2 and y2:4 6
Distance=5

[Process completed - press Enter]
```

Coding C++

Auto saved at 19:20:04

RUN MENU

```cpp
#include <iostream>
using namespace std;

int main()
{
    double r, area;

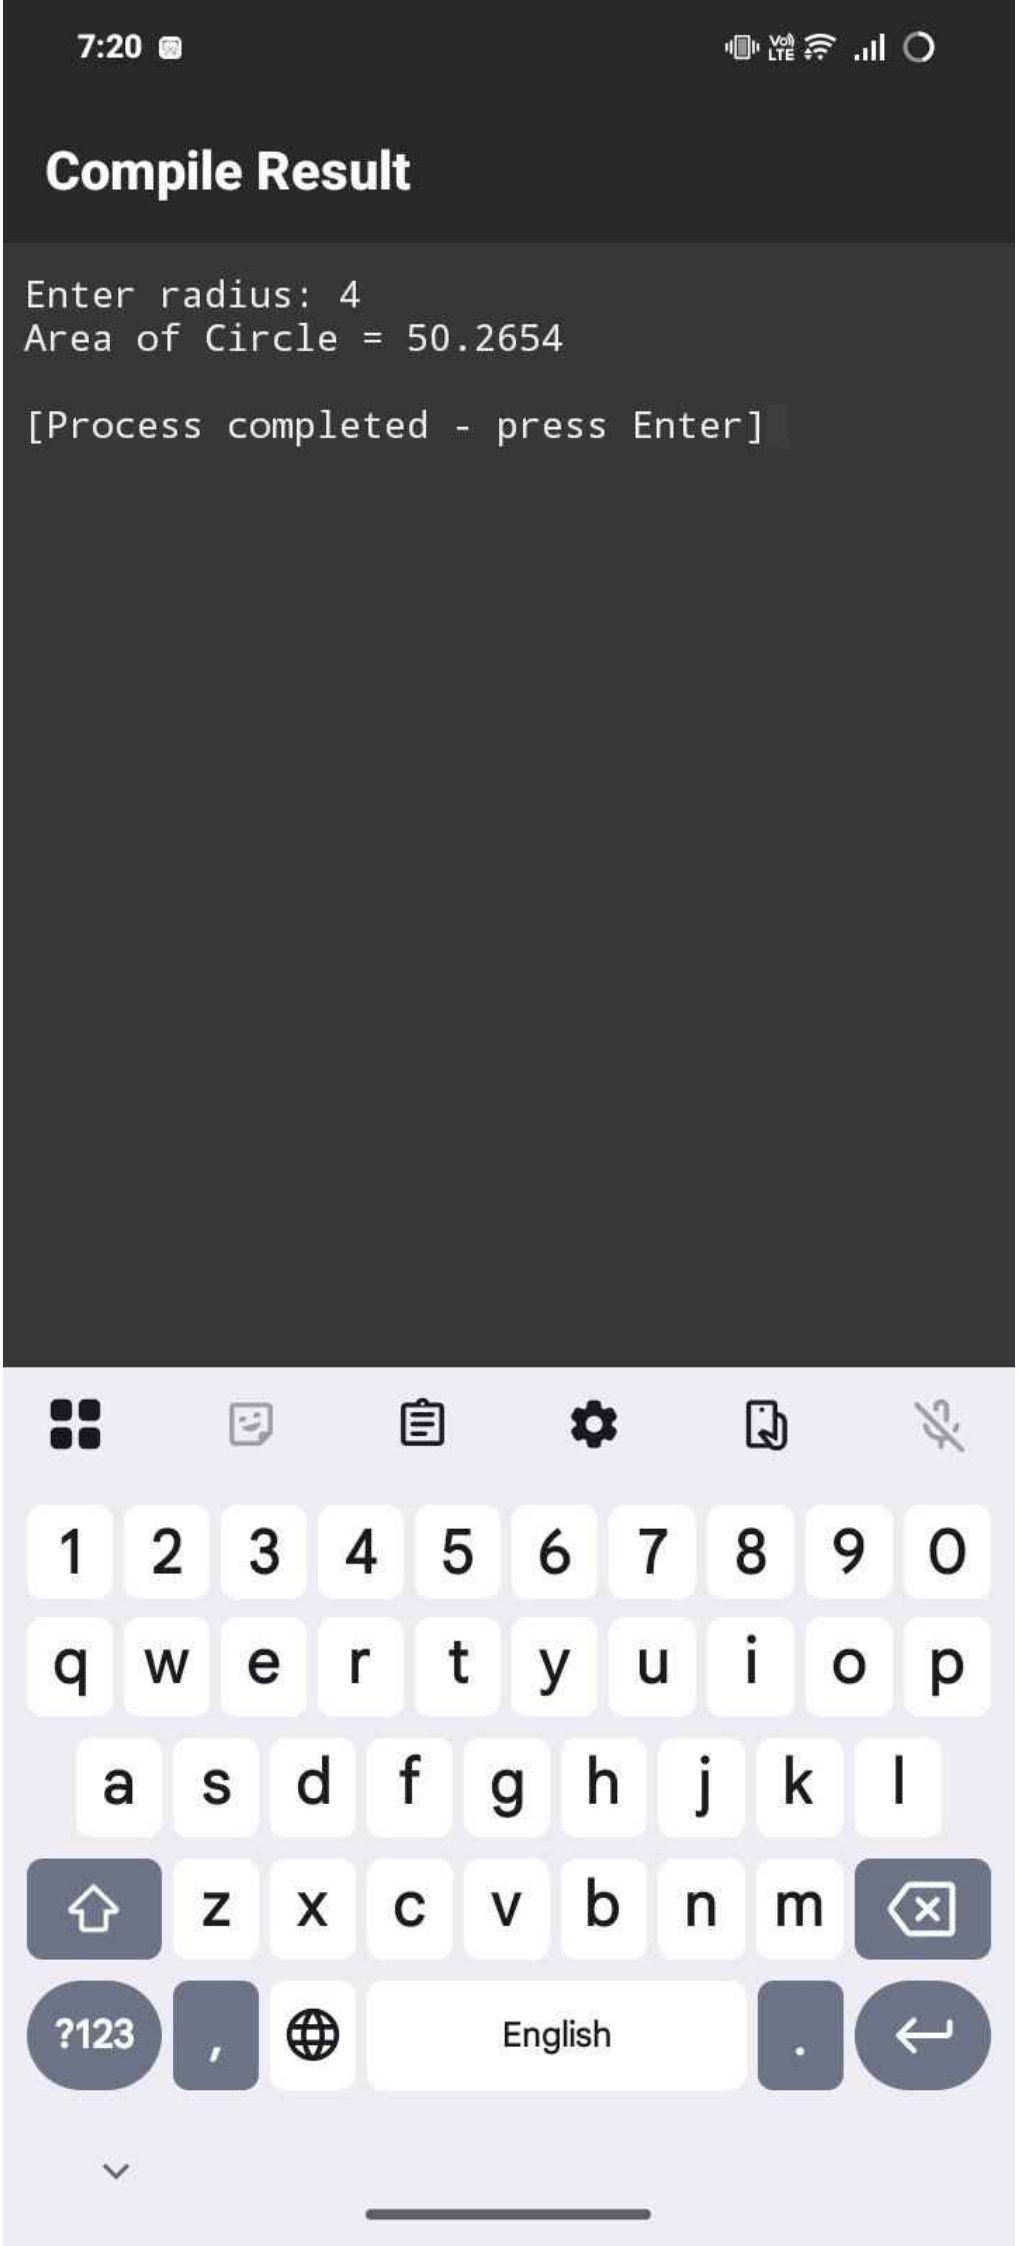
    cout << "Enter radius: ";
    cin >> r;

    area = 3.14159 * r * r;

    cout << "Area of Circle = " << area << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,


7:20
Compile Result
Enter radius: 4
Area of Circle = 50.2654
[Process completed - press Enter]
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

```cpp
#include <iostream>
using namespace std;

int main()
{
    double length, width, area;

    cout << "Enter length: ";
    cin >> length;

    cout << "Enter width: ";
    cin >> width;

    area = length * width;

    cout << "Area of Rectangle = " << area << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

Compile Result

```
Enter length: 4
Enter width: 6
Area of Rectangle = 24

[Process completed - press Enter]
```

```cpp
#include <iostream>
using namespace std;

int main()
{
    double base, height, area;

    cout << "Enter base: ";
    cin >> base;

    cout << "Enter height: ";
    cin >> height;

    area = base * height * 0.5;

    cout << "Area of Triangle = " << area << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

Compile Result

```
Enter base: 6
Enter height: 8
Area of Triangle = 24

[Process completed - press Enter]
```

Coding C++

Auto saved at 20:00:58

RUN MENU

```cpp
#include <iostream>
#include <iomanip>
using namespace std;

int main()
{
    double item1 = 12.95;
    double item2 = 24.95;
    double item3 = 6.95;
    double item4 = 14.95;
    double item5 = 3.95;

    double subtotal, tax, total;

    subtotal = item1 + item2 + item3 + item4 + item5;
    tax = subtotal * 0.06;
    total = subtotal + tax;

    cout << fixed << setprecision(2);

    cout << "Item 1: $" << item1 << endl;
    cout << "Item 2: $" << item2 << endl;
    cout << "Item 3: $" << item3 << endl;
    cout << "Item 4: $" << item4 << endl;
    cout << "Item 5: $" << item5 << endl;

    cout << "Subtotal: $" << subtotal << endl;
    cout << "Sales Tax: $" << tax << endl;
    cout << "Total: $" << total << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

8:03

Compile Result

```
Item 1: $12.95
Item 2: $24.95
Item 3: $6.95
Item 4: $14.95
Item 5: $3.95
Subtotal: $63.75
Sales Tax: $3.82
Total: $67.58

[Process completed - press Enter]
```

Coding C++

Auto saved at 20:16:44

RUN MENU

```cpp
#include <iostream>
using namespace std;

int main()
{
    int num;

    cout << "Enter a five-digit number: ";
    cin >> num;

    cout << num / 10000 << "    ";
    num = num % 10000;

    cout << num / 1000 << "    ";
    num = num % 1000;

    cout << num / 100 << "    ";
    num = num % 100;

    cout << num / 10 << "    ";
    num = num % 10;

    cout << num << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

8:18

Compile Result

```
Enter a five-digit number: 12345
1   2   3   4   5

[Process completed - press Enter]
```

8:25

Coding C++

Auto saved at 20:23:34

RUN MENU

```cpp
#include <iostream>
using namespace std;

int main()
{
    int var1, var2, temp;

    cout << "Enter value of var1: ";
    cin >> var1;

    cout << "Enter value of var2: ";
    cin >> var2;

    temp = var1;
    var1 = var2;
    var2 = temp;

    cout << "After swapping:" << endl;
    cout << "var1 = " << var1 << endl;
    cout << "var2 = " << var2 << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

8:25

Compile Result

```
Enter value of var1: 4
Enter value of var2: 6
After swapping:
var1 = 6
var2 = 4

[Process completed - press Enter]
```

```cpp
#include <iostream>
using namespace std;

int main()
{
    char ch;

    cout << "Enter a lowercase alphabet: ";
    cin >> ch;

    ch = ch - 32;

    cout << "Uppercase alphabet: " << ch << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

Compile Result

```
Enter a lowercase alphabet: a
Uppercase alphabet: A

[Process completed - press Enter]
```