



ACI MAKE CSM Standards

(Informal)

Version 1.5

16 March 2005

Publication Number: TO-MK000-10

© 2005 by ACI Worldwide Inc.

All rights reserved. All information contained in this document is confidential and proprietary to ACI Worldwide Inc. This material is a trade secret and its confidentiality is strictly maintained. Use of any copyright notice does not imply unrestricted or public access to these materials. No part of this document may be photocopied, electronically transferred, modified, or reproduced in any manner without the prior written consent from:

ACI Worldwide Inc.
330 South 108th Avenue
Omaha, Nebraska 68154
(402) 390-7600

BASE24, BASE24-atm, BASE24-atm non-currency dispense, BASE24-atm self-service banking, BASE24-billpay, BASE24-from host maintenance, BASE24-pos, BASE24 Remote Banking, BASE24-telebanking, BASE24-teller, BASE24 Visa Cash, BASE24-frequent shopper, XPNET, and Enguard are trademarks or registered trademarks of ACI Worldwide Inc., Transaction Systems Architects, Inc., or their subsidiaries.

Tandem is a trademark or registered trademark of Compaq Computer Corporation in the United States and/or other countries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

Document Control

<u>Version</u>	<u>Date Distributed</u>
1.3	98/03/31
MAJOR CHANGES:	Added the RPQC file to be more consistent with standard MAKE processing.
1.4	00/08/07
MAJOR CHANGES:	Changed RPQ to CSM in accordance with the Global Delivery Process (GDP) guidelines.
1.5	05/03/16
MAJOR CHANGES:	Update to make reference to 6.0.

CSM Standards for Makefile Modifications

This document is **not** meant to totally replace the current CSM Coding Standards document, but should build upon it. It is assumed that the audience for this document is familiar with ACI MAKE and its implementation.¹

Notice that throughout this document where the text "<CUST>" is used, you would actually replace it with a valid customer acronym such as "BOFA", "CM00", "GW00", etc.... In other words, you will not actually be creating sub volumes named "CUSTMAKE", "CUSTAT60" (or "CUSTAT53" for SYNC02), "CUSTOBJ", etc....

In addition, this document has been written based on Release 6.0. The same coding standards will apply to Release 5.3, in which the sub volume naming convention will be "CUSTAT53", "CUSTBA53", etc.

This document contains the following sections:

-  CSM Code Location and Naming Conventions
-  Makefile Modifications for CSMs
-  ACI Makefile Hierarchy
-  CSM Examples Using Make
 - o Example One: ATM Auth CSM
 - o Example Two: ATM Auth and ATM AFT CSM
-  Attachment One
 - o CSMMACS
 - o CSMM
 - o CSMC
 - o AUTHQM
 - o ATDDL
 - o RQATDM
-  Commonly Asked Questions

¹ Documentation such as the "ACI MAKE (Informal)" and "BASE24 Procedural Release 6.0 ACI MAKE Implementation (Informal)" manuals should be reviewed and understood before utilizing this manual.

CSM Code Location and Naming Conventions

The standards for the location of customized modules are now the same for customized BASE24 Procedural (formally known as Classic) modules, ITS modules, etc. Note that these CSM standards follow BASE24 Procedural module CSM standards rather than standards previously shown for ITS CSMs.

In most cases, the last four characters of the CSM sub volume name are taken from the first four characters of the vanilla sub volume name (e.g. OC11, BA60, AT60, FH60, ...etc.). The exception to this rule is in the case of SWITCH CSMs; the last four characters are taken from last four characters of the vanilla sub volume (e.g. STRI, FDRI, etc.).

For vanilla sub volumes, the naming conventions are XXNNYYYY where:

XX	=	OK - kernel	BA - BASE
		OE - IEP	AT - ATM
		OC - core	PS - POS
		etc...	

NN = release level

YYYY = LEX, DDL, ISMT, AUTH, SRC, OBJ, etc.

Therefore, CSM code for the customer <CUST> would be placed on sub volumes as follows:

<u>Vanilla Sub volume</u>	<u>Corresponding CSM Sub volume</u>
\$<VOL>.OC11VRU	\$<VOL>.<CUST>OC11
\$<VOL>.BA60DDL	\$<VOL>.<CUST>BA60
\$<VOL>.BA60HISO	\$<VOL>.<CUST>BA60
\$<VOL>.PS60RTAU	\$<VOL>.<CUST>PS60
etc...	

In order to differentiate Sync Point 2 code for classic Base24, the Sub volumes will end with "2" as follows:

<u>Vanilla Sub volume</u>	<u>Corresponding CSM Sub volume</u>
\$<VOL>.BA60DDL	\$<VOL>.<CUST>BA62
\$<VOL>.BA60HISO	\$<VOL>.<CUST>BA62
\$<VOL>.PS60RTAU	\$<VOL>.<CUST>PS62
etc..	

Generally, CSM naming conventions for files will be to add a Q prior to the last one or two characters in the module name (depending on whether a one or two character suffix identifies the type of file).

For example, when CSMs are made to files on the Sub volume \$<VOL>.OC11HIST, the files would be named as follows:

<u>Vanilla Filenames</u>	<u>CSM Filenames</u>
OC11HIST.HISTDS.....	<CUST>OC11.HISTQDS
OC11HIST.HISTPS.....	<CUST>OC11.HISTQPS
OC11HIST.HISTTG.....	<CUST>OC11.HISTQTG
OC11HIST.HISTTS.....	<CUST>OC11.HISTQTS
etc...	

and for files on the Sub volume \$<VOL>.PS60AUTH:

<u>Vanilla Filenames</u>	<u>CSM Filenames</u>
PS60RTAU.AUTHS.....	<CUST>PS60.AUTHQS
PS60RTAU.AUTHLIBS.....	<CUST>PS60.AUTHLBQS*
PS60RTAU.ROUTERS.....	<CUST>PS60.ROUTERQS
PS60RTAU.RTAUG.....	<CUST>PS60.RTAUQG
etc..	

* Note that this is a slight variation of the standard where the 'l' in AUTHLIBS has been dropped.

Generally, for vanilla filenames that are 8 characters long, replace the 6th or 7th character with a "Q" (depending on whether a one or two character suffix identifies the type of file). The following examples fall in that category:

<u>Vanilla Filenames</u>	<u>CSM Filenames</u>
OC11VRU.SVVRUTTS.....	<CUST>OC11.SVVRUQTS
OC11AFM.RQCUSTXS.....	<CUST>OC11.RQCUSQXS
AT60AFT.RQTDIEBS.....	<CUST>AT60.RQTDIEQS
etc...	

In addition to the customer product/release Sub volumes, a CSM customer Object and a customer MAKE Sub volume should be created (<CUST>OBJ and <CUST>MAKE). In the customized Make files, all CSM object files for all products should be directed to the <CUST>OBJ Sub volume. Customized Make files will be placed on the customer product/release Sub volume(s) or the customer MAKE Sub volume depending on the hierarchy level of the Make file being modified. The only Make files on the product/release Sub volume(s) should be those Make files normally found on the vanilla product/release Sub volume. All other Make files should be placed on the customer MAKE Sub volume (<CUST>MAKE).

For example, CSM Make files for the customer <CUST> would be placed on Sub volumes as follows:

Product/Release Sub volumes:

Vanilla Sub volume

\$<VOL>.OC11ACCT.ACCTM
\$<VOL>.BA60AFT.RQPBFM
\$<VOL>.BA60AFT.BAAFTM
\$<VOL>.PS60RTAU.AUTHM
etc...

Corresponding CSM Sub volume

\$<VOL>.<CUST>OC11.ACCTQM
\$<VOL>.<CUST>BA60.RQPBFQM
\$<VOL>.<CUST>BA60.BAAFTQM
\$<VOL>.<CUST>PS60.AUTHQM

<CUST>MAKE Sub volume:

Vanilla Sub volume

<n/a>
<n/a>
<n/a>
<n/a>

Corresponding CSM Sub volume

\$<VOL>.<CUST>MAKE.CSMC
\$<VOL>.<CUST>MAKE.CSMM
\$<VOL>.<CUST>MAKE.LOADMACS
\$<VOL>.<CUST>MAKE.CSMMACS

Makefile Modifications for CSMs

With BASE24 Procedural Release 5.1 and ITS, the relatively new concept (for ACI) of Make files must be dealt with. All vanilla Make files use the ALLMACS file which incorporates through! INCLUDE statements and its own defines, filename defines for every source file, global file, object file, DDL output file, Make file, etc.... Therefore, when CSM modifications are made to files and the filenames change, obviously something is going to have to change with the filename defines for those customized files.

Previously, the standard approach for handling customized files within the Make methodology was to create a new filename DEFINE (macro from Make's perspective) for every new or modified file. While this approach guaranteed customized files would not be unwittingly used in the creation of vanilla targets, it also created some unnecessary overhead (e.g. a source file being customized solely because it sourced or copied in an customized file) and subverted some of the power of Make (ease of altering the input files to a Make by pointing macro names at different physical files).

A compromise approach (as described in this document) is to only create a new filename define (macro) for a file if the file is NOT logically equivalent to an existing vanilla file. For example, it is common when modifying ATM Auth to use a skeleton, which usually sources in the majority of the code from vanilla Auth. This skeleton file is not the logical equivalent of the original Auth source; so it would require a new CSM filename define (macro). The opposite example would be a modification to Auth globals. In this case, the entire source present in the original Auth globals is also present in the customized version. Therefore, a customized Auth globals is logically equivalent to the vanilla globals, and no new filename define (macro) should be created.

While this method (using existing define or macro names whenever possible) has a number of advantages, it would have the undesirable side effect of propagating customized code into the Make of a customer's vanilla system without another procedural change in the way CSM modules and vanilla modules are made. Previously, the Make of CSM modules was designed to be included in the Make of a customer's overall system. That is, the path to Make all of the CSM modules was grafted into the existing tree for the vanilla Make by invoking CSMM from within B24M. Using this method a vanilla filename define or macro which pointed at an customized file would result in that file being used in the Make of any vanilla modules as well as customized modules. To avoid this problem and completely isolate the Make of the customized components, CSMM will no longer be invoked from within B24M. CSMM can be invoked by executing the CSMC file.

Breaking CSMM out from the vanilla Make is only half the solution. Another layer of filename defines must also be added as a "front end" to the existing CUSTMACS and ALLMACS layers. Previously CUSTMACS invoked ALLMACS, and CUSTMACS

provided all of the customization for a given customer's environment. This customization actually fell into one of two categories: changes which impacted the Make specific to the customer's CSM components, and changes which impacted the Make specific to the customer's vanilla components. Since CSMM (i.e. all the Makes which are strictly CSM) will now be executed standalone by using CSMC, those changes which previously would have been included in CUSTMACS will now be broken out into an CSMMACS file. This CSMMACS file will "include" CUSTMACS (which "includes" ALLMACS).

In summary, the new methodology for setting up a "standalone" CSM Make environment will adhere to the following guidelines:

- 1) A "CSM_ON" toggle set to FALSE should be placed in CSMMACS. This way if CSMMACS is ever invoked prior to CUSTMACS, which would cause the CSM filename defines and config macro declarations to override vanilla equivalents, the toggle will also override and prevent CSMM from being invoked in B24M.
- 2) A new layer will be added to the vanilla system of declaring filename and configuration macro's by the addition of the CSMMACS file. The CSMMACS file should contain **ONLY** those macros (filename defines or toggles), which are required for the CSM. This can be accomplished by either beginning with a complete CUSTMACS as a base and paring it back or by beginning with an empty file and adding the required macro's as one proceeds.
- 3) The CSMMACS file should "include" the vanilla CUSTMACS file (which in turn will "include" a vanilla ALLMACS).
- 4) If a CSM file is a complete replacement for an existing vanilla file, a new filename macro should **NOT** be created. Rather, the vanilla macro name that corresponds with the existing vanilla physical file for which the CSM file is a replacement will be added to CSMMACS and altered to point at the customized physical file.
- 5) If a CSM file is not a complete replacement for an existing vanilla file (e.g. a skeleton file or entirely new file), a new macro should be created to point at the new physical file, and this declaration should be added to CSMMACS.

The way to approach adding new filename defines or modifying existing ones is to leave both the vanilla CUSTMACS and ALLMACS files alone and create a new 'MACS' file that identifies the CSM files that were modified. This will be accomplished in three steps:

- 1) The ALLMACS define (which tells us where the ALLMACS file is located) is generally loaded by users during TANDEM login by adding the following lines in their TACLCSTM file:

```
delete define =allmacs  
add define =allmacs, file $<VOL>.BA60MAKE.CUSTMACS
```


For our CSM customers, the ALLMACS filename define must be modified to point to a CSM custom ALLMACS file. This new filename will be **\$<VOL>.<CUST>MAKE.CSMMACS**. For the first CSM delivered to a customer involving Make files, ACI will provide the customers with a **\$<VOL>.<CUST>MAKE.LOADMACS** obey file which will have the following two lines:

```
delete define =allmacs
add define =allmacs, file $<VOL>.<CUST>MAKE.CSMMACS
```

Users who need to run any Make files (to compile, BIND, etc.) can obey the LOADMACS file to get the correct ALLMACS file define or they can place the correct ALLMACS define line (i.e. for CSMMACS) in their TACLCSTM file, replacing the original. The CSMC file also executes the LOADMACS file.

- 2) The **<CUST>MAKE.CUSTMACS** file may be copied from the BA60MAKE or customer distribution Sub volume. If no changes need to be made to modify the CUSTMACS specifically for the customer's environment, the file can simply be "included" from its current location. Customers will be installed with the standard ACI CUSTMACS file on their BA60MAKE Sub volume. In the development environment, an attempt should be made to use a CUSTMACS which is a fairly accurate recreation of the customers actual CUSTMACS. It is not absolutely critical, however, since the CUSTMACS **will not** be delivered with the CSM.
- 3) A CSMMACS file must be created which will declare all of the entirely new macros (filename defines and toggles) and modifications to existing ones (pointing vanilla filename macro's at customized physical files, or setting toggles) and then! INCLUDE the customer's CUSTMACS. It can be done in this manner because when filenames are defined, the first define of a specific filename (i.e. the CSM filename) that is encountered is the one that is used by Make. See the examples in the following sections.

ACI Makefile Hierarchy:

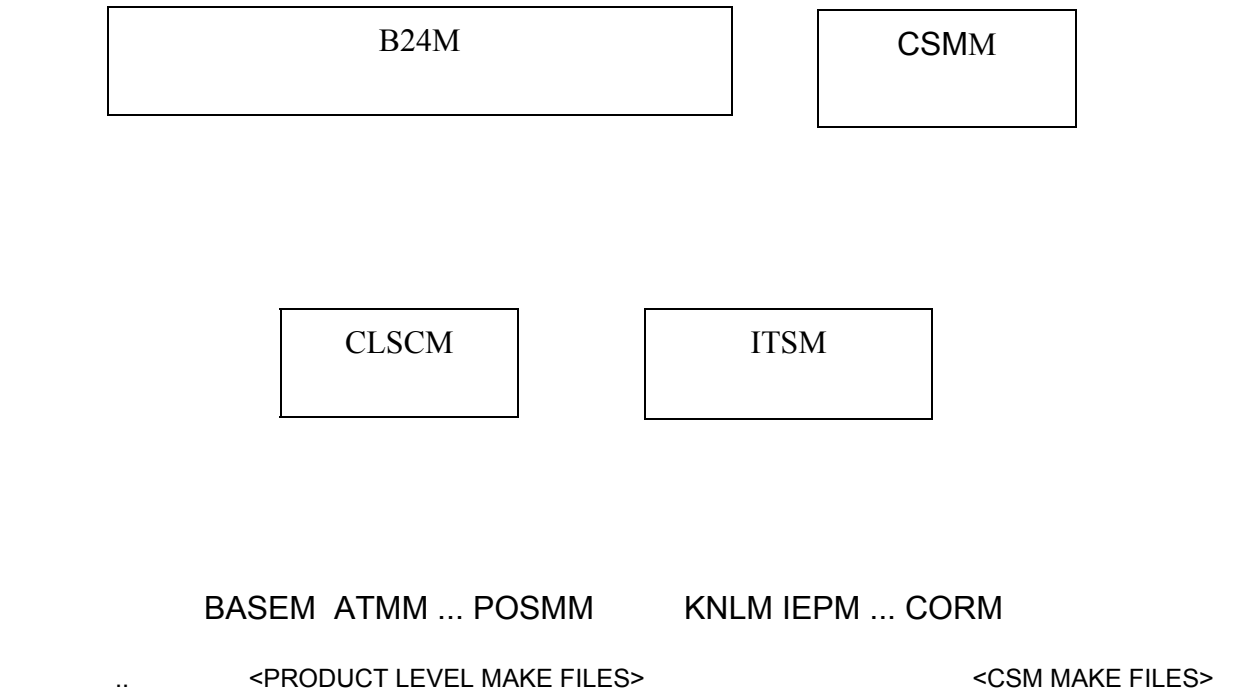

The B24M file is located on \$<VOL>.BA60SRC and contains defines (toggles) that indicate which Make file branches will be traversed (executed) in the hierarchy. The CLSCM and ITSM Make files apply to vanilla system files only. Under the new methodology for a “standalone” CSM Make environment, the CSMM file is no longer subordinate to or invoked from the B24M file. The CSMM Make file applies to the customers customized system files.

Note that fixes/enhancements for vanilla modules will still need to be evaluated for CSM impacts and hand applied to the CSM modules, if applicable.

For a customer to build their entire system (vanilla and CSM), they should first run B24M with the defines that execute CLSCM and ITSM turned on as appropriate for the customer's system, and then run CSMM (obey CSMC) in a separate Make.

CSM Examples Using Make

Refer to Attachment One following these examples for listings of the Make files associated with the examples below.

In the sample Make file excerpts presented below, CSM filename defines which represent entirely new files and are **not** logically equivalent to existing vanilla files and their defines are in bold face. Existing vanilla defines which have been redirected (via CSMMACS) to point at CSM files (or Sub volumes) are highlighted in gray.

Example One: ATM Auth (TAL Source) CSM

Although there will probably be some exceptions, generally you will follow these steps:

- 1) Create a copy of the vanilla source on the customized Sub volume and name it appropriately. FUP DUP the globals and Make file (if necessary) for the vanilla source that will be customized to the correct CSM Sub volume and rename them appropriately.

eg: <CUST>AT60 would have the following files:

AUTHQS	- customized AUTHS
AUTHQG	- customized AUTHG
AUTHQM	- customized AUTHM

- 2) After applying the CSM modifications within the CSM Auth source file (AUTHQS), modify the Make file (AUTHQM) that was moved over in step (1). Note that for this example the AUTHQS file contains the customized procedures as well as sourced in procedures from AUTHS, which are not customized. The resulting CSM Auth object code will then be bound with the vanilla AUTHLIB object to produce the executable code.

Remove all compile steps that are not needed for the CSM, such as any unnecessary compiles for DDLs or other AUTH modules (AUTHLIBS) not customized and the creation of the externals file using GENFWD if no CSM externals are needed. Remove all such unnecessary steps from the Make file.

The CSM Auth Make file when executed using CSMMACS will:

- a) Generate the customized TAL externals file (AUTHQE) instead of the vanilla externals file (AUTHE) (if necessary). Note that a CSM externals file only needs to be generated when a new CSM procedure has been added or when parameters are added/deleted from an existing procedure.

The customized externals file is generated by replacing the vanilla target (atauth_auth) with the new CSM target (custat60_authqe), and listing the customized source file (custat60_authqs) as a dependency of the customized externals target file. When recreating the customized externals file via GENFWD, the customized source file is used. Notice that both the customized Auth source and external files are only partial replicas of the original files, and, thus, require new define names.

```
$(CUSTAT60_authqe) : $(CUSTAT60_authqs)
$(GENFWD)/in $(CUSTAT60_authqs) / ext $(CUSTAT60_authqe)
```

- b) Create the customized TAL object file (AUTHQO) instead of the vanilla TAL object file (AUTHO). In this case the object file is a complete replacement for the vanilla object, so a new CSM filename define should not be substituted for the vanilla define (i.e. leave atauth_autho intact in the Make file, but point the macro name at an CSM physical file in CSMMACS).

However, dependencies for the customized TAL source and external files (custat60_authqs and custat60_authqe) must be added in addition to the ones that already exist for the vanilla TAL source and externals files (atauth_auths and atauth_auth). Both vanilla and CSM versions of the source and externals files are included as dependencies because all of them go into the Make of the object and the customized versions are not complete replacements for the vanilla versions (note, the vanilla source is pulled in indirectly through the CSM).

The AUTH globals file has also been customized, but the customized globals file is a complete replacement for the vanilla file so the macro name (atauth_authg) should be left intact (the filename define or macro should be pointed at an customized physical file in CSMMACS).

```
$(atauth_autho) : [
    $(basrc_baddltal) \
    $(atsrc_atddltal) ] $(atauth_auths) \
    $(CUSTAT60_authqs) \
    $(atauth_auth) \
    $(CUSTAT60_authqe) \
    $(atauth_authlib) \
    $(atauth_authg) \
    .
```

```

.
.
= $(TAL)/in $(CUSTAT60_authQs), out $s.#auth $(atauth_compile_opts)/
&
= $(atauth_autho); $(atauth_tal_opts)
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #auth

= secure $(FUP) $(atauth_autho) $(atauth_secure_opt)

```

- c) BIND the executable. The final target filename define (atauth_auth) should be pointed at an customized physical file name within CSMMACS. Note, atauth_autho in the following dependency list should also be pointing at an customized physical file.

```

$(atauth_auth)      : $(atauth_autho)          \
                    $(atauth_authlibo)         \
                    !IF $(fc_on) = TRUE |THEN| \
                    $(atfcav_fcauth)           \
                    !ENDIF                     \
                    $(aciutils_utilb)          \
                    $(basrc_secutil)           \
                    $(basrc_bautil)            \
                    $(basrc_cvutil)            \

$(TACL)/INLINE/
= $(tacl_init) $(make_tacl_macros)

= #PUSH      :var
= #APPEND    :var add data SKEL^COMMON^GLOBALS from $(atauth_autho)
= #APPEND    :var add data *                      from $(atauth_autho)
= [#IF $(fc_on) = $(TRUE) |THEN|
= #APPEND    :var add data FC^GLOBALS              from $(atfcav_fcauth)
= ] == end if
= #APPEND    :var add code * from $(atauth_autho), delete
= #APPEND    :var add code * from $(atauth_authlibo), delete
= #APPEND    :var move B30^GET^TRAN^INDEX before AUTH^L1
= #APPEND    :var move B50^CHECK^INST^TRAN^ALLOWED before AUTH^L1
= [#IF $(fc_on) = $(TRUE) |THEN|
= #APPEND    :var add code * from $(atfcav_fcauth), delete
= ] == end if
= #APPEND    :var select search $(BASRC_SECUTIL)
= #APPEND    :var select search $(BASRC_BAUTIL)
= #APPEND    :var select search $(BASRC_CVUTIL)
= #APPEND    :var select search $(ACIUTILS_UTILB)
= #APPEND    :var set data 64
= #APPEND    :var select list * off
= #APPEND    :var $(atauth_bind_steps)
= #APPEND    :var build $(atauth_auth) !

= $(BIND)/ inv :var, out $s.#authb $(atauth_compile_opts)/
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #authb
= #POP      :var

```

d) AXCEerate the customized code if necessary.

```
= [#IF $(atauth_axcel_on) = $(TRUE) | THEN|
= #PUSH :var
= #EOF :var
= $(AXCEL)/inv :var, OUT $$.#rauth &
= $(atauth_axcel_opts) / &
= $(atauth_auth), $(atauth_auth); &
= USERLIB $(spannet_hskelb)
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #rauth
= #POP :var
= ] == end if AXCEL On
```

e) Move the customized TAL executable (AUTHQ) object file to the Customer CSM Object Sub volume (<CUST>OBJ) instead of the Vanilla Object Sub volume (AT60OBJ). Again, the filename define (macro) atm_obj_loc is an existing vanilla name which should be pointed at the CSM location for final executables (in CSMMACS). Note, this step may be redundant if atauth_auth and atm_obj_loc both point to the same location in CSMMACS. If such is the case, the macro move_obj_subvol_on should be turned off (set to FALSE) in CSMMACS.

```
= dup_exec_file $(move_obj_subvol_on) $(atauth_secure_opt) &
= $(atauth_auth) $(atm_obj_loc)
```

3) Create an <CUST>MAKE.CSMMACS. Within CSMMACS create copies of the following existing vanilla filename defines (macro's) and modify them to point at CSM (physical) files or Sub volumes: atauth_authm, atauth_auth, atauth_authg, atauth_autho, atm_obj_loc. Add the new CSM filename defines to the <CUST>MAKE.CSMMACS file: custat60_authqs, custat60_authqe. This file only needs to be created for the first CSM. Note, in many cases all of the files involved in the CSM of a given "module" may be complete replacements (e.g. requesters, DDL's). In these cases, no customized version of the modules' Make files may be necessary; only the CSMMACS file pointing the vanilla macro (define) names at the customized physical files would be necessary.

For the customized ATM AUTH example, the CSMMACS file does the following (see Attachment One for an example CSMMACS file):

a) Modifies macro's to:

1. Redirect the placement of executables to an CSM object location (ATM_OBJ_LOC pointed at an CSM object Sub volume).
2. Point to the CSM ATM Auth Makefile (atauth_authm pointed at authqm).
3. Point to the CSM globals file (atauth_authg pointed at authqg)
4. Point to the CSM TAL intermediate object file (atauth_autho pointed at authqo).

5. Point to the CSM TAL executable object file (atauth_auth pointed at authq).
- b) Adds macro's to:
 1. Point to the customized TAL source file (custat60_authqs pointed at authqs).
 2. Point to the CSM external file (custat60_authqe pointed at authqe)
- b) Includes the vanilla CUSTMACS file.
- 4) Edit the <CUST>MAKE.CSMM file (create it if necessary) which will be used to execute all the CSM Make files. This file will consist of !INCLUDE statements which will run all CSM Make files. Add an !INCLUDE statement for the AUTHQM file that was created in step (1). See Attachment One for an example CSMM file.
- 5) In order to Make only a single customized module, go to the Sub volume where development was done (<CUST>AT60) and run Make on the appropriate *QM file (AUTHQM). Note, in some cases an customized Makefile may not have been created because it wasn't necessary. If so, run the vanilla Makefile for the module (using CSMMACS). The <CUST>MAKE.LOADMACS file must be obeyed prior to performing the Make.

In order to Make all the CSM code (and only CSM code) and ensure all CSM objects are up-to-date, go to the <CUST>MAKE Sub volume and obey the CSMC file.

Example Two: ATM Auth (TAL Source) and ATM AFT (SCOBOL)/DDL CSM

Example Two is a continuation of Example One. This example assumes all the steps in Example One have been performed to incorporate an CSM into ATM Auth. Example Two continues with additional CSM's to an ATM DDL and an ATM AFT (SCOBOL) module.

Customized DDLs should be compiled together with the associated vanilla DDLs for that product and have the resulting DDL output files (xxDDL_{TAL}, xxDDL_{COB}, xxDDL_{FUP}, where xx = the product designation such as AT) contained on a CSM Sub volume that is separate from the vanilla DDL output files.

Customized SCOBOL modules should be compiled separately from their vanilla counterparts and should have their resulting CSM objects contained in a POBJ that is separate from the vanilla SCOBOL objects. As with the customized SCOBOL source files, the AFT screen source files will also be compiled separately from the vanilla AFT screen source files. There are no separate Make files totally dedicated to compiling multiple or individual AFT screen source files. This is done in the Makefile for the respective SCOBOL requester. With that in mind, follow these steps:

- 1) FUP DUP the vanilla source files over to the CSM Sub volume and rename them accordingly.

eg: <CUST>AT60 would have the following files:

DDL _{FATD}	- customized DDL _{FATD}
RQATDQS	- customized RQATDS
SCRNATDQ	- customized SCR _{NATD1}

- 2) After applying the CSM modifications to the DDL (DDL_{FATD}), ATD Screen source file (SCR_{NATDQ}), and ATD Requester source file (RQATDQS), there are no Makefile modifications required.

For the DDL_{FATD}, SCR_{NATDQ}, and RQATDQS files, the CSM modifications are applied to the source code in its entirety (i.e. sections and or specific procedures are not taken out of the vanilla source and placed in the associated CSM source module). Therefore, the customized source files are complete replacements for their equivalent vanilla files, and no new filename defines (macro's) should be created. Furthermore since no new filename defines will be created, the vanilla Make files for the DDL and requester can be used as is.

Although the Make files should not be customized, the vanilla Make files for this example are presented here with a description of which embedded macro's (highlighted in gray shade in Make code excerpts) should be redirected (in CSMMACS) to new customized physical files.

ATDDL

ATDDL when executed with CSMMACS creates the customized DDL output files (TAL, COB, FUP, TPLT) and customized dictionary instead of the vanilla versions of the files. This is done by pointing the vanilla filename defines for the target and additional output files (atsrc_atddlal, atsrc_atddlcob, atsrc_atddlfup, atsrc_atdplt, and atddl_dict) in CSMMACS at customized physical files (yet to be). The one customized dependency, DDLFATD, is also pulled into the Make by pointing its vanilla filename define (atddl_ddlfatd) at an customized physical file in CSMMACS.

```
$(atsrc_atddlal) :{
    $(atddl_ddldict)
    $(atsrc_atddlcob)
    $(atsrc_atddlfup)
    $(atsrc_atdplt) } $(badefts_ddlgdefs) \
    $(atddl_ddlfrcpt) \
    $(atddl_ddlfrpt) \
    $(atddl_ddlfatd) \
    $(atddl_ddlftlf) \
    $(atddl_ddlgpem) \
    $(atddl_ddlgsem) \
    $(atddl_ddlgtlfx)
```

The location of the CSM dictionary which will be output by the DDL compiler is achieved by redirection of the dictionary macro in CSMMACS. Likewise, the customized ATD DDL (<CUST>AT60.DDLFATD) is incorporated into the DDL output files instead of the vanilla ATD DDL file (AT60DDL.DDLFATD) by redirection in CSMMACS.

•
•
•

```
= #SET :var ?DICTN [expandssv $(atddl_ddldict) ]
= #APPEND :var ?nocomments
= #APPEND :var ?noclistout
= #APPEND :var ?talbound 0
= #APPEND :var ?deflist
= #APPEND :var ?COBOL [temp_cob_fname]
= #APPEND :var ?TAL [temp_tal_fname]
= #APPEND :var ?FUP [temp_fup_fname] !

= #APPEND :var ?NOFUP

= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfrcpt)

= #APPEND :var ?FUP [temp_fup_fname]
= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfrcpt)
```

```

= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfatd)

= #APPEND :var ?NOFUP
= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlftlft)

```

•
•
•

RQATDM

RQATDM when executed with CSMMACS will:

- a) Create the CSM output file (RQATDQO) instead of the vanilla output file (RQATDO). Compile the requester object into the correct CSM POBJ file (PATDOn the CSM Sub volume) instead of the vanilla POBJ. Note that the PATD is a temporary POBJ file that is purged after copying the object to the customer CSM object Sub volume (<CUST>OBJ).

This is done by pointing the vanilla filename defines for the target file (ataft_rqatdo) and additional output file (final psuedo object location - dest_pobj) in CSMMACS at the appropriate CSM physical files. Likewise, the vanilla filename defines which correspond with the customized input files should be pointed at the appropriate customized physical files (in CSMMACS). That is, the DDL Cobol file (atsrc_atddlcob), the DDL source file (atddl_ddlfatd), the requester source file (ataft_rqtdfs), and the screen source file (ataft_scrntdf1) should be pointed at CSM files.

```

$(ataft_rqatdo) :{
    $(dest_pobj) }[
    $(atsrc_atddlcob)
    $(basrc_baddlcob) ] $(atddl_ddlfatd)
                        $(baddl_ddlsec)
                        $(baddl_ddlgpth)
                        $(basrc_bacoutls)
                        $(basrc_cobnames)
                        $(basrc_hlpscrn)
                        $(ataft_rqtdfs)
                        $(ataft_scrntdf1)
                        $(ataft_scrntdfb)

!IF $(ataft_t3270_on) = TRUE |THEN|
=   aci_scobolx_make $(SCOBOLX) $(TARGET) /in $(ataft_rqtdfs),      &
=   out $s.#rqtdfi/ [temp_pobj]; settog 1;                          &
=   $(ataft_scobolx_opts)
=   check_scobol_completion $(TARGET)
=   del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #rqtdfi
!ENDIF

```

```

!IF $(ataft_t6520_on) = TRUE |THEN|
=   aci_scobolx_make $(SCOBOLX) $(TARGET) /in $(ataft_rqtdfs),      &
=       out $s.#rqtdft/ [temp_pobj]; settog 3;                      &
=       $(ataft_scobolx_opts)
=   check_scobol_completion $(TARGET)
=   del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #rqtdft
!ENDIF

```

- b) Screen compile the customized screen source file (SCRNATDQ) instead of the vanilla screen source file (SCRNATD1) by redirection via CSMMACS.

```

= $(ACIAID) /in $(ataft_scrntdf1), out $s.#scntdf1 /                &
=       [scn_tdfo]
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #scntdf1

```

- c) Ensure the customized Requester pseudo object is SCUP copied to the Customer CSM Object Sub volume (<CUST>OBJ) instead of the Vanilla Object Sub volume (AT60OBJ).

```

= #PUSH :var
= #SET :var COPY [temp_pobj] (*),$(dest_pobj)
= $(SCUP)/inv :var/
= check_completion $(TARGET)
= #POP :var

```

- 3) Create copies of the following existing vanilla filename defines (macro's) within CSMMACS and modify them to point at CSM (physical) files or Sub volumes: atsrc_atddltal, atsrc_atddlcob, atsrc_atddlfup, atsrc_atplt, atddl_dict, atddl_ddlfatd, ataft_rqatdo, dest_pobj, ataft_rqatds, and ataft_scrntdf1. In general, for a CSM to a single SCOBOL module, at least three filename defines will need to be redirected within the CSMMACS file. The filename defines which must be redirected are needed for the CSM source file, the CSM output file (contains a timestamp) and the CSM POBJ file.

For the customized ATM AFT example the CSMMACS file does the following (see Attachment One for an example CSMMACS file):

- a) Modifies macro's to:
1. Redirect the placement of the requester pseudo object to the CSM POBJ location (dest_pobj).
 2. Point to the customized SCOBOL source file (ataft_rqatds pointed at rqatdqs).
 3. Point to the CSM SCOBOL object file (ataft_rqatdo pointed at rqtdfqo).
 4. Point to the customized screen source file (ataft_scrntdf1 pointed at scrntdfq).

5. Point to the customized ATD DDL file (atddl_ddlfdtd pointed at ddlfdtd).
6. Point to the CSM DDL output files (atsrc_atddlta, atsrc_atddlcob, atsrc_atddlfdup, atsrc_atdplt, and atddl_ddldict pointed at appropriate CSM files).

b) Includes the vanilla CUSTMACS file.

- 4) Edit the <CUST>MAKE.CSMM file which will be used to recompile and re-BIND all CSM code. This file will consist of !INCLUDE statements which will run all CSM Make files. Note, "CSM Make files" for this example does not include any Make files which themselves have been customized. Add !INCLUDE statements for the vanilla ATDDL and RQATDM Make files (atddl_atddl and ataft_rqtdfm). See Attachment One for an example CSMM file.
- 5) In order to Make only a single customized module, run Make on the appropriate vanilla Make file (ATDDL or RQATDM). The <CUST>MAKE.LOADMACS file must be obeyed prior to performing the Make in order to redirect the vanilla defines to the customized physical file locations.

In order to Make all the CSM code (and only CSM code) and ensure all CSM objects are up-to-date, go to the <CUST>MAKE Sub volume and obey the CSMC file.

Attachment One

<CUST>MAKE.CSMMACS:

```
#
# CSMMACS - This file is used to override any flags/configuration
#           and filename macros which must be re-defined to make
#           a customers CSM modules.
#
#####
# RECORD OF CHANGES:
#
#   DATE       VERSION   PERSON   CHANGE
#   _____
#
#####

#
# Classic
#
classic_on      = $(TRUE)
atm_on          = $(TRUE)
CSM_on          = $(FALSE)

#-----
# CSM Configuration and Macros
#-----
# Security of object files
base_secure_opt = "NCNC"
base_compile_opts = ,PRI 140

dest_pobj       = \K9.$data28.pblxobj.pobj
atm_obj_loc     = \K9.$data28.pblxobj

#-----
# ATM
#-----
atsrc_atddlta1  = \K9.$data28.pblxat60.atddlta1
atsrc_atddlcob  = \K9.$data28.pblxat60.atddlcob
atsrc_atddlfup  = \K9.$data28.pblxat60.atddlfup
atsrc_attp1t    = \K9.$data28.pblxat60.attp1t
atddl_ddlfatd   = \K9.$data28.pblxat60.ddlftdf
atddl_ddldict   = \K9.$data28.pblxat60.ddldict

ataft_rqatdo    = \K9.$data28.pblxobj.rqatdQo
ataft_rqatds    = \K9.$data28.pblxat60.rqatdQs
ataft_scrnatd1  = \K9.$data28.pblxat60.scrnatdQ
```

```

#-----
#   AUTHORIZATION
#-----
atauth_authg           = \K9.$data28.pblxat60.authQg
atauth_autho           = \K9.$data28.pblxat60.authQo
atauth_auth             = \K9.$data28.pblxat60.authQ
atauth_authm           = \K9.$data28.pblxat60.authQm
CUSTAT60_authQe        = \K9.$data28.pblxat60.authQe
CUSTAT60_authQs        = \K9.$data28.pblxat60.authQs

#
# Include CUSTMACS and ALLMACS
#

# SYNC 2 ALLMACS
#include \K9.$DATA28.BA60MAKE.custMACS

```

<CUST>MAKE .CSMM:

```
#####
#
#           BASE-24 Release 5.1
#
#           CSM MAKE File
#
#           Applied Communications, Inc.
#           330 So. 108th Ave.
#           Omaha, Nebraska 68154
#           (402) 390-7600
#
#   Copyright by Applied Communications, Inc. 1995
#   All Rights Reserved
#
#####
```

```
!IF $D(allmacs) = FALSE |THEN|
#
#   Define any macros you want to change from their standard
#   values here
#
#include =allmacs
!ENDIF
```

```
#-----
#   BASE CSM's           -
#-----
```

```
#-----
#   ATM CSM's           -
#-----
#include $(atauth_authm)
#include $(atddl_atddlm)
#include $(ataft_rqatdm)
```

```
#-----
#   POS CSM's           -
#-----
```

```
#-----
#   SWITCH CSM's        -
#-----
```


<CUST>MAKE .CSMC :

```
Comment *****
Comment *   This file compiles all the products and modules that   *
Comment *   comprise your BASE24 system.                           *
Comment *                                                           *
Comment *   Usage:  TACL/ IN CSMC/                                   *
Comment *****

Comment  Set TACL Defines for MAKE

obey loadmacs

Comment *****
Comment *   The syntax to MAKE the required modules is:             *
Comment *                                                           *
Comment *   MAKEVxxx / out $s.#b24m,nowait/ b24m -<opt1> -<opt2> ... *
Comment *                                                           *
Comment *       where:      xxx is the version of MAKE               *
Comment *                   <opt1> is any option supported by MAKE   *
Comment *                   <opt2> is any option supported by MAKE   *
Comment *   (see the MAKE manual for supported options)             *
Comment *                                                           *
Comment *   THE FORCE OPTION IS NOT RECOMMENDED FOR CSM COMPILES.    *
Comment *****

$sysaci.makev500.make /out $s.#CSMM, name $b24,nowait/ CSMM -list -listreplace

delete define =allmacs
```

<custAT60>.AUTHQM:

```
##*FIX2.23 10/24/03 AUTHM 6004 MAKE AT60AUTH AT07289 D ***
##*FIX2.23 10/15/03 AUTHM 6003 MAKE AT60AUTH AT07203 C ***
##*FIX2.22 06/06/02 AUTHM 6002 MAKE AT60AUTH AT05336 B ***
##*FIX2.14 05/14/01 AUTHM 6001 MAKE AT60AUTH AT04490 A ***
##*SEQ2.05 03/29/01 AUTHM 6000 MAKE AT60AUTH #
##### # 0001
# # 0002
# BASE24-atm # 0003
# ----- # 0004
# # 0005
# Authorization MAKE file # 0006
# # 0007
# Proprietary Software Product # 0008
# # 0009
# ACI Worldwide Inc. # 0010
# 330 South 108th Avenue # 0011
# Omaha, Nebraska 68154 # 0012
# (402) 390-7600 # 0013
# # 0014
# Copyright by ACI Worldwide Inc. 1995 - 2000 # 0015
# # 0016
# All Rights Reserved. No part of this document may be # 0017
# reproduced in any manner without the prior written consent of # 0018
# ACI Worldwide Inc. This material is a trade secret and its # 0019
# confidentiality is strictly maintained. Use of any copyright # 0020
# notice does not imply unrestricted or public access to these # 0021
# materials. # 0022
# # 0023
# BASE24 (R) is a registered trademark of ACI Worldwide Inc. # 0024
# # 0025
##### # 0026
# # 0027
# Record of Changes: # 0028
# # 0029
# Date Person/Emp # # 0030
# -----
# 01JUN95 DLM Initial Release. # 0031
# # 0032
# 02NOV95 RDS/447 Added support for Fraud Control. # 0033
# # 0034
# 08FEB96 JMR/1728 Modified Axcel macro & check completion. # 0035
# # 0036
# 20FEB96 SGN Removed invalid defines. # 0037
# # 0038
# 24JAN97 WTH The Auth process would not initialize Skel # 0039
# common globals were not at memory location # 0040
# zero. # 0041
# Corrected the MAKE file to specifically add # 0042
# skel common globals at memory location zero. # 0043
# # 0044
# 29APR97 DMA/1382 BRR/1915 # 0045
# The auth process is still having trouble # 0046
# initializing because Skel common globals are # 0047
# not at memory location zero. # 0048
# Changed the MAKE file to not use "ADD *, # 0049
# DELETE" statements. # 0050
# Use "ADD DATA *, DELETE" or "ADD CODE *, # 0051
# DELETE" instead. # 0052
# # 0053
# 06MAY97 BDC/1448 Added new *_BIND_STEPS define to BIND # 0054
# step. This will allow for more BINDER # 0055
# step configurability. # 0056
# REF RPC 243079 # 0057
# # 0058
```

```

# 01OCT1997 MFL/320 # 0059
# Symptom: BASE24 VISA Cash Enhancement. # 0060
# Problem: None. # 0061
# Fix: This make file will now compile and bind the VISA # 0062
# Cash modules if flag SM_ON is true. # 0063
# Dependency: Apply fix and reMAKE. # 0064
# Reference: WO #970709-2. # 0065
# # 0066
# # 0067
# 01OCT1997 MFL/320 # 0068
# Symptom: BASE24 Non-Currency Dispense Enhancement. # 0069
# Problem: None. # 0070
# Fix: This make file will now compile and bind the NCD # 0071
# module if flag NCD_ON is true. Also moved compile # 0072
# and bind statements into this file for the SSB auth # 0073
# modules. # 0074
# Dependency: Apply fix and reMAKE. # 0075
# Reference: WO #960311-5. # 0076
# # 0077
# 12MAR1998 BDC/65 # 0078
# Symptom: The position of bindable modules piece was in the wrong # 0079
# location in this file. # 0080
# Problem: The bindable modules piece was placed under the build # 0081
# statements for a target. Because of this, MAKE didn't # 0082
# look at the bindable module '!include' statements when # 0083
# building its dependency tree. # 0084
# Fix: Moved the bindable module '!include' statements before # 0085
# the first target definition in the file. # 0086
# Dependency: Apply fix and reMAKE. # 0087
# Reference: RPC #244469 # 0088
# # 0089
# 04APR1998 BRR/445 # 0090
# Symptom: DDLBATKN was not included in the dependency list. # 0091
# Problem: Same as the Symptom: # 0092
# Fix: Added DDLBATKN to the dependency list. # 0093
# Dependency: Apply fix and reMAKE. # 0094
# Reference: RPC #244543 # 0095
# # 0096
# 01APR1998 CAL/283 # 0097
# Symptom: BASE24 EMEA CSE Support # 0098
# Problem: None. # 0099
# Fix: Added section to genfwd AUTHCSES. Added AUTHCSES and as # 0100
# a dependecny for AUTHLIBO. Added AUTHCSEE as a # 0101
# dependency to AUTHO and AUTHLIBO. # 0102
# Added check for ATM ICC Support. If on the AT51AUC # 0103
# subvolume will be compiled and the ICC procs will be # 0104
# bound over the dummy procs that are kept in the AUTHCSES # 0105
# file. # 0106
# Dependency: Apply fix. Apply corresponding fix to AUTHCSES, # 0107
# AUTHLIBS, AUTHS and reMAKE. # 0108
# Reference: WO #980206-1 # 0109
# # 0110
# 30NOV1998 BH/177 # 0111
# Symptom: Skel Common Globals are not located at Global Address 0 # 0112
# when certain product combinations are bound together. # 0113
# Problem: Data blocks are not added in the bind statement. # 0114
# Fix: Modified 'add code * from $(atauth_autho)' to be # 0115
# 'add * from $(atauth_autho)'. # 0116
# Dependency: Apply fix and reMAKE. # 0117
# Reference: RPC #246137 # 0118
##### # 0119
# Release 6.0 # 0120
##### # 0121
# 30NOV2000 BJK/1691 JFP/1694 JW/580 # 0122
# Symptom: Release 6.0 Enhancements # 0123

```

# Problem:	None.	# 0124
# Fix:	- Added baddl_ddlbcnst, oklib_oklibte and	# 0125
#	balib_balibte to the dependency list for the AUTH	# 0126
#	Library Object.	# 0127
#	- Added oksrc_oktg, okddl_okdt and oklib_oklibtg to	# 0128
#	the dependency list for the AUTH Library Object,	# 0129
#	the AUTH object and the Fraud Control Auth Object.	# 0130
#	- Added atauth_authtbl to the dependency list for the	# 0131
#	AUTH object and the AUTH Library Object.	# 0132
#	- Removed the move statements that were in the BIND	# 0133
#	section that are no longer necessary.	# 0134
#	- Amended extdecs to extdecs0 in the dependency lists	# 0135
#	to allow D series NSK calls to be used.	# 0136
#	- Added oklib_oklibto, atliblo, and basrc_batkncvo to	# 0137
#	the search statements for the BIND and to its	# 0138
#	dependency list.	# 0139
#	- Added bacse_batkccvo to the dependency list as it was	# 0140
#	missing.	# 0141
#	- Removed Fraud Control support.	# 0142
#	- Removed Visa Cash support.	# 0143
# Dependency:	Restore Release 6.0 files, modify the appropriate	# 0144
#	CUSTMACS flags, and run MAKE.	# 0145
# Reference:	WO #971118-2 (PITABLE Expansion)	# 0146
#	WO #981118-3 (Transactions Allowed)	# 0147
		# 0148
# 30MAR2001	JW/580	# 0149
# Symptom:	Added 5.3 EMV/MC support	# 0150
# Problem:	None.	# 0151
# Fix:	- Changed all ICC references to EMV.	# 0152
#	- Changed camutils references from baisrc to baiemv.	# 0153
#	- Added authemvd, authmcud and batkccve to the	# 0154
#	dependency lists.	# 0155
#	- Alphabetized the dependency lists.	# 0156
#	- Added includes for Multi-Currency.	# 0157
#	- Changed to add code * statements from add * in the	# 0158
#	bind step for various code pieces.	# 0159
#	- Changed from an add code * to a select search	# 0160
#	statement for balibto.	# 0161
#	- Added the CSE Tkn Id files and CSE Tkn DDLs to the	# 0162
#	dependency lists for future use.	# 0163
# Dependency:	Restore Release 6.0 files, modify the appropriate	# 0164
#	CUSTMACS flags, and run MAKE.	# 0165
# Reference:	WO #010102-01 (EMV 5.3/6.0 Uplift)	# 0166
#	WO #990405-01 (Multicurrency 5.3/6.0 Uplift)	# 0167
		# 0168A00
# 04MAY2001	JEW/580	# 0168A01
# Symptom:	BASE24 Release 5.3 PRISM Components	# 0168A02
# Problem:	None.	# 0168A03
# Fix:	Added include for the PRISM make file atpath_authpim.	# 0168A04
#	Added atauth_authpid to the dependency lists for the	# 0168A05
#	Authlibs and Auths compiles.	# 0168A06
#	Added atpath_authpio to the dependency list for the	# 0168A07
#	bind, and to the add code list.	# 0168A08
# Dependency:	Restore Release 6.0 files, modify the appropriate	# 0168A09
#	CUSTMACS flags, and run Make.	# 0168A0A
# Reference:	WO #000613-003	# 0168A0B
#		# 0168A0C
# 30MAR2001	pas/515	# 0168A0D
# Symptom:	Added 5.3 MC Support	# 0168A0E
# Problem:	None.	# 0168A0F
# Fix:	1. Corrected in the BIND, the #APPEND statement	# 0168A0G
#	for the BASE conversion utilities to be TKNCV	# 0168A0H
#	instead of BATKNCVO and removed the #APPEND	# 0168A0I
#	statement for BATKCCVO.	# 0168A0J
#	2. Added in the BIND, atmcutl and bamcutl which	# 0168A0K

```

# are needed for multiple currency support. # 0168A0L
# Dependency: Restore Release 6.0 files, modify the appropriate # 0168A0M
# CUSTMACS flags, and run MAKE. # 0168A0N
# Reference: WO #990405-01 (Multicurrency 5.3/6.0 Uplift) # 0168A0O
# 0168A0P
# 0168B00
# 0168B01
# 0168B02
# 0168B03
# 0168B04
# 0168B05
# 0168B06
# 0168B07
# 0168B08
# 0168B09
# 0168C00
# 0168C01
# 0168C02
# 0168C03
# 0168C04
# 0168C05
# 0168C06
# 0168C07
# 0168C08
# 0168C09
# 0168C0A
# 0168D00
# 0168D01
# 0168D02
# 0168D03
# 0168D04
# 0168D05
# 0168D06
# 0168D07
# 0168D08
# 0168D09
# 0168D0A
# 0168C0B
# 0169
# 0170
# 0171
# 0172
# 0173
# 0174
# 0175
# 0176
# 0177
# 0178
# 0179
# 0180
# 0181
# 0182
# 0183
# 0184
# 0185
# 0186
# 0187
# 0188
# 0189
# 0190
# 0191
# 0192
# 0193
# 0194
# 0195

# 01JUN2002 LAF/328
# Symptom: MAC MAS Release 6.0 uplift
# Problem: None.
# Fix: This make file will now compile and bind the MAS
# module if flag ATM_MAS_BY_QUAL_ON is true.
# Dependency: Apply fix to AUTHG, AUTHLIBS, AUTHM, AUTHS, AUTHTBL,
# CUSTMACS, and run MAKE.
# Reference: WO #020417-01

# 15OCT2003 JMS/530
# Symptom: SSB Check Enhancement
# Problem: None.
# Fix: Added a dependency for AUTHD when compiling AUTHLIBS.
# Dependency: Apply fixes to DDLFCPF, AUTHG, AUTHLIBS, AUTHMM and
# AUTHM. Restore AUTHD. SSB Check customers must apply
# the fix to AUTHSSCS. Run MAKE. SSB Check customers
# must run the CPF Conversion program. Refer to
# BA60UD07.SCNSSBC for a complete listing of dependencies.
# Reference: WO #020826-01

# 15OCT2003 alr/455
# Symptom: TSS Key Index Support.
# Problem: None.
# Fix: Added check for TSS_KEY_IDX_ON
# Added AUTHD as a dependency.
# Dependency: Apply fixes to AUTHG, AUTHLIBS and AUTHM, restore
# AUTHD and run Make. Refer to BA60UD07.SCNTKI for a
# complete listing of dependencies.
# Reference: WO #030226-02.

#####
!IF $(allmacs) = FALSE |THEN|
#
# Define any macros you want to change from their standard
# values here
#

#include =allmacs
!ENDIF

#-----
# AUTH Bindable Modules
#-----

!IF $(ATM_EMV_ON) = TRUE |THEN|
#include $(atiath_authemvm)
!ENDIF

!IF $(ATM_MCU_ON) = TRUE |THEN|
#include $(atuath_authmcum)

!ENDIF

```

```

!IF $(ATM_MAS_BY_QUAL_ON) = TRUE |THEN|
    !include $(atmath_authmasm)
!ENDIF

!IF $(NCD_ON) = TRUE |THEN|
    !include $(atnath_authncdm)
!ENDIF

!IF $(SSB_BASE_ON) = TRUE |THEN|
    !include $(atbath_authssbm)

    !IF $(SSB_CHK_ON) = TRUE |THEN|
        !include $(atcath_authsscm)
    !ENDIF
!ENDIF

!IF $(PRM_ON) = TRUE |THEN|
    !IF $F$(atpath_authpim) = TRUE |THEN|
        !include $(atpath_authpim)
    !ENDIF
!ENDIF

!IF $(TSS_KEY_IDX_ON) = TRUE |THEN|
    !include $(atyath_authtkim)
!ENDIF

#-----
# AUTH Externals
#-----

$(atauth_authcsee) : $(atauth_authcses)
$(GENFWD)/in $(atauth_authcses)/ ext $(atauth_authcsee)

$(atauth_authlibe) : $(atauth_authlibs)
$(GENFWD)/in $(atauth_authlibs)/ ext $(atauth_authlibe)

$(CUSTAT60_authqe) : $(CUSTAT60_authqs)
$(GENFWD)/in $(CUSTAT60_authqs)/ ext $(CUSTAT60_authqe)

$(atauth_authethe) : $(atauth_authths)
$(GENFWD)/in $(atauth_authths)/ ext $(atauth_authethe)

#-----
# AUTH Library Object
#-----

$(atauth_authlibo) : [
    $(basrc_baddltal) \
    $(atsrc_atddltal) ] $(aciutils_utildefs) \
    $(aciutils_utilexts) \
    $(atauth_authcsee) \
    $(atauth_authcseg) \
    $(atauth_authcses) \
    \
    $(atauth_authd) \
    \
    $(atauth_authemvd) \
    $(atauth_authg) \
    $(atauth_authlibe) \
    $(atauth_authlibs) \

```

```

# 0195B00
# 0195B01
# 0195B02
# 0195B03
# 0195B04
# 0195B05
# 0196
# 0197
# 0198
# 0199
# 0200
# 0201
# 0202
# 0203
# 0204
# 0205
# 0206
# 0206A00
# 0206A01
# 0206A02
# 0206A03
# 0206A04
# 0206A05
# 0206D00
# 0206D01
# 0206D02
# 0206D03
# 0206D04
# 0206A06
# 0207A00
# 0207A01
# 0208
# 0209
# 0210
# 0211
# 0212
# 0213
# 0214
# 0215
# 0216
# 0217
# 0218
# 0219
# 0220
# 0221
# 0222
# 0223
# 0224
# 0225
# 0226
# 0227
# 0228
# 0229
# 0230
# 0231
# 0232C00
# 0232C01
# 0232C02
# 0233
# 0234
# 0235
# 0236

```

```

$(atauth_authmcud)      \      # 0237
                                # 0237A00
$(atauth_authpid)      \      # 0237A01
                                # 0237A02
$(atauth_authtbl)      \      # 0238
$(atddl_ddlftlf)       \      # 0239
$(bacse_attkcid)       \      # 0240
$(bacse_batkccve)      \      # 0241
$(bacse_batkcid)       \      # 0242
$(bacse_ddlattkc)      \      # 0243
$(bacse_ddlbatkc)      \      # 0244
$(baddl_ddlattkn)      \      # 0245
$(baddl_ddlbatkn)      \      # 0246
$(baddl_ddlbcnst)      \      # 0247
$(baddl_ddlfcdf)       \      # 0248
$(baddl_ddlfcdf)       \      # 0249
$(baddl_ddlfcdf)       \      # 0250
$(baddl_ddlfcdf)       \      # 0251
$(baddl_ddlfcdf)       \      # 0252
$(baddl_ddlfcdf)       \      # 0253
$(baddl_ddlfcdf)       \      # 0254
$(baddl_ddlfcdf)       \      # 0255
$(baddl_ddlfcdf)       \      # 0256
$(baddl_ddlfcdf)       \      # 0257
$(baddl_ddlfcdf)       \      # 0258
$(baddl_ddlfcdf)       \      # 0259
$(baddl_ddlfcdf)       \      # 0260
$(baddl_ddlfcdf)       \      # 0261
$(baddl_ddlfcdf)       \      # 0262
$(baddl_ddlfcdf)       \      # 0263
$(baddl_ddlfcdf)       \      # 0264
$(balib_balibte)       \      # 0265
$(basrc_attknid)       \      # 0266
$(basrc_batkncve)      \      # 0267
$(basrc_batkncid)      \      # 0268
$(basrc_bautile)       \      # 0269
$(basrc_cvutile)       \      # 0270
$(basrc_secutile)      \      # 0271
$(okddl_okdt)          \      # 0272
$(oklib_oklibte)       \      # 0273
$(oklib_oklibtg)       \      # 0274
$(oksrc_oktg)          \      # 0275
$(rdebug_dumpext)      \      # 0276
$(spannet_globals)     \      # 0277
$(spannet_initlibs)    \      # 0278
$(spannet_skel)        \      # 0279
$(spannet_skelexts)    \      # 0280
$(system_extdecs0)     \      # 0281
                                # 0282
$(TACL)/INLINE/        # 0283
= $(tacl_init) $(make_tacl_macros) # 0284
                                # 0285
= $(TAL)/in $(atauth_authlibs), & # 0286
= out $.#atauth1.t & # 0287
= $(atauth_compile_opts)/ & # 0288
= $(atauth_authlibo); & # 0289
= $(atauth_tal_opts) # 0290
= check_completion $(TARGET) # 0291
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #atauth1.t # 0292
                                # 0293
= secure $(FUP) $(atauth_authlibo) $(atauth_secure_opt) # 0294
= check_completion $(TARGET) # 0295
                                # 0296

```

```
#-----
# AUTH Object
#-----
```



```

$(TACL)/INLINE/ # 0352
= $(tacl_init) $(make_tacl_macros) # 0353
# 0354
= $(TAL)/in $(atauth_auths), & # 0355
= out $s.#atauth.t & # 0356
= $(atauth_compile_opts)/ & # 0357
= $(atauth_autho); & # 0358
= $(atauth_tal_opts) # 0359
= check_completion $(TARGET) # 0360
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #atauth.t # 0361
# 0362
= secure $(FUP) $(atauth_autho) $(atauth_secure_opt) # 0363
= check_completion $(TARGET) # 0364
# 0365
#----- # 0366
# AUTH Executable - BIND # 0367
#----- # 0368
# 0369
$(atauth_auth) : $(aciutils_utilb) \ # 0370
# 0371
$(atauth_autho) \ # 0372
$(atauth_authlibo) \ # 0373
!IF $(atm_emv_on) = TRUE |THEN| \ # 0374
$(atiath_authemvo) \ # 0375
$(baiemv_camutilo) \ # 0376
!ENDIF \ # 0377
!IF $(atm_mcu_on) = TRUE |THEN| \ # 0378
$(atuath_authmcuo) \ # 0379
# 0379A00
$(atumcu_atmcutl) \ # 0379A01
$(baumcu_bamcutl) \ # 0379A02
# 0379A03
# 0380A00
# 0380A01
!ENDIF \ # 0381
# 0382
# 0383
# 0383B00
!IF $(atm_mas_by_qual_on) = TRUE |THEN| \ # 0383B01
$(atmath_authmaso) \ # 0383B02
!ENDIF \ # 0383B03
# 0383B04
# 0384
# 0385
!IF $(ncd_on) = TRUE |THEN| \ # 0386
$(atnath_authncdo) \ # 0387
!ENDIF \ # 0388
!IF $(ssb_base_on) = TRUE |THEN| \ # 0389
$(atbath_authssbo) \ # 0390
!IF $(ssb_chk_on) = TRUE |THEN| \ # 0391
$(atcath_authssco) \ # 0392
!ENDIF \ # 0393
!ENDIF \ # 0394
# 0394A00
!IF $(prm_on) = TRUE |THEN| \ # 0394A01
!IF $(F$(atpath_authpio)) = TRUE |THEN| \ # 0394A02
$(atpath_authpio) \ # 0394A03
!ENDIF \ # 0394A04
!ENDIF \ # 0394A05
# 0394A06
# 0394D00
!IF $(tss_key_idx_on) = TRUE |THEN| \ # 0394D01
$(atyath_authtkio) \ # 0394D02
!ENDIF \ # 0394D03
# 0394D04

```

```

$(atlib_atliblo) \ # 0395
$(bacse_batkccvo) \ # 0396
$(basrc_bautil) \ # 0397
$(basrc_cvutil) \ # 0398
$(basrc_secutil) \ # 0399
$(basrc_batkncvo) \ # 0400
$(oklib_oklibto) \ # 0401
# 0402
$(TACL)/INLINE/ # 0403
= $(tacl_init) $(make_tacl_macros) # 0404
# 0405
= #PUSH :var # 0406
= #APPEND :var add * from $(atauth_autho), delete # 0407
= #APPEND :var add code * from $(atauth_authlibo), delete # 0408
# 0409
# 0410
!IF $(atm_emv_on) = TRUE |THEN| # 0411
= #APPEND :var add code * from $(atiath_authemvo), delete # 0412
!ENDIF # 0413
# 0414
!IF $(atm_mcu_on) = TRUE |THEN| # 0415
= #APPEND :var add code * from $(atuath_authmcuo), delete # 0416
!ENDIF # 0417
# 0418
# 0419
# 0419B00
!IF $(ATM_MAS_BY_QUAL_ON) = TRUE |THEN| # 0419B01
= #APPEND :var add * from $(atmath_authmaso), delete # 0419B02
!ENDIF # 0419B03
# 0419B04
# 0420
# 0421
!IF $(NCD_ON) = TRUE |THEN| # 0422
= #APPEND :var add * from $(atnath_authncdo), delete # 0423
!ENDIF # 0424
# 0425
!IF $(SSB_BASE_ON) = TRUE |THEN| # 0426
= #APPEND :var add * from $(atbath_authssbo), delete # 0427
!IF $(SSB_CHK_ON) = TRUE |THEN| # 0428
= #APPEND :var add * from $(atcath_authssco), delete # 0429
!ENDIF # 0430
!ENDIF # 0431
# 0432
# 0432A00
!IF $(PRM_ON) = TRUE |THEN| # 0432A01
!IF $(atpath_authpio) = TRUE |THEN| # 0432A02
= #APPEND :var add code * from $(atpath_authpio), delete # 0432A03
!ENDIF # 0432A04
!ENDIF # 0432A05
# 0432A06
# 0432D00
!IF $(tss_key_idx_on) = TRUE |THEN| # 0432D01
= #APPEND :var add code * from $(atyath_authtkio), delete # 0432D02
!ENDIF # 0432D03
# 0432D04
# 0433
!IF $(atm_emv_on) = TRUE |THEN| # 0434
= #APPEND :var add code * from $(baiemv_camutilo), delete # 0435
!ENDIF # 0436
# 0437
!IF $(atm_mcu_on) = TRUE |THEN| # 0438
# 0438A00
= #APPEND :var add code * from $(atumcu_atmcutl), delete # 0438A01
= #APPEND :var add code * from $(baumcu_bamcutl), delete # 0438A02
# 0438A03

```

```

!ENDIF
= #APPEND :var select search $(ATLIB_ATLIBLO)
= #APPEND :var select search $(OKLIB_OKLIBTO)
= #APPEND :var select search $(ACIUTILS_UTILB)

= #APPEND :var select search $(BASRC_BAUTIL)
= #APPEND :var select search $(BASRC_TKNCV)
= #APPEND :var select search $(BASRC_CVUTIL)
= #APPEND :var select search $(BASRC_SECUTIL)

= #APPEND :var set data 64
= #APPEND :var select list * off
=

= #APPEND :var $(atauth_bind_steps)
= #APPEND :var build $(atauth_auth) !

= $(BIND)/ inv :var, out $s.#atauth.b $(atauth_compile_opts)/
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #atauth.b
= #POP :var

#-----
# AUTH Accelerate
#-----

!IF $(atauth_axcel_on) = TRUE |THEN|
= #PUSH :var
= #EOF :var
= $(AXCEL)/inv :var, OUT $S.#atauth.axc &
= $(atauth_axcel_opts) / &
= $(atauth_auth), $(atauth_auth); &
= USERLIB $(spannet_hskelb)
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(atauth_purge_spooler_on) #atauth.axc
= #POP :var
!ENDIF

= dup_exec_file $(move_obj_subvol_on) $(atauth_secure_opt) &
= $(atauth_auth) $(atm_obj_loc)

```

AT60DDL.ATDDL.M:

Note, no changes were made in this Make file since no new define names were required. However, those vanilla defines which were redirected in CSMMACS to point at customized physical files have been shaded.

```
##*FIX2.14 04/18/01 ATDDL.M 6001 MAKE AT60DDL AT04467 A ***
##*SEQ2.05 03/29/01 ATDDL.M 6000 MAKE AT60DDL #
##### # 0001
# # 0002
# BASE24-atm # 0003
# ----- # 0004
# # 0005
# Data Definition Language MAKE File # 0006
# # 0007
# Proprietary Software Product # 0008
# # 0009
# ACI Worldwide Inc. # 0010
# 330 South 108th Avenue # 0011
# Omaha, Nebraska 68154 # 0012
# (402) 390-7600 # 0013
# # 0014
# Copyright by ACI Worldwide Inc. 1996 - 2000 # 0015
# # 0016
# All Rights Reserved. No part of this document may be # 0017
# reproduced in any manner without the prior written consent of # 0018
# ACI Worldwide Inc. This material is a trade secret and its # 0019
# confidentiality is strictly maintained. Use of any copyright # 0020
# notice does not imply unrestricted or public access to these # 0021
# materials. # 0022
# # 0023
# BASE24 (R) is a registered trademark of ACI Worldwide Inc. # 0024
# # 0025
##### # 0026
# # 0027
# Record of Changes: # 0028
# # 0029
# Date Person/Emp # # 0030
# -----
# 01JUN1995 DLM Initial Release # 0031
# # 0032
# # 0033
# 26JUN1997 BDC/1448 Modified the EXPANDSSV statement to # 0034
# access the target instead of the make # 0035
# file. This will allow the -test # 0036
# option in make to function properly. # 0037
# RPC 242137 # 0038
##### # 0039
# Release 6.0 # 0040
##### # 0041
# 30NOV2000 JAS/479 # 0042
# Symptom: Release 6.0 Enhancements # 0043
# Problem: None. # 0044
# Fix: Added the following files to the compile step: # 0045
# ATDDL_DDLFATD, ATDDL_DDLGATD # 0046
# ATDDL_DDLFTRF # 0047
# Dependency: Restore Release 6.0 files, modify the appropriate # 0048
# CUSTMACS flags, and run MAKE. # 0049
# Reference: WO #981118-3 (Transactions Allowed) # 0050
# WO #990108-1 (TDF Expansion) # 0051
# # 0052
# 20MAR2001 AMK/1964 JJD/615 # 0053
# Symptom: Uplift the DialUp Device Handlers to 5.3 # 0054
# Problem: None. # 0055
```

```

# Fix:          Added support for dial-up ATMs.                                # # 0056
# Dependency:   New subvolume AT53PN50 (includes atpn50fm, atpn50mm,          # # 0057
#              n50dlug, n50dlum, n50dlus). New files ddlfadcf,              # # 0058
#              n50dluds and n50updt. Apply fixes to atddlm, atddlmm,         # # 0059
#              atmfm, atmmm, atn50m, atn50mm, at5070, cnfg5070,             # # 0060
#              cnn50doc, custmacs, ddlftdf, flgsdoc, n50g, n50m,            # # 0061
#              n50s, rqt5080s, scrn5080 and remake.                         # # 0062
# Reference:    None. (retro of AT5P110 from WO #991123-1)                  # # 0063
#                                                     # 0063A00
#                                                     # 0063A01
# 17APR2001    djb/040                                                       # 0063A02
# Symptom:     Added Channel, Regional and CSM DDL support.                 # 0063A03
# Problem:     None.                                                         # 0063A04
# Fix:         Added includes for atddl_csesrc, atddl_cntrysrc,             # 0063A05
#              atddl_csmsrc, atddl_csetpl, atddl_cntrytpl and               # 0063A06
#              atddl_csmtpl.                                                # 0063A07
#              Added atddlm_deps dependency.                               # 0063A08
# Dependency:   Restore Release 6.0 files, modify the appropriate          # 0063A09
#              CUSTMACS flags, and run MAKE.                               # 0063A0A
# Reference:    WO #000101-1 (General Release 6.0)                         # 0063A0B
#                                                     # 0063A0C
#                                                     # 0064
##### # 0065
!IF $D(allmacs) = FALSE |THEN| # 0066
# # 0067
#   Define any macros you want to change from their standard # 0068
#   values here # 0069
# # 0070
#include =allmacs # 0071
!ENDIF # 0072
# # 0073
#----- # 0074
#   BASE24-atm DDLs - # 0075
#----- # 0076
# # 0077
$(atsrc_atddlc) :{ # 0078
    $(atddl_ddldict) \ # 0079
    $(atsrc_atddlcob) \ # 0080
    $(atsrc_atddlfup) \ # 0081
    $(atsrc_atddlthal) \ # 0082
    # 0083
    $(atsrc_attpplt) } $(atddl_ddlfadcf) \ # 0084
    # 0085
    # 0086
    $(atddl_ddlfatd) \ # 0087
    # 0088
    $(atddl_ddlfrcpt) \ # 0089
    $(atddl_ddlfrpt) \ # 0090
    $(atddl_ddlftdf) \ # 0091
    $(atddl_ddlftlf) \ # 0092
    $(atddl_ddlfttrf) \ # 0093
    $(atddl_ddlgatd) \ # 0094
    $(atddl_ddlgpem) \ # 0095
    $(atddl_ddlgsem) \ # 0096
    $(atddl_ddlgtlfx) \ # 0097
    $(atdefs_dict) \ # 0098
    # 0099A00
    $(atdefs_ddlgadef) \ # 0099A01
    $(atddlm_deps) # 0099A02
    # 0099A03
    $(TACL)/INLINE/ # 0100
= $(tacl_init) $(make_tacl_macros) # 0101
# # 0102
#   Create our temporary language files based upon the location # 0103
#   of our MAKEFILE # 0104

```

```

#
= #PUSH    temp_c_fname
= #PUSH    temp_cob_fname
= #PUSH    temp_tal_fname
= #PUSH    temp_fup_fname
= #PUSH    temp_tplt_fname

= #SET temp_c_fname      [expandssv $(atddl_ddldict)].atmpc
= #SET temp_cob_fname    [expandssv $(atddl_ddldict)].atmpcob
= #SET temp_tal_fname    [expandssv $(atddl_ddldict)].atmptal
= #SET temp_fup_fname    [expandssv $(atddl_ddldict)].atmpfup
= #SET temp_tplt_fname   [expandssv $(atddl_ddldict)].atmptplt

= ADD DEFINE =atddl_atddlc,   FILE [temp_c_fname]
= ADD DEFINE =atddl_atddlcob, FILE [temp_cob_fname]
= ADD DEFINE =atddl_atddlatal, FILE [temp_tal_fname]
= ADD DEFINE =atddl_atddlfup, FILE [temp_fup_fname]
= ADD DEFINE =atddl_attplt,   FILE [temp_tplt_fname]

#
# Copy the BASE24-atm DDL Dictionary files
#
= dup_dict [expandssv $(atdefs_dict)] [expandssv $(atddl_ddldict)]

= #PUSH    :var
= #SET     :var ?DICTN [expandssv $(atddl_ddldict) ]
= #APPEND  :var ?nocomments
= #APPEND  :var ?noclistout
= #APPEND  :var ?talbound 0
= #APPEND  :var ?deflist
= #APPEND  :var ?C      =atddl_atddlc      !
= #APPEND  :var ?COBOL  =atddl_atddlcob    !
= #APPEND  :var ?TAL    =atddl_atddlatal   !
= #APPEND  :var ?FUP    =atddl_atddlfup    !
= #APPEND  :var ?NOFUP

= #APPEND :var ?FUP =atddl_atddlfup
= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfcf)

= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfcf)
= #APPEND :var ?NOFUP

= #APPEND :var ?NOC
= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfrpt)

= #APPEND :var ?NOC
= #APPEND :var ?FUP =atddl_atddlfup
= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlfrcpt)
= #APPEND :var ?NOFUP

= #APPEND :var ?NOC
= #APPEND :var ?FUP =atddl_atddlfup
= #APPEND :var ?nocomments
= #APPEND :var ?source $(atddl_ddlftdf)
= #APPEND :var ?NOFUP

= #APPEND :var ?NOC
= #APPEND :var ?nocomments

```

```

= #APPEND :var ?source $(atddl_ddlftlft) # 0170
# 0171
= #APPEND :var ?C [temp_c_fname] # 0172
= #APPEND :var ?FUP =atddl_atddlftup # 0173
= #APPEND :var ?nocomments # 0174
= #APPEND :var ?source $(atddl_ddlfttrf) # 0175
= #APPEND :var ?NOFUP # 0176
# 0177
= #APPEND :var ?NOC # 0178
= #APPEND :var ?NOCOBOL # 0179
= #APPEND :var ?nocomments # 0180
= #APPEND :var ?source $(atddl_ddlgtlftx) # 0181
= #APPEND :var ?COBOL =atddl_atddlcob # 0182
# 0183
= #APPEND :var ?NOC # 0184
= #APPEND :var ?nocomments # 0185
= #APPEND :var ?source $(atddl_ddlgatd) # 0186
# 0187
= #APPEND :var ?NOC # 0188
= #APPEND :var ?NOCOBOL # 0189
= #APPEND :var ?nocomments # 0190
= #APPEND :var ?source $(atddl_ddlgsem) # 0191
= #APPEND :var ?COBOL =atddl_atddlcob # 0192
# 0193
= #APPEND :var ?NOC # 0194
= #APPEND :var ?NOCOBOL # 0195
= #APPEND :var ?nocomments # 0196
= #APPEND :var ?source $(atddl_ddlgpem) # 0197
= #APPEND :var ?COBOL =atddl_atddlcob # 0198
# 0199
# 0199A00
!IF $F$(atddl_csesrc) = TRUE |THEN| # 0199A01
!include $(atddl_csesrc) # 0199A02
!ENDIF # 0199A03
# 0199A04
!IF $F$(atddl_cntrysrc) = TRUE |THEN| # 0199A05
!include $(atddl_cntrysrc) # 0199A06
!ENDIF # 0199A07
# 0199A08
!IF $F$(atddl_csmsrc) = TRUE |THEN| # 0199A09
!include $(atddl_csmsrc) # 0199A0A
!ENDIF # 0199A0B
# 0199A0C
# 0199A0D
= #APPEND :var ?NOC # 0200
= #APPEND :var ?NOCOBOL # 0201
= #APPEND :var ?NOTAL # 0202
= #APPEND :var ?FUP =atddl_attplt ! # 0203
= #APPEND :var output record RPT3MSTR. # 0204
= #APPEND :var output record RPT3TTL. # 0205
= #APPEND :var output record RPT5MSTR. # 0206
= #APPEND :var output record RPT5TTL. # 0207
# 0208
# 0208A00
!IF $F$(atddl_csetpl) = TRUE |THEN| # 0208A01
!include $(atddl_csetpl) # 0208A02
!ENDIF # 0208A03
# 0208A04
!IF $F$(atddl_cntrytpl) = TRUE |THEN| # 0208A05
!include $(atddl_cntrytpl) # 0208A06
!ENDIF # 0208A07
# 0208A08
!IF $F$(atddl_csmtpl) = TRUE |THEN| # 0208A09
!include $(atddl_csmtpl) # 0208A0A
!ENDIF # 0208A0B

```

```

= $(DDL)/inv :var, out $s.#at.ddl &
= $(atddl_compile_opts)/ &
= $(atddl_ddl_opts)

= check_completion $(TARGET) $(atddl_ddl_warnings_allowed)

= chk_peruse_job $(TARGET) &
= $(TRUE) &
= $(PERUSE) &
= #at.ddl &
= $(atddl_ddl_warning_text) &
= $(atddl_ddl_alwd_warnings)

= del_peruse_job $(PERUSE) $(atddl_purge_spooler_on) #at.ddl

= ddltal_underbar_conv [temp_tal_fname]

= #SET :var CAB/TLYYMMD0/T0YYMMDD/A
= #APPEND :var E
= $(EDIT) /inv :var/ [temp_tplt_fname]
= check_completion $(TARGET)

= #SET :var CONFIG DUP PURGE, SOURCEDATE
= #APPEND :var DUP =atddl_atddlc , $(atsrc_atddlc)
= #APPEND :var DUP =atddl_atddlcob, $(atsrc_atddlcob)
= #APPEND :var DUP =atddl_atddltal, $(atsrc_atddltal)
= #APPEND :var DUP =atddl_atddlfup, $(atsrc_atddlfup)
= #APPEND :var DUP =atddl_attplt , $(atsrc_attplt)
= SINK [$(FUP)/inv :var/]
= check_completion $(TARGET)

= secure $(FUP) $(atsrc_atddlc) $(atddl_secure_opt)
= check_completion $(TARGET)
= secure $(FUP) $(atsrc_atddlcob) $(atddl_secure_opt)
= check_completion $(TARGET)
= secure $(FUP) $(atsrc_atddltal) $(atddl_secure_opt)
= check_completion $(TARGET)
= secure $(FUP) $(atsrc_atddlfup) $(atddl_secure_opt)
= check_completion $(TARGET)
= secure $(FUP) $(atsrc_attplt) $(atddl_secure_opt)
= check_completion $(TARGET)

= SINK [PURGE [temp_c_fname]]
= SINK [PURGE [temp_cob_fname]]
= SINK [PURGE [temp_tal_fname]]
= SINK [PURGE [temp_fup_fname]]
= SINK [PURGE [temp_tplt_fname]]

= #POP temp_c_fname
= #POP temp_cob_fname
= #POP temp_tal_fname
= #POP temp_fup_fname
= #POP temp_tplt_fname

= DELETE DEFINE =atddl_atddlc
= DELETE DEFINE =atddl_atddlcob
= DELETE DEFINE =atddl_atddltal
= DELETE DEFINE =atddl_atddlfup
= DELETE DEFINE =atddl_attplt

= #POP :var

```

```

# 0208A0C
# 0208A0D
# 0209
# 0210
# 0211
# 0212
# 0213
# 0214
# 0215
# 0216
# 0217
# 0218
# 0219
# 0220
# 0221
# 0222
# 0223
# 0224
# 0225
# 0226
# 0227
# 0228
# 0229
# 0230
# 0231
# 0232
# 0233
# 0234
# 0235
# 0236
# 0237
# 0238
# 0239
# 0240
# 0241
# 0242
# 0243
# 0244
# 0245
# 0246
# 0247
# 0248
# 0249
# 0250
# 0251
# 0252
# 0253
# 0254
# 0255
# 0256
# 0257
# 0258
# 0259
# 0260
# 0261
# 0262
# 0263
# 0264
# 0265
# 0266
# 0267
# 0268
# 0269
# 0270

```


AT60AFT.RQATDM:

Note, no changes were made in this Make file since no new define names were required. However, those vanilla defines which were redirected in CSMMACS to point at customized physical files have been shaded.

```
#*SEQ2.05 03/29/01 RQATDM 6000 MAKE AT60AFT #
##### # 0001
# # 0002
# BASE24-atm # 0003
# ----- # 0004
# # 0005
# ATD Requester/Screen MAKE File # 0006
# # 0007
# Proprietary Software Product # 0008
# # 0009
# ACI Worldwide Inc. # 0010
# 330 South 108th Avenue # 0011
# Omaha, Nebraska 68154 # 0012
# (402) 390-7600 # 0013
# # 0014
# Copyright by ACI Worldwide Inc. 2000 # 0015
# # 0016
# All Rights Reserved. No part of this document may be # 0017
# reproduced in any manner without the prior written consent of # 0018
# ACI Worldwide Inc. This material is a trade secret and its # 0019
# confidentiality is strictly maintained. Use of any copyright # 0020
# notice does not imply unrestricted or public access to these # 0021
# materials. # 0022
# # 0023
# BASE24 (R) is a registered trademark of ACI Worldwide Inc. # 0024
# # 0025
##### # 0026
# # 0027
# Record of Changes: # 0028
# # 0029
# Date Person/Emp # # 0030
# ----- # 0031
##### # 0032
# RELEASE 6.0 # 0033
##### # 0034
# 30NOV2000 CKC/163 # 0035
# Symptom: Release 6.0 Enhancements. # 0036
# Problem: None. # 0037
# Fix: Initial Release. # 0038
# Dependency: Restore Release 6.0 files, modify the appropriate # 0039
# CUSTMACS flags, and run MAKE. # 0040
# Reference: WO #981118-3 (Transactions Allowed) # 0041
# WO #990108-1 (TDF Expansion) # 0042
# WO #990826-04 (Pathway Cleanup) # 0043
# WO #000616-01 (Product Separation) # 0044
##### # 0045
# # 0046
!IF $D(allmacs) = FALSE |THEN| # 0047
# # 0048
# Define any macros you want to change from their standard # 0049
# values here # 0050
# # 0051
#include =allmacs # 0052
!ENDIF # 0053
```

```

#-----
# ATD Requester
#-----
$(ataft_rqatdo) :{
    $(dest_pobj) }[
    $(atsrc_atddlcb)
    $(basrc_baddlcb) ] $(ataft_rqatds)
                        $(ataft_scrnatd1)
                        $(ataft_scrnatdb)
                        $(atddl_ddlgatd)
                        $(atsrc_atdxg)
                        $(baddl_ddlfsec)
                        $(baddl_ddlgpth)
                        $(basrc_bacoutls)
                        $(basrc_cobnames)
                        $(basrc_hlpscrn)

    $(TACL)/INLINE/
= $(tacl_init) $(make_tacl_macros)

= #PUSH temp_pobj scn_atdo

= #SET temp_pobj [expandssv $(ataft_rqatdo)].patd
= #SET scn_atdo [expandssv $(ataft_rqatdo)].scnatdo

= ADD DEFINE =ataft_scnatdo, FILE [scn_atdo]

= $(ACIAID) /in $(ataft_scrnatdb), &
= out $s.#rqatdb.scn &
= $(ataft_compile_opts) / &
= [scn_atdo]!
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #rqatdb.scn

= $(ACIAID) /in $(ataft_scrnatd1), &
= out $s.#rqatd1.scn &
= $(ataft_compile_opts) / &
= [scn_atdo]
= check_completion $(TARGET)
= del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #rqatd1.scn

= SINK [del [temp_pobj]*]

!IF $(ataft_t3270_on) = TRUE |THEN|
= aci_scobolx_make $(SCOBOLX) $(TARGET) /in $(ataft_rqatds), &
= out $s.#rqatd.i &
= $(ataft_compile_opts)/ &
= [temp_pobj]; &
= settog 1; &
= $(ataft_scobolx_opts)
= check_scobol_completion $(TARGET)
= del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #rqatd.i
!ENDIF

!IF $(ataft_t6520_on) = TRUE |THEN|
= aci_scobolx_make $(SCOBOLX) $(TARGET) /in $(ataft_rqatds), &
= out $s.#rqatd.t &
= $(ataft_compile_opts)/ &
= [temp_pobj]; &
= settog 3; &
= $(ataft_scobolx_opts)
= check_scobol_completion $(TARGET)
= del_peruse_job $(PERUSE) $(ataft_purge_spooler_on) #rqatd.t
!ENDIF

```

```

= #PUSH :var
= #SET :var COPY [temp_pobj] (*),$(dest_pobj)
= $(SCUP)/inv :var/
= check_completion $(TARGET)
= #POP :var

= SINK [del [temp_pobj]*]
= SINK [PURGE [scn_atdo]]

= #POP temp_pobj scn_atdo
= DELETE DEFINE =ataft_scnatdo

ataft_rqtdfo

atsrc_atddlcob
atddl_ddlftdf

ataft_scrntdf1

ataft_rqatds

```

```

# 0119
# 0120
# 0121
# 0122
# 0123
# 0124
# 0125
# 0126
# 0127
# 0128
# 0129
# 0130

```

Commonly Asked Questions

Q: What does the error "SQL error, no row selected" mean?

A: It probably means that the specific define being referenced is not in the dependency list for the module being compiled, i.e. forgot to specify the *QTS or *QS file in the Make file dependency list.

Q: Why is the correct file name not expanded in the Make file run?

A: Make sure that the correct filename is specified in the CSMMACS or CUSTMACS file.

Q: How do I override the value of a specific define or parameter?

A: Change it in the CSMMACS (or CUSTMACS if you wish to avoid having to remove extraneous clutter later), *FM, *MM, or *TM file if the define or parameter applies to a group of Make files or change it in the specific Make file (*M) if it only applies to the one Make file.

For example, the *_compile_opts and *_purge_spooler_on defines could be set to compile with symbols and to purge the spooler output respectively. The level these defines are placed at would determine if these defines applied to a group of Make files or to an individual Make file. For instance, to compile the ATM Auth module only with symbols, the define atauth_compile_opts would be set to use symbols and the define would be placed in the AUTHQM (customized Auth) Make file.

Q: Why do my defines appear to be ignored even though I have everything specified correctly?

A: Try running the Make file without the -test option and use the -list option.

Q: How do I Make all of the CSM modules without Make'ing any vanilla files?

A: Obey the \$vol.custMAKE.CSMC file.

Q: How do I Make some or all of the BASE24 vanilla modules without Make'ing any CSM files?

A: Add define for ALLMACS set to an appropriate CUSTMACS file and run Make on the desired vanilla Make (*M) file.