

Reference Guide

BASE24-inventoryTM



© 2007 by ACI Worldwide, Inc. All rights reserved.

All information contained in this documentation, as well as the software described in it, is confidential and proprietary to ACI Worldwide, Inc., or one of its subsidiaries, is subject to a license agreement, and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of ACI Worldwide, Inc., or one of its subsidiaries.

ACI, ACI Worldwide, and the ACI product names used in this documentation are trademarks or registered trademarks of ACI Worldwide, Inc., or one of its subsidiaries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

Contents

Preface	v
Conventions Used in This Manual	ix
1: Introduction	1-1
System Overview	1-2
Background	1-3
BASE24-inventory Mobile Top-Up Environment	1-4
BASE24-atm Mobile Top-Up Transaction Flows Using BASE24-inventory	1-7
Mobile Top-Up Definitions-based Model Using BASE24-inventory, Approved ..	1-8
Mobile Top-Up Definitions-based Model Using BASE24-inventory, Reversed ..	1-11
BASE24-pos Mobile Top-Up Transaction Flows Using BASE24-inventory	1-14
Mobile Top-Up with Funds Using BASE24-inventory, Approved	1-15
BASE24-pos Mobile Top-Up with Funds Using BASE24-inventory, Reversed ..	1-18
BASE24-inventory Functional Overview	1-21
BASE24-inventory Network Environment	1-21
BASE24-inventory Database Relationship	1-23
2: Configuration	2-1
LCONF Assigns and Params	2-2
BASE24-inventory Stock Configuration File (NSCF)	2-3
Screen 1	2-3
BASE24-inventory Transaction Log File (NTLF)	2-13
Alternate Keys	2-13
NTLF Summary Screen Function Keys	2-14
Mobile Operator File (MOF)	2-29
Mobile Operator File Configuration Considerations	2-29

3: Operations Guidelines	3-1
Refresh Process	3-2
Sample Refresh Report	3-3
Refresh File Format	3-4
Reports Generation	3-7
Settlement and Transaction Reports	3-7
Stock Summary Reports	3-7
Ad-hoc Reports for Troubleshooting	3-8
Housekeeping	3-9
Housekeeping Monitoring Process	3-9
Housekeeping Deletion Using a Timer	3-10
Housekeeping Deletion Using an NCPCOM Command	3-14
Index	Index-1

Preface

This manual provides an overview and technical description of the BASE24-inventory product. The BASE24-inventory product enables service companies and financial institutions to sell mobile top-up inventory vouchers using their existing network infrastructure.

Audience

This manual is a reference for financial institution and service company personnel responsible for delivery networks and mobile top-up inventory. This publication also provides an overview of the BASE24-inventory product for those interested in gaining a general understanding of the system.

Prerequisites

This manual assumes readers are familiar with the BASE24-atm Mobile Top-Up or BASE24-pos Mobile Top-Up products, their basic functions and terminology.

Additional Documentation

The BASE24 documentation set is arranged so that each BASE24 manual presents a topic or group of related topics in detail. When one BASE24 manual presents a topic that has already been covered in detail in another BASE24 manual, the topic is summarized and the reader is directed to the other manual for additional information. Information has been arranged in this manner to be more efficient for readers who do not need the additional detail and at the same time provide the source for readers who require the additional information.

This manual contains references to the following BASE24 publications:

- The ***BASE24-atm Diebold 10XX/478X Device Support Manual*** provides information on the configuration of ATM mobile top-up.
- The ***BASE24-atm NCR 5XXX Device Support Manual*** provides information on the configuration of ATM mobile top-up.
- The ***BASE24-atm Transaction Processing Manual*** describes the flow of BASE24-atm transactions.
- The ***BASE24 Base Files Maintenance Manual*** provides detailed descriptions of the fields in the base files that can be updated using the BASE24-inventory product.
- The ***BASE24 Logical Network Configuration File Manual*** provides detailed information about the assigns and params used by the BASE24-inventory product.
- The ***BASE24-pos Standard POS Device Configuration Manual*** describes the configuration of standard POS device handlers for mobile top-up transactions.
- The ***BASE24-pos Transaction Processing Manual*** details information on BASE-pos transaction flows.
- The ***BASE24 Refresh and Extract Manual*** provides information related to the initiating of the Refresh process undertaken by the BASE24-inventory product.
- The ***BASE24 Tokens Manual*** provides detailed information about the tokens used by the BASE24-inventory product.

Software

This manual documents standard processing as of its publication date. Software that is not current and custom software modifications (CSMs) may result in processing that differs from the material presented in this manual. The customer is responsible for identifying and noting these changes.

Manual Summary

The following is a summary of the contents of this manual.

“Conventions Used in This Manual” follows this preface and describes notation and documentation conventions necessary to understand the information in the manual.

Section 1, “Introduction,” provides a more detailed look into the BASE24-inventory operation procedures including an overview of the BASE24-inventory product. This section also provides several illustrations of the functionality of the product and its environment, including transaction flows and a depiction of the system environment.

Section 2, “Configuration,” details the various configuration screens and field descriptions for the BASE24-inventory product.

Section 3, “Operations Guidelines,” gives a listing and description of the reports produced by the BASE24-inventory product and the extracts or refreshes used by the BASE24-inventory database.

Publication Identification

Three entries appearing at the bottom of each page uniquely identify this BASE24 publication. The publication number (for example, VO-001-01 for the *BASE24-inventory Reference Guide*) appears on every page to assist readers in identifying the manual from which a page of information was printed. The publication date (for example, Nov-2007 for November, 2007) indicates the issue of the manual. The software release information (for example, R6.0v8 for release 6.0, version 8) specifies the software that the manual describes. This information matches the document information on the copyright page of the manual.

ACI Worldwide, Inc.

Conventions Used in This Manual

This section explains how the BASE24-inventory product is documented in this manual.

Syntax Notation

Syntax descriptions in this manual use several symbols and conventions to denote how commands must be entered. These conventions are described in the table below.

Notation	Meaning
UPPERCASE LETTERS	Indicate key words and literals that you must enter exactly as shown.
<i>lowercase italics</i>	Identify variables that you must provide.
Brackets []	Enclose optional syntax items that you can enter in the command.
Braces { }	Enclose a group of items from which you are required to choose one item. The items are separated within the braces by a vertical bar ().
Vertical bar	Separates alternatives in a list of items.
Ellipsis ...	Indicates the immediately preceding syntactical item can occur one or more times.
Punctuation	Must be entered as shown. This includes parentheses, commas, semicolons, and other symbols not previously described.

Notation	Meaning
Spaces	Are required as delimiters wherever it would be otherwise impossible to discriminate between adjacent words or symbols. You can insert additional spaces between any adjacent words or symbols, but not within a word or multiple character symbol.
Indented lines	Indicates a continuation of the preceding line of syntax. If the syntax of a command is too long to fit on a single line, each continuation line is indented.

Field Descriptions

Each field appearing on a file maintenance screen is listed by name and then described. Field descriptions briefly summarize the contents, purpose, and permissible values, as shown in the following example taken from the Inventory Stock Configuration File (NSIF).

Example

STOCK TYPE — Four-character value that identifies the type of stock uniquely (e.g., TM01 for a Prepaid Mobile Recharge Voucher, TP01 for a Prepaid Phone Card Recharge Voucher). This is the key field. All other fields are functional attributes of the stock type.

Field Length = 1–4 alphanumeric characters
Required Field = Yes
Default Value = No default value
Data Name = NSCF.PRIKEY.STOCK-TYPE

Explanation

Each field description is completed by one or more of the following items of information:

Item	Description
Example	Illustrates a possible entry for the field to further clarify the value or values that can be entered.

Item	Description
Field Length	Specifies the size of the field and the type of characters that can be entered. This length refers to the field and valid values for the file maintenance screen, not the field in the DDLs. Possible values are alphabetic, alphanumeric, hexadecimal, and numeric. The term <i>alphanumeric</i> includes all alphabetic, numeric, and special characters that can be entered from a keyboard without using a control sequence. The term <i>hexadecimal</i> includes all numbers and the letters A through F. When a field value cannot be modified by the operator, the field length is <i>System protected</i>.
Occurs	Indicates the number of times the field can be displayed on the screen. This information is provided only when the field can be displayed multiple times.
Required Field	Specifies whether a value has to be entered in the field. Possible values are Yes and No. Some fields are required only under certain conditions. In this case, the entry is Yes, followed by the conditions that determine when the field is required.
Default Value	Specifies the value that is automatically placed in the field when the screen is first displayed or when the F8 key is pressed to clear the screen.
Data Name	Provides the DDL name associated with the field appearing on the screen. Data names are included in the documentation to assist in communicating screen and field issues to your technical staff. Note that screen data is not always stored in the BASE24 database as it appears on the screen or as it is described in the field description. If you need information on how screen data is actually stored, consult the DDLs.

Blank Characters

Field descriptions for internal and external messages, tokens, files maintenance screens, and reports often include lists of valid values. When the value contains a blank character, this manual uses the symbol *b* to indicate the blank character.

Unlabeled Fields on Screens

Angle brackets (< >) indicate an unlabeled field on a screen. An unlabeled field is a field that is present on a screen but is not preceded by an identifying literal label. For the purposes of documenting the field, a label has been assigned and appears inside the angle brackets. A multiple line unlabeled field is displayed as a shaded area and also has a label in angle brackets.

In the field descriptions for the screen, the unlabeled field appears according to its place on the screen and is identified by the same label.

Unlabeled fields are not included in the index by field name; they appear by subject in the main index.

1: Introduction

The BASE24-inventory product provides the software infrastructure that enables customers to manage stock inventory for mobile phone operators and to interface with the BASE24 financial network to receive and respond to funds authorization requests.

This section provides an introduction and a system overview for BASE24 Inventory Reference. It includes the following topics:

- An overview of how BASE24-inventory works within a BASE24-atm Mobile Top-Up system and a BASE24-pos Mobile Top-Up system
- A description of the BASE24-inventory network environment
- A discussion of the operational aspects of the system

System Overview

The BASE24-inventory product allows cardholders to add airtime for mobile telephones without an interchange interface, instead adding minutes directly via the cardholder's financial institution and the BASE24 financial network.

The BASE24-inventory product provides the software infrastructure enabling customers to manage stock inventory for mobile phone operators and to interface with the BASE24 financial network to receive and respond to funds authorization requests.

The BASE24-inventory product uses a database that contains stock files, transaction log files, and configuration files.

The system operates through the following processes: an Authorization process, a Settlement process, a Housekeeping process, a Refresh process, and a Reporting process.

- The Inventory Stock Manager works as the BASE24-inventory product's authorization process, authorizing mobile top-up transactions according to the stock type's pre-defined parameters and logs the transactions to the transaction log file.
- Settlement process cuts over the stock types and inventory to the next business day.
- The Housekeeping process monitors the stock levels in the stock files and performs cleanup.
- The Refresh process adds stock records to the stock file with input from the Mobile Operator systems.
- Enform reports provide information on the stock files and an Enform extract module extracts the transaction log file for transfer to a PC.

The rest of this section provides an overview of the common architecture and general characteristics of the solution and the terminology used.

Background

BASE24-inventory requires either the BASE24-atm Mobile Top-Up or the BASE24-pos Mobile Top-Up acquiring product to do the following:

- Use a financial institution's point-of-sale (POS) network to load airtime onto a user's pre-paid mobile phone account. This supports cash or card payments.
- Use a financial institution's automated teller machine (ATM) network to load airtime onto a user's account. This supports card payments only.

The processes described above can involve an inventory system that simulates existing paper-based voucher methods, or it can involve a direct connection to a mobile phone operator to enable the loading of airtime directly onto a pre-paid user's account with the mobile phone operator.


BASE24-inventory Mobile Top-Up Environment

A mobile top-up transaction involves authorizing and debiting a customer's card and account for the amount of the voucher and, with funds approved, printing a voucher on the ATM or POS receipt printer.

In its generic functionality, a BASE24-pos or BASE24-atm Mobile Top-Up solution first accepts a mobile top-up transaction message from a device. POS mobile top-up transactions can be with or without funds.

Mobile top-up message types can be requests (0200) and reversals (0420). All such messages are routed to the Transaction Context Manager (TCM).

The architecture of the BASE24-inventory mobile top-up environment is indicated in the following diagram:

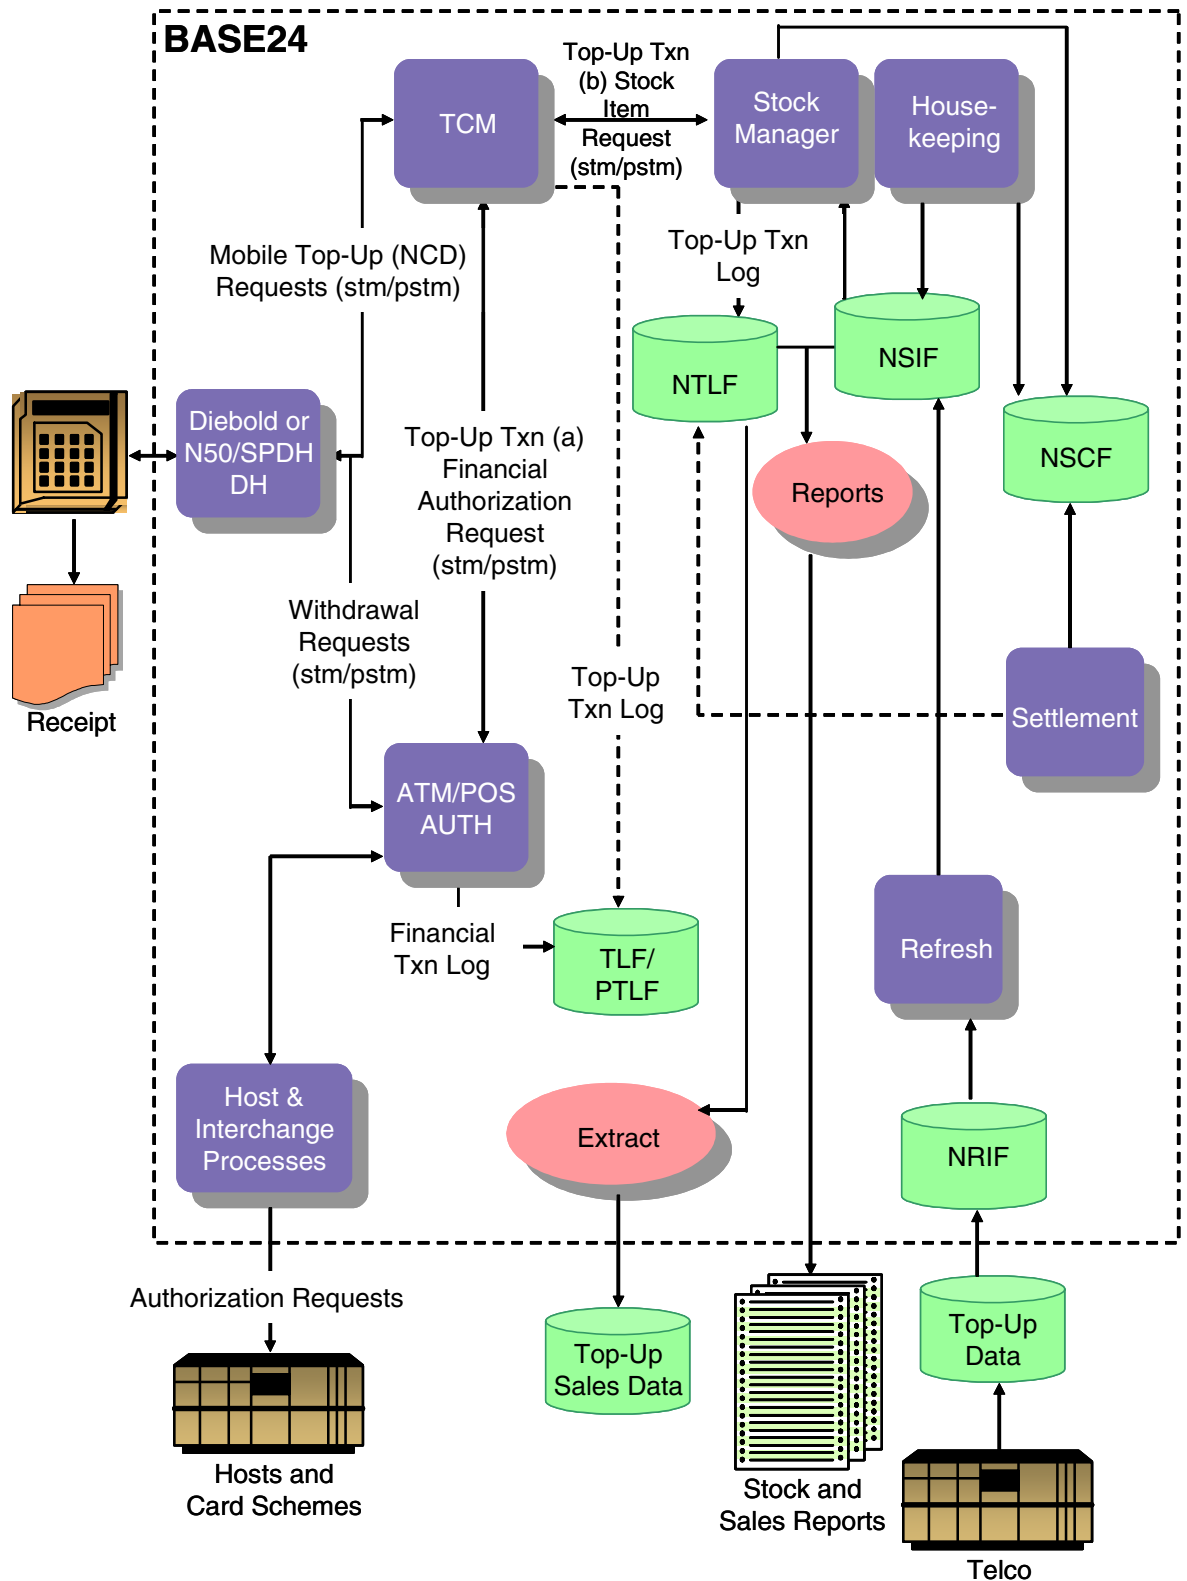

The BASE24 Transaction Context Manager (TCM) process is configured within the BASE24-atm and BASE24-pos mobile top-up networks. It manages the splitting of the transaction into a funds authorization transaction sent to the BASE24-atm Authorization process or BASE24-pos Router/Authorization module and a mobile top-up transaction sent to the BASE24-inventory Stock Manager process.

The Device Handler process receives a transaction request from an ATM or POS device.

BASE24-atm Mobile Top-Up Transaction Flows Using BASE24-inventory

The following diagrams and descriptions outline message flows for BASE24-atm Mobile Top-Up transactions. The BASE24-inventory product requires a definitions-based mobile top-up acquiring model using locally defined values for mobile telephone operators (the actual service providers), the amount of a stock item that can be purchased, and other information needed to complete the mobile top-up.

The transaction is processed first by the Device Handler process and then by the Transaction Context Manager process, which routes the transaction, based on settings in the Split Transaction Routing File (STRF), to the BASE24-atm Authorization process and the BASE24-inventory Stock Manager process.


For information specific to the device for configuring mobile top-up, refer to the following manuals:

- The ***BASE24-atm Diebold 10XX/478X Device Support Manual***
- The ***BASE24-atm NCR 5XXX Device Support Manual***

The ***BASE24-atm Transaction Processing Manual*** also contains descriptions of typical ATM transaction flows.

Mobile Top-Up Definitions-based Model Using BASE24-inventory, Approved

The diagram below illustrates a transaction approved by the BASE24-atm Authorization process and the BASE24-inventory Stock Manager process.

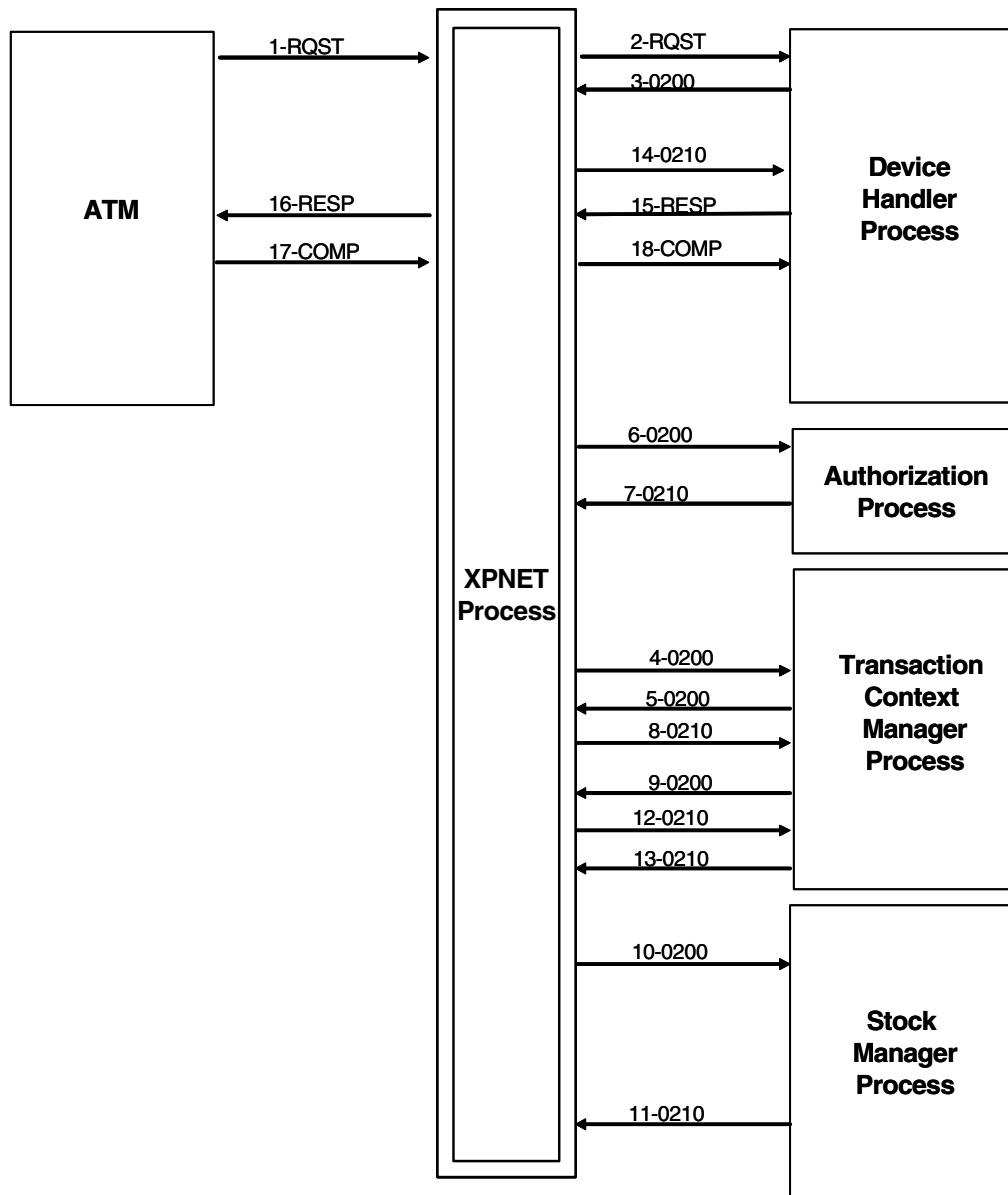

Steps	Processing
1–2	The ATM sends a top-up native-mode message request to the Device Handler process.
3–4	The Device Handler process reformats the native-mode message into a 0200 request message, sets an authorized timer, then sends the 0200 request message to the Transaction Context Manager process configured in the SPLIT-TXN-RTG-DEST parameter in the Logical Network Configuration File (LCONF).
5–6	The Transaction Context Manager process determines from the Split Transaction Routing File (STRF) that the transaction must be sent to the Authorization process. The Transaction Context Manager process sends a 0200 request to the Authorization process.
7–8	The Authorization process determines how to process the transaction request. The Authorization process approves the request, logs the response to the Transaction Log File (TLF), updates the database files appropriately, then returns a 0210 response message to the Transaction Context Manager process.
9–10	The Transaction Context Manager process determines from the Split Transaction Routing token that a request must be sent to the Stock Manager process. The Transaction Context Manager process sends a 0200 request to the Stock Manager process.
11–12	The Stock Manager process approves the transaction, logs the top-up response to the BASE24-inventory Transaction Log File (NTLF), updates the database files appropriately, and sends a 0210 response message to the Transaction Context Manager process.
13–14	The Transaction Context Manager logs the 0210 response to the Transaction Log File (TLF) and sends the 0210 response to the Device Handler process.
15–16	The Device Handler process deletes its authorization timer and reformats the 0210 response message into a native-mode response and sends it to the ATM.

Steps


Processing

17–18

The ATM sends a native-mode message to the Device Handler process to indicate the transaction completed as authorized.

Mobile Top-Up Definitions-based Model Using BASE24-inventory, Reversed

The diagram below illustrates a mobile top-up transaction declined by the BASE24-inventory Stock Manager process and the generation of a reversal response.

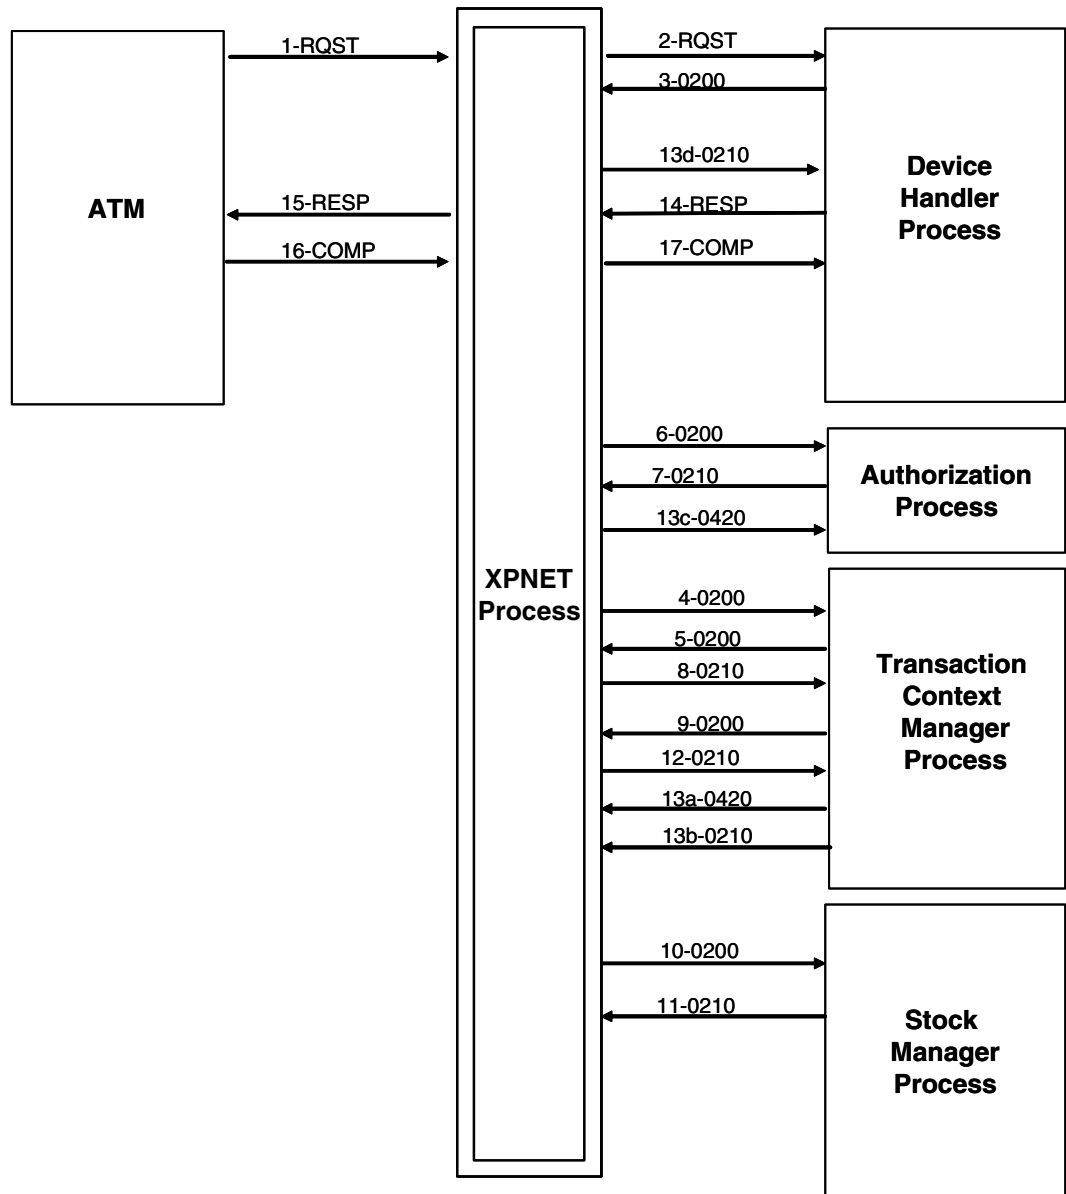

Steps	Processing
1–2	The ATM sends a top-up native-mode request message to the Device Handler process.
3–4	The Device Handler process reformats the native-mode message into a 0200 request, sets an authorization timer, then sends the 0200 request message to the Transaction Context Manager process configured in the SPLIT-TXN-RTG-DEST param in the Logical Network Configuration File (LCONF).
5–6	The Transaction Context Manager process determines from the Split Transaction Routing File (STRF) that the transaction must be sent to the Authorization process. The Transaction Context Manager process sends a 0200 request to the Authorization process.
7–8	The Authorization process determines how to process the transaction request. The Authorization process approves the request, logs the response to the Transaction Log File (TLF), updates the database files appropriately, then returns a 0210 response message to the Transaction Context Manager process.
9–10	The Transaction Context Manager process determines from the Split Transaction Routing token that a request must be sent to the Stock Manager process. The Transaction Context Manager process sends a 0200 request to the Stock Manager process.
11–12	The Stock Manager process declines the transaction request, formats a response, logs the response to the BASE24-inventory Transaction Log File (NTLF) and sends the response to the Transaction Context Manager process.
13a–13d	The Transaction Context Manager process generates a 0420 reversal to the Authorization process and logs the 0210 top-up response to the Transaction Log File (TLF). The Transaction Context Manager process sends the 0210 response to the Device Handler process.

Steps	Processing
14–15	The Device Handler process deletes its authorization timer and reformats the 0210 response message into a native-mode response that it sends to the ATM.
16–17	The ATM sends a native-mode message to the Device Handler process to indicate that the transaction completed as authorized.


BASE24-pos Mobile Top-Up Transaction Flows Using BASE24-inventory

The diagrams below illustrate the flow of a mobile top-up transaction on a BASE24-pos system using the BASE24-inventory product.

Refer to the *BASE24-pos Standard POS Device Configuration Manual* for details on configuring the SPDH for mobile top-up transactions. Refer to the *BASE24-pos Transaction Processing Manual* for more information on POS transaction flows.

Mobile Top-Up with Funds Using BASE24-inventory, Approved

The diagram below details a mobile top-up transaction processed with funds, BASE24-inventory, and approved by the BASE24-pos Authorization module and the BASE24-inventory Stock Manager process.

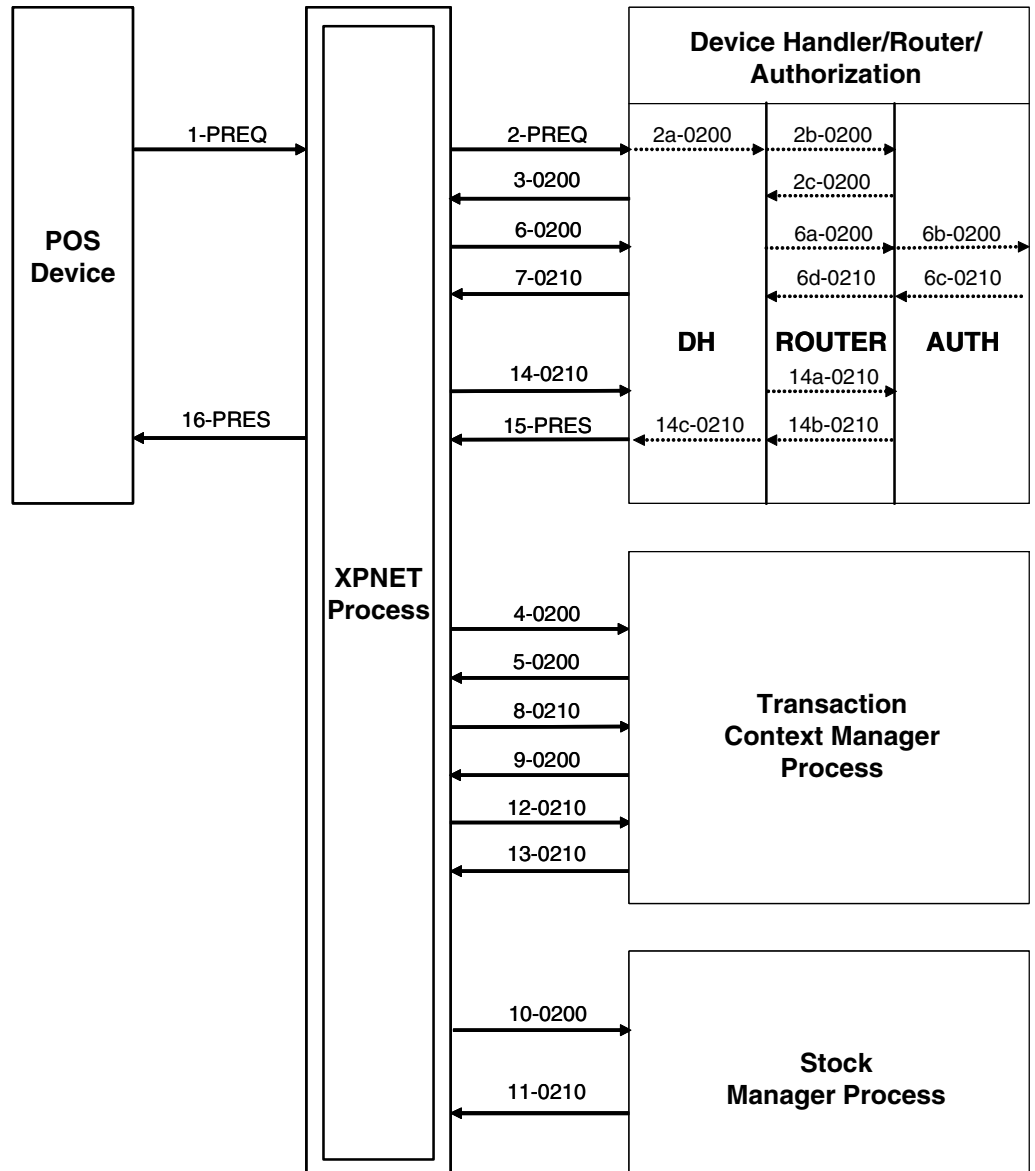


Steps	Processing
1–2	The POS device sends the transaction request to the BASE24-pos system as a native-mode message, where it is received by the XPNET process and forwarded to the appropriate Device Handler/Router/Authorization process.
2a–2c	The Device Handler module reads the BASE24-pos Terminal Data files record for the POS device to determine how to process the request. The Device Handler module then reformats the transaction request into a POS Standard Internal Message (PSTM), sets a response time and passes the transaction request as a 0200 message to the Router module.
3–4	The Device Handler/Router/Authorization process sends the 0200 message to the Transaction Context Manager process.
5–6	The Transaction Context Manager process formats a 0200 message for a purchase transaction and passes it to the Device Handler/Router/Authorization process.
6a–6d	The Router module locates a Card Prefix File (CPF) record for the card involved in the transaction and determines AST routing. The Router module then passes the message to the Authorization module. From the CPF, the Authorization module locates an Institution Definition File (IDF) record for the institution that issued the card. The IDF record identifies how the transaction request is to be processed. In this case, the transaction request is to be processed using Authorization level 2. The Authorization module approves the request, updates the database files appropriately, logs the purchase transaction response to the POS Transaction Log File (PTLF), and formats a 0210 response message.
7–8	The Device Handler/Router/Authorization process sends the 0210 message to the Transaction Context Manager process.

Steps	Processing
9–10	The Transaction Context Manager process formats a 0200 request message for a mobile top-up using funds transaction request and passes it to the Stock Manager process configured in the Mobile Operator File (MOF) and the Split Transaction Routing File (STRF).
11–12	The Stock Manager process approves the request, updates the database files appropriately, logs the mobile top-up using funds transaction response to the BASE24-inventory Transaction Log File (NTLF), and formats a 0210 response message.
13–14	The Transaction Context Manager process logs the 0210 message to the PTLF as a mobile top-up with funds transaction and sends the message to the Device Handler/Router/Authorization process.
14a–14c	The Router module receives the 0210 message and passes it to the Device Handler module. The Authorization module is not involved in processing at this point so it does not log another 0210 message to the PTLF.
15–16	The Device Handler module reformats the response message into native-mode format, deletes the response timer, and sends the response to the POS device.

BASE24-pos Mobile Top-Up with Funds Using BASE24-inventory, Reversed

The diagram below details a mobile top-up transaction processed with funds, using BASE24-inventory, and declined by the BASE24-inventory Stock Manager process.

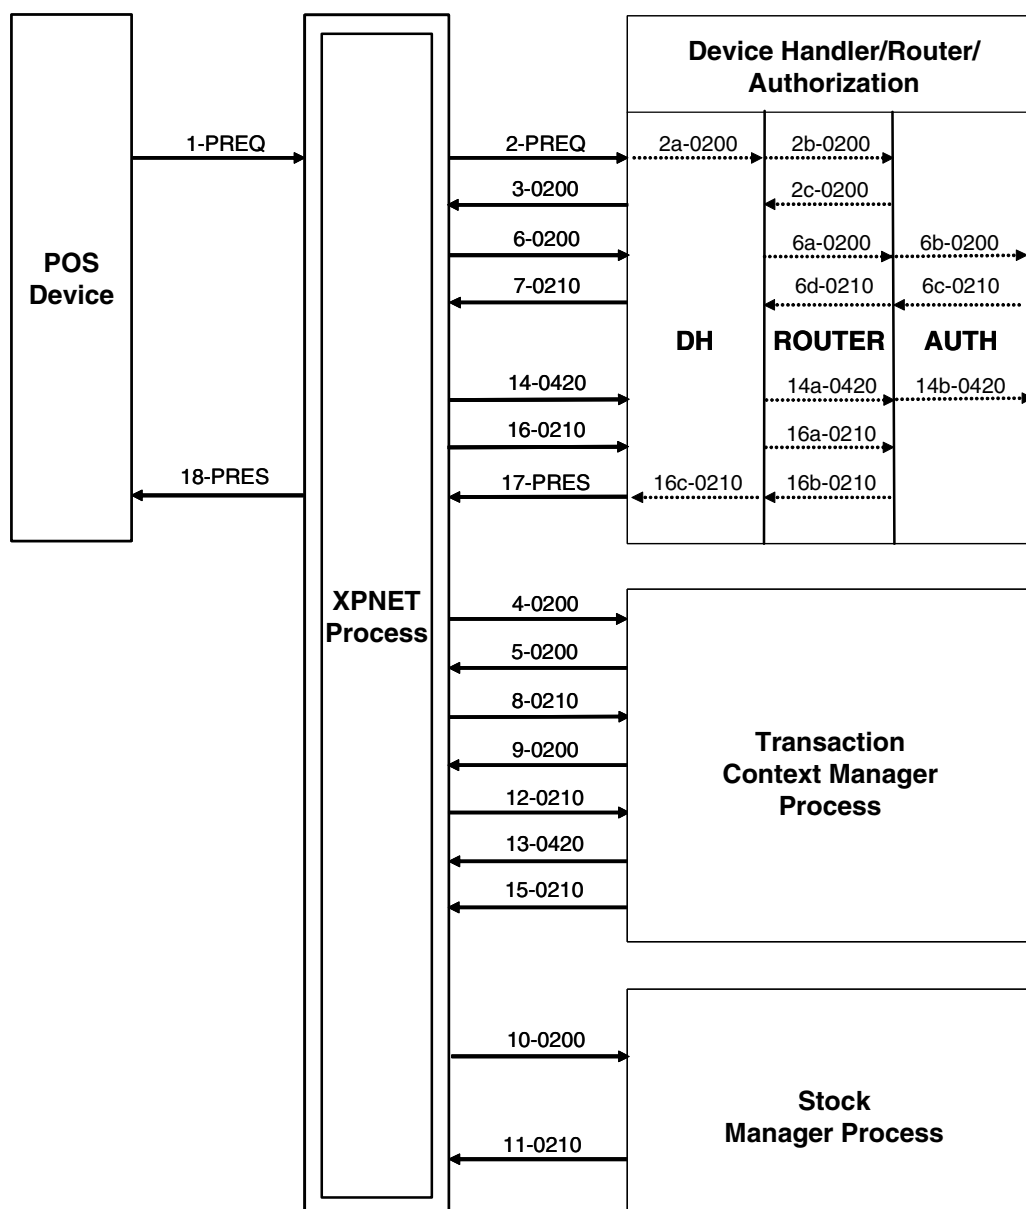

Steps	Processing
1–2	The POS device sends the transaction request to the BASE24-pos system as a native-mode message, where it is received by the XPNET process and forwarded to the appropriate Device Handler/Router/Authorization process.
2a–2c	The Device Handler module reads the BASE24-pos Terminal Data files record for the POS device to determine how to process the request. The Device Handler module then reformats the transaction request into a POS Standard Internal Message (PSTM), sets a response timer, and passes the transaction request as a 0200 message to the Router module.
3–4	The Device Handler/Router/Authorization process sends the 0200 message to the Transaction Context Manager process.
5–6	The Transaction Context Manager process formats a 0200 message for a purchase transaction and returns it to the Device Handler/Router/Authorization process.
6a–6d	The Router module locates a Card Prefix File (CPF) record for the card involved in the transaction and determines AST routing. The Router module then passes the message to the Authorization module. From the CPF, the Authorization module locates an Institution Definition File (IDF) record for the institution that issued the card. The IDF record identifies how the transaction request is to be processed. In this case, the transaction request is to be processed using authorization level 2. The Authorization module approves the request, updates the database files appropriately, logs the purchase request transaction response to the POS Transaction Log File (PTLF), and formats a 0210 response message.
7–8	The Device Handler/Router/Authorization process sends the 0210 message to the Transaction Context Manager process.

Steps	Processing
9–10	The Transaction Context Manager process formats a 0200 request message for a mobile top-up using funds transaction and passes it to the Stock Manager process configured in the Mobile Operator File (MOF) and Split Transaction Routing File (STRF).
11–12	The Stock Manager process declines the transaction request, logs the mobile top-up using funds transaction response to the BASE24-inventory Transaction Log File (NTLF), and formats a 0210 response message.
13–14	The Transaction Context Manager process formats a 0420 reversal message for the purchase transaction and sends it to the Device Handler/Router/Authorization process.
14a–14b	The Router module passes the 0420 message to the Authorization module. The Authorization module logs the reversal to the PTLF, updates the database files appropriately, then drops the message.
15–16	The Transaction Context Manager process logs the 0210 message to the PTLF as a mobile top-up with funds transaction and sends the message to the Device Handler/Router/Authorization process.
16a–16c	The Router module receives the 0210 message and passes it to the Device Handler module. The Authorization module is not involved in processing at this point, so it does not log a 0210 message to the PTLF.
17–18	The Device Handler module reformats the response message into native-mode format, deletes the response timer, and sends the response to the POS device.

BASE24-inventory Functional Overview

BASE24-inventory, running on an HP NonStop platform, provides the software infrastructure enabling customers to recharge vouchers through ATM and POS devices.

It enables customers to stock inventory for their mobile phone operators and to interface with the financial network to receive and respond to authorization requests. It houses the inventory database that contains the stock files, transaction log files and configuration files.

Mobile voucher products that are sorted and sold using this system include Mobile Vouchers for specific amounts.

BASE24-inventory Network Environment

The BASE24-inventory network environment includes four XPNET Satellite processes and one HP NonStop program, which are described below with a diagram illustrating their interaction.

XPNET Satellite Processes

The BASE24-inventory network environment operates with the following XPNET satellite processes:

- The Stock Manager process authorizes and logs transactions according to the stock type's pre-defined parameters configured in the BASE24-inventory Stock Configuration File (NSCF). There is at least one Stock Manager process for each stock type supported in the network.
- The Settlement process cuts over the stock types to the next business day.
- The Refresh process refreshes the stock files (i.e., adds new stock) using the input files from mobile phone operators. This is a stand-alone process that is not bound into the standard BASE24 Refresh process.
- The Housekeeping process monitors the stock levels in the stock files based on parameters defined in the BASE24-inventory Stock Configuration File (NSCF) for each stock type supported by the network.


HP NonStop Enform Function

The BASE24-inventory product uses the HP NonStop Enform program to provide the following information:

- The BASE24-inventory Transaction Log File (NTLF) Extract Enform provides an extract of the transaction log file after the logical network cutover time. The extracted file is then transferred to the PC for generating transaction and settlement reports.
- The BASE24-inventory Stock Item File (NSIF) Report Enform generates reports on the status of the stock items in the NSIF.
- The BASE24-inventory NTLF Report Enform generates a report on the transactions contained in the NTLF.

BASE24-inventory Database Relationship

The diagram below illustrates the relationship between the BASE24-inventory processes and its files.

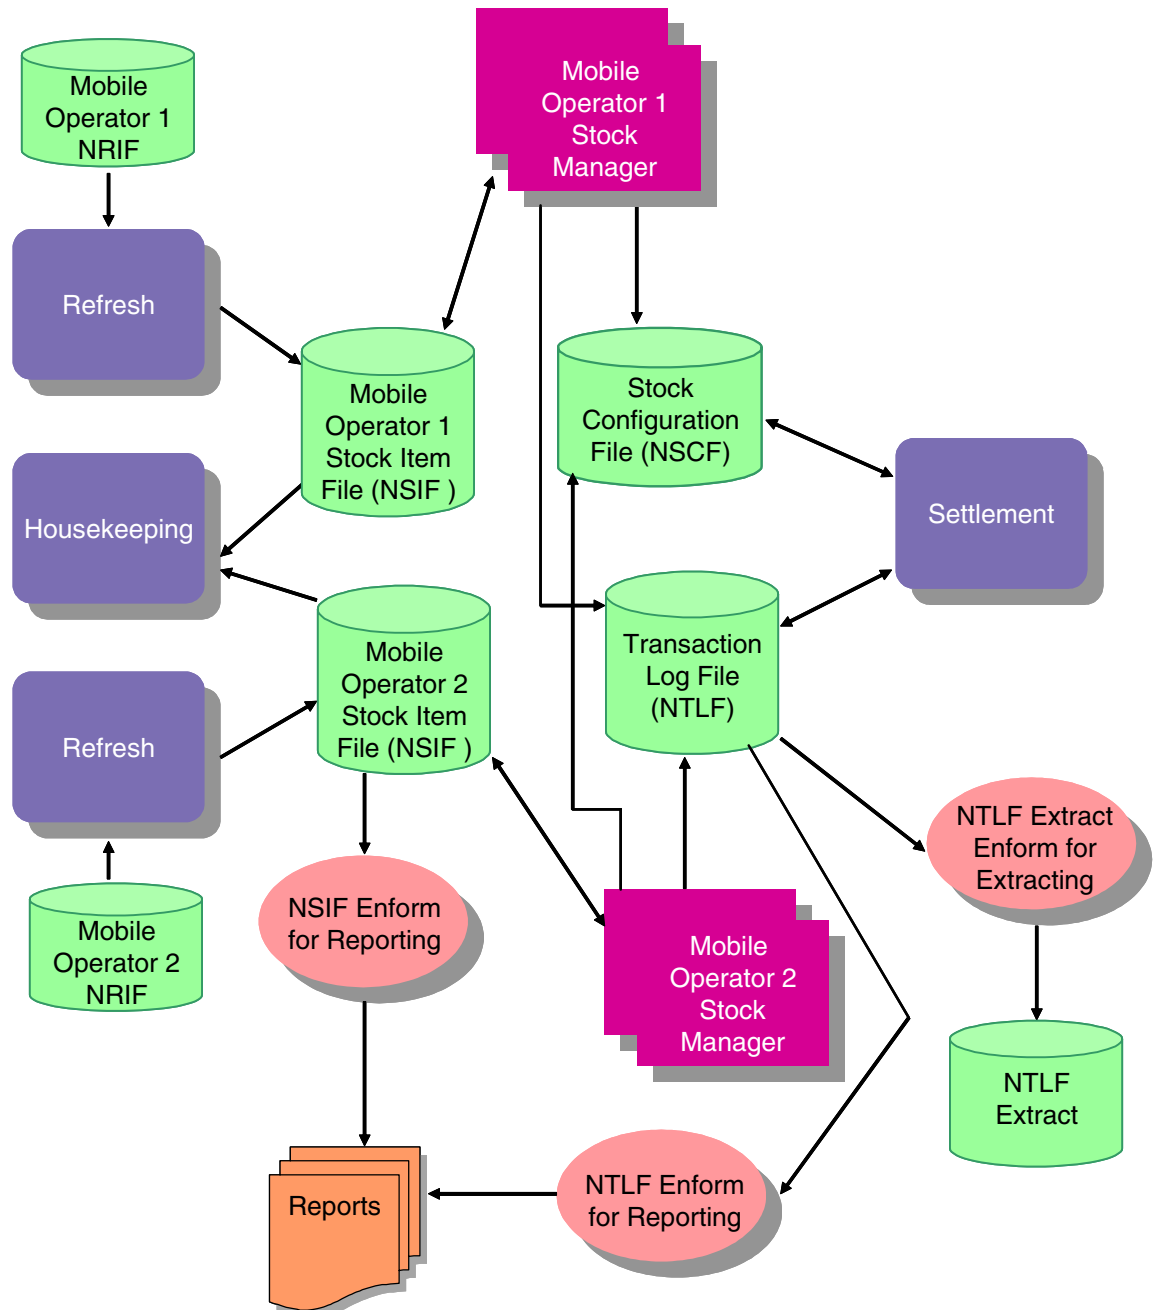

ACI Worldwide, Inc.

2: Configuration

This section describes the aspects of the BASE24-inventory configuration.

The BASE24-atm or BASE24-pos mobile top-up acquiring product is required for acquiring mobile top-up transactions for processing by BASE24-inventory. Refer to the corresponding ATM or POS device manual for configuring mobile top-up prior to configuring BASE24-inventory.

LCONF Assigns and Params

This following are assigns and params that must exist in the Logical Network Configuration File (LCONF) to support the BASE24-inventory product. For more information on assigns and params for the BASE24-inventory product, see the *BASE24 Logical Network Configuration File Manual*.

Assigns

INV-EXP-STOCK-CLEANUP-REP-LOC

INV-GROUP-STOCK-DELETE-REP-LOC

INV-REFR-RPT

INV-SOLD-STOCK-CLEANUP-REP-LOC

NRIF

NSCF

NTLF

Params

INV-LN-CUTOVER

INV-LNET-CUTOVER-SERVICE

INV-SETL-ATM-CUT-SERVICE

INV-SETL-LN-CUTOVER-LEAD-TIME

INV-SETL-NTLF-EXT-TO-ALLOCATE

INV-SETL-NTLF-FILE-RETENTION

INV-SETL-POS-CUT-SERVICE

INV-SMGR-STOCK-TYPE

BASE24-inventory Stock Configuration File (NSCF)

The BASE24-inventory Stock Configuration File (NSCF) contains one record for each stock type maintained by the BASE24-inventory system. The NSCF defines details of the stock type.

Screen 1

Stock Configuration File screen 1 is shown below, followed by a description of its fields.

BASE24-INV
STOCK CONFIGURATION
LLLL
YY/MM/DD
HH:MM
01 OF 03

STOCK TYPE:

DESC:

STOCK FILE LOCATION:

SERVICE:

CURRENCY CODE: (**)

CURRENT BUSINESS DATE: YYMMDD

CUTOVER TIME: 00:00

LOG ROUTING CODE:

HOST INTERFACE CONTROL

AUTH LEVEL: ()

PRIMARY DPC:

COMPLETION REQUIRED: (Y/N)

SYMBOLIC NAME:

STOCK ISSUER

ISSUER ID:

NAME:

***** BASE24 *****

FILE DESTINATION:

NEW LOGICAL NETWORK ID:

F12-HELP

STOCK TYPE — Four-character value that uniquely identifies the type of stock (e.g., TM01 for a mobile recharge voucher, TP01 for a phone card recharge voucher). This is the key field. All other fields are functional attributes of the stock type.

Field Length:	4 alphanumeric characters
Required Field:	Yes
Default Value:	No default value
Data Name:	NSCF.PRIKEY.STOCK-TYPE

STOCK DESCRIPTION — The user-defined description of the stock type. This field is for informational use only.

Field Length: 1–24 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: NSCF.STOCK-TYPE-DESC

STOCK FILE LOCATION — The HP NonStop location of the BASE24-inventory Stock Item File (NSIF). There will be one unique NSIF for each stock type.

Field Length: 1–16 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: NSCF.STOCK-FILE-LOC

SERVICE — The user-defined name that identifies this stock type as a service. This name is used in service-based routing. XPNET routes all transactions for the stock type to the appropriate Stock Manager process that is set up with this service name. For example, mobile recharge voucher is a service and the corresponding Stock Manager process is a service provider that performs the specific service of authorizing a mobile recharge voucher transaction.

Field Length: 1–16 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: NSCF.SERVICE

CURRENCY CODE — The currency code of the stock type.

Field Length: 3 numeric characters
Required Field: No
Default Value: 000
Data Name: NSCF.CURRENCY-CDE

CURRENT BUSINESS DATE — The current processing date for this stock type. At cutover time, the Settlement process increments this by one to the next calendar day. It always follows a seven-day-per-week schedule.

Field Length: 6 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: NSCF.CURRENT-BUS-DATE

CUTOVER TIME — The time at which the Settlement process cuts the stock type over to the next business date. It must be at least 30 minutes prior to the scheduled logical network cutover time. This field is represented in HH:MM format (based on a 24-hour clock from 0000 to 2359).

Field Length: 4 numeric characters
Required Field: No
Default Value: 00:00
Data Name: NSCF.CUTOVER-TIME

AUTH LEVEL — Determines the amount of participation BASE24-inventory has in processing a mobile top-up transaction. Valid values are as follows.

- 1 = Online. Authorize transactions on the host only. If the host is offline, deny the transaction (not supported by BASE24-inventory).
- 2 = Offline. Authorize transactions on BASE24-inventory only.
- 3 = Online/Offline. Authorize transactions on the host if the host is online. If the host is offline, authorize transactions on BASE24-inventory and forward completions to the host when the host is online (not supported by BASE24-inventory).

Field Length: 1 numeric character
Required Field: No
Default Value: 2
Data Name: NSCF.AUTH-LVL

PRIMARY DPC — A number identifying the host system for authorization routing. This field is reserved for future use.

Field Length: 4 numeric characters
Required Field: No
Default Value: No default value
Data Name: NSCF.PRIMARY-DPC

SYMBOLIC NAME — The symbolic name of the Host Interface process used for the host system identified in the Primary DPC field. This field is reserved for future use.

Field Length: 16 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: NSCF.HOST-SYMBOLIC-NAME

COMPLETION REQUIRED — A code indicating whether the stock type requires BASE24-inventory to transmit completion messages to the host. This field is reserved for future use. Valid values are as follows:

Y = Yes, transmit completion messages to the host.
N = No, do not transmit completion messages to the host.

Field Length: 1 alphabetic character
Required Field: No
Default Value: No default value
Data Name: NSCF.COMPL-REQ

ISSUER ID — The stock issuer identification. Issuer ID will restrict user access to the BASE24-inventory screens.

Field Length: 4 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: NSCF.ISSUER-FIID

ISSUER NAME — The description associated with the value in the ISSUER ID field. This field is for information only.

Field Length: 22 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: NSCF.ISSUER-NAME

Screen 2

Stock Configuration File screen 2 is shown below, followed by a description of its fields.

```

BASE24-INV  STOCK CONFIGURATION  LLLL  YY/MM/DD  HH:MM  02 OF 03

STOCK TYPE:          DESC:
TIME OF DAY: HH:MM (HH:MM)  DAY OF WEEK:  (FRI)

MONITOR STOCK LEVEL DAILY?:  (Y/N)
STOCK DENOMINATION
   1:      2:      3:      4:      5:
   6:      7:      8:      9:     10:
  11:     12:     13:     14:     15:
  16:     17:     18:     19:     20:
THRESHOLD LEVEL
   1:      2:      3:      4:      5:
   6:      7:      8:      9:     10:
  11:     12:     13:     14:     15:
  16:     17:     18:     19:     20:
                        RE-NOTIFY AFTER:  (DAYS)
      DELETE SOLD STOCK PRIOR TO:  (DAYS)
DELETE UNSOLD STOCK DUE TO EXPIRE IN:  (DAYS)

***** BASE24 *****
                        FILE DESTINATION:  NEW LOGICAL NETWORK ID:
                        F12-HELP

```

TIME OF DAY — The time of day (in HH:MM format, based on a 24-hour clock from 00:00 to 23:59) when the BASE24-inventory Housekeeping process begins its clean-up functions.

Field Length: 4 characters
 Required Field: Yes
 Default Value: 00:00
 Data Name: NSCF.TIME-OF-DAY

DAY OF WEEK — A code indicating the day of the week the Housekeeping process begins its clean-up functions. A description of the day of the week entry is displayed to the right of the DAY OF WEEK field. Valid values are as follows:

- 1 = Sunday
- 2 = Monday
- 3 = Tuesday
- 4 = Wednesday

5 = Thursday
6 = Friday
7 = Saturday

Field Length: 1 character
Required Field: No
Default Value: 0
Data Name: NSCF.T-DAY-OF-WEEK

MONITOR STOCK LEVEL DAILY — Indicates whether or not the Housekeeping process monitors the stock level on a daily basis. Valid values are as follows:

Y = Yes, the stock level is monitored daily.
N = No, the stock level is not monitored daily. It is monitored on the day of the week specified in the DAY OF WEEK field.

Field Length: 1 alphabetic character
Required Field: No
Default Value: No default value
Data Name: NSCF.MON-STK-LVL-DAILY

STOCK DENOMINATION — The stock denomination supported for this stock type. Up to 20 denominations can be set for monitoring against up to 20 threshold levels. The value of this field is in cents. A denomination set to zero will not be validated.

Field length: 4 numeric characters
Occurs: 20 times
Required field: No
Default value: 0
Data name: NSCF.STOCK-DENOM

THRESHOLD LEVEL — The threshold level for each stock denomination supported for this stock type in number of stock items. If the available stock for a denomination falls below the corresponding threshold level, an event message is logged by the Housekeeping process.

Field length: 4 numeric characters
Occurs: 20 times
Required field: No
Default value: 0
Data Name: NSCF.THRESHOLD-LEVEL

RE-NOTIFY AFTER — The number of days before a second event message is logged by the Housekeeping process to signal a threshold level violation. Valid values are 0–999.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: 0
Data Name: NSCF.RE-NOTIFY

DELETE SOLD STOCK PRIOR TO — The number of days prior to the current calendar day which is used as the cut-off for deleting sold stock. Stock records sold before the cut-off date will be deleted by the Housekeeping process. This functionality is automatically invoked on the day specified in the DAY OF WEEK field. Valid values are 0–999.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: 0
Data Name: NSCF.DEL-SOLD-STK

DELETE UNSOLD STOCK DUE TO EXPIRE IN — The number of days from the current calendar day which is used as the cut-off for deleting unsold stock due to expire. Unsold stock records that have a record expiration date falling before the cut-off date will be deleted by the Housekeeping process. This functionality is automatically invoked on the day specified in the DAY OF WEEK field. Valid values are 0–999.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: 0
Data Name: NSCF.DEL-UNSOLD-STK

Screen 3

Stock Configuration File screen 3 is shown below, followed by a description of its fields.

BASE24-INV

STOCK CONFIGURATION

LLLL

YY/MM/DD

HH:MM

03 OF 03

STOCK TYPE:

DESC:

CUSTOMER MESSAGE

1234567890123456789012345678901234567890

LINE 1:

LINE 2:

LINE 3:

LINE 4:

LINE 5:

***** BASE24 *****

FILE DESTINATION:

NEW LOGICAL NETWORK ID:

F12-HELP

CUSTOMER MESSAGE

The following fields configure the customer message that appears on receipts. Up to five LINE fields on this screen can be used to build the message.

LINE 1 — The first line of the customer message.

Field Length:	40 alphanumeric characters
Required Field:	No
Default Value:	spaces
Data Name:	NSCF.CUST-RCPT-MSG-LINE[1]

LINE 2 — The second line of the customer message.

Field Length: 40 alphanumeric characters
Required Field: No
Default Value: spaces
Data Name: NSCF.CUST-RCPT-MSG-LINE[2]

LINE 3 — The third line of the customer message.

Field Length: 40 alphanumeric characters
Required Field: No
Default Value: spaces
Data Name: NSCF.CUST-RCPT-MSG-LINE[3]

LINE 4 — The fourth line of the customer message.

Field Length: 40 alphanumeric characters
Required Field: No
Default Value: spaces
Data Name: NSCF.CUST-RCPT-MSG-LINE[4]

LINE 5 — The fifth line of the customer message.

Field Length: 40 alphanumeric characters
Required Field: No
Default Value: spaces
Data Name: NSCF.CUST-RCPT-MSG-LINE[5]

BASE24-inventory Transaction Log File (NTLF)

The BASE24-inventory Transaction Log File (NTLF) contains a record of every mobile top-up transaction (approved or denied) processed by BASE24-inventory during a single processing day.

The NTLF is used by the BASE24-inventory report Enform programs to produce their reports and can also be extracted daily to provide detailed transaction data for processing by a host.

Records are written to the NTLF sequentially and each NTLF record has three alternate keys which allow for perusal of the file through BASE24-inventory file maintenance functions.

The NTLF perusal function uses two types of screen formats—a summary format and a detail format. Summary screen formats display summary information for twelve NTLF records at one time. Detail screen formats display one NTLF record at a time with information specific to that record. You can peruse the NTLF information by card number, terminal logical network and terminal FIID, and by stock type and stock FIID, depending on the key entered.

A new NTLF is created by the Settlement process at logical network cutover. Once a new NTLF is created, the previous NTLF is closed and is available for reporting and extract processing.

This section describes the screens used to peruse transactions in the NTLF. It shows an illustration of each screen format and describes the information each screen format provides. The summary screens are shown first, for each alternate key (card number, terminal logical network and terminal FIID, and stock type and stock FIID), followed by the detail screen.

Alternate Keys

You can access NTLF records by using any of the following alternate keys:

- Card number
- Terminal logical network and terminal FIID
- Stock type and stock FIID

If any of these alternate keys are not configured, perusal by these keys is not allowed.

When entering a card number as the key, the NTLF Summary screen is displayed with the transaction code in the first column.

You can also enter the member number along with the card number. A member number allows more than one card to be issued for a single card number. When you enter a member number, the records associated with the card number and member number are retrieved. If you enter asterisks in this field, or if you leave it blank, the records retrieved are all of those associated with the card number regardless of member number.

When entering a terminal logical network and a terminal FIID as the key, the NTLF Summary screen is displayed with the card number in the first column.

When entering a stock type and stock FIID as the key, the NTLF Summary screen is displayed with the stock number in the first column.

NTLF Summary Screen Function Keys

Using function keys, you can perform the following tasks from the NTLF Summary screens.

- Display the first or last twelve records in the NTLF for the card number, terminal FIID and terminal logical network, or stock FIID and stock type selected for perusal.
- Page forward or backward through the NTLF displaying records for the card number, terminal logical network and terminal FIID, or stock FIID and stock type selected for perusal.
- Display the details of a particular record on the NTLF summary screen.

The function keys explained in the table below enable you to perform these tasks. The first column of information below shows the BASE24 keys. The second column describes the functions that can be accomplished with these function keys.

Key	Description
F1	First Page, Read Forward — Displays the first twelve transaction records in the NTLF for the card number, terminal FIID and terminal logical network, or stock type and stock FIID, and reads the NTLF from the first record to the last record. Refer to the “Paging Forward or Backward” topic later in this section for further explanation.
F2	Last Page, Read Backward — Displays the last twelve transaction records in the NTLF for the card number, terminal FIID and terminal logical network, or stock type and stock FIID, and reads the NTLF from the last record to the first record. Refer to the “Paging Forward or Backward” topic later in this section for further explanation.
F4	Detail Page — Displays the detail record for the selected record on the summary screen.
F8	Clear Screen — Clears all fields on the current screen except the date.
F9	Next Page — Reads the next twelve records in the NTLF and displays them on the summary screen. The direction in which the file is being read identifies the records read when the key is pressed. Refer to the “Paging Forward or Backward” topic later in this section for further explanation of how function keys work together when paging through the NTLF.
F11	Previous Page — Reads the previous twelve records in the NTLF and displays them on the summary screen. The direction in which the file is being read identifies the records read when this key is pressed. Refer to the topic “Paging Forward or Backward” later in this section for further explanation of how function keys work together when paging through the NTLF.

Paging Forward or Backward

Four function keys—F1, F2, F9, and F11—work together to control which records are read and displayed on the NTLF Summary screens. The F1 and F2 keys identify the direction in which the NTLF will be read, which in turn affects which records are read when the F9 and F11 keys are pressed.

Using an NTLF containing 60 records as an example and showing a sequence of function keystrokes, the following table illustrates how these function keys operate.

Function Key Pressed	NTLF Records Displayed	Function Key Pressed	NTLF Records Displayed
F1	1–12	F2	49–60
F9	13–24	F9	37–48
F9	25–36	F9	25–36
F11	13–24	F11	37–48
F9	25–36	F9	25–36

Once an NTLF Summary screen is displayed and you have chosen a specific NTLF record to display on one of the NTLF detail screen formats, you can read other detail records within the NTLF by perusing forward and backward through the file. However, the only detail records that can be accessed by perusing forward or backward in the file are those records that were displayed on the NTLF Summary screen.

For example, when records 13 through 24 are displayed on the NTLF Summary screen, you can choose to display detail record number 15. When detail record number 15 is displayed, you can peruse back to detail record number 13 or forward to detail record number 24. You cannot access detail records out of that range. To do so, you must return to the NTLF Summary screen and request a new range of records.

The NTLF Summary screen formats display summary information about the records requested. Twelve summary records are displayed on the NTLF Summary screen at one time. There are three NTLF Summary screen formats with the format displayed depending on the key requested. Refer to the previous topic “Alternate Keys” for additional information.

NTLF Summary Screens

The NTLF summary screen appears differently, depending on what key data (card number, terminal logical network and terminal FIID, and stock type and stock FIID) is used to retrieve the records.

Field descriptions for each screen follow the three screen examples.

Card Number as the Key

The NTLF Summary screen displayed when retrieving records using a card number as key data is shown below.

```

BASE24-INV  TRAN LOG LIST          LLLL          YY/MM/DD HH:MM 01 OF 04
CARD NUM:          MBR NUM: ***  DATE(YMMDD): YMMDD
  TERM LN:          TERM FIID:    SOURCE:          TERM ID:
STOCK TYPE:        STOCK FIID:    NUM:

TR STK  STOCK          STOCK          RESP TRAN  TRAN      TERM
CD TYP  NUMBER          VALUE          CODE DATE   TIME      FIID
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM

***** BASE24 *****
                                FILE DESTINATION:    NEW LOGICAL NETWORK ID:

```

Terminal Logical Network and Terminal FIID as the Key

The NTLF Summary screen displayed when retrieving records using the terminal logical network and terminal FIID as key data is shown below.

```
BASE24-INV  TRAN LOG LIST          LLLL      YY/MM/DD HH:MM 02 OF 04
CARD NUM:      MBR NUM: ***  DATE(YYMMDD): YYMMDD
TERM LN:      TERM FIID:      SOURCE:      TERM ID:
STOCK TYPE:    STOCK FIID:      NUM:

CARD          TR STK  STOCK          STOCK          RESP TRAN TRAN
NUMBER        CD TYP  NUMBER          VALUE          CODE DATE TIME
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM

***** BASE24 *****
FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F1-FIRST PAGE  F2-LAST PAGE  F4-DETAIL  F9-NEXT PAGE  F11-PREV PAGE  F12-HELP
```

Stock Type and Stock FIID as the Key

The NTLF Summary screen displayed when retrieving records using the stock type and stock FIID as key data is shown below, followed by a description of the fields for all three NTLF Summary Screen formats:

```

BASE24-INV  TRAN LOG LIST          LLLL      YY/MM/DD  HH:MM  03 OF 04
CARD NUM:           MBR NUM: ***  DATE(YYMMDD): YYMMDD
  TERM LN:           TERM FIID:      SOURCE:           TERM ID:
STOCK TYPE:         STOCK FIID:      NUM:

STOCK          TERM CARD          TR STOCK          RESP TRAN TRAN
NUMBER         FIID NUMBER        CD VALUE        CODE DATE TIME
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM
                                     MM/DD HH:MM

END OF FILE
***** BASE24 *****
FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F1-FIRST PAGE  F2-LAST PAGE  F4-DETAIL  F9-NEXT PAGE  F11-PREV PAGE  F12-HELP

```

CARD NUM — The card number of the card initiating the transactions selected for perusal.

Transactions may be selected by card number, by terminal, or by stock type. If a card number is entered in the CARD NUM field, the TERM ID, TERM LN, TERM FIID, STOCK TYPE, and STOCK FIID fields must be left blank.

Field Length:	19 numeric characters
Required Field:	Yes, if perusing records by cardholder
Default Value:	No default value
Data Name:	NTLF.HEAD.CRD.PAN.NUM

MBR NUM — The member number associated with the card number entered in the CARD NUM field. If this field is asterisk- or blank-filled, the records displayed are for all transactions for the card number entered in the CARD NUM field regardless of member number.

Field Length: 3 numeric characters
Required Field: No
Default Value: No default value
Data Name: NTLF.HEAD.CRD.MBR-NUM

DATE — The NTLF date used to select transactions for display. This field is displayed in YYMMDD format.

Field Length: 6 numeric characters
Required Field: Yes
Default Value: The current date
Data Name: Not applicable

TERM LN — The terminal logical network of the NTLF records for display. This is the logical network to which the terminal-owning network belongs. This field is used only when perusing NTLF records by terminal key data.

Field Length: 4 alphanumeric characters
Required Field: Yes, if perusing by terminal
Default Value: No default value
Data Name: NTLF.HEAD.TERM.LN

TERM FIID — The FIID of the terminal-owning financial institution. This field is used only when perusing NTLF records by terminal key data.

Field Length: 4 alphanumeric characters
Required Field: Yes, if perusing by terminal
Default Value: No default value
Data Name: NTLF.HEAD.TERM.FIID

SOURCE — The source from which the transaction originated. Valid values are as follows:

01 = ATM
02 = POS

Field Length: 2 numeric characters
Required Field: No
Default Value: No default value
Data Name: NTLF.HEAD.TERM.TERM-SOURCE

TERM ID — The terminal ID of the terminal whose NTLF records are being perused.

Transactions may be selected by card number, by terminal, or by stock type. If a terminal ID is entered in the TERM ID field, the CARD NUM, STOCK TYPE, and STOCK FIID fields must be left blank.

Field Length: 1–17 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: NTLF.HEAD.TERM.TERM-ID

STOCK TYPE — The stock type of the NTLF records being perused.

Transactions may be selected by card number, by terminal, or by stock type. If a stock type is entered in the STOCK TYPE field, the CARD NUM, TERM LN, TERM FIID, and TERM ID fields must be left blank.

Field Length: 1–4 alphanumeric characters
Required Field: Yes, if perusing by stock
Default Value: No default value
Data Name: NTLF.HEAD.STOCK.STOCK-TYPE

STOCK FIID — The FIID of the stock type issuer. This field is used only when perusing NTLF records by stock type key data.

Field Length: 4 alphanumeric characters
Required Field: Yes, if perusing by stock
Default Value: No default value
Data Name: NTLF.HEAD.STOCK.ISSUER-FIID

NUM — The unique stock number within the stock type.

Field Length: 16 numeric characters
Required Field: No
Default Value: No default value
Data Name: NTLF.HEAD.STOCK.STOCK-NUM

TR CD — The transaction type associated with this record. The actual numeric transaction code is displayed. For a list of valid transaction codes and their definitions, refer to the ***BASE24-atm Transaction Processing Manual***.

Field Length: System protected
Data Name: NTLF.NSTM.PROC-CDE

STK TYP — The stock type for this transaction.

Field Length: System protected
Data Name: NTLF.HEAD.STOCK.STOCK-TYPE

STOCK NUMBER — The stock number of the stock purchased for this transaction.

Field Length: System protected
Data Name: NTLF.HEAD.STOCK.STOCK-NUM

RESP CODE — The response code assigned by the transaction authorizer.

Field Length: System protected
Data Name: NTLF.NSTM.RESP-CDE

STOCK VALUE — The requested transaction amount in whole and fractional currency units. Depending on the transaction, the amount may be followed by one of the following codes:

A = Adjustment
F = Forced post
R = Reversal
S = Suspect reversal
T = Administrative
X = Exception (This transaction could not be processed due to invalid data—overrides all other values)

Field Length: System protected
Data Name: NTLF.NSTM.AMT

TRAN DATE — The date when the transaction entered the BASE24 system. The format of the date, DD/MM or MM/DD, is controlled by the value of the DATE-DISPLAY-TYPE paramter in the Logical Network Configuration File (LCONF).

Field Length: System protected
Data Name: NTLF.NSTM.TRAN-DAT

TRAN TIME — The time (HH:MM) that the transaction entered the BASE24 system. The time displayed includes the time offset.

Field Length: System protected
Data Name: NTLF.NSTM.TRAN-TIM

TERM FIID — The FIID of the terminal-owning financial institution.

Field Length: System protected
Data Name: NTLF.HARD.TERM-FIID

NTLF Detail Screen Function Keys

Using function keys from the detail screens, you can perform the following tasks:

- Page backward and forward through the detail screens for the transactions previously displayed on the NTLF Summary screen.
- Return to the NTLF Summary screen previously displayed.

The function keys explained in the table below enable you to perform these tasks. The first column of information below shows the BASE24 keys. The second column describes the functions that can be accomplished with these function keys.

Key	Description
F5	Goto Summary Screen — Returns to the NTLF Summary screen that was previously displayed.
F6	Next Record — Reads the next record for the transactions on the NTLF Summary screen that was previously displayed. Pressing this key provides information for the next record for those transactions that were listed on the summary screen.
F7	Previous Record — Reads the previous record for the transactions on the NTLF Summary List that was previously displayed. Pressing this key provides information for the previous record for those transactions listed on the summary screen.

NTLF Detail Screen

The detail screen for the NTLF is shown below, followed by a description of its fields.

```

BASE24-INV   TRAN LOG LIST           LLLL       YY/MM/DD  HH:MM  04 OF 04
CARD NUM:                                MBR NUM: ***  DATE(YYMMDD):  YYMMDD
  TERM LN:          TERM FIID:          SOURCE:          TERM ID:
STOCK TYPE:        STOCK FIID:          NUM:

      STOCK NUMBER:                      STOCK TYPE:          ISSUER FIID:
      STOCK VALUE:                      TRAN CODE:
      SEQ NUM:                          TRAN DATE/TIME: YY/MM/DD HH:MM:SS
DELIVERY SEQ NUM:                      RESP CODE:

      CARD NUMBER:
      CURRENCY CODE:                    REVERSAL CODE:
ACQ POSTING DATE: YY/MM/DD            INV POSTING DATE: YY/MM/DD
                                      ISS SETTLEMENT DATE: YY/MM/DD

      TERM ID:                          SOURCE:              TERM FIID:
      TERM LOCATION:                    CITY:
      RETAILER ID:

NO MORE DETAIL INFORMATION IS AVAILABLE FOR THIS TRANSACTION.
***** BASE24 *****
      FILE DESTINATION:          NEW LOGICAL NETWORK ID:
F5-GOTO SUMMARY      F6-NXT REC  F7-PRV REC  F12-HELP

```

STOCK NUMBER — The stock number associated with this record.

Field Length: System protected
Data Name: NTLF.HEAD.STOCK.STOCK-NUM

STOCK TYPE — The stock type associated with this record.

Field Length: System protected
Data Name: NTLF.HEAD.STOCK.STOCK-TYPE

ISSUER FIID — The FIID of the card-issuing institution for the card used to initiate the transaction.

Field Length: System protected
Data Name: NTLF.NSTM.CRD-FIID

STOCK VALUE — The monetary value of the stock involved in the transaction. The display of the letter R following the stock value indicates a transaction reversal.

Field Length: System protected
Data Name: NTLF.NSTM.AMT

TRAN CODE — The transaction type associated with this record. The actual numeric transaction code is displayed. A description of the transaction code is displayed next to the transaction code. For a list of valid transaction codes and their definitions, refer to the *BASE24-atm Transaction Processing Manual*.

Field Length: System protected
Data Name: NTLF.NSTM.PROC-CDE

SEQ NUM — The sequence number assigned to the transaction by the BASE24-atm or BASE24-pos Device Handler process.

Field Length: System protected
Data Name: NTLF.NSTM.SEQ-NUM

TRAN DATE/TIME — The date (in YY/DD/MM format) and time (in HH:MM:SS format) when the transaction entered the BASE24 system.

Field Length: System protected
Data Names: NTLF.NSTF.TRAN-DAT
NTLF.NSTF.TRAN-TIM

DELIVERY SEQ NUM — The sequence number assigned to the transaction by the delivery system.

Field Length: System protected
Data Name: NTLF.DELIVER-SEQ-NUM

RESP CODE — The response code assigned by the transaction authorizer. A description of the response code follows the actual response code.

Field Length: System protected
Data Name: NTLF.NSTM.RESP-CDE

CARD NUMBER — The card number of the card initiating the transaction.

Field Length: System protected
Data Name: NTLF.NSTM.CRD-NUM

CURRENCY CODE — The currency code for the transaction.

Field Length: System protected
Data Name: NTLF.NSTM.TRAN-CRNCY-CDE

REVERSAL CODE — In a transaction reversal, this code indicates the type of reversal and list a reason for the reversal.

Field Length: System protected
Data Name: NTLF.NSTM.RVSL-CDE

ACQ POSTING DATE — The date (in YY/MM/DD format) on which the transaction is settled by the acquirer's interchange, if an interchange originated the transaction. If an interchange did not originate the transaction, this field is set to zeroes.

Field Length: System protected
Data Name: NTLF.NSTM.ACQ-ICHG-SETL-DAT

INV POSTING DATE — The date on which the BASE24-inventory system posted the transaction in YY/MM/DD format.

Field Length: System protected
Data Name: NTLF.NSTM.POST-DAT

ISS SETTLEMENT DATE — The date (in YY/MM/DD format) the transaction is settled by the issuer's interchange if an interchange authorized the transaction. If an interchange did not authorize the transaction, this field is set to zeroes.

Field Length: System protected
Data Name: NTLF.NSTM.ISS-ICHG-SETL-DAT

TERM ID — The terminal ID of the terminal where the transaction originated.

Field Length: System protected
Data Name: NTLF.NSTM.TERM-ID

SOURCE — The source from which the transaction originated.

Field Length: System protected
Data Name: NTLF.NSTM.TERM-SOURCE

TERM FIID — The FIID of the terminal-owning financial institution.

Field Length: System protected
Data Name: NTLF.NSTM.TERM-ID

TERM LOCATION — The location of the terminal where the transaction originated.

Field Length: System protected
Data Name: NTLF.NSTM.TERM-LOCATION.TERM-OWNER-NAME

CITY — The city in which the originating terminal is located.

Field Length: System protected
Data Name: NTLF.NSTM.TERM-LOCATION.TERM-CITY

RETAILER ID — The identification code of the retailer at which the transaction originated.

Field Length: System protected
Data Name: NTLF.NSTM.RETL-ID

Mobile Operator File (MOF)

The Mobile Operator File (MOF) includes five screens with fields related to transaction routing. The screens in the MOF enable transaction routing, Top-Up configuration, and Top-Up business rules.

The MOF is a required file for BASE24-inventory and contains one record for each stock type supported. It defines details of the mobile phone operators and the services provided.

See the *BASE24 Base Files Maintenance Manual* for MOF screens and field descriptions.

Mobile Operator File Configuration Considerations

The Mobile Operator File is configured for ATM and POS environments.

ATM Environments

To relate the stock codes in BASE24-inventory with entries in the MOF, it is necessary to set the MOF operator ID with the stock codes defined for the device handler, detailed in the CARRIER-VT*identifier* param in the Logical Network Configuration File (LCONF).

Refer to the appropriate device support manual (*BASE24-atm Diebold 10XX Device Support Manual* or *BASE24-atm NCR 5XXX Device Support Manual*) for configuring BASE24-atm mobile top-up.

BASE24-inventory requires BASE24-atm mobile top-up using the the definitions-based model.

POS Environments

The SPDH message contains the Top-Up card details. The prefix of this card is used to look up the MOF record by using the operator IIN (e.g., Top-Up card number 8944302222222222, where the IIN is 894430).

Refer to the *BASE24-pos Standard POS Device Configuration Manual* for details on configuring BASE24-pos mobile top-up.

ACI Worldwide, Inc.

3: Operations Guidelines

This section lists reports produced by the BASE24-inventory processes plus extracts and refreshes that are used by the BASE24-inventory database. This configuration needs to be customized for each customer's environment.

Refresh Process

The Refresh process is designed to partially refresh the BASE24-inventory Stock Item File (NSIF). It takes the stock file that has been supplied by the mobile phone operator in the BASE24-inventory Refresh Input Format (NRIF) and adds all of the new stock records to the NSIF. There is no impact to the transaction processing while the refresh is running.

The BASE24-inventory Refresh process is a stand-alone XPNET satellite process controlled by the BASE24 network (it is not included in the standard BASE24 Refresh process). It can be accessed via NCPCOM at any time of the day. One BASE24-inventory Refresh process should be defined for each stock type supported by the network.

The Refresh process uses the Logical Network Configuration File (LCONF) to determine all input and output file locations with the exception of the NSIF. The NSIF location is specified in the BASE24-inventory Stock Configuration File (NSCF).

The Refresh file is an ENSCRIBE type E file with a record size of 80. The records in the ENSCRIBE type E file must be in the NRIF format. The NRIF assign in the LCONF refers to the location of this file. Please refer to the ***BASE24 Logical Network Configuration File Manual*** for more details on required assigns.

A report is produced, indicating whether process execution has completed successfully. The report location is defined in the LCONF assign INV-REFR-RPT. If the attempt to add a record has failed due to records already existing, the record detail is output to a report and the process continues with the next record. Check the report for the number of records read, added, and skipped.

The BASE24-inventory Refresh process can be initiated via the NCPCOM or the BASE24 Refresh screen. Refer to the ***BASE24 Refresh and Extract Manual*** for details on initiating the process.

Sample Refresh Report

The following is a sample of a BASE24-inventory Refresh report.

BASE24 INVENTORY REFRESH REPORT FOR PREPAID MOBILE - TM01		PAGE	001
		DATE	JUN 26, 2005
		TIME	17:03:57.14
STOCK SERIAL NUMBER	REASON TO SKIP RECORD		
-----	-----		
999999999888	RECORD ALREADY EXISTS		
999999999888	RECORD ALREADY EXISTS		
999999999888	RECORD ALREADY EXISTS		
NUMBER OF STOCK RECORDS READ		:	00000011
NUMBER OF STOCK RECORDS ADDED		:	00000008
NUMBER OF STOCK RECORDS SKIPPED		:	00000003
*** NSIF REFRESH COMPLETE ***			

Duplicate stock records are not added to the NSIF. If the 'Record Skip' count has a non-zero value, it means the records are already available in NSIF. In this case, it is possible that the batch input file is refreshed more than once by oversight.

Refresh File Format

The BASE24-inventory Refresh Input Format (NRIF) is the standard format BASE24-inventory uses to refresh the BASE24-inventory Stock Item File (NSIF). The following is a description of the NRIF and its fields.

Position	Level	Field Name and Description	Data Type
1–2	02	REC-INDICATOR A code identifying the type of record. Valid values are as follows: FH = HEADER record FD = STOCK record FT = TRAILER record	PIC X(2)
3–132	02	REC The record description.	PIC X(130)
3–132	02	HEADER This field contains one HEADER record at the beginning of the file.	REDEFINES REC
3–6	04	STOCK-TYPE The type of refresh to be processed.	PIC X(4)
7	04	ENCRYPT-FLAG A code indicating whether or not BASE24-inventory should perform encryption on the activation number. Valid values are as follows: 0 = Encryption is not required. 1 = BASE24-inventory requires the activation number be encrypted.	PIC 9(1)

8–15	04	CREATE-DATE	PIC 9(8)
The file creation date as a value in YYYYMMDD format.			
16–21	04	CREATE-TIME	PIC 9(6)
The file creation time as a value in HHMMSS format.			
22–23	04	REL-NUM	PIC 9(2)
The release number of the software.			
24–132	04	FILLER	PIC X(109)
3–132	02	STOCK	REDEFINES REC
There is one STOCK record for each stock number. This information will be used to build the NSIF.			
3–18	04	STOCK-NUM	PIC X(16)
The numeric stock number.			
19–34	04	ACTIVATE-NUM	PIC X(16)
The activation number. BASE24-inventory will encrypt this before writing it to the NSIF if the ENCRYPT-FLAG is set to a value of 1.			
35–46	04	STOCK-VALUE	PIC 9(12)
The value of the stock in cents.			
47–54	04	STOCK-EXP-DATE	PIC 9(8)
The stock expiration date in YYYYMMDD format.			
55–62	04	REC-EXP-DATE	PIC 9(8)
The record expiration date in YYYYMMDD format.			

63-132	04	FILLER	PIC X(70)
--------	----	--------	-----------

3-132	02	TRAILER	REDEFINES REC
-------	----	---------	---------------

There is one TRAILER record at the end of the file.

3-9	04	NUM-REC	PIC 9(7)
-----	----	---------	----------

The number of STOCK records.

10-132	04	FILLER	PIC X(123)
--------	----	--------	------------

Reports Generation

BASE24-inventory uses the HP Enform program to generate reports for Settlement and Transaction, Stock Summary, and Ad-hoc Reports for Troubleshooting. The following is a description of BASE24-inventory report generation.

Refer to the documentation provided with the code for details on running the Enform report. On the HP NonStop, details can be found at `\aci.$<vol>.NV60RPTS.AAREADME`.

Settlement and Transaction Reports

The NTLF has to be extracted daily using an HP Enform program after the logical network cutover time. Daily settlement and transaction reports are generated by the bank from the database.

Stock Summary Reports

Stock summary reports can be produced at any time of the day. These reports will detail the status of the BASE24-inventory Stock Item File (NSIF).

Sample Report

A sample stock summary report for the `\<system>.<vol>.NV60RPTS.COUNTSTK` Enform report is shown below.

Summary of NSIF			Date: 17/11/2005
Stock Type	Stock Value	Stock Status	Stock Count
-----	-----	-----	-----
JMS3	1000	0	4
		1	2
	2000	0	5
	5000	0	4
		1	1
Stock status: 0 - unsold			
1 - sold			
2 - activated			
3 - normal reversal			
4 - doubtful reversal			

A sample stock summary report for the \<system>.<volume>.NV60RPTS.ENFSTOCK Enform report is shown below.

Summary of NSIF		Date 17/11/2005
STOCK-TYPE	STOCK-VALUE	Stock Sold
-----	-----	-----
JMS3	1000	2
	5000	1
JMS3	1000	4
	2000	5
	5000	4

Ad-hoc Reports for Troubleshooting

The NTLF Transaction List will detail the transactions in the NTLF report to assist in troubleshooting problems.

Ad-hoc reports can be produced at any time of the day.

Sample Report

A sample report for the \<system>.<volume>.NV60RPTS.ENFNTLFL Enform report is shown below.

This report lists all of the NTLF transactions.

trn dt	trn tm	pan	term id	Seq#	acq dt	msg	rsp	ty	stk#	\$
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
051117	13475100	3333333907600	SPDH07	0000	000000	0210	074	JM	20.	
051117	13485100	3333333907600	SPDH07	0000	000000	0210	074	JM	20.	
051117	14071100	33333335551212	SPDH07	0000	000000	0210	074	JM	10.	
051117	15550964	202010990000000	S1AN50LI	1427	000000	0210	072	JJ	10.	
051117	15555274	202010990000000	S1AN50LI	1428	000000	0210	072	JE	10.	
051117	15571682	202010990000000	S1AN50LI	1429	000000	0210	000	JM	0000000000014210	10.
051117	16191400	3333333333333333	S1AN02	0000	000000	0210	000	JM	0000000000014211	10.
051117	16220700	3333333333338888	SPDH02	0000	000000	0210	000	JM	0000000000014221	50.

Housekeeping

The BASE24-inventory Housekeeping process is an XPNET satellite process controlled by the BASE24 network. The Housekeeping functionality consists of the following:

- Housekeeping monitoring reads the BASE24-inventory Stock Item Files (NSIF) to display alert messages to EMSPERUSE when stocks are running low.
- Housekeeping deletion deletes records from the NSIF using a timer.
- Housekeeping deletion deletes records from the NSIF using an NCPCOM command.

Housekeeping Monitoring Process

The Housekeeping Monitoring process maintains the NSIF files. The process periodically checks the level of available stock for each denomination against a threshold and logs a warning message to the EMSPERUS if the volume falls below the threshold. The program also displays stock availability information messages to the EMSPERUS. This process checks all denominations for all stock types. The threshold limit for each denomination is provided by the customer via the BASE24-inventory Stock Configuration File (NSCF) screen 2. See section 2 for a detailed description of NSCF screen 2 and its fields.

This process is controlled by a timer and is defined on NSCF screen 2 for each stock type supported in the network. When the timer has expired, this process reads the records from the NSIF files and displays informational or warning messages on all stock types.

Stock Messages

The sample EMSPERUS output below details the monitoring of stock messages from the Housekeeping process. This information is displayed when the timer expires or if either of the following NCPCOM commands are delivered to the process:

Syntax

DELIVER PROCESS *housekeeping-process*, "STATUS, THRESHOLD"

housekeeping-process — The symbolic name assigned to the Housekeeping process in the XPNET node.

Syntax

DELIVER *housekeeping-process*, "STATUS *stock-type*"

stock-type — Identifies the four-character stock type.

```
00-09-12;10:52:00.011 \ACIP.$THKP      ACI.GENSIM.1000      80
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Starting Housekeeping Threshold Checking for TM01
00-09-12;10:52:00.080 \ACIP.$THKP      ACI.GENSIM.1000      120
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Stock Type: TM01; Den: $25.00; Available: 11; Sold: 5; Threshold: 5
00-09-12;10:52:00.092 \ACIP.$THKP      ACI.GENSIM.1000      120
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Stock Type: TM01; Den: $60.00; Available: 10; Sold: 5; Threshold: 12
00-09-12;10:52:00.103 \ACIP.$THKP      ACI.GENSIM.1000      121
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Warning, Stock Low! Type: TM01; Den: $60.00; Available: 10;
                        Threshold: 12
00-09-12;10:52:00.113 \ACIP.$THKP      ACI.GENSIM.1000      120
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Stock Type: TM01; Den: $100.00; Available: 10; Sold: 5; Threshold: 12
00-09-12;10:52:00.129 \ACIP.$THKP      ACI.GENSIM.1000      121
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Warning, Stock Low! Type: TM01; Den: $50.00; Available: 10;
                        Threshold: 12
00-09-12;10:52:00.141 \ACIP.$THKP      ACI.GENSIM.1000      82
                        FROM: P1A^NVHKP      RE: P1A^NVHKP
                        Housekeeping Threshold Checking for TM01 Complete
```

Housekeeping Deletion Using a Timer

The Housekeeping Deletion process maintains the NSIF files by deleting the sold and expired stock records. The process is configured via NSCF screen 2. See Section 2 for a detailed description of NSCF screen 2 and its fields. The process is controlled by a timer which is defined on NSCF screen 2. When the timer has expired, this process will read the records in the NSIF files and delete expired and sold records.

Timer Deletion Messages

The sample EMSPERUS output shown below details the deletion of stock messages from the Housekeeping process when the timer expires.

```

06-03-10;13:40:00.003 \K9.$BB7HK      ACI.SKEL-U.1000      40
      FROM: P1A^HKP      RE: P1A^HKP
      Starting Housekeeping Threshold Checking for JEN2
06-03-10;13:40:00.045 \K9.$BB7HK      ACI.SKEL-U.1000      70
      FROM: P1A^HKP      RE: P1A^HKP
      Clean up of NSIF $B24NT1.TES7JEN2.NSIF      is about to
      take place...
06-03-10;13:40:00.597 \K9.$BB7HK      ACI.SKEL-U.1000      430
      FROM: P1A^HKP      RE: P1A^HKP
      ----- Sold Stock Clean Up has completed -----
06-03-10;13:40:00.598 \K9.$BB7HK      ACI.SKEL-U.1000      431
      FROM: P1A^HKP      RE: P1A^HKP
      For Stock Type JEN2
06-03-10;13:40:00.600 \K9.$BB7HK      ACI.SKEL-U.1000      432
      FROM: P1A^HKP      RE: P1A^HKP
      Number of 10.00      stocks deleted: 000000
06-03-10;13:40:00.602 \K9.$BB7HK      ACI.SKEL-U.1000      433
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 0.00
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      432
      FROM: P1A^HKP      RE: P1A^HKP
      Number of 20.00      stocks deleted: 000000
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      433
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 0.00
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      432
      FROM: P1A^HKP      RE: P1A^HKP
      Number of 50.00      stocks deleted: 000000
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      433
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 0.00
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      436
      FROM: P1A^HKP      RE: P1A^HKP
      Total Number of sold stocks deleted: 00000000
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      437
      FROM: P1A^HKP      RE: P1A^HKP
      Combine value of stocks deleted: 0.00
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      438
      FROM: P1A^HKP      RE: P1A^HKP
      ***** Please check spooler for detail report *****
06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      440
      FROM: P1A^HKP      RE: P1A^HKP
      ----- Expiring Unsold Stock Clean Up has completed -----

```

Sample output, continued:

```

06-03-10;13:40:00.647 \K9.$BB7HK      ACI.SKEL-U.1000      441
      FROM: P1A^HKP      RE: P1A^HKP
      For Stock Type JEN2
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      442
      FROM: P1A^HKP      RE: P1A^HKP
      Number of 10.00      stocks deleted: 000005
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      443
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 50.00
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      442
      FROM: P1A^HKP      RE: P1A^HKP
      Number of 20.00      stocks deleted: 000005
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      443
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 100.00
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      443
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 100.00
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      442
      FROM: P1A^HKP      RE: P1A^HKP
      Number of 50.00      stocks deleted: 000005
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      443
      FROM: P1A^HKP      RE: P1A^HKP
      Value of above stock deleted: 250.00
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      446
      FROM: P1A^HKP      RE: P1A^HKP
      Total Number of expiring stocks deleted: 00000015
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      447
      FROM: P1A^HKP      RE: P1A^HKP
      Combine value of stocks deleted: 400.00
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      448
      FROM: P1A^HKP      RE: P1A^HKP
      ***** Please check spooler for detail report *****
06-03-10;13:40:00.649 \K9.$BB7HK      ACI.SKEL-U.1000      80
      FROM: P1A^HKP      RE: P1A^HKP
      Stock Type: JEN2; Den: 10.00      ; Available: 0; Sold: 0;
      Threshold: 5
06-03-10;13:40:00.683 \K9.$BB7HK      ACI.SKEL-U.1000      81
      FROM: P1A^HKP      RE: P1A^HKP
      Warning, Stock Low! Type: JEN2; Den: 10.00      ; Available: 0;
      Threshold: 5
06-03-10;13:40:00.683 \K9.$BB7HK      ACI.SKEL-U.1000      80
      FROM: P1A^HKP      RE: P1A^HKP
      Stock Type: JEN2; Den: 20.00      ; Available: 0; Sold: 0;
      Threshold: 5
06-03-10;13:40:00.683 \K9.$BB7HK      ACI.SKEL-U.1000      81
      FROM: P1A^HKP      RE: P1A^HKP
      Warning, Stock Low! Type: JEN2; Den: 20.00      ; Available: 0;
      Threshold: 5
06-03-10;13:40:00.683 \K9.$BB7HK      ACI.SKEL-U.1000      80
      FROM: P1A^HKP      RE: P1A^HKP
      Stock Type: JEN2; Den: 50.00      ; Available: 0; Sold: 0;
      Threshold: 5
06-03-10;13:40:00.683 \K9.$BB7HK      ACI.SKEL-U.1000      81
      FROM: P1A^HKP      RE: P1A^HKP
      Warning, Stock Low! Type: JEN2; Den: 50.00      ; Available: 0;
      Threshold: 5
06-03-10;13:40:00.683 \K9.$BB7HK      ACI.SKEL-U.1000      42
      FROM: P1A^HKP      RE: P1A^HKP
      Housekeeping Threshold Checking for JEN2 Complete

```

Timer Delete Sold Report

The sample report below provides detail on the deletion of sold stock item records as part of the BASE24-inventory Housekeeping report, when the timer expires.

HKP01	SOLD STOCK CLEAN UP REPORT		Date: 10/03/2006
	FOR STOCK TYPE JEN2		
STOCK NUMBER	STOCK VALUE	DATE SOLD	TIME SOLD
-----	-----	-----	-----
Total number of 10.00	stocks deleted is 000000 with total value		0.00
Total number of 20.00	stocks deleted is 000000 with total value		0.00
Total number of 50.00	stocks deleted is 000000 with total value		0.00
Total number of sold stock deleted is 00000000 with grand total value of 0.00			
***** End of Report *****			

Timer Delete Expired Report

The sample report below provides detail on the deletion of expired stock item records as part of the BASE24-inventory Housekeeping report, when the timer expires.

HKP02	EXPIRING SOLD STOCK CLEAN UP REPORT FOR STOCK TYPE JEN2	Date: 10/03/2006
STOCK NUMBER -----	STOCK VALUE -----	RECORD EXPIRY DATE -----
0000000000000411	10.00	31/12/2005
0000000000000412	10.00	31/12/2005
0000000000000413	10.00	31/12/2005
0000000000000414	10.00	31/12/2005
0000000000000415	10.00	31/12/2005
0000000000000416	20.00	31/12/2005
0000000000000417	20.00	31/12/2005
0000000000000418	20.00	31/12/2005
0000000000000419	20.00	31/12/2005
0000000000000420	20.00	31/12/2005
0000000000000421	50.00	31/12/2005
0000000000000422	50.00	31/12/2005
0000000000000423	50.00	31/12/2005
0000000000000424	50.00	31/12/2005
0000000000000425	50.00	31/12/2005
Total number of 10.00 stocks deleted is 000005 with total value 50.00		
Total number of 20.00 stocks deleted is 000005 with total value 100.00		
Total number of 50.00 stocks deleted is 000005 with total value 250.00		
Total number of expiring stocks deleted is 00000015 with grand total value of 400.00		
***** End of Report *****		

Housekeeping Deletion Using an NCPCOM Command

The Housekeeping process is also able to delete records of a specific stock type and provide detailed reports on the deletion through use of an NCPCOM command. An NCPCOM command can be delivered to the Housekeeping process to delete specific records for a stock type. The format of the command is as follows:

Syntax

DELIVER PROCESS *housekeeping-process*, "DELETE *stock-type*, *stock-amount*, *stock-date*"

housekeeping-process — The symbolic name assigned to the Housekeeping process in the XPNET node.

stock-type — Identifies the four-character stock type.

stock-amount — Indicates the amount of stock, including decimal positions (i.e., 1000=\$10.00).

stock-date — Indicates the date the stock item was refreshed (created), in YYYYMMDD format.

NCPCOM Command Deletion Messages

The sample EMSPERUS output shown below details the deletion of stock messages from the Housekeeping process using an NCPCOM command to delete a specific stock type.

```

06-03-10;14:06:37.008 \K9.$BB7HK      ACI.SKEL-U.1000      160
      FROM: P1A^HKP      RE: P1A^HKP
***** Executing Group Delete *****
06-03-10;14:06:37.012 \K9.$BB7HK      ACI.SKEL-U.1000      161
      FROM: P1A^HKP      RE: P1A^HKP
      Stock Type JMS3, Value 10.00      Refreshed on 051117
06-03-10;14:06:37.014 \K9.$BB7HK      ACI.SKEL-U.1000      162
      FROM: P1A^HKP      RE: P1A^HKP
      Please wait for completion...
06-03-10;14:06:37.239 \K9.$BB7HK      ACI.SKEL-U.1000      163
      FROM: P1A^HKP      RE: P1A^HKP
      Ad Hoc delete, number of record processed = 3, please wait...
06-03-10;14:06:37.242 \K9.$BB7HK      ACI.SKEL-U.1000      163
      FROM: P1A^HKP      RE: P1A^HKP
      Ad Hoc delete, number of record processed = 6, please wait...
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      163
      FROM: P1A^HKP      RE: P1A^HKP
      Ad Hoc delete, number of record processed = 9, please wait...
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      450
      FROM: P1A^HKP      RE: P1A^HKP
      ----- Ad Hoc Deletion has completed -----
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      451
      FROM: P1A^HKP      RE: P1A^HKP
      For Stock Type JMS3, Value 10.00      , Creation Date 051117
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      452
      FROM: P1A^HKP      RE: P1A^HKP
      Number of stock in the group deleted: 000003
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      453
      FROM: P1A^HKP      RE: P1A^HKP
      Combine value of stock deleted: 30.00
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      454
      FROM: P1A^HKP      RE: P1A^HKP
      Number of stock in the group not deleted: 000000
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      455
      FROM: P1A^HKP      RE: P1A^HKP
      Combine value of stock not deleted: 0.00
06-03-10;14:06:37.278 \K9.$BB7HK      ACI.SKEL-U.1000      456
      FROM: P1A^HKP      RE: P1A^HKP
***** Please check spooler for detail report *****

```

NCPCOM Command Deletion Report

The sample report below provides detail on the deletion of stock item records as part of the BASE24-inventory Housekeeping report when specific stock is deleted by an NCPCOM command.

```
HKP03                      AD HOC STOCK CLEAN UP REPORT      Date: 10/03/2006
                        FOR STOCK TYPE JMS3, STOCK VALUE 10.00      REFRESHED ON 17/11/05

STOCK NUMBER      STOCK TYPE      STOCK VALUE      ADD DATE & TIME      STATUS      ACTION
-----
0000000000014213  JMS3              10.00            051117150721        UNSOLD      DELETE
0000000000014214  JMS3              10.00            051117150721        UNSOLD      DELETE
0000000000014215  JMS3              10.00            051117150721        UNSOLD      DELETE

Total number of stocks in the group deleted is 000003 with total value 30.00
Total number of stocks in the group not deleted is 000000 with total value 0.00
***** End of Report *****
```

ACI Worldwide, Inc.

Index

A

Authorization process, [1-6](#)

B

BASE24-inventory ATM mobile top-up transaction flows
 definitions-based model using BASE24-inventory,
 approved, [1-8](#)
 definitions-based model using BASE24-inventory,
 reversed, [1-11](#)

BASE24-inventory POS mobile top-up transaction flows
 with funds using BASE24-inventory, approved, [1-15](#)
 with funds using BASE24-inventory, reversed, [1-18](#)

BASE24-inventory Transaction Log File (NTLF)
 alternate keys, [2-13](#)
 NTLF detail screen, [2-25](#)
 NTLF detail screen function keys, [2-24](#)
 NTLF summary screen function keys, [2-14](#)
 overview, [2-13](#)

BASE24-pos Router/Authorization module, [1-6](#)

C

Configuration, [2-1](#)

D

Database relationship, [1-23](#)

F

Functional overview
 database relationship, [1-23](#)
 network environment, [1-21](#)

H

Housekeeping
 deletion using a timer, [3-10](#)
 deletion using an NCPCOM command, [3-14](#)
 monitoring process, [3-9](#)
 overview, [3-9](#)

L

LCONF assigns and params, [2-2](#)

M

Mobile Operator File (MOF), [2-29](#)

Mobile top-up environment
 functionality, [1-4](#)
 Transaction Context Manager process, [1-6](#)

N

Network environment, [1-21](#)

NTLF detail screen, [2-25](#)

NTLF summary screens
 card number as the key, [2-17](#)
 stock type and stock FIID as the key, [2-19](#)
 terminal logical network and terminal FIID as the
 key, [2-18](#)

O

Operations guidelines, [3-1](#)

R

Refresh file format, [3-4](#)

Refresh process, [3-2](#)

Reports generation
 ad-hoc reports for troubleshooting, [3-8](#)
 settlement and transaction reports, [3-7](#)
 stock summary reports, [3-7](#)

S

Stock Configuration File (NSCF)
 screen 1, [2-3](#)
 screen 2, [2-8](#)
 screen 3, [2-11](#)

Stock Manager process, [1-6](#)

System overview, [1-2](#)

ACI Worldwide, Inc.