



BASE24-teller[®]

Settlement and Reporting Manual

© 1994 by Applied Communications, Inc.

All rights reserved. All information contained in this manual is confidential and proprietary to Applied Communications, Inc. No part of this document may be photocopied or reproduced in any manner without the prior written consent of Applied Communications, Inc.

BASE24 and BASE24-teller are registered trademarks of Applied Communications, Inc.

Tandem and Enform are trademarks of Tandem Computers, Inc.

IBM is a registered trademark of International Business Machines Corporation.

Print Record

02/94, Version 1 (new)

Contents

Preface.	vii
Section 1	
Introduction.	1-1
BASE24-teller's Role in Settlement.	1-2
BASE24-teller Settlement and Reporting.	1-3
Logical Network Participants	1-4
Accountholders	1-4
Teller Terminals	1-4
Tellers	1-5
Participating Institutions.	1-5
Central Institution	1-6
The BASE24-teller Business Day.	1-7
Teller Terminal Cutover	1-8
Institution Cutover	1-8
Logical Network Cutover	1-8
The BASE24-teller Settlement/Reporting Database.	1-10
Teller Transaction Log File (TTLF).	1-10
Report Transactions by Time Block File (RTTB)	1-11
Report Transactions by Type File (RTTF).	1-11
Other Database Files.	1-11
BASE24-teller Report Overview	1-12
Daily Reports	1-12
Periodic Reports	1-13
Database Reports	1-13
The BASE24-teller Cutover Process	1-15
Cutover Operations.	1-16

Section 2

BASE24-teller Settlement Support	2-1
Settlement Tools	2-2
Terminal Balancing and Cutover	2-4
Institution Settlement	2-5
Vault Cash Account	2-6
Teller Terminal Settlement Accounts	2-7
Individual Customer Accounts	2-7
Logical Network Account	2-8
Logical Network Settlement	2-9
Logical Network Clearings Account	2-10
Individual Institution Account	2-10

Section 3

BASE24-teller Reports	3-1
Daily Network Clearings Statement Report (SETL01-B24)	3-2
Daily Institution Cardholder Activity Report (STAT07-B24)	3-8
Daily Detail Report (Report 01)	3-13
Part 1 — FIID Detail	3-18
Part 2 — FIID Totals Report	3-25
Part 3 — Grand Totals	3-27
Daily Summary by Type Report (Report 02)	3-29
Part 1 — Institution Grand Totals	3-33
Part 2 — Logical Network Grand Totals	3-37
Daily Summary by Teller ID Report (Report 03)	3-40
Part 1 — Institution Information	3-44
Part 2 — Grand Totals	3-44
Daily Summary by Teller ID and Time Block Report (Report 04)	3-45
Part 1 — Institution Information	3-49
Part 2 — Grand Totals	3-50
Periodic Summary by Type Report (Report 12)	3-51
Periodic Summary by Teller ID Report (Report 13)	3-57
Periodic Summary by Time Block Report (Report 14)	3-62

BASE24-teller Reports *continued*

Account Routing File (ARF) Database Report	3-69
Part 1 — Bank Routing Code Records	3-72
Part 2 — Account Number Routing Records	3-73
Institution Definition File (IDF) Database Report	3-75
Override Response File (ORF) Database Report	3-81
Stop Payment File (SPF) Database Report	3-84
Teller Terminal Data File (TTDF) Database Report	3-87
Teller Transaction File (TTF) Database Report	3-90
Warning/Hold/Float File (WHFF) Database Report	3-94

Section 4

Configuring Cutover and Reporting	4-1
Configuring Cutover	4-2
Terminal Cutover	4-3
Institution Cutover	4-4
Logical Network Cutover	4-6
Configuring Reports to Run	4-7
Logical Network Configuration File	4-8
Institution Definition File	4-10
COBNAMES File	4-11

Section 5

Settlement and Reporting Operations	5-1
Cutting Over and Balancing a Teller Terminal	5-2
Generating BASE24-teller Reports	5-3
Function Keys	5-5
Generating Daily Reports	5-6
Generating Periodic Reports	5-7
Generating Database Reports	5-8
Running Enform Database Reports	5-8
Running TAL Database Reports	5-10

Appendix A

Processing Information	A-1
Process Configuration.....	A-2
Startup Logic.....	A-2
Multiple Copies.....	A-2
Log Messages	A-2
Initialization	A-3
Warmboot Processing.....	A-5
Timer Processing	A-6
Financial Institution Cutover Timer	A-6
Logical Network Cutover Timer.....	A-7
Network Control Supervisor (NCS) Commands	A-8
Index	Index-1

Preface

BASE24-teller provides settlement and reporting tools that enable institutions to settle more efficiently and accurately with each other. The settlement and reporting tools include settlement reports, statistical reports, and database reports. The tools also include recommended accounts and cutover procedures to ensure that all transactions are credited or debited correctly within the appropriate business day.

This manual describes the settlement and reporting tools available with BASE24-teller. It also describes the functionality within BASE24-teller that guides and controls cutover and reporting actions.

Audience

This manual is intended for the BASE24 operational staff who monitor and control BASE24-teller cutover, settlement, and reporting. It also provides settlement initialization and cutover procedures for technical support personnel.

Additional Documentation

The BASE24 documentation set is arranged so that each BASE24 manual presents a topic or group of related topics in detail. When one BASE24 manual presents a topic that has already been covered in detail in another BASE24 manual, the topic is summarized and the reader is directed to the other manual for additional information. Information has been arranged in this manner to be more efficient for readers that do not need the additional detail and at the same time provide the source for readers that require the additional information. This manual contains references to the following BASE24 publications:

- ***BASE24-teller Files Maintenance Manual*** provides data entry screens and field descriptions for BASE24-teller terminal files.

- ***BASE24 Logical Network Configuration File Manual*** provides information about how to access the Logical Network Configuration File and describes the assigns and params that are configured in the Logical Network Configuration File.
- ***BASE24-teller Transaction Processing Manual*** provides descriptions about how BASE24-teller transactions are processed and describes the BASE24-teller internal message header (TSTMH).

Software

This manual documents standard processing for BASE24-teller Release 5.0.

Customer-specific code modifications (i.e., RPQs) may result in processing that differs from the material presented in this manual. The customer is responsible for identifying and noting these changes.

Manual Summary

The ***BASE24-teller Settlement and Reporting Manual*** is divided into the following sections:

Section 1, “Introduction,” provides an overview of BASE24-teller settlement and reporting, the network participants, and how transaction activity is reported.

Section 2, “BASE24-teller Settlement Support,” describes the settlement support provided by BASE24-teller, including teller terminal balancing, institution settlement, logical network settlement, and suggested accounts to facilitate settlement procedures.

Section 3, “BASE24-teller Reports,” describes the reports produced by BASE24-teller.

Section 4, “Configuring Cutover and Reporting,” describes the configuration tasks that a user must perform to establish BASE24-teller cutover and reporting.

Section 5, “Settlement and Reporting Operations,” describes the operations that a user must perform when managing BASE24-teller settlement and reporting on a daily basis.

Appendix A, “Processing Information,” contains processing information such as supplementary information for process configuration, a description of process initialization and warmboot, descriptions of timer processing, and a list of NCS commands that the BASE24-teller settlement process can receive.

Publication Identification

Two entries appearing at the bottom of each page uniquely identify this BASE24 publication. The publication number (e.g., TR-AE000-06 for the ***BASE24-teller Settlement and Reporting Manual***) appears on every page to assist readers in applying updates to the appropriate manual. The publication date (e.g., 02/94 for February, 1994) identifies the last time material on a particular page has been revised. This date can be used to verify that the reader has the most current information and is particularly helpful when dealing with HELP24 to answer operating questions.

The print record, located on the page immediately following the title page is also helpful when verifying that a manual contains the most current information. An entry is added to the print record each time a BASE24 publication is modified in any way. Each print record entry includes the date of the change, a unique version number, and the type of change (new, update, or reissue). Version 1 is assigned to a *new* manual. Later versions can be updates or reissues, depending on the changes being made. An *update* typically involves changes on a small number of pages throughout the manual. A *reissue* occurs when all pages of the manual are replaced because changes affect a large number of pages.

Applied Communications, Inc.

Section 1

Introduction

This section introduces the reader to BASE24-teller settlement. The topics discussed in this section are BASE24-teller's role in settlement, the financial entities (or network participants) involved in settlement, how transaction activity is reported, and the files used to process settlement information.

BASE24-teller's Role in Settlement

The BASE24-teller role in settlement is one of transaction management and reporting. BASE24-teller defines the business day, logs and keeps track of each day's transaction activity, provides a daily file of transactions for processing by a host, and reports the funds due from and owed to the various logical network participants.

Although BASE24-teller processing and reporting is designed specifically to enhance network participants' internal settlement and accounting, participating BASE24-teller institutions are themselves responsible for the tangible aspects of settlement such as balancing teller cash drawers and transferring funds from one institution to another. Institutions must debit and credit their accountholder accounts and settle amongst themselves. BASE24-teller facilitates this settlement effort by providing a file of transactions it has processed during the day. This file is the Teller Transaction Log File (TTLF). BASE24-teller also provides a set of settlement and statistical reports to facilitate the settlement effort.

BASE24-teller Settlement and Reporting

The BASE24-teller network is “settled” each day. Settlement, in this context, is actually a reconciliation effort whereby the current day’s transaction activity is closed out and reported and the system is shown to be in balance.

BASE24-teller settlement differs from the settlement carried out by its various network participants in that BASE24-teller does not move funds to *settle* accounts. It does, however, provide the support which allows network participants to initiate this movement of funds.

Logical Network Participants

BASE24-teller functions only within one logical network. Within the logical network, the entities involved in transaction processing include the following:

- Accountholders
- Teller terminals
- Tellers
- Participating institutions
- Central institution

Because BASE24-teller functions only within one logical network, transactions are not received from or sent to interchanges or other logical networks. The specific role of each entity involved in BASE24-teller processing is described below.

Accountholders

Accountholders are individuals who have established financial accounts at an institution within the logical network. These accountholders manipulate funds in their accounts via tellers at teller terminals. Accountholders can also have cards as evidence of their account; however, tellers still must manipulate the funds in their accounts at the teller terminals. Cards are assigned to accountholders at the discretion of the institution that owns the accounts.

BASE24-teller does not consider an accountholder to be a settlement entity in that BASE24-teller does not compute a daily settlement position for each accountholder as it does for other participants in the logical network. However, BASE24-teller does capture all transactions initiated on behalf of accountholders in the daily Teller Transaction Log File (TTLF). The records in the TTLF allow each individual transaction to be posted to the appropriate accountholder account.

Teller Terminals

Teller terminals are machines where tellers initiate financial transactions on behalf of accountholders and perform database maintenance functions. Tellers also initiate administrative transactions via teller terminals. Each teller terminal is owned by a specific institution and is defined within the BASE24-teller system by a teller terminal identification code.

Throughout the business day, BASE24-teller logs transaction information from each teller terminal to a transaction log file. When a new business day begins, this transaction log file is used to create reports that reflect each teller terminal's transaction activity. Using these reports, the institution can facilitate terminal reconciliation procedures.

Tellers

Tellers are individuals who operate teller terminals. They initiate financial transactions on behalf of accountholders and maintain the institution's database. Each teller is also responsible for cutting over their teller terminal at terminal cutover. Each teller is defined within the BASE24-teller system by a unique teller identification code.

Throughout the business day, BASE24-teller logs transaction information for each teller to a transaction log file. When a new business day begins, this transaction log file is used to create statistical reports for the institution that reflect each teller's activity; however, they do not provide any financial activity totals used in teller balancing.

Participating Institutions

Participating institutions are financial institutions within the logical network that own accounts and/or teller terminals and have an arrangement permitting one institution's customers to conduct business at the other institution's teller terminals. Accountholders from one participating institution can request a transaction at a teller terminal owned by either the institution that owns the account or another participating institution within the logical network.

BASE24-teller computes a daily settlement position for each institution in the logical network. For a participating institution, this figure includes the net amount the network owes the participating institution for those transactions made by accountholders of other participating institutions. For example, if another institution's accountholder makes a withdrawal for \$20.00 at a teller terminal belonging to this participating institution, BASE24-teller keeps track of this amount and, at the end of the business day, informs the terminal owner that \$20.00 is due from the logical network for transactions made by other accountholders.

The BASE24-teller settlement and statistical reports report on all transactions made at this institution's teller terminals so that funds and fees can be settled accurately.

Central Institution

The central institution functions just as a participating institution does, but it also has other responsibilities. In addition to owning accounts and/or teller terminals, the central institution is responsible for generating BASE24-teller reports and managing the settlement efforts among itself and other participating institutions within the logical network.

The BASE24-teller Business Day


BASE24-teller manages transaction activity according to the logical network's business day. Transactions processed by BASE24-teller during the defined business day are included in that day's Teller Transaction Log File (TTLF) and, consequently, on that day's reports.

The BASE24-teller business day is defined by a series of daily cutovers during which transactions stop being recorded to the current posting day and begin posting to the next day's business. BASE24-teller has three daily cutovers: teller terminal cutover, institution cutover, and logical network cutover. The cutovers must occur in that order. For example, when the institution cuts over, transactions cannot be processed from those terminals that have not cut over.

Institution cutover must occur before logical network cutover. When the logical network contains participating institutions, all participating institutions must be cut over before the logical network cuts over. If a participating institution has not cut over prior to logical network cutover, all transactions initiated by that institution's teller terminals are declined.

Ultimately, the logical network cutover defines the BASE24-teller business day since it is the time when all participating institutions are cut over to the next day, allowing the central institution to produce the BASE24-teller reports. If the logical network does not contain participating institutions and each institution allows only on-us transactions, each institution can generate its own reports at institution cutover instead of waiting for logical network cutover.

The diagram below shows the cutover hierarchy. Each cutover is described following the diagram.

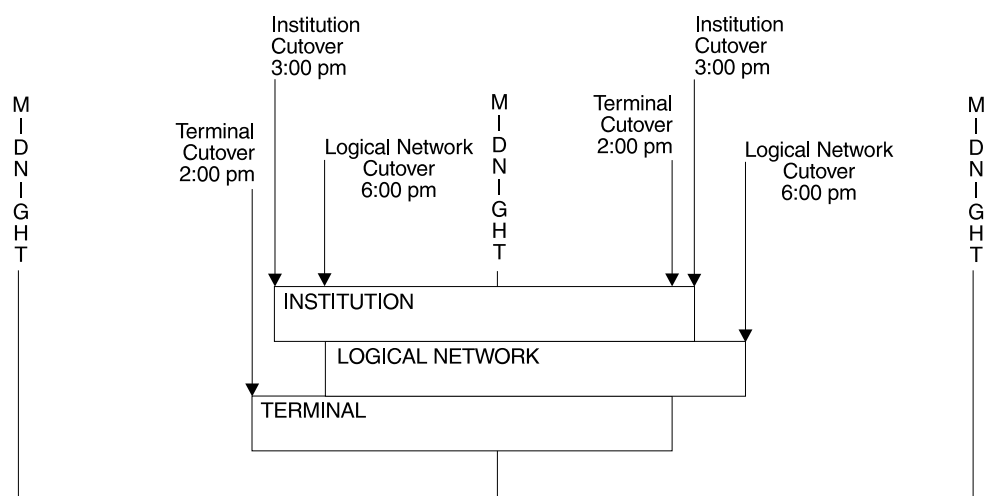

Teller Terminal Cutover

From the institution's point of view, teller terminal cutover is the point at which the BASE24-teller business day begins for its teller terminals. When a terminal is cut over, the posting date in the Teller Terminal Data File (TTDF) is set to the new posting date, and all transactions initiated at that teller terminal after that point are included in the next BASE24-teller business day.

BASE24-teller does not automatically perform teller terminal cutover. The teller must manually perform a cutover transaction at the terminal to cut the terminal over to the next business day. Each institution must establish a window of time during which all teller terminals must be cut over. The end of this window should fall before institution cutover. Terminals that have not been cut over by the time the institution cuts over cannot perform accountholder or administrative transactions.

Institution Cutover

At institution cutover, BASE24-teller performs a number of settlement actions at the institution level. BASE24-teller increases the processing dates in the Institution Definition File (IDF) record based on the current date and whether processing occurs on weekends and holidays. BASE24-teller begins to use these new dates in transaction processing when the logical network cuts over. After institution cutover, the BASE24-teller system does not allow transactions to be performed at terminals that have not been cut over.

Institutions define their individual cutover times in the Institution Definition File (IDF). Each institution in the logical network must cut over before the logical network cuts over.

Logical Network Cutover

At logical network cutover, the entire logical network moves to a new business day. The BASE24-teller system then begins using the new processing dates established at institution cutover. BASE24-teller closes the Teller Transaction Log File (TTLF) for the day just ended, and this file is then available for extracting and reporting.

The central institution, which is controlling the logical network, can then run BASE24-teller reports for the logical network and for the network's participating institutions. If the logical network does not contain participating institutions and each institution allows only on-us transactions, each institution must run its own set of reports.

The logical network cutover time is defined in the Logical Network Configuration File (LCONF).

The BASE24-teller Settlement/Reporting Database

BASE24-teller uses three files for settlement and reporting. Transactions that have been processed for the day are logged to the Teller Transaction Log File (TTLF). Two other files may or may not exist, depending on whether the institution has chosen to produce periodic reports. If the institution chooses to produce periodic reports, historical information is logged to the Report Transactions by Time Block File (RTTB) and the Report Transactions by Type File (RTTF).

Teller Transaction Log File (TTLF)

The Teller Transaction Log File (TTLF) is at the center of the daily BASE24-teller settlement and reporting effort. BASE24-teller logs daily transaction activity in the TTLF, and this file forms the database for BASE24-teller settlement and reporting. Each institution in the logical network logs to the logical network's TTLF. The TTLF contains one record for each transaction, approved or denied, processed during a single BASE24-teller business day.

BASE24-teller bases its business day on its various cutovers and each TTLF is representative of those transactions BASE24-teller recognizes for the defined business day. By extracting the TTLF, institutions can process the transactions against their accountholder accounts and create their own host reports.

The Settlement Initiator process creates the TTLF at logical network cutover for use by the Authorization and Device Handler processes. BASE24-teller maintains seven open TTLFs, one for the current date and six for subsequent dates. If BASE24-teller does not process on a particular date (i.e., holidays or weekends), the TTLF for that date is created but remains empty.

In addition, BASE24-teller maintains the number of closed TTLFs specified in the TLR-SETL-TTLF-FILE-RETENTION param in the Logical Network Configuration File (LCONF). At logical network cutover, the Settlement Initiator process creates new TTLFs and purges closed TTLFs from the system.

At sign on, a teller can specify whether he or she wishes to post transactions to the current business day's TTLF or the next business day's TTLF. The Device Handler process uses the CURRENT BUSINESS DATE field or NEXT BUSINESS DATE field in the Institution Definition File (IDF) and loads one of those dates into the TTDF to properly identify the TTLF being used.

Report Transactions by Time Block File (RTTB)

The Report Transactions by Time Block File (RTTB) is at the center of the periodic BASE24-teller reporting effort. When institutions produce daily BASE24-teller reports, historical transaction information is logged to the RTTB and this file forms part of the database for periodic BASE24-teller reporting. The RTTB contains one record for each teller ID, with the number of transactions processed during a BASE24-teller business day broken down into one hour time blocks.

Report Transactions by Type File (RTTF)

The Report Transactions by Type File (RTTF) is also at the center of the periodic BASE24-teller reporting effort. When institutions produce daily BASE24-teller reports, historical transaction information is logged to the RTTF and this file forms part of the database for periodic BASE24-teller reporting. The RTTF contains one record for every transaction type that has occurred for a given BASE24-teller business day and is supported by the specified institution.

Other Database Files

BASE24-teller provides database reports that allow institutions to verify the accuracy of their database. These database reports enable institutions to see what is in various database files without viewing the files online. The database files that BASE24-teller provides reports for are listed below:

- Account Routing File (ARF)
- Institution Definition File (IDF)
- Override Response File (ORF)
- Stop Payment File (SPF)
- Teller Terminal Data File (TTDF)
- Teller Transaction File (TTF)
- Warning/Hold/Float File (WHFF)

BASE24-teller Report Overview

BASE24-teller provides reports that include both settlement information and statistical information. The statistical reports are an accumulation of totals for approved and declined transactions categorized by type of transaction, teller ID, and time block. The settlement reports show the net position of each institution to the logical network, thus enabling participating institutions to settle funds among themselves.

BASE24-teller reports provide detail transactions for audit trail and comparison purposes. These reports aid managers in measuring line activity and making staffing decisions. The BASE24-teller system does not do any kind of settlement to the teller's cash drawer. The tellers must settle their cash drawers.

BASE24-teller generates reports using transactions accumulated during each institution's business day. Thus, daily reports contain transactions accumulated during a single business day. Periodic reports are printed for an historical period (i.e., the previous week or month) and contain summary data accumulated from all daily activity in the reporting period.

BASE24-teller also provides database reports that enable institutions to verify the accuracy of their database files. Database reports show the parameters and data that appear in the BASE24-teller database files.

Daily Reports

The daily reports are listed and briefly described below. Refer to section 3 for details on each report.

Daily Network Clearings Statement Report — Reflects the debit, credit, and net position of each institution in the logical network.

Daily Institution Cardholder Activity Report — Provides a detail listing of all cardholder activity for each institution.

Daily Detail Report — Reflects all transaction activity for the current business day. The Daily Detail Report can be sorted by FIID, teller ID, transaction date, and time, or by FIID, account number, and transaction type.

Daily Summary by Type Report — Reflects all transaction activity for the current business day by the type of transaction.

Daily Summary by Teller ID Report — Reflects all transaction activity for the current business day by the identification code of the teller.

Daily Summary by Teller ID and Time Block Report — Reflects all transaction activity for the current business day in one hour time increments and by the identification code of the teller.

Periodic Reports

The periodic reports are listed and briefly described below. Refer to section 3 for details on each report.

Periodic Summary by Type Report — Reflects all transaction activity between the dates selected by the operator by the type of transaction.

Periodic Summary by Teller ID Report — Reflects all transaction activity between the dates selected by the operator for the selected teller.

Periodic Summary by Time Block Report — Reflects all transaction activity between the dates selected by the operator in hourly time blocks.

Database Reports

The database reports are listed and briefly described below. Refer to section 3 for details on each report.

Account Routing File (ARF) Database Report — Provides a listing of the information in the Account Routing File (ARF). This report is produced only if institutions within the logical network perform interbank routing.

Institution Definition File (IDF) Database Report — Provides a listing of the information in the BASE24-teller segment of the Institution Definition File (IDF).

Override Response File (ORF) Database Report — Provides a listing of the information in the Override Response File (ORF).

Stop Payment File (SPF) Database Report — Provides a listing of all stop payment records in the Stop Payment File (SPF).

Teller Terminal Data File (TTDF) Database Report — Provides a listing of teller terminal information as it appears in the Teller Terminal Data File (TTDF) for each teller terminal.

Teller Transaction File (TTF) Database Report — Provides information about how individual institutions support each teller transaction as defined in the Teller Transaction File (TTF).

Warning/Hold/Float File (WHFF) Database Report — Provides a listing of all warnings, holds, and deposit floats that have been placed on each institution's accounts.

The BASE24-teller Cutover Process

BASE24-teller captures daily transaction activity in the Teller Transaction Log File (TTLF). The TTLF contains one record for each transaction—approved or denied—processed during an institution’s defined business day.

Institutions can gain access to information in the TTLF by perusing the file online, running reports, or extracting the file for host reporting. Operators with appropriate access can peruse the TTLF at any time. However, to run reports or extract the file, the TTLF must be closed by a daily cutover.

The BASE24-teller business day is defined by a series of daily cutovers during which transactions stop being logged to the current business day and start being logged to the next business day. There are three daily cutovers: terminal cutover, institution cutover, and logical network cutover. These cutovers must occur in that order.

BASE24-teller does not automatically cut over teller terminals, thus determining when a teller terminal’s current business day ends and the next business day begins. Nor does it automatically settle the institution’s daily business. Teller terminal cutover must be performed manually by a teller. BASE24-teller can be configured, using various base and BASE24-teller files, to automatically cut over the institution and the logical network from the current business day to the next business day.

Ultimately, logical network cutover defines the BASE24-teller business day since it is the time when all BASE24-teller institutions are cut over to the next day, allowing the BASE24-teller reports to be produced. The central institution establishes the time at which the logical network cuts over. The logical network cutover time is based on when the central institution needs transaction information from the participating institutions in order to run reports.

Cutover Operations

The following summary provides information about an institution's operations at the time one business day cuts over to the next business day:

1. **Terminal Cutover** — Prior to institution cutover, the institution's tellers should balance their cash drawers, sign off from the current business day, and sign on to the next business day. For example, if institution cutover is at 3:00 p.m., then institution procedures might dictate that all tellers balance the current day's business between 1:00 p.m. and 2:00 p.m. After balancing, each teller must sign off from the current business day and sign on to the next business day.
2. **Institution Cutover** — At institution cutover, the Settlement Initiator process sends a cutover command to the Device Handler and Authorization processes. This cutover command contains the new IDF processing dates. The Device Handler process updates the dates in its IDF memory table using these new IDF processing dates.

Transactions begin logging to the next business day's TTLF. If a teller has not balanced and signed on to the next business day by institution cutover, all transactions after cutover for that teller are denied because the posting date in the Device Handler process' IDF memory table do not match those in the TTDF memory table. When a teller who has not signed on to the next business day attempts to process transactions, a message is sent to that terminal indicating the transactions are denied because the teller has not signed on and the business date is invalid.

3. **Settlement Initiation** — Prior to network cutover, the Settlement Initiator process sets a timer based on a value the central institution has set in the TLR-LN-CUTOVER param in the LCONF.
4. **Network Cutover** — When the timer expires, the Settlement Initiator process sends a network cutover message to the Device Handler and Authorization processes. The Authorization process closes the current business day's TTLF, leaving the new business day's TTLF and the next business day's TTLF available for transaction logging. At network cutover, institutions can no longer log to the current business day's TTLF. If an institution has not cut over prior to network cutover, all transactions initiated by that institution's teller terminals are denied. The Settlement Initiator also creates and opens another TTLF.
5. **Extract** — After the logical network has cut over, the current business day's TTLF is ready to be extracted. The Extract process creates a tape of the contents of the current business day's TTLF. The central institution can then use this tape to update host files and create reports on the host.

6. **Reporting** — Once network cutover is complete, the central institution can use the current business day's TTLF to create reports on the Tandem. (If the institution is using host reporting, reports can only be run after the Extract process has created the tape for use by the host.) The reporting process reads through the current business day's TTLF and builds a series of daily detail and summary reports. If parameters in the IDF indicate that the reporting process should store data for periodic reports, the reporting process also builds two periodic report files, RTTB and RTTF. These report files are used in producing periodic reports.

Applied Communications, Inc.

Section 2

BASE24-teller Settlement Support

This section describes the settlement support provided by BASE24-teller. The topics discussed in this section are teller terminal balancing, institution settlement, logical network settlement, and suggested accounts to facilitate settlement procedures.

Settlement Tools

BASE24-teller provides the tools necessary for internal settlement procedures by maintaining the Teller Transaction Log File (TTLF), which contains records of all transactions, approved and denied, that BASE24-teller processed during the business day. When extracted, the TTLF can be set up to automatically post debits and credits to accountholder accounts.

In addition to posting transactions to accountholder accounts, BASE24-teller provides the means to post those debits and credits incurred with other institutions by providing a BASE24-teller network settlement report. This report contains information necessary to obtain the institution's net position within the logical network. Other BASE24-teller reports list detailed transaction activity by teller, date, and institution. These reports can be used for tracking transaction activity and troubleshooting.

BASE24-teller settlement is conducted in the following stages:

- Teller Terminal Balancing and Cutover

Tellers should balance their terminal cash drawers and sign on to a new business day at a time specified by the institution. BASE24-teller does not provide any tools for balancing teller terminals, nor does it automatically cut teller terminals over to a new business day. These are procedures that must be done according to each institution's business practices.

- Institution Settlement

The institution settles its own tellers and settles with other participating institutions by settling with the logical network. The actual transfer of funds during institution settlement must be done manually by each institution.

To assist in this manual effort, ACI recommends certain accounts to be established within the institution in order to track all debits and credits. BASE24-teller also provides a network settlement report to assist in this manual effort.

- Logical Network Settlement

The central institution running the logical network settles with all participating institutions, allowing them to indirectly settle amongst themselves. The actual transfer of funds during logical network settlement must be done manually by each institution.

To assist in this manual effort, ACI recommends certain accounts to be established within the central institution in order to track all debits and credits. BASE24-teller also provides a network settlement report to assist in this manual effort.

The accounts that ACI recommends in order to track all debits and credits and to assist in settlement are described later in this section.

Terminal Balancing and Cutover


BASE24-teller is not involved in teller terminal balancing or teller terminal cutover. Tasks such as balancing the cash drawers and closing each terminal's business day are left to the discretion of each institution. This enables each institution to establish its own business practices at the terminal level.

BASE24-teller does track the transactions made at each teller terminal by logging each transaction, with the appropriate terminal ID, to the Teller Transaction Log File (TTLF). This information can be printed on settlement and statistical reports, enabling institutions to monitor daily and periodic terminal activity.

BASE24-teller also monitors whether each teller terminal has cut over to a new business day by institution cutover. If a teller has not cut the terminal over to a new business day by the time the institution cuts over to a new business day, BASE24-teller denies all transaction requests initiated at that terminal. BASE24-teller does not, however, cut the teller terminal over automatically; the teller must initiate a cutover transaction manually.

Institution Settlement

For an individual institution participating in the logical network, BASE24-teller settlement consists of settling debits and credits incurred by its own accountholders. Institutions post debits and credits to accountholder accounts by extracting the TTLF. The institution can establish procedures to automatically post each transaction to the appropriate account using the extracted file. Or the institution can produce reports from which each transaction can be manually posted to the appropriate account.

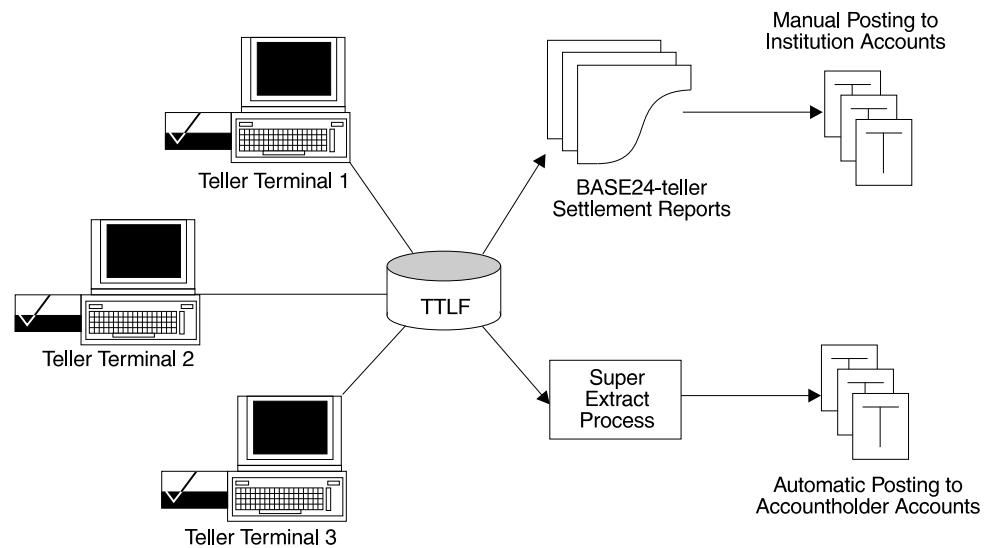

Teller activity is settled by debiting and crediting certain accounts designed to represent each teller and accountholder belonging to other institutions. Each institution must settle with other institutions for their accountholder activity at its tellers or its accountholders' activity at other institution's tellers. BASE24-teller requires that each institution in the logical network settle with the central institution, which serves in the role of the logical network.

BASE24-teller views the logical network as an individual settlement entity. Each institution posts debits and credits to the account representing the logical network. These debits and credits result from activity at the institution's terminals by other accountholders and activity by the institution's accountholders. Once the logical network has the debit and credit postings from each institution, the logical network notifies the appropriate institutions of the net amount they owe the logical network. Thus, individual institutions indirectly settle amongst themselves by settling with the logical network.

ACI does not dictate internal accounting procedures for individual institutions; however, ACI does recommend establishing and maintaining the accounts listed below for both card/account-issuing and terminal-owning institutions. These accounts aid in accounting for, and offsetting, all debits and credits incurred throughout the reporting day. Each account is described in more detail on the following pages.

- Vault cash account
- Teller terminal settlement accounts
- Individual customer accounts
- Logical network account

In these account descriptions, the term “our” refers to accountholders and tellers belonging to the institution conducting this settlement procedure. The term “other” refers to accountholders and tellers belonging to other institutions in the logical network.

Vault Cash Account

The vault cash account, also referred to as the master teller account, reflects all cash purchased from the vault for all tellers and the cash returned to the vault from each teller. One vault cash account should be established for each institution or branch. Each institution or branch must enter and maintain the data for its own vault cash account.

Debits	Credits
Cash returned to the vault from the teller.	Cash purchased from the vault for the teller.
Offset: Credit to the teller terminal settlement account	Offset: Debit to the teller terminal settlement account

Teller Terminal Settlement Accounts

The teller terminal settlement accounts reflect all transactions made by each teller. This account will not zero out. It should equal the teller's cash in and cash out amounts from their starting balance for the day. One teller terminal settlement account should be established for each teller.

Debits	Credits
Our accountholders making deposits or payments.	Our accountholders making withdrawals or receiving funds.
Offset: Credit to the individual customer account.	Offset: Debit to the individual customer account.
Other accountholders making deposits or payments.	Other accountholders making withdrawals or receiving funds.
Offset: Credit to the logical network account.	Offset: Debit to the logical network account.

Individual Customer Accounts

The individual customer accounts are debited and credited according to withdrawals or disbursements and deposits or payments made with the teller. One individual customer account should be established for each accountholder. Individual customer accounts are debited and credited by posting the extracted TTLF records for the day. Institutions must manually make offsetting entries to the appropriate accounts.

Debits	Credits
Our accountholders making withdrawals or receiving funds at teller terminals.	Our accountholders making deposits or payments at teller terminals.
Offset: Credit to the teller terminal settlement account.	Offset: Debit to the teller terminal settlement account.

Logical Network Account

The logical network account reflects those debits and credits made by not-on-us accountholders. Not-on-us accountholders are accountholders whose accounts are owned by other institutions. The net amount derived from the logical network account indicates the amount the institution must pay, or be paid by, the logical network. One logical network account should be established for each institution.


Institutions can update this account using information found in the Daily Network Clearings Statement Report (SETL01). Institutions post debits and credits made by other accountholders to this account. The institution must pay the logical network the deposit amount received from other accountholders, and the logical network must reimburse the institution for the activity of other accountholders. In this way, institutions indirectly settle their accountholder activity at each other's terminals by way of the logical network.

Debits	Credits
Other accountholders making withdrawals or receiving funds.	Other accountholders making deposits or payments.
Offset: Credit to the teller terminal settlement account.	Offset: Debit to the teller terminal settlement account.
(The logical network must reimburse the institution.)	(The institution must reimburse the logical network.)

Logical Network Settlement

A central institution must be responsible for logical network settlement. In terms of BASE24-teller settlement, this central institution represents the logical network as a separate settlement entity.

Institutions needing to settle amongst themselves do so through the central institution, which serves in the role of the logical network. The logical network acts on behalf of all other participating institutions in clearing all debits and credits incurred throughout the reporting day, allowing institutions to be paid for all outside accountholder activity with their tellers, and requiring institutions to pay for activity incurred by their accountholders with tellers of other institutions.

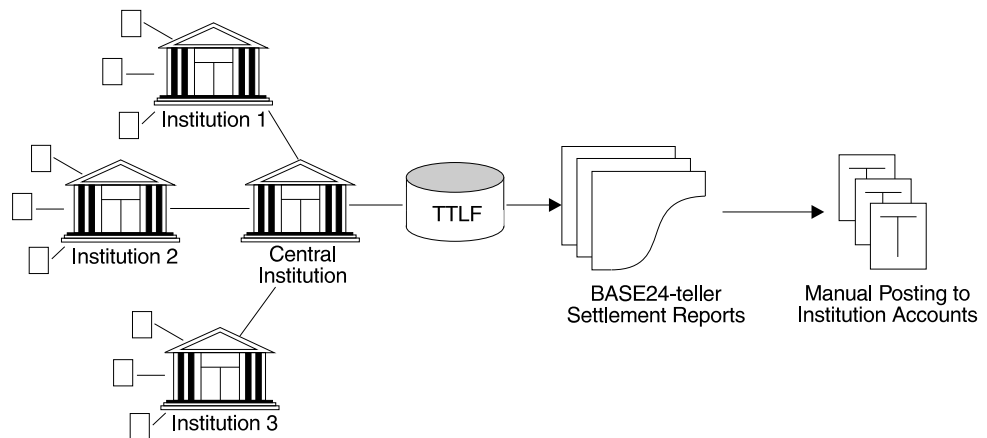

ACI does not dictate internal accounting procedures for the central institution; however, ACI does recommend establishing and maintaining the accounts listed below for the central institution. These accounts aid in accounting for, and offsetting, all debits and credits incurred throughout the reporting day. Each account is described in more detail on the following pages.

- Logical network clearings account
- Individual institution account

Logical Network Clearings Account

The logical network clearings account offsets the amounts paid from, or due to, other institutions in the logical network. The central institution should establish one logical network clearings account for the logical network.

Institutions can make entries to this account based on data from the Daily Network Clearings Statement Report (SETL01). This account should net to zero every day, illustrating that all transactions have been credited or debited to appropriate customer accounts. Entries in the logical network clearings account offset the amounts due to or from the individual institution accounts.

Debits	Credits
Withdrawals or disbursements by other accountholders at a specific institution's terminals.	Deposits or payments by other accountholders at a specific institution's terminals.
Offset: Credit to the individual institution account.	Offset: Debit to the individual institution account.
(The logical network owes this amount to the institution.)	(The institution owes this amount to the logical network.)

Individual Institution Account

The individual institution accounts are the accounts from which the logical network settles with each institution. The central institution should establish one individual institution account for each institution in the logical network. The individual institution account represents the institution's net position to the logical network, according to the logical network. It shows how much each individual institution in the logical network owes, or is owed from, all other institutions in the logical network.

The central institution enters data into each individual institution account based on information from the Daily Network Clearings Statement Report (SETL01), which provides a daily net position for every institution in the logical network. Offsets to the individual institution accounts must be made to the logical network clearings account.

Debits	Credits
Deposits or payments made by other accountholders with this institution's tellers.	Withdrawals or disbursements made by other accountholders with this institution's tellers.
Offset: Credit to the logical network clearings account	Offset: Debit to the logical network clearings account
(The institution owes this amount to the logical network.)	(The logical network owes this amount to the institution.)

Applied Communications, Inc.

Section 3

BASE24-teller Reports

BASE24-teller provides a standard set of management reports relating to logical network settlement and transaction volumes. These reports provide the information needed to conduct settlement procedures based on the daily activities of accountholders and tellers. Periodic reports are also available, providing institutions with periodic overviews of all accountholder and teller activity.

This section show examples of and describes the reports used in the BASE24-teller settlement and reporting system. The BASE24-teller reports discussed in this section are listed below.

- Daily Network Clearings Statement Report (SETL01-B24)
- Daily Institution Cardholder Activity Report (STAT07-B24)
- Daily Detail Report (Report 01)
- Daily Summary by Type Report (Report 02)
- Daily Summary by Teller ID Report (Report 03)
- Daily Summary by Teller ID and Time Block Report (Report 04)
- Periodic Summary by Type Report (Report 12)
- Periodic Summary by Teller ID Report (Report 13)
- Periodic Summary by Time Block Report (Report 14)
- Account Routing File (ARF) Database Report
- Institution Definition File (IDF) Database Report
- Override Response File (ORF) Database Report
- Stop Payment File (SPF) Database Report
- Teller Terminal Data File (TTDF) Database Report
- Teller Transaction File (TTF) Database Report
- Warning/Hold/Float File (WHFF) Database Report

Daily Network Clearings Statement Report (SETL01-B24)

The Daily Network Clearings Statement Report (SETL01-B24) is a daily report that reflects the debit, credit, and net position of each institution in the logical network that had transaction activity recorded in the Teller Transaction Log File (TTLF). If an institution does not have transaction activity recorded in the TTLF, that institution does not appear on the report. The report contains a separate line entry for each institution that shows transaction activity in the TTLF. Only approved transactions are included in the totals on this report.

Each institution receives a copy of this report, indicating its net debit or credit position to the logical network. Because this report shows the net position of each institution in relation to the rest of the logical network, it does not include transactions for on-us customers at on-us terminals. Only those transactions in which the logical network and FIID of the terminal owner are different than those of the card/account owner are included on this report. Log only transactions are not included on this report.

This report is printed at the location specified in the TLR-RPT-NTWK-CLEARINGS assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$\$.#NTWK.

The Daily Network Clearings Statement Report includes approved BASE24-teller financial transactions for the defined day. The entire report nets to zero, with total debits equal to total credits. The following table lists the approved transactions that appear on this report and defines each transaction as either a debit or credit according to this report.

Transaction	Debits	Credits
Withdrawal (10)	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Cash Check-Transit (11) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals

Transaction	Debits	Credits
Cash Check-Official (12) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Miscellaneous Debit (16) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00 or if <i>from</i> account type is 41, 42, or 43.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Cash Check-Affiliate (17) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Debit Memo Post (18) Note: Not included in report if <i>from</i> account type is 41, 42, or 43.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Deposit (20)	Not-on-us customers at on-us terminals	On-us customers at not-on-us terminals
Split Deposit (21)	Not-on-us customers at on-us terminals	On-us customers at not-on-us terminals
Miscellaneous Credit (22) Note: Not included in report if <i>to</i> account type is 41, 42, or 43.	Not-on-us customers at on-us terminals	On-us customers at not-on-us terminals
Credit Memo Post (23) Note: Not included in report if <i>to</i> account type is 41, 42, or 43.	Not-on-us customers at on-us terminals	On-us customers at not-on-us terminals

Transaction	Debits	Credits
Payment From (50) Note: Included on the report when the <i>from</i> account type is 01, 11, or 21 and the <i>to</i> account type is 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Payment To (50) Note: Included on the report when the <i>from</i> account type is 00 and the <i>to</i> account type is 31, 32, 50, 51, 52, 53, 54, or 55.	Not-on-us customers at on-us terminals	On-us customers at not-on-us terminals
Purchase Money Order (60) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Purchase Cashier's Check (61) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Purchase Traveler's Check (62) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Purchase Bank Draft (63) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Purchase Certified Check (64) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals

Transaction	Debits	Credits
Purchase Bond (65) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals
Purchase Miscellaneous (66) Note: Not included in report if <i>from</i> and <i>to</i> account types are both 00.	On-us customers at not-on-us terminals	Not-on-us customers at on-us terminals

A sample of the report is shown on the following page, followed by descriptions of its fields.

SETL01-B24

TLR1 CLEARINGS STATEMENT REPORT

DATE YY/MM/DD
PAGE 1

INSTITUTION ID NUMBER	INSTITUTION NAME	COUNT	DEBIT AMOUNT	COUNT	CREDIT AMOUNT		NET

BK03	OTHER NATIONAL BANK	5	5,000.00	5	5,000.00		0.00
BK04	ANOTHER NATIONAL BANK	3	3,000.00	3	3,000.00		0.00
SETTLEMENT TOTAL		8	8,000.00	8	8,000.00		0.00

END OF REPORT

Format Description

The report header contains the report number, the report name, the logical network name, the reporting date, and the page number.

INSTITUTION ID NUMBER — The FIID of the institution to which this particular settlement record belongs.

INSTITUTION NAME — The name of the institution for this particular settlement record.

DEBIT COUNT — The number of transactions for which this institution owes the logical network.

DEBIT AMOUNT — The total dollar amount this institution owes the logical network.

CREDIT COUNT — The number of transactions for which the logical network owes this institution.

CREDIT AMOUNT — The total dollar amount the logical network owes this institution.

NET — The net position of this institution to the logical network. The amount in this field is calculated by subtracting the value in the DEBIT AMOUNT field from the value in the CREDIT AMOUNT field.

SETTLEMENT TOTAL — The debit, credit, and net totals for all institutions listed on this report. Total debits must always equal total credits, with a net amount of zero.

Daily Institution Cardholder Activity Report (STAT07-B24)

The Daily Institution Cardholder Activity Report (STAT07-B24) is a daily report that provides a detailed listing of all cardholder activity by institution for the current BASE24-teller business day. It also provides audit trails for the institution to use in tracking activity and in troubleshooting. Transactions are listed in chronological order according to the time they were initiated at the teller terminal.

The report also includes transactions that began processing but were reversed before the transaction completed. Reversed transactions are listed with the requested amount. An asterisk in the right-most column indicates reversal transactions.

Records for reversal transactions (0420s and 0430s) and advice transactions (0220s, 0230s, 0320s, 0330s, 0620s, and 0630s) listed on this report are followed by one of the following indicators:

```
*****REVERSAL*****  
*****FORCE POST*****
```

This report is printed at the location specified in the TLR-RPT-CRD-ACTIVITY assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#CARD.

A sample of the report is shown on the following page, followed by descriptions of its fields.

STAT07-B24

LLLL DAILY INSTITUTION CARDHOLDER ACTIVITY REPORT

INSTITUTION
ID NUMBER NAME

DATE YY/MM/DD

BK03 OTHER NATIONAL BANK

PAGE 1

PAN FROM ACCT	MBR TO ACCT	DESCRIPTION	B24SEQ A RSP RC	DATE TERM	TIME	OFST	TERM LN	AMOUNT
2345678901234567890 000 0112345678		(WITHDRAWAL - DDA)	000015 0 F0I 0	07/27	16:53	+000	LLLL	1,000.00
2345678901234567890 000 0112345678		(WITHDRAWAL - DDA)	000016 0 F0I 0	07/27	16:54	+000	LLLL	1,000.00
2345678901234567890 000 0112345678		(WITHDRAWAL - DDA)	000017 0 F0I 0	07/27	16:59	+000	LLLL	1,000.00
2345678901234567890 000 0112345678		(WITHDRAWAL - DDA)	000018 3 A00 0	07/27	17:12	+000	LLLL	1,000.00
4123456789012345 000 0112345678		(WITHDRAWAL - DDA)	000009 3 A00 0	07/27	15:36	+000	LLLL	1,000.00
4123456789012345 000 0112345678		(WITHDRAWAL - DDA)	000010 3 033 0	07/27	15:39	+000	LLLL	1,000.00
4444123456789019 130 0112345678		(WITHDRAWAL - DDA)	000002 0 F0I 0	07/27	08:54	+000	LLLL	1,000.00
4444123456789019 130 0112345678		(WITHDRAWAL - DDA)	000005 3 A07 0	07/27	11:07	+000	LLLL	1,000.00
4444123456789019 130 0112345678		(WITHDRAWAL - DDA)	000006 3 A00 0	07/27	11:25	+000	LLLL	1,000.00
4444123456789019 130 0112345678		(WITHDRAWAL - DDA)	000007 0 F35 0	07/27	15:03	+000	LLLL	1,000.00
4850499111114 000 0112345678 1112345678		(TRANSFER DDA - TDA)	000019 0 F21 1	07/27	17:30	+000	LLLL	10,000.00

STAT07-B24
INSTITUTION
ID NUMBER NAME
BK03 OTHER NATIONAL BANK

LLLL DAILY INSTITUTION CARDHOLDER ACTIVITY REPORT

DATE YY/MM/DD

PAGE 2

PAN FROM ACCT	MBR TO ACCT	DESCRIPTION	B24SEQ A RSP RC	DATE TERM	TIME	OFST	TERM LN	AMOUNT
4850499111114 0112345678	000 1112345678	(TRANSFER DDA - TDA)	000020 0 F21 1	07/27 S1A^TLR^TERM^NAM	17:31	+000	LLLL	10,000.00
4850499111114 0112345678	000 1112345678	(TRANSFER DDA - TDA)	000021 0 F21 1	07/27 S1A^TLR^TERM^NAM	17:34	+000	LLLL	10,000.00
4850499111114 0112345678	000 1112345678	(TRANSFER DDA - TDA)	000022 3 A00 0	07/27 S1A^TLR^TERM^NAM	17:39	+000	LLLL	10,000.00
4850499111114 0112345678	000 1112345678	(TRANSFER DDA - TDA)	000023 3 A00 0	07/27 S1A^TLR^TERM^NAM	17:43	+000	LLLL	10,000.00

END OF REPORT

Format Description

The report header contains the report number, the report name, the logical network name, the reporting date, and the page number.

INSTITUTION ID NUMBER — The FIID of the institution.

INSTITUTION ID NAME — The name of the institution.

PAGE — The page number of the report.

PAN — The Primary Account Number (PAN) assigned to the card that initiated this transaction.

MBR — The member number identifying the cardholder. This field contains a value only if more than one person is authorized to use this card.

DESCRIPTION — A text description of this transaction.

B24SEQ — The sequence number of this transaction.

DATE — The date (MM/DD) that this transaction was performed.

TIME — The time (HH:MM) that this transaction was performed.

OFST — The time difference in minutes (MMM) between the terminal and the Tandem processor if they are located in different time zones.

TERM LN — The logical network to which the terminal that initiated this transaction belongs.

AMOUNT — The dollar amount of this transaction.

FROM ACCT — The account number of the account that is debited by this transaction when the transaction involves a debit. When the transaction is a split deposit transaction, this field contains the account number of the first account to which funds are deposited.

TO ACCT — The account number of the account that is credited by this transaction. When the transaction is a split deposit transaction, this field contains the account number of the second account to which funds are deposited. When the transaction is a non-financial transaction, such as a balance inquiry or Stop Payment File (SPF) update, this field contains the account number of the account involved in the transaction.

A — A code indicating the authorizer of this transaction. Valid values are as follows:

- 1 = Device controlled by BASE24
- 2 = Device Handler
- 3 = Authorization process
- 4 = Host Interface process
- 5 = Host
- 6 = Switch process (not applicable to BASE24-teller)
- 7 = Switch (not applicable to BASE24-teller)

RSP — The response code assigned to this transaction indicating whether this transaction was approved or denied.

RC — A code indicating whether the card was retained or returned in this transaction. Valid values are as follows:

- 0 = Return card or card not used in this transaction
- 1 = Retain card

TERM — The terminal identifier of the terminal from which this transaction was initiated.

Daily Detail Report (Report 01)

The Daily Detail Report (Report 01) is a log of all activity for the current BASE24-teller business day. It provides an audit trail for the institution.

The Daily Detail Report can be sorted by two methods, depending on the function key used to generate this report. The report can be sorted by FIID, teller ID, and transaction date and time; or the report can be sorted by FIID, account number, and transaction type. The report contains the same detail information regardless of how the report is sorted.

Transactions that do not have a defined FIID are reported together; the report heading indicates that the FIID is not defined for these transactions. Although the detail for these transactions is included in this report, these transactions are not included in the summary totals for daily summary reports (Report 02, Report 03, or Report 04) or the periodic summary reports (Report 12, Report 13, or Report 14).

This report is produced in three parts. The first part consists of detail lines for specific FIIDs. The detail lines provide information for each individual transaction that occurred for the financial institution, including approved transactions, denied transactions, and transactions that were in error. Transactions that were in error are attempted transactions that could not be approved nor denied. For example, a transaction that contains bad data cannot be read by the BASE24 system. Therefore, it is not processed at all and is neither approved nor denied.

Note: Ten detail lines can be printed for each transaction on this report. Two standard detail lines are printed for each transaction. The other eight detail lines are optional and are printed only if that information is available in the transaction log file. If the information is not available in the transaction log file, that detail line is not printed. Information that should be logged to the transaction log file is configured in the Token File (TKN). Refer to the **BASE24 Tokens Manual** for information on configuring tokens.

Records for reversal transactions (0420s and 0430s) and advice transactions (0220s, 0230s, 0320s, 0330s, 0620s, and 0630s) listed on this report are followed by one of the following indicators:

```
*****REVERSAL*****  
*****FORCE POST*****
```

The second part of this report consists of totals for specific FIIDs. These totals include approved and denied transactions. The totals do not include transactions in error, Stop Payment File (SPF) update transactions, or Warning/Hold/Float File (WHFF) update transactions.

The third part of this report consists of grand totals for all FIIDs in the logical network. These totals include approved and denied transactions. The totals do not include transactions in error, Stop Payment File (SPF) update transactions, or Warning/Hold/Float File (WHFF) update transactions.

This report is printed at the location specified in the TLR-RPT-DLY-DETAIL assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$\$.#REPORT1.

Samples of the three parts of the Daily Detail Report are shown on the following pages, followed by descriptions of the fields.

REPORT 01 - DAILY DETAIL REPORT
SORTED BY: LN FI TLR-ID TRN-DTE TRN-TIM

BK01 - FIRST NATIONAL BANK MM/DD/YY PAGE 1

FROM ACCT TERMINAL ID	TO ACCT TELLER	STAT DEV/SEQ	DESCRIPTION B24SEQ CARD NUMBER	RSP RC O I	DATE FIID	TIME OFST	TRAN AMT CASH-IN	FEE AMT CASH-OUT
0112345678 S1A^TLR^TERM^NAM	TELLERID 000001	000001	(SIGNOFF	A01 0 0	) 06/04	07:47 0 TBK1 0000		
0112345678 S1A^TLR^TERM^NAM	TELLERID 000002	000002	(SIGNOFF	A01 0 0	) 06/04	07:59 0 TBK1 0000		
0112345678 S1A^TLR^TERM^NAM	TELLERID 000003	000003	(SIGNOFF	A90 0 0	) 06/04	08:02 0 TBK1 0000		
0112345678 S1A^TLR^TERM^NAM	TELLERID 000004	000004	(CASH CHECK - TRANSIT - DDA	F72 0 2	) 06/04	08:19 F TBK1 0000	11.00 0.00	0.00 11.00
***** REVERSAL *****								
0112345678 S1A^TLR^TERM^NAM	TELLERID 000005	000005	(CASH CHECK - TRANSIT - DDA	F72 0 2	) 06/04	09:01 F TBK1 0000	11.00 0.00	0.00 11.00
***** REVERSAL *****								
0112345678 S1A^TLR^TERM^NAM	TELLERID 000006	000006	(CASH CHECK - TRANSIT - DDA	A07 0 2	) 06/04	09:15 0 TBK1 0000	11.00 0.00	0.00 11.00
CR-LINE-ACCT TYP: 32 CR-LINE ACCT: 3212345678				TRANSFER AMT:		10.00		
0112345678 S1A^TLR^TERM^NAM	TELLERID 000007	000007	(CASH CHECK - TRANSIT - DDA	A00 0 2	) 06/04	09:17 0 TBK1 0000	11.00 0.00	0.00 11.00
***** REVERSAL *****								
0112345678 S1A^TLR^TERM^NAM	TELLERID 000008	000008	(CASH CHECK - TRANSIT - DDA	A03 0 2	) 06/04	13:07 0 TBK1 0000	11.00 0.00	0.00 11.00
0112345678 S1A^TLR^TERM^NAM	TELLERID 000009	000009	(CASH CHECK - TRANSIT - DDA	A00 0 2	) 06/04	13:24 0 TBK1 0000	11.00 0.00	0.00 11.00
***** REVERSAL *****								
0112345678 S1A^TLR^TERM^NAM	TELLERID 000010	000010	(CASH CHECK - TRANSIT - DDA	A03 0 2	) 06/04	13:38 0 TBK1 0000	11.00 0.00	0.00 11.00
0112345678 S1A^TLR^TERM^NAM	TELLERID 000011	000011	(CASH CHECK - TRANSIT - DDA	A07 0 2	) 06/04	13:49 0 TBK1 0000	11.00 0.00	0.00 11.00
CR-LINE-ACCT TYP: 32 CR-LINE ACCT: 3212345678				TRANSFER AMT:		10.00		

REPORT 01 - DAILY DETAIL REPORT
SORTED BY: LN FI TLR-ID TRN-DTE TRN-TIM

BK01 - FIRST NATIONAL BANK MM/DD/YY PAGE 2

FROM ACCT	TO ACCT	STAT	DESCRIPTION	DATE	TIME	TRAN AMT	FEE AMT
TERMINAL ID	TELLER	DEV/SEQ	B24SEQ CARD NUMBER	RSP RC O I FIID	OFST	CASH-IN	CASH-OUT

	COUNT	TRAN AMT	CASH-IN AMT	CASH-OUT AMT	CHECK AMT
APPROVED TOTALS	9	66.00	0.00	66.00	0.00
DECLINED TOTALS	2	22.00	0.00	22.00	0.00

FIID RESPONSE CODE SUMMARY

CD	-----DESCRIPTION-----	COUNT	CD	-----DESCRIPTION-----	COUNT	CD	-----DESCRIPTION-----	COUNT
A00	APPROVED TRANSACTION	2	A01	APPROVED W/NO BAL	2	A03	APPROVED W/OVERRIDE	2
A90	APPROVED ADMIN RQST	1	F72	NO NBF REC - REVERSE	2	A07	APPROVED W/BACK-UP	2
TOTALS							11	

REPORT 01 - DAILY DETAIL REPORT		ALL - GRAND-TOTALS		MM/DD/YY	PAGE	3		
	COUNT	TRAN AMT	CASH-IN AMT	CASH-OUT AMT	CHECK AMT			
APPROVED GRAND TOTALS	9	66.00	0.00	66.00	0.00			
DECLINED GRAND TOTALS	2	22.00	0.00	22.00	0.00			
GRAND TOTAL RESPONSE CODE SUMMARY								
CD	-----DESCRIPTION-----	COUNT	CD	-----DESCRIPTION-----	COUNT	CD	-----DESCRIPTION-----	COUNT
A00	APPROVED TRANSACTION	2	A01	APPROVED W/NO BAL	2	A03	APPROVED W/OVERRIDE	2
A90	APPROVED ADMIN RQST	1	F72	NO NBF REC - REVERSE	2	A07	APPROVED W/BACK-UP	2
				TOTALS	11			
*** END OF DAILY REPORT 01 ***								

Part 1 — FIID Detail

The fields described below are located on the first part of the Daily Detail Report (Report 1). The report header contains the FIID and name of the institution, the date the report was run, and the page number of the report page.

SORTED BY — The sort criteria selected by the institution. The data on this report is sorted according to the function key the operator pressed when generating this report. Valid sort criteria are one of the following:

Account owner (LN FI ACCT-NUM TRAN-TYP-CDE) or
Terminal owner (LN FI TLR-ID TRN-DTE TRN-TIM)

FROM ACCT — The account number of the account that is debited by this transaction when the transaction involves a debit. When the transaction is a split deposit transaction, this field contains the account number of the first account to which funds are deposited.

TO ACCT — The account number of the account that is credited by this transaction. When the transaction is a split deposit transaction, this field contains the account number of the second account to which funds are deposited. When the transaction is a non-financial transaction, such as a balance inquiry or Stop Payment File (SPF) update, this field contains the account number of the account involved in the transaction.

STAT — The Positive Balance File (PBF) account status, stop pay/warning status, or card status the teller entered when initiating the PBF or Cardholder Account File (CAF) update transaction. If this transaction is not a PBF or CAF update or if the token containing this information was not logged to the TTLF, this field is blank.

DESCRIPTION — A text description of the transaction represented by a transaction code, a *from* account type, and a *to* account type. This information is obtained from the Teller Transaction File (TTF).

DATE — The date (MM/DD) that this transaction was performed.

TIME — The time (HH:MM) that this transaction was performed.

TRAN AMT — The transaction amount in whole and fractional currency units. For financial transactions, this field contains the transaction amount. For Stop Payment File (SPF) transactions, this field may contain the stop payment amount of the record that is being added to or deleted from the SPF. For Warning/Hold/Float File (WHFF) transactions, this field may contain the amount of the record that is being added to or deleted from the WHFF. If the appropriate tokens were not logged to the TTLF, this field is blank.

FEE AMT — The amount of the fee collected if this transaction was a purchase transaction. If the institution does not collect fees, this field contains zeros.

TERMINAL ID — The identification code of the teller terminal where the transaction was entered.

TELLER — The identification code of the teller who performed the transaction.

DEVSEQ — The sequence number the device or controller assigned to the transaction.

B24SEQ — The sequence number the BASE24 Device Handler process assigned to the transaction.

CARD NUMBER — The card number of the card used to initiate this transaction. If a card was not used to initiate this transaction, the field is blank.

RSP — A code indicating the reason the transaction was approved or denied. For more information on response codes, refer to the ***BASE24-teller Transaction Processing Manual***.

RC — A code indicating whether the card was retained or returned in this transaction. Valid values are as follows:

- 0 = Return card or card not used in this transaction
- 1 = Retain card

O — A code indicating the override level used to process this transaction. Valid values are as follows:

- 0 = No override level — The transaction was processed without an override.
- 1 = Teller override level — The transaction was processed with an override level of a teller.
- 2 = Supervisor override level — The transaction was processed with an override level of a supervisor.
- 3 = Manager override level — The transaction was processed with an override level of a manager.
- 4 = Override restricted — The transaction was denied and could not be approved with an authorization override.

I — A code that indicates the account associated with the fatal error. If a fatal error did not occur, this field is blank. Valid values are as follows:

- F = From account or, in split deposit transactions, the first account.
- T = To account or, in split deposit transactions, the second account.
- C = Credit line account or back-up account.

FIID — The FIID of the financial institution where the transaction was performed.

OFST — The time difference in minutes between this terminal and the Tandem processor if they are located in different time zones.

CASH-IN — The amount of the transaction deposit that was in the form of currency.

CASH-OUT — The amount of the transaction that was disbursed to the accountholder in the form of currency.

Additional Detail Lines

The Daily Detail Report (Report 01) can print different detail lines depending on the type of transaction being reported. The first two detail lines are the same for all types of transactions and are described above.

Following the first two detail lines, the report can optionally contain one or more additional detail lines. The additional detail lines vary depending on the type of transaction and whether special processing was needed to approve the transaction. Special processing includes automatic passbook printing, credit line processing, override processing, etc. The information for these additional detail lines is carried in specific tokens in the internal message and optionally logged to the Teller Transaction Log File (TTLF). Refer to the ***BASE24 Tokens Manual*** for more information on tokens.

Each of the detail lines is described below. Only the applicable detail lines for a given transaction are printed on an actual report. In the report example, the detail lines are separated by blank lines for clarity. On actual reports, detail lines for the same transaction are not separated by blank lines.

No Book File (NBF) Detail Line

The following fields are shown if the transaction is a passbook print, passbook reprint, or automatic passbook print transaction. This detail line is not printed if the transaction is a No Book File (NBF) inquiry transaction.

REC CNT — The number of passbook entries that were returned in the NBF token.

STRT BAL — The starting balance of the passbook prior to the passbook print.

END BAL — The ending balance of the passbook after these entries have been made to the passbook.

DAT/TIM — The date (MM/DD/YY) and time (HH:MM:SS) the record was added to the NBF.

Note: On the example report, this field occurs five times to illustrate where this field can occur when the NBF token contains multiple transactions. The NBF token can contain one to five transactions, and this field occurs once for each transaction in the token.

Stop Payment File (SPF) Update Detail Line

The following fields are shown if the transaction is a request to add or delete a stop payment to or from the Stop Payment File (SPF). This detail line is not printed if the transaction is a stop payment inquiry.

CHCK/HI — The check number for the stop payment record that is being added to or deleted from the Stop Payment File (SPF). If a record with a range of check numbers is being added to or deleted from the SPF, this field contains the highest check number in the range.

CHCK/LO — If a record with a range of check numbers is being added to or deleted from the SPF, this field contains the lowest check number in the range. If a record with a single check number is being added to or deleted from the SPF, this field is blank.

The date (MM/DD/YY) and the time (HH:MM:SS:TT) that the stop payment record was added to the SPF follows the lowest check number.

EXP DAT — The date (MM/DD/YY) that this stop payment request expires.

A text description of the stop payment follows the expiration date.

STOP STAT — A code indicating the new value of the STOP PAY/WARNING STATUS field contained in the Positive Balance File (PBF). Valid values are as follows:

- 0 = No stops or warnings
- 1 = Stops
- 2 = Warnings
- 3 = Stops and warnings

Warning/Hold/Float File (WHFF) Update Detail Line

The following fields are shown if the transaction is an addition to or deletion from the Warning/Hold/Float File (WHFF).

REC TYP — A code indicating the type of WHFF record that is being added or deleted. Valid values are as follows:

- 01 = Warning
- 02 = Hold
- 03 = Deposit Float

DATE — The date (MM/DD/YY) that the WHFF record was added.

TIME — The time (HH:MM:SS:TT) that the WHFF record was added.

EXP DATE — The date (MM/DD/YY) the WHFF record expires.

A text description of the transaction follows the expiration date.

WARN STAT — A code indicating the new value of the STOP PAY/WARNING STATUS field contained in the Positive Balance File (PBF). Valid values are as follows:

- 0 = No stops or warnings
- 1 = Stops
- 2 = Warnings
- 3 = Stops and warnings

Credit Line Detail Line

The following fields are shown if the transaction is a credit line transaction.

CR-LINE ACCT TYP — The account type associated with the credit line account.

CR-LINE ACCT — The account number of the credit line account.

TRANSFER AMT — The amount transferred from the credit line account to the primary account. This field contains a value of zero if the credit line transaction was denied. (The primary account number appears in the FROM ACCT field on line 1.)

Override Detail Line

The override detail line is a series of uncaptioned fields. This line is repeated for each account that has override information. The first field is a code indicating the account type with which this override is associated. It can occur three times; once for each account. Valid values are as follows:

F = *From* account

T = *To* account

C = Credit line account

The second field is the overridable response code associated with the *from* account, *to* account, or credit line/back-up account involved in this transaction. It can occur up to 64 times for each account.

Part 2 — FIID Totals Report

The fields described below are located on the second part of the Daily Detail Report (Report 1).

Approved Totals

The totals for all approved transactions processed by this financial institution. Totals for Stop Payment File (SPF) update transactions and Warning/Hold/Float File (WHFF) update transactions are not included in these totals.

COUNT — The total number of transactions that have been approved by this financial institution.

TRAN AMT — The total dollar amount of all transactions that have been approved by this financial institution.

CASH-IN AMT — The total amount of all deposits that were in the form of currency.

CASH-OUT AMT — The total amount of all disbursements that were in the form of currency.

CHECK AMT — The total amount of all deposits made in the form of checks.

Declined Totals

The totals for all declined transaction processed by this financial institution. Totals for Stop Payment File (SPF) update transactions and Warning/Hold/Float File (WHFF) update transactions are not included in these totals.

COUNT — The total number of transactions that were declined by this financial institution.

TRAN AMT — The total dollar amount of all transactions that have been declined by this financial institution.

CASH-IN AMT — The total amount of all cash deposit requests that were declined.

CASH-OUT AMT — The total amount of all cash disbursement requests that were declined.

CHECK AMT — The total amount of all check deposit requests that were declined.

FIID Response Code Summary

The response code summary lists all response codes that were issued during the reporting period, along with the appropriate text description of each response code. The summary then gives a count of the number of transactions processed with that particular response code.

CD — The response code indicating whether a transaction was approved or declined.

DESCRIPTION — Text describing the response code.

COUNT — The number of transactions that were processed with this response code.

TOTALS — The total number of all transactions, approved and declined, listed on the detail report for the FIID. Totals for Stop Payment File (SPF) update transactions and Warning/Hold/Float File (WHFF) update transactions are not included in these totals.

Part 3 — Grand Totals

The following fields are located on the third part of the Daily Detail Report (Report 01).

Approved Grand Totals

The totals of approved transactions for all institutions in the logical network. Totals for Stop Payment File (SPF) update transactions and Warning/Hold/Float File (WHFF) update transactions are not included in these totals.

COUNT — The total number of transactions approved by all financial institutions throughout the logical network.

TRAN AMT — The total dollar amount of all transactions approved by all financial institutions throughout the logical network.

CASH-IN AMT — The total amount of all cash deposits made at financial institutions throughout the logical network.

CASH-OUT AMT — The total amount of all cash disbursements made at financial institutions throughout the logical network.

CHECK AMT — The total amount of deposits made by check at financial institution throughout the logical network.

Declined Grand Totals

The following fields are totals of transactions declined by institutions throughout the logical network. Totals for Stop Payment File (SPF) update transactions and Warning/Hold/Float File (WHFF) update transactions are not included in these totals.

COUNT — The total number of transactions declined by financial institutions throughout the logical network.

TRAN AMT — The total dollar amount of all transactions declined by financial institutions throughout the logical network.

CASH-IN AMT — The total amount of all cash deposits declined at financial institutions throughout the logical network.

CASH-OUT AMT — The total amount of all cash disbursement requests declined at financial institutions throughout the logical network.

CHECK AMT — The total amount of deposit requests in the form of checks that were declined at financial institution throughout the logical network.

Grand Total Response Code Summary

The grand total response code summary lists all response codes that were issued in the logical network during the reporting period, along with the appropriate text description of each response code. The summary then gives a count of the number of transactions processed in the logical network with that particular response code.

CD — The response code indicating whether a transaction was approved or declined.

DESCRIPTION — Text describing the response code.

COUNT — The number of transactions that were processed with this response code.

TOTALS — The total number of all transactions, approved and declined, listed on the detail reports for all financial institutions. Totals for Stop Payment File (SPF) update transactions and Warning/Hold/Float File (WHFF) update transactions are not included in these totals.

Daily Summary by Type Report (Report 02)

BASE24-teller offers a comprehensive set of transactions that can be performed by the institution's tellers. Each individual transaction in the set is a specific combination of transaction type, *from* account type, and *to* account type. For a list of transactions in the transaction set, refer to the ***BASE24-teller Transaction Processing Manual***.

The Daily Summary by Type Report (Report 02) lists all activity for the current BASE24-teller business day by transaction type. It is formatted in two parts. The first part lists the transaction types processed by specific institutions, along with approved, declined, and reversal totals for each institution. The second part provides grand totals of all approved, declined, and reversal transactions for the entire logical network.

The Daily Summary by Type Report can be used to review transaction volume according to the number of transactions and dollar amounts for each transaction type offered by the institution.

This report is printed at the location specified in the TLR-RPT-DLY-TYP assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#REPORT2.

A sample of the Daily Summary by Type Report is shown on the following pages, followed by descriptions of its fields.

REPORT 02 - DAILY SUMMARY BY TYPE				BK01 - FIRST NATIONAL BANK		MM/DD/YY	PAGE	1
TC	FR	TO	COUNT	TRAN AMOUNT	CASH-IN AMT	CASH-OUT AMT	FEE AMT	CHECK AMT
11	01	00	APP	6	66.00	0.00	66.00	0.00
			DEC	2	22.00	0.00	22.00	0.00
			REV	2	22.00	0.00	22.00	0.00
93	00	00	APP	3	0.00	0.00	0.00	0.00
			DEC	0	0.00	0.00	0.00	0.00
				COUNT	TRAN AMOUNT	CASH-IN AMT	CASH-OUT AMT	FEE AMT
								CHECK AMT
APPROVED TOTALS				9	66.00	0.00	66.00	0.00
DECLINED TOTALS				2	22.00	0.00	22.00	0.00
REVERSAL TOTALS				2	22.00	0.00	22.00	0.00

REPORT 02 - DAILY SUMMARY BY TYPE

BK02 - SECOND NATIONAL BANK

MM/DD/YY

PAGE

2

TC	FR	TO		COUNT	TRAN AMOUNT	CASH-IN AMT	CASH-OUT AMT	FEE AMT	CHECK AMT
60	01	00	APP	1	50.00	50.00	50.00	3.00	0.00
			DEC	0	0.00	0.00	0.00	0.00	0.00
			REV	0	0.00	0.00	0.00	0.00	0.00
20	01	00	APP	2	112.00	112.00	0.00	0.00	112.00
			DEC	0	0.00	0.00	0.00	0.00	0.00
			REV	0	0.00	0.00	0.00	0.00	0.00
93	00	00	APP	1	0.00	0.00	0.00	0.00	0.00
			DEC	0	0.00	0.00	0.00	0.00	0.00
				COUNT	TRAN AMOUNT	CASH-IN AMT	CASH-OUT AMT	FEE AMT	CHECK AMT
APPROVED TOTALS				4	162.00	162.00	50.00	3.00	112.00
DECLINED TOTALS				0	0.00	0.00	0.00	0.00	0.00
REVERSAL TOTALS				0	0.00	0.00	0.00	0.00	0.00

REPORT 02 - DAILY SUMMARY BY TYPE			ALL - GRAND-TOTALS		MM/DD/YY	PAGE	3
		COUNT	TRAN AMOUNT	CASH-IN AMT	CASH-OUT AMT	FEE AMT	CHECK AMT
APRV	GRAND TOT	13	228.00	162.00	116.00	3.00	112.00
DCLN	GRAND TOT	2	22.00	0.00	22.00	0.00	0.00
RVSL	GRAND TOT	2	22.00	0.00	22.00	0.00	0.00

*** END OF DAILY REPORT 02 ***

Part 1 — Institution Grand Totals

The following fields are located on the first part of the Daily Summary by Type Report (Report 02). It contains totals for individual institutions in the logical network. The report header contains the FIID and name of the applicable financial institution, the date the report was generated, and the page number of the report.

TC — The transaction code of the transaction being defined. This code, together with a *from* account type and a *to* account type, represents a single type of transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid transaction codes.

FR — The account type of the account that is debited by this transaction when the transaction involves a debit. When the transaction is a split deposit transaction, this field contains the account type of the first account to which funds are deposited. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

TO — The *to* account type of the transaction being defined. This indicates the type of account that is credited by the transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

App

The following fields contain totals for transactions of this type that have been approved.

COUNT — The total number of transactions with this transaction code, *to* account, and *from* account that have been approved.

TRAN AMT — The total dollar amount of transactions with this transaction code, *to* account, and *from* account that have been approved.

CASH-IN AMT — The total amount of cash that has been received as a result of approved transactions with this transaction code, *to* account, and *from* account.

CASH-OUT AMT — The total amount of cash that has been disbursed as a result of approved transactions with this transaction code, *to* account, and *from* account.

FEE AMT — The total amount of fees that have been collected as a result of approved transactions with this transaction code, *to* account, and *from* account.

CHECK AMT — The total amount of checks that have been received as a result of approved transactions with this transaction code, *to* account, and *from* account.

Dec

The following fields contain totals for transactions of this type that have been declined.

COUNT — The total number of transactions with this transaction code, *to* account, and *from* account that have been declined.

TRAN AMT — The total dollar amount of transactions with this transaction code, *to* account, and *from* account that have been declined.

CASH-IN AMT — The total amount of cash that would have been received if these transactions with this transaction code, *to* account, and *from* account had not been declined.

CASH-OUT AMT — The total amount of cash that would have been disbursed if these transactions with this transaction code, *to* account, and *from* account had not been declined.

FEE AMT — The total amount of fees that would have been collected if these transactions with this transaction code, *to* account, and *from* account had not been declined.

CHECK AMT — The total amount of checks that would have been received if these transactions with this transaction code, *to* account, and *from* account had not been declined.

Rev

The following fields contain totals for reversal transactions of this type. These totals include reversals initiated by both BASE24-teller and the institution's tellers.

COUNT — The total number of transactions with this transaction code, *to* account, and *from* account that have been reversed.

TRAN AMT — The total dollar amount of transactions with this transaction code, *to* account, and *from* account that have been reversed.

CASH-IN AMT — The total amount of cash that would have been received had these transactions with this transaction code, *to* account, and *from* account not been reversed.

CASH-OUT AMT — The total amount of cash that would have been disbursed had these transactions with this transaction code, *to* account, and *from* account not been reversed.

FEE AMT — The total amount of fees that have been lost as a result of reversal transactions with this transaction code, *to* account, and *from* account.

CHECK AMT — The total amount of checks that would have been received had these transactions with this transaction code, *to* account, and *from* account not been reversed.

Approved Totals

The following fields contain totals of all approved teller transactions performed during this reporting period at this particular institution.

COUNT — The total number of approved teller transactions.

TRAN AMT — The total amount of all approved teller transactions.

CASH-IN AMT — The total amount of cash received as a result of approved transactions.

CASH-OUT AMT — The total amount of cash disbursed as a result of approved transactions.

FEE AMT — The total amount of fees collected as a result of approved transactions.

CHECK AMT — The total amount of checks received as a result of approved transactions.

Declined Totals

The following fields contain totals of all declined teller transactions performed during this reporting period at this particular institution.

COUNT — The total number of teller transactions that were declined.

TRAN AMT — The total amount of teller transactions that were declined.

CASH-IN AMT — The total amount of cash that would have been received if these transactions had not been declined.

CASH-OUT AMT — The total amount of cash that would have been disbursed if these transactions had not been declined.

FEE AMT — The total amount of fees lost as a result of declined transactions.

CHECK AMT — The total amount of checks that would have been received if these transactions had not been declined.

Reversal Totals

The following fields contain totals of all reversal teller transactions performed during this reporting period at this particular institution.

COUNT — The total number of teller transactions that have been reversed.

TRAN AMT — The total amount of all teller transactions that have been reversed.

CASH-IN AMT — The total amount of cash that would have been received if these transactions would not have been reversed.

CASH-OUT AMT — The total amount of cash that would have been disbursed if these transactions had not been reversed.

FEE AMT — The total amount of fees lost as a result of reversals.

CHECK AMT — The total amount of check deposits that were reversed.

Part 2 — Logical Network Grand Totals

The following fields are located on the second part of the Daily Summary by Type Report (Report 02). It contains totals for the entire logical network.

Apprv Grand Tot

The following fields contain totals of all approved teller transactions performed during this reporting period in the logical network.

COUNT — The total number of approved teller transactions performed.

TRAN AMT — The total amount of all approved teller transactions performed.

CASH-IN AMT — The total amount of cash that has been received as a result of approved transactions.

CASH-OUT AMT — The total amount of cash that has been disbursed as a result of approved transactions.

FEE AMT — The total amount of fees that have been collected as a result of approved transactions.

CHECK AMT — The total amount of checks that have been received as a result of approved transactions.

Dcln Grand Tot

The following fields contain totals of all declined teller transactions performed during this reporting period in the logical network.

COUNT — The total number of teller transactions that were declined.

TRAN AMT — The total amount of teller transactions that were declined.

CASH-IN AMT — The total amount of cash that would have been received if these transactions had not been declined.

CASH-OUT AMT — The total amount of cash that would have been disbursed if these transactions had not been declined.

FEE AMT — The total amount of fees that would have been collected if these transactions had not been declined.

CHECK AMT — The total amount of checks that would have been received if these transactions had not been declined.

Rvsl Grand Tot

The following fields contain totals of all reversal teller transactions performed during this reporting period in the logical network.

COUNT — The total number of reversed teller transactions.

TRAN AMT — The total amount of all reversed teller transactions.

CASH-IN AMT — The total amount of cash that would have been received if these transactions had not been reversed.

CASH-OUT AMT — The total amount of cash that would have been disbursed if these transactions had not been reversed.

FEE AMT — The total amount of fees lost as a result of reversals.

CHECK AMT — The total amount of check deposits that were reversed.

Daily Summary by Teller ID Report (Report 03)

The Daily Summary by Teller ID Report (Report 03) lists all activity for the current BASE24-teller business day by teller identification code. The totals include both approved and declined transactions for all tellers in each institution. Institutions can determine if a transaction was approved by looking at the response code defined in the Daily Detail Report (Report 01). The report also includes a grand total of all transactions performed by each teller in the logical network.

Institution management can use the Daily Summary by Teller ID Report to determine the relative workload of its line personnel.

This report is printed at the location specified in the TLR-RPT-DLY-TLR assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#REPORT3.

A sample of the report is shown on the following pages, followed by descriptions of its fields.

REPORT 03 - DAILY SUMMARY BY TELLER ID				BNK1 - FIRST NATIONAL BANK				MM/DD/YY	PAGE	1	
TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRAN
00000001	11	00000002	10	00000003	10	00000004	10	00000005	10	00000006	10
00000007	10	00000008	10	00000009	10	00000010	10	00000011	10	00000012	10
TOTAL NUMBER OF TRANSACTIONS			121								

BNK2 - SECOND NATIONAL BANK

MM/DD/YY

PAGE

2

TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRANS	TELLER-ID	TRAN
00000011	05	00000012	05	00000013	05	00000014	05	00000015	05	00000016	05
00000017	05	00000018	05	00000019	05	00000020	05	00000021	05	00000022	05

TOTAL NUMBER OF TRANSACTIONS	60
------------------------------	----

REPORT 03 - DAILY SUMMARY BY TELLER ID

ALL - GRAND-TOTALS

MM/DD/YY PAGE 3

GRAND TOTAL TRANS 181

*** END OF DAILY REPORT 03 ***

Part 1 — Institution Information

The report header contains the FIID and name of the institution, the date the report was generated, and the page number of the report. The fields described below are located on the first part of the Daily Summary by Teller ID Report. These fields are repeated for each teller ID that performed transactions during the business day and, therefore, has records in the TTLF.

TELLER ID — The identification code of the teller who initiated the transactions.

TRANS — The total number of transactions processed by the individual teller during the current business day.

TOTAL NUMBER OF TRANSACTIONS — The total number of transactions processed during the current business day at this institution.

Part 2 — Grand Totals

The field described below is located on the last page of the Daily Summary by Teller ID Report.

GRAND TOTAL TRANS — The total number of transactions processed during the current business day for all tellers in the institutions included in part 1 of this report.

Daily Summary by Teller ID and Time Block Report (Report 04)

The Daily Summary by Teller ID and Time Block Report (Report 04) lists all activity by teller identification number in hourly time blocks for the current BASE24-teller business day. It also shows the total number of transactions processed by all the institutions and the percentage of the day's activity that was processed during each hour.

The Daily Summary by Teller ID and Time Block Report illustrates peak processing periods during the current business day. Institution management can use this report to make staffing level decisions.

This report is printed at the location specified in the TLR-RPT-DLY-TIM assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#REPORT4.

A sample of this report is shown on the following pages, followed by descriptions of its fields.

REPORT 04 - DAILY SUMMARY BY TELLER ID AND TIME BLOCK

BNK1 - FIRST NATIONAL BANK

MM/DD/YY

PAGE 1

TELLERID	12AM- 1AM 8AM- 9AM 4PM- 5PM	1AM- 2AM 9AM-10AM 5PM- 6PM	2AM- 3AM 10AM-11AM 6PM- 7PM	3AM- 4AM 11AM-12PM 7PM- 8PM	4AM- 5AM 12PM- 1PM 8PM- 9PM	5AM- 6AM 1PM- 2PM 9PM-10PM	6AM- 7AM 2PM- 3PM 10PM-11PM	7AM- 8AM 3PM- 4PM 11PM-12AM		
TELLER01	0 0% 2 18% 0 0%	0 0% 3 27% 0 0%	0 0% 0 0% 0 0%	0 0% 0 0% 0 0%	0 0% 0 0% 0 0%	0 0% 4 36% 0 0%	0 0% 0 0% 0 0%	2 18% 0 0% 0 0%		
									TOTAL	11
TELLER02	0 0% 4 31% 0 0%	0 0% 2 15% 0 0%	0 0% 6 46% 0 0%	0 0% 1 8% 0 0%	0 0% 0 0% 0 0%	0 0% 0 0% 0 0%	0 0% 0 0% 0 0%	0 0% 0 0% 0 0%		
									TOTAL	13
FIID	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	2 8%		
TOTALS	6 25%	5 21%	6 25%	1 4%	0 0%	4 17%	0 0%	0 0%		
BY HOUR	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%		
									TOTAL	24

REPORT 04 - DAILY SUMMARY BY TELLER ID AND TIME BLOCK												BNK2 - SECOND NATIONAL BANK												MM/DD/YY		PAGE 1	
TELLERID	12AM- 1AM		1AM- 2AM		2AM- 3AM		3AM- 4AM		4AM- 5AM		5AM- 6AM		6AM- 7AM		7AM- 8AM												
	8AM- 9AM	4PM- 5PM	9AM-10AM	5PM- 6PM	10AM-11AM	6PM- 7PM	11AM-12PM	7PM- 8PM	12PM- 1PM	8PM- 9PM	1PM- 2PM	9PM-10PM	2PM- 3PM	10PM-11PM	3PM- 4PM	11PM-12AM											
TELLERAA	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%											
	0	0%	0	0%	0	0%	0	0%	1	8%	0	0%	5	42%	6	50%											
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%											
	TOTAL																12										
TELLERBB	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%											
	0	0%	0	0%	0	0%	0	0%	3	14%	4	18%	0	0%	7	32%											
	8	36%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%											
	TOTAL																22										
FIID	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%											
TOTALS	0	0%	0	0%	0	0%	0	0%	4	12%	4	12%	5	15%	13	38%											
BY HOUR	8	23%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%											
	TOTAL																34										

REPORT 04 - DAILY SUMMARY BY TELLER ID AND TIME BLOCK				ALL	-	GRAND-TOTALS	MM/DD/YY	PAGE	1
12AM- 1AM	1AM- 2AM	2AM- 3AM	3AM- 4AM	4AM- 5AM	5AM- 6AM	6AM- 7AM	7AM- 8AM		
8AM- 9AM	9AM-10AM	10AM-11AM	11AM-12PM	11PM- 1PM	1PM- 2PM	2PM- 3PM	3PM- 4PM		
4PM- 5PM	5PM- 6PM	6PM- 7PM	7PM- 8PM	8PM- 9PM	9PM-10PM	10PM-11PM	11PM-12PM		
0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	2 3%		
6 11%	5 9%	6 11%	1 2%	4 7%	8 13%	5 9%	13 22%		
8 13%	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%	0 0%		
							TOTAL	58	

*** END OF DAILY REPORT 04 ***

Part 1 — Institution Information

The report header contains the FIID and name of the institution, the date the report was generated, and the page number of the reports. The fields described below are located on the first part of the Daily Summary by Teller ID and Time Block Report. These fields are repeated for each teller ID that performed transactions during the business day and, therefore, has records in the TTLF.

TELLER ID — The identification number of the teller who initiated the transactions.

HHHH-HHHH — The time intervals for activity reported for the teller specified in the TELLER ID field. For each hourly time block on the report, the following statistics (per teller ID) are printed:

1st Column = The number of transactions processed during each one hour time block for the specified teller ID.

2nd Column = The percent of the teller's activity for the day that was processed during each one hour time block. The percent is calculated by dividing the number of transactions in the first column for each one hour time block by the teller's total transactions for the current business day.

TOTAL — The total number of transactions this teller processed during the current business day.

FIID TOTALS BY HOUR — The total number of transactions and the percent of totals reported for all tellers according to the one hour time block intervals.

Part 2 — Grand Totals

The fields described below are on the last page of the Daily Summary by Teller ID and Time Block Report. These totals include both approved and declined transactions for all tellers in the institutions included in part I of this report.

HHHH-HHHH — The time intervals for activity reported for all tellers specified in part 1 of this report. For each hourly time block on the report, the following statistics (per teller ID) are printed:

1st Column = The number of transactions processed during each one hour time block for all tellers in part 1 of this report.

2nd Column = The percent of the total teller activity during each one hour time block. The percent is calculated by dividing the number of transactions in the first column for each one hour time block by the total transactions for the current business day.

TOTAL — The total number of teller transactions processed during the current business day.

Periodic Summary by Type Report (Report 12)

The Periodic Summary by Type Report (Report 12) lists transaction activity that occurred between the dates selected by the operator at the time the report is generated. Transactions are sorted by transaction type and the date the transaction occurred.

This report lists all transaction types occurring on each date in the current periodic run. The total number of approved and declined transactions are accumulated and printed after each day's activity. Following the listing by each day in the period, the report again lists each transaction type followed by a calculated average of the number of times it occurred for every calendar day in the current periodic run.

Transaction type is determined by the combination of the transaction code, the *from* account, and the *to* account. This report is written to Tandem's spooler location using data from the Report Transaction by Type File (RTTF).

The Periodic Summary by Type Report can be used to review transaction volume, according to the number of transactions and dollar amounts for each account type offered by the institution.

This report is printed at the location specified in the TLR-RPT-PERIODIC-TYP assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#REPRT12.

The Periodic Summary by Type Report (Report 12) is shown on the following page, followed by descriptions of its fields.

REPORT 12 - PERIODIC SUMMARY BY TYPE BK01 - FIRST NATIONAL BANK MM/DD/YY PAGE 1

REPORT PARAMETERS:

DATE RANGE: 07/22/92 - 07/29/92 FIID: BK01

DATE	TC	FR	TO	-----DESCRIPTION-----		COUNT	AMOUNT
07/29	10	01	00	(WITHDRAWAL - DDA)	APP	0	\$0.00
					DEC	1	\$10.00
07/29	10	11	00	(WITHDRAWAL - TDA)	APP	13	\$130.00
					DEC	0	\$0.00
07/29	20	00	11	(DEPOSIT - TDA)	APP	1	\$20.00
					DEC	0	\$0.00
07/29	30	00	11	(PBF INQUIRY - TDA)	APP	2	\$0.00
					DEC	0	\$0.00
07/29	31	00	01	(PBF SHORT INQUIRY - DDA)	APP	0	\$0.00
					DEC	1	\$0.00
07/29	34	00	11	(NBF INQUIRY - TDA)	APP	5	\$0.00
					DEC	2	\$0.00
07/29	35	00	11	(PASSEBOOK PRINT - TDA)	APP	2	\$0.00
					DEC	0	\$0.00
07/29	36	00	11	(PASSBOOK REPRINT - TDA)	APP	4	\$0.00
					DEC	0	\$0.00
07/29	93	00	00	(SIGNOFF)	APP	6	\$0.00
					DEC	0	\$0.00
APPROVED TOTALS						33	
						DECLINED TOTALS	4

07/29 *** END OF FILE (RTTF) ENCOUNTERED - NORMAL TERMINATION ***

REPORT 12 - PERIODIC SUMMARY BY TYPE				BK01 - FIRST NATIONAL BANK				10/02/92	PAGE	2
REPORT PARAMETERS:										
DATE RANGE: 07/22/92 - 07/29/92				FIID: BK01						
TC	FR	TO	-----DESCRIPTION-----	MON AVG	TUE AVG	WED AVG	THR AVG	FRI AVG	SAT AVG	SUN AVG
COUNT										
10	01	00	(WITHDRAWAL - DDA)							
APP	COUNT		0	0	0	0	0	0	0	0
DEC	COUNT		1	0	0	1	0	0	0	0
	APP AMOUNT		\$0.00		DEC AMOUNT		\$10.00			
10	11	00	(WITHDRAWAL - TDA)							
APP	COUNT		13	0	0	7	0	0	0	0
DEC	COUNT		0	0	0	0	0	0	0	0
	APP AMOUNT		\$130.00		DEC AMOUNT		\$0.00			
20	00	11	(DEPOSIT - TDA)							
APP	COUNT		1	0	0	1	0	0	0	0
DEC	COUNT		0	0	0	0	0	0	0	0
	APP AMOUNT		\$20.00		DEC AMOUNT		\$0.00			
30	00	11	(PEF INQUIRY - TDA)							
APP	COUNT		2	0	0	1	0	0	0	0
DEC	COUNT		0	0	0	0	0	0	0	0
	APP AMOUNT		\$0.00		DEC AMOUNT		\$0.00			
31	00	01	(PEF SHORT INQUIRY - DDA)							
APP	COUNT		0	0	0	0	0	0	0	0
DEC	COUNT		1	0	0	1	0	0	0	0
	APP AMOUNT		\$0.00		DEC AMOUNT		\$0.00			
34	00	11	(NEF INQUIRY - TDA)							
APP	COUNT		5	0	0	3	0	0	0	0
DEC	COUNT		2	0	0	1	0	0	0	0
	APP AMOUNT		\$0.00		DEC AMOUNT		\$0.00			
35	00	11	(PASSBOOK PRINT - TDA)							
APP	COUNT		2	0	0	1	0	0	0	0
DEC	COUNT		0	0	0	0	0	0	0	0
	APP AMOUNT		\$0.00		DEC AMOUNT		\$0.00			
36	00	11	(PASSBOOK REPRINT - TDA)							
APP	COUNT		4	0	0	2	0	0	0	0
DEC	COUNT		0	0	0	0	0	0	0	0
	APP AMOUNT		\$0.00		DEC AMOUNT		\$0.00			

REPORT 12 - PERIODIC SUMMARY BY TYPE

BK01 - FIRST NATIONAL BANK

10/02/92 PAGE 3

REPORT PARAMETERS:

DATE RANGE: 07/22/92 - 07/29/92

FIID: BK01

TC	FR	TO	-----DESCRIPTION-----	MON AVG	TUE AVG	WED AVG	THR AVG	FRI AVG	SAT AVG	SUN AVG
COUNT										
93	00	00	(SIGNOFF)							
APP	COUNT		6	0	0	3	0	0	0	0
DEC	COUNT		0	0	0	0	0	0	0	0
APP AMOUNT				\$0.00	DEC AMOUNT				\$0.00	
RANGE	FIID	TOTAL COUNT		TOTAL MON AVG	TOTAL TUE AVG	TOTAL WED AVG	TOTAL THR AVG	TOTAL FRI AVG	TOTAL SAT AVG	TOTAL SUN AVG
TOTAL APP		33		0	0	18	0	0	0	0
TOTAL DEC		4		0	0	3	0	0	0	0

*** END OF REPORT 12 ***

Format Description

The report header contains the report number, the report name, the institution ID, the reporting date, and the page number.

DATE RANGE — The beginning and ending date (YY/MM/DD) the operator selected for the current periodic run.

FIID — The FIID of the financial institution selected by the operator for the current periodic run. If this report is run for all FIIDs, ALL appears in the field.

TC — The transaction code of the transaction being defined. This code, together with a *from* account type and a *to* account type, represents a single type of transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid transaction codes.

FR — The *from* account type of the transaction being defined. This account type is debited by the transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

TO — The account type of the account that is credited by this transaction. When the transaction is a split deposit transaction, this field contains the account type of the second account to which funds are deposited. When the transaction is a non-financial transaction, such as a balance inquiry or Stop Payment File (SPF) update, this field contains the account type of the account involved in the transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

DESCRIPTION — A text description of the transaction represented by a valid combination of transaction code, *from* account type, and *to* account type.

COUNT — The total number of approved (AP) and declined (DC) transactions performed for the specific transaction type.

AMOUNT — The total dollar amount of approved (AP) and declined (DC) transactions performed for the specific transaction type.

DAY OF WEEK AVG — The average number of the specified transaction type occurring for each day of the week, Monday (MON) through Sunday (SUN), in the current periodic report run. The average is found by totaling the number of transactions occurring on one day of the week during the selected reporting period and dividing it by the number of times the calendar day occurred during the reporting period.

For example, if there are two Tuesdays in the reporting period, with 50 withdrawals from checking accounts made during the first Tuesday and 100 withdrawals made from checking accounts during the second Tuesday, the Tuesday average for withdrawals from checking accounts would be 75 $((50 + 100)/2 = 75)$.

TOTAL COUNT — The total number of all approved (RANGE FIID TOTAL APP) and declined (RANGE FIID TOTAL DEC) transactions for the dates specified for this report.

TOTAL DAY OF WEEK AVG — The total averages for all approved (RANGE FIID TOTAL APP) and declined (RANGE FIID TOTAL DEC) transactions for that day of the week in the current periodic report run. The average is calculated by totaling the number of transactions occurring on one day of the week during the current periodic report run and dividing it by the number of times that calendar day occurred during the reporting period.

For example, if there are two Tuesdays in the reporting period with 450 transactions approved during the first Tuesday and 200 transactions approved during the second Tuesday, the Tuesday average for approved transactions would be 325 $((450 + 200)/2 = 325)$.

Periodic Summary by Teller ID Report (Report 13)

The Periodic Summary by Teller ID Report (Report 13) lists the total number of transactions performed by a teller ID for each day in the date range along with a grand total of transactions performed for the entire date range.

The date parameters and the teller ID are specified via the Teller Report Generator (TRPT) screen when the report is generated. This report can be run for a specific teller or for all tellers. When run for all tellers, the entries are listed in order by teller ID number. Totals by date are calculated for all tellers within the institution immediately following the last teller's totals.

If the report is run for all institutions in the logical network, a summary section is produced that includes all financial institutions in the logical network.

This report is printed at the location specified in the TLR-RPT-PERIODIC-TLR assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#REPRT13.

The Periodic Summary by Teller ID Report (Report 13) is shown on the following page, followed by descriptions of its fields.

REPORT 13 - PERIODIC SUMMARY BY TELLERID BK01 - FIRST NATIONAL BANK MM/DD/YY PAGE 1

REPORT PARAMETERS:

DATE RANGE: 07/22/92 - 07/29/92 FIID: BK01 TELLER-ID: ALL

TELLER-ID: TELLERID

(07/27) 22

TELLER TOTALS 22

TELLER-ID: TLRID-01

(07/27) 15

(07/29) 20

TELLER TOTALS 35

TELLER-ID: TLRID-10

(07/29) 30

TELLER TOTALS 30

*** TOTALS BY DATE ***

(07/27) 37

(07/29) 50

FIID TOTALS 87

REPORT 13 - PERIODIC SUMMARY BY TELLERID

ALL - GRAND-TOTALS

MM/DD/YY PAGE 2

REPORT PARAMETERS:

DATE RANGE: 07/22/92 - 07/29/92 FIID: BK01 TELLER-ID: ALL

*** GRAND TOTALS BY DATE ***

(07/27)	37
(07/29)	50

ALL TELLERS TOTAL	87
-------------------	----

*** END OF REPORT 13 ***

Part 1 — Institution Teller Totals

The following fields contain information about the totals for the tellers at a specific institution.

DATE RANGE — The beginning and ending dates (MM/DD/YY) the operator selected for the current periodic run.

FIID — The FIID of the financial institution the operator selected for the current periodic run. If this report is run for all FIIDs, ALL appears in this field.

TELLER-ID — The identification number of the teller the operator selected for the current periodic run. If this report is run for all tellers, ALL appears in this field.

TELLER-ID — The identification number of the teller who performed these transactions. Below this field are the dates (MM/DD) of each day in the current periodic run that had transaction activity by this teller. Following the date is the total number of transactions processed on that date by the specified teller.

TELLER TOTALS — The total number of transactions processed for all dates in the current periodic run by the specified teller.

*****TOTALS BY DATE***** — The total number of transactions processed by all tellers in the financial institution for each date in the current periodic run.

FIID TOTALS — The total number of transactions processed in the current periodic run by all tellers for the financial institution.

Part 2 — Grand Totals

The following fields contain information about teller totals for all institutions.

DATE RANGE — The beginning and ending dates (MM/DD/YY) the operator selected for the current periodic run.

FIID — The FIID of the financial institution the operator selected for the current periodic run. If this report is run for all FIIDs, ALL appears in this field.

TELLER-ID — The identification number of the teller the operator selected for the current periodic run. If this report is run for all tellers, ALL appears in this field.

TELLER TOTALS — The total number of transactions processed in the current periodic run by all tellers.

*****GRAND TOTALS BY DATE***** — The total number of transactions processed by all tellers in the financial institution for each date in the current periodic run.

Periodic Summary by Time Block Report (Report 14)

The Periodic Summary by Time Block Report (Report 14) lists the number of transactions (and the percent of the total transactions this number represents) performed by the financial institution for each hour of the business day included in the date range of the report.

Following the detail, the average number of transactions and percent of the total transactions are calculated and printed for each day of the week.

The date parameters and the FIID are identified through the Teller Report Generator (TRPT) screen when the report is generated. This report is printed at the location specified in the TLR-RPT-PERIODIC-TIM assign in the Logical Network Configuration File (LCONF). If no spooler location is specified or if an invalid spooler location is specified in the LCONF, the report program uses a default spooler location of \$S.#REPRT14.

The Periodic Summary by Time Block Report (Report 14) is shown on the following page, followed by descriptions of its fields.

REPORT 14 - PERIODIC SUMMARY BY TIME BLOCK										BK01 - FIRST NATIONAL BANK										MM/DD/YY		PAGE	1	
REPORT PARAMETERS:																								
DATE RANGE: 07/22/92 - 07/29/92										FIID: BK01														
	12AM - 1AM		1AM - 2AM		2AM - 3AM		3AM - 4AM		4AM - 5AM		5AM - 6AM		6AM - 7AM		7AM - 8AM		8AM - 9AM		9AM - 10AM		10AM - 11AM		11AM - 12PM	
	8AM - 9AM		9AM - 10AM		10AM - 11AM		11AM - 12PM		12PM - 1PM		1PM - 2PM		2PM - 3PM		3PM - 4PM		4PM - 5PM		5PM - 6PM		6PM - 7PM		7PM - 8PM	
	4PM - 5PM		5PM - 6PM		6PM - 7PM		7PM - 8PM		8PM - 9PM		9PM - 10PM		10PM - 11PM		11PM - 12AM									
07/22	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	TOTALS										0													
07/23	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	TOTALS										0													
07/24	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	TOTALS										0													
07/25	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	TOTALS										0													
07/26	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	TOTALS										0													
07/27	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
	TOTALS										0													

REPORT 14 - PERIODIC SUMMARY BY TIME BLOCK						BK01 - FIRST NATIONAL BANK						MM/DD/YY		PAGE		2			
REPORT PARAMETERS:																			
DATE RANGE: 07/22/92 - 07/29/92						FIID: BK01													
12AM - 1AM		1AM - 2AM		2AM - 3AM		3AM - 4AM		4AM - 5AM		5AM - 6AM		6AM - 7AM		7AM - 8AM		8AM - 9AM			
8AM - 9AM		9AM - 10AM		10AM - 11AM		11AM - 12PM		12PM - 1PM		1PM - 2PM		2PM - 3PM		3PM - 4PM		4PM - 5PM			
4PM - 5PM		5PM - 6PM		6PM - 7PM		7PM - 8PM		8PM - 9PM		9PM - 10PM		10PM - 11PM		11PM - 12AM					
07/28	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
TOTALS										0									
07/29	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	1	2%	8	21%	6	16%	7	18%	0	0%	2	5%	0	0%	4	10%	0	0%	
	9	24%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
TOTALS										37									
FIID TOTALS																			
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	1	2%	8	21%	6	16%	7	18%	0	0%	2	5%	0	0%	4	10%	0	0%	
	9	24%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
TOTALS										37									
MONDAY AVERAGE																			
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
MONDAY PERCENT					0%		MONDAY AVERAGE TOTAL					0							
TUESDAY AVERAGE																			
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
TUESDAY PERCENT					0%		TUESDAY AVERAGE TOTAL					0							
WEDNESDAY AVERAGE																			
	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
	0	0%	4	22%	3	16%	3	16%	0	0%	1	5%	0	0%	2	11%	0	0%	
	4	22%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	
WEDNESDAY PERCENT					100%		WEDNESDAY AVERAGE TOTAL					18							

REPORT 14 - PERIODIC SUMMARY BY TIME BLOCK

BK01 - FIRST NATIONAL BANK

MM/DD/YY PAGE 3

REPORT PARAMETERS:

DATE RANGE: 07/22/92 - 07/29/92 FIID: BK01

12AM - 1AM	1AM - 2AM	2AM - 3AM	3AM - 4AM	4AM - 5AM	5AM - 6AM	6AM - 7AM	7AM - 8AM
8AM - 9AM	9AM - 10AM	10AM - 11AM	11AM - 12PM	12PM - 1PM	1PM - 2PM	2PM - 3PM	3PM - 4PM
4PM - 5PM	5PM - 6PM	6PM - 7PM	7PM - 8PM	8PM - 9PM	9PM - 10PM	10PM - 11PM	11PM - 12AM
THURSDAY AVERAGE							
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
THURSDAY PERCENT		0%	THURSDAY AVERAGE TOTAL			0	
FRIDAY AVERAGE							
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
FRIDAY PERCENT		0%	FRIDAY AVERAGE TOTAL			0	
SATURDAY AVERAGE							
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
SATURDAY PERCENT		0%	SATURDAY AVERAGE TOTAL			0	
SUNDAY AVERAGE							
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
0	0%	0	0%	0	0%	0	0%
SUNDAY PERCENT		0%	SUNDAY AVERAGE TOTAL			0	
WEEKLY AVERAGE TOTAL					18		

*** END OF REPORT 14 ***

Format Description

The report header contains the report number, the report name, the institution ID, the reporting date, and the page number.

DATE RANGE — The beginning and ending dates (MM/DD/YY) that the operator selected for the current periodic run.

FIID — The FIID of the financial institution the operator selected for the current periodic run. If this report is run for all FIIDs, ALL appears in this field.

HHHH - HHHH — The time intervals for activity reported for all dates in the current periodic run. For each hourly time block on the report, the following statistics are reported:

1st Column = The number of transactions processed during each one hour time block in the current periodic run.

2nd Column = The percent of the total transaction activity for the reporting day that was processed during each one hour time block. The percent is calculated by dividing the number of transactions in the first column for each one hour time block by the total number of transactions for the reporting day.

TOTALS — The total number of transactions the institution processed for that particular date.

FIID TOTALS — The total number of transactions the institution processed for all dates in the current periodic run. For each hourly time block on the report, the following statistics are reported:

1st Column = The number of transactions processed during each one hour time block in the current periodic run.

2nd Column = The percent of the total transaction activity for the reporting day that was processed during each one hour time block. The percent is calculated by dividing the number of transactions in the first column for each one hour time block by the total number of transactions for the reporting day.

DAY OF WEEK AVERAGE — The average number of transactions occurring during each hourly time block for each calendar day of the week, Monday (MON) through Sunday (SUN), in the current periodic run. For each hourly time block on the report, the following statistics are reported:

- 1st Column = The average number of transactions processed during each one hour time block for each calendar day of the week. For example, if there are two Tuesdays in the reporting period, the hour being reported is 4PM to 5PM, 23 transactions were processed between 4PM and 5PM on the first Tuesday, and 15 transactions were processed between 4PM and 5PM on the second Tuesday, an average of 19 transactions were processed between 4PM and 5PM on Tuesday $((23 + 15)/2 = 19)$.
- 2nd Column = The percent of the total transaction activity during each one hour time block. This percent is calculated by dividing the transactions occurring in the hourly group by the total transactions processed during the calendar day. For example, if there are two Tuesdays in the reporting period, a total of 88 transactions were processed during the first Tuesday, a total of 76 transactions were processed during the second Tuesday, and an average of 19 transactions were processed between the hours of 4PM and 5PM, 11.5% of the transaction activity occurred between 4PM and 5PM on a Tuesday $(19/164 = 11.5\%)$

DAY OF WEEK PERCENT — The total average percent of transaction activity occurring for each calendar day of the week, Monday (MON) through Sunday (SUN), in the current periodic run. The following example demonstrates how the percent of total transaction activity is calculated for one calendar day.

Daily averages are as follows:

- 1500 = Monday average
1000 = Tuesday average
950 = Wednesday average
390 = Thursday average
1160 = Friday average
500 = Saturday average
0 = Sunday average
- 5,500 = Sum of daily averages

The transaction activity average for one calendar day is then divided by the sum of daily averages to obtain the percentage of transaction activity for one calendar day. In this case the calendar day of Thursday had 7% of all transaction activity ($390/5500 = 7\%$).

DAY OF WEEK AVERAGE TOTAL — The average number of transactions occurring for each calendar day, Monday (MON) through Sunday (SUN), in the current periodic run. The average is found by totaling the number of transactions occurring on one calendar day of the week during the current periodic run and dividing it by the number of times the calendar day appears in the current periodic run. For example, the THURSDAY AVERAGE TOTAL for a periodic run that includes three weeks would be calculated as follows:

Thursday #1 = 550 transactions
Thursday #2 = 220 transactions
Thursday #3 = 400 transactions

$$(550 + 220 + 400) / 3 = 390$$

The average number of transactions processed on a Thursday during this periodic run was 390.

WEEKLY AVERAGE TOTAL — The average number of transactions processed weekly for the current periodic run. This average is the sum of all the calculated daily averages for each calendar day in the periodic run.

Account Routing File (ARF) Database Report

The Account Routing File (ARF) Database Report provides a listing of the information in the Account Routing File (ARF). The ARF defines parameters that the logical network uses in interbank routing. One ARF Database Report is produced for the logical network. The central institution can use this report to verify the information in the BASE24-teller database. This report is produced only if institutions within the logical network perform interbank routing.

This report is formatted in two sections. Each section is separated by a page break. The first section reports the bank routing code records. The second section reports the account number routing records.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Account Routing File (ARF) Database Report is shown on the following pages, followed by descriptions of its fields.

ACCOUNT ROUTING FILE (ARF) DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

BANK ROUTING CODE RECORDS

ACCT TYPE	ACCT LENGTH	BANK ROUTING CODE		INSERT POSN	INSERT VALUE	INSERT LENGTH	ACCT FIID
----	-----	HI	LO	-----	-----	-----	----
01	10		1234	03	54	2	BK01
11	18	00000009876		18	9	1	BK01

ACCOUNT ROUTING FILE (ARF) DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

ACCOUNT NUMBER ROUTING RECORDS

ACCT TYPE ----	ACCT LENGTH -----	MATCH POSN -----	MATCH VALUE -----	MATCH LENGTH -----	ACCT FIID ----
11	18	18	9	1	BK01

Part 1 — Bank Routing Code Records

The following fields contain information pertaining to the bank routing code records.

ACCT TYPE — The account type associated with the account number(s) being defined. Valid values are as follows:

- 01 = DDA (checking account)
- 11 = Savings account
- 12 = Individual Retirement Account (IRA)
- 13 = Certificate of Deposit
- 21 = NOW account
- 31 = Credit card account
- 32 = Credit line account
- 41 = Installment loan account
- 42 = Mortgage loan account
- 43 = Commercial loan account
- 50 = Utility payment account
- 51 = Utility 1 payment account
- 52 = Utility 2 payment account
- 53 = Utility 3 payment account
- 54 = Utility 4 payment account
- 55 = Utility 5 payment account
- ** = No designated account

ACCT LENGTH — The length of the original account number. Valid values are 1 through 19.

BANK ROUTING CODE - HI — A code that identifies the institution that owns the account. If a range of routing codes is being supported, this code represents the high value of that range. If a range of routing codes is not supported, this field contains the routing code itself.

BANK ROUTING CODE - LO — A code that identifies the institution that owns the account. If a range of routing codes is being supported, this code represents the low value of that range. If a range of routing codes is not supported, this field is blank.

INSERT POSN — The position within the original account number where one or more numeric characters can be inserted to make the account number unique within the logical network. Valid positions are 1 through 19.

INSERT VALUE — The numeric characters that can be inserted into the original account number to make it unique within the logical network. This field can contain 1 to 18 numeric characters.

INSERT LENGTH — The number of digits in the insert value.

ACCT FIID — The FIID of the institution that owns the account.

Part 2 — Account Number Routing Records

The following fields contain information pertaining to account number routing records.

ACCT TYPE — The account type associated with the account number(s) being defined. Valid values are as follows:

- 01 = DDA (checking account)
- 11 = Savings account
- 12 = Individual Retirement Account (IRA)
- 13 = Certificate of Deposit
- 21 = NOW account
- 31 = Credit card account
- 32 = Credit line account
- 41 = Installment loan account
- 42 = Mortgage loan account
- 43 = Commercial loan account
- 50 = Utility payment account
- 51 = Utility 1 payment account
- 52 = Utility 2 payment account
- 53 = Utility 3 payment account
- 54 = Utility 4 payment account
- 55 = Utility 5 payment account
- ** = No designated account

ACCT LENGTH — The length of the original account number. Valid values are 1 through 19.

MATCH POSN — The position within the original account number where BASE24-teller can locate the identifier used to determine the institution that owns the account.

MATCH VALUE — The identifier that can be found in the original account number and enables BASE24-teller to determine the institution that owns the account.

MATCH LENGTH — The number of digits in the match value.

ACCT FIID — The FIID of the institution that owns the account.

Institution Definition File (IDF) Database Report

The Institution Definition File (IDF) Database Report provides a listing of the information in the BASE24-teller segment of the Institution Definition File (IDF). The IDF defines processing parameters specific to each institution in the logical network. One IDF Database Report is produced for the logical network. The central institution can use this report to verify the information in the BASE24-teller database.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Institution Definition File (IDF) Database Report is shown on the following page, followed by descriptions of its fields.

INSTITUTION DEFINITION FILE (IDF) DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

IDF TELLER SEGMENT INFORMATION

FIID	IN	RE	BK	CSH IN	CSH OUT	STRT CUT	END CUT	CRNCY	CUST	PERCENT	MAXIMUM	MAXIMUM
BANKING	RELATIONSHIPS					CUR BUS	NXT BUS	CODE	CLASS	DEPOSIT	CREDIT	NUMBER
CR XFER	METH/INCR	AMT		DB XFER	METH/INCR	AMT						DEPOSITS
CRD ACCT	SEL											MAXIMUM
												CASH OUT
=====	=====	=====	=====	=====	=====	=====	=====	=====	=====	=====	=====	=====
BK01	Y			N	N	13:00	14:00	840	2	50%	100	2
ABC123						92/10/05	92/10/06					500
I				25	I		25					
2												

Format Description

FIID — The FIID of the institution.

INTERBNK — A value indicating whether the institution supports interbank routing. Interbank routing allows institutions to accept and route transactions to be authorized by other financial institutions within the logical network.

CSH IN — A code established at the institution level that is used to determine how memo post deposits are credited to a customer's available balance in the Positive Balance File (PBF). The ledger balance is always increased by the full deposit amount. Valid values are as follows:

- N = No, the cash portion of the deposit is not memo posted. The ledger balance increases by the total amount of the deposit. The available balance increases by a percentage of the total deposit as determined by the institution in the PERCENT-DEP field of the IDF. The amount on hold increases by the total amount of the deposit, minus the amount of the deposit added to the available balance.
- Y = Yes, the cash portion of the deposit is memo posted. The ledger balance increases by the total amount of the deposit. The available balance increases by the cash in amount, plus a percentage of the non-cash in amount of the deposit. The percentage of the non-cash in amount is determined by the institution in the PERCENT-DEP field of the IDF. The amount on hold increases by the total amount of the deposit, minus the amount of the deposit added to the available balance.

CSH OUT — A code established at the institution level that is used to determine how memo post deposits are debited to a customer's available balance and ledger balance in the Positive Balance File (PBF). Valid values are as follows:

- N = No, the cash out portion of the deposit is not memo posted. The ledger balance increases by the total amount of the deposit, without regard to the amount of cash out. The available balance increases by the cash in amount portion of the deposit, plus a percentage of the non-cash in amount of the deposit. This percentage is determined by the institution in the PERCENT-DEP field of the IDF. The amount on hold increases by the total amount of the deposit, minus the amount of the deposit added to the available balance without regard to the cash out amount. The cash out today balance increases by the cash out amount.

- Y = Yes, the cash out portion of the deposit is memo posted. The ledger balance increases by the total amount of the deposit without regard to the cash out amount. The available balance increases by the cash in amount, plus a percentage of the non-cash in amount of the deposit, and minus the cash out amount of the deposit. This percentage is determined by the institution in the PERCENT-DEP field of the IDF. The amount on hold increases by the total amount of the deposit, minus the amount of the deposit added to the available balance. The cash out today balance increases by the cash out amount.
- X = Only the difference between the cash in and cash out portions of the deposit is memo posted. The ledger balance increases by the total amount of the deposit. The available balance increases by a percentage of the total deposit amount minus the difference between the cash out and cash in amounts. This percentage is determined by the institution in the PERCENT-DEP field of the IDF. The amount on hold increases by the total amount of the deposit, minus the amount of the deposit added to the available balance. The cash out today balance increases by the cash out amount.

STRT CUT — The time (HH:MM) that this institution allows individual tellers to begin cutover.

END CUT — The ending time (HH:MM) of the teller cutover window. At this time, the institution no longer logs to the current Teller Transaction Log File (TTLF). Transactions posted after this time are logged to the new TTLF. If a teller at the institution has not cutover by this time, all transactions initiated at that teller are declined until cutover is completed.

CRNCY CODE — A code indicating what type of currency this institution uses.

Customer Class Table

The following fields (CUST CLASS, PERCENT DEPOSIT, MAXIMUM CREDIT, MAXIMUM NUMBER DEPOSITS, and MAXIMUM CASH OUT) compose the customer class table. A customer class table for each customer class specified in the IDF for this institution is displayed on the report.

CUST CLASS — A customer class value defined for the institution. Valid values are 0 through 9.

PERCENT DEPOSIT — The percentage of the deposit that is immediately credited to the customer's account upon deposit via a teller terminal.

MAXIMUM CREDIT — The maximum amount of instant credit to any one account on a given calendar day via a teller terminal.

MAXIMUM NUMBER DEPOSITS — The maximum number of deposits to any one account that can be considered for instant credit. If the number of deposits exceeds the value in this field, no instant credit is available for this deposit.

MAXIMUM CASH OUT — The maximum amount of cash that a customer can withdraw from a depository account via a teller terminal in one day.

BANKING RELATIONSHIPS — One or more characters indicating the institutions with which this institution has a banking relationship.

CUR BUS — The current business date (YY/MM/DD) for this institution.

NXT BUS — The next business date (YY/MM/DD) for this institution.

CR XFER METH — A code indicating how BASE24-teller determines the transfer amount for an automatic transfer from a credit line account to the primary account. Valid values are as follows:

E = Exact amount; the exact credit amount needed is transferred from the credit line account to the primary account. For example, if the amount of credit needed is \$15.50, then that amount is automatically transferred from the credit line account to the primary account.

- I = Increment amount; an increment amount specified by the institution is transferred from the credit line account to the primary account. For example, if the amount of credit needed is \$15.50 and the specified increment amount is \$5.00, then \$20.00 is automatically transferred from the credit line account to the primary account.

CR INCR AMT — The increment amount used for automatic, internal transfers from credit line accounts to primary accounts.

DB XFER METH — A code indicating how BASE24-teller determines the transfer amount for an automatic transfer from a savings or demand deposit account to the primary account. Valid values are as follows:

- E = Exact amount; the exact transfer amount needed is transferred from the savings or demand deposit account to the primary account. For example, if the amount needed is \$15.50, then that amount is automatically transferred from the savings or demand deposit account to the primary account.
- I = Increment amount; an increment amount specified by the institution is transferred from the savings or demand deposit account to the primary account. For example, if the amount needed is \$15.50 and the specified increment amount is \$5.00, then \$20.00 is automatically transferred from the savings or demand deposit account to the primary account.

DB INCR AMT — The increment amount used for automatic, internal transfers from savings or demand deposit accounts to primary accounts.

CRD ACCT SEL — A code indicating which account is selected from the Cardholder Authorization File (CAF) when more than one account type is associated with a single transaction request. Valid values are as follows:

- 0 = No account selection.
- 1 = Select the first primary account.
- 2 = Customer will select the account.

Override Response File (ORF) Database Report

The Override Response File (ORF) Database Report provides a listing of the information in the Override Response File (ORF). The ORF defines the levels at which specific response codes can be overridden. One ORF Database Report is produced for the logical network. The central institution can use this report to verify the information in the BASE24-teller database.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Override Response File (ORF) Database Report is shown on the following page, followed by descriptions of its fields.

OVERRIDE RESPONSE FILE (ORF) DATABASE REPORT
 PRODUCED ON: mm/dd/yy
 hh:mm

PROFILE	RESPONSE CODE	OUR CUST-OUR TERM MINIMUM OVERRIDE LEVEL	OUR CUST-NOT ON US MINIMUM OVERRIDE LEVEL	RESPONSE CODE DESCRIPTION
12A345B6	A03	TELLER OVERRIDE	MANAGER OVERRIDE	APPROVED WITH OVERRIDE

END

Format Description

PROFILE — A code indicating a group of institutions for override processing.

RESPONSE CODE — The response code for which the minimum override levels are being defined.

OUR CUST—OUR TERM MINIMUM OVERRIDE LEVEL — A text description of the minimum override level required for approval of an on-us transaction with the specified response code. Possible descriptions are as follows:

NO OVERRIDE REQUIRED
TELLER OVERRIDE
SUPERVISOR OVERRIDE
MANAGER OVERRIDE
OVERRIDE RESTRICTED

OUR CUST—NOT ON US MINIMUM OVERRIDE LEVEL — A text description of the minimum override level required for approval of a not-on-us transaction with the specified response code. Possible descriptions are as follows:

NO OVERRIDE REQUIRED
TELLER OVERRIDE
SUPERVISOR OVERRIDE
MANAGER OVERRIDE
OVERRIDE RESTRICTED

RESPONSE CODE DESCRIPTION — A text description of the specified response code.

Stop Payment File (SPF) Database Report

The Stop Payment File (SPF) Database Report provides a listing of the information in the Stop Payment File (SPF). The SPF contains records of stop pays that have been issued for accounts. One SPF Database Report is produced for each SPF in the logical network. The central institution can use this report to verify the information in the BASE24-teller database.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Stop Payment File (SPF) Database Report is shown on the following page, followed by descriptions of its fields.

STOP PAYMENT FILE (SPF) DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

FIID	ACCOUNT NUMBER	ACCT TYPE	HIGH CHECK NUM	LOW CHECK NUM	AMOUNT	EXP DATE	DESCRIPTION DATE TIME
BK01	222222	01	00000098765	00000098750	0.00	000000	STOLEN CHECKS 921005 14553200

END

Format Description

FIID — The FIID of the institution owning the account associated with this stop payment record.

ACCOUNT NUMBER — The account number of the account associated with this stop payment record.

ACCT TYPE — A code indicating the type of customer account specified in the ACCOUNT NUMBER field. Valid values are as follows:

01 = DDA (checking account)

21 = NOW account

HIGH CHECK NUM — The check number of the check on which to stop payment. If this stop payment record is for a range of check numbers, this field contains the highest check number in the range.

LOW CHECK NUM — The lowest check number in a range of checks on which to stop payment. If this stop payment record is for a single check, this field is blank.

AMOUNT — The amount, in whole and fractional currency units, for which the stop payment has been issued.

EXP DATE — The date (YYMMDD) that this stop payment record expires.

DESCRIPTION — A message that the institution placed in the Stop Payment File (SPF) regarding this stop payment record. If the institution did not place a comment in the SPF for this record, this field is blank.

DATE — The date (YYMMDD) that this stop payment record was added to the SPF.

TIME — The time (HHMMSSTT) that this stop payment record was added to the SPF.

Teller Terminal Data File (TTDF) Database Report

The Teller Terminal Data File (TTDF) Database Report provides a listing of the information in the Teller Terminal Data File (TTDF). The TTDF contains records of the teller terminals defined within the logical network. One TTDF Database Report is produced for the logical network. The central institution can use this report to verify the information in the BASE24-teller database.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Teller Terminal Data File (TTDF) Database Report is shown on the following page, followed by descriptions of its fields.

TELLER TERMINAL DATA FILE (TTDF) DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

TERMINAL ID	FIID	LN	STA #	DEVICE TYPE	DH PROCESS	AUTH PROCESS	AUTO PB PRNT	BANKING RELATIONSHIP
S1A^ISC^BC^10	BK01	LLLL	0000	54	P1A^TISC	P1A^TAUTH1	Y	ABC123

END

Format Description

TERMINAL ID — The terminal ID of the teller terminal. This is the symbolic station name assigned to the terminal in the Network Environment Source File (NEFS). This ID is unique within the logical network.

FIID — The FIID of the institution owning the terminal.

LN — The logical network in which the teller terminal is located.

STA # — The station number for the teller terminal as assigned in the Network Environment File (NEF).

DEVICE TYPE — A code indicating the device type of this teller terminal.

DH PROCESS — The name of the Device Handler process designated to receive transactions from the teller terminal.

AUTH PROCESS — The name of the Authorization process to which the Device Handler process is to send requests from the teller terminal.

AUTO PB PRNT — A code indicating whether this teller terminal is capable of supporting automatic passbook printing.

BANKING RELATIONSHIP — Characters indicating with which institutions the terminal owner has banking relationships.

Teller Transaction File (TTF) Database Report

The Teller Transaction File (TTF) Database Report provides a listing of the information in the Teller Transaction File (TTF). The TTF contains records of how individual institutions support each teller transaction. One TTF Database Report is produced for the logical network. The central institution can use this report to verify the information in the BASE24-teller database.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Teller Transaction File (TTF) Database Report is shown on the following page, followed by descriptions of its fields.

TELLER TRANSACTION FILE (TTF) DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

FIID	TRAN CODE	FROM ACCT	TO ACCT	TRANSACTION DESCRIPTION	TERM TRAN ALLOWED	OUR CUST- NOT ON US TERM	AUTH LEVEL	SEARCH WHFF	COMPLETIONS TO HOST	PREAUTH
BK01	10	11	00	WITHDRAWAL FROM SAVINGS	YES	YES	ONLINE	YES	APPROVED TRANS	Y

END

Format Description

FIID — The FIID of the financial institution defining the transaction.

TRAN CODE — The transaction code of the transaction being defined. This code, together with the *from* account type and a *to* account type, represents a single type of transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid transaction codes.

FROM ACCT — A code indicating the account type of the account that is debited by this transaction when the transaction involves a debit. When the transaction is a split deposit transaction, this field contains a code indicating the account type of the first account to which funds are deposited. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

TO ACCT — A code indicating the account type of the account that is credited by this transaction. When the transaction is a split deposit transaction, this field contains a code indicating the account type of the second account to which funds are deposited. When the transaction is a non-financial transaction, such as a balance inquiry or Stop Payment File (SPF) update, this field contains a code indicating the account type of the account involved in the transaction. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

TRANSACTION DESCRIPTION — A text description of the transaction type, as defined by the transaction code, *from* account, and *to* account. Refer to the ***BASE24-teller Transaction Processing Manual*** for a complete list of transaction types.

TERM TRAN ALLOWED — A text description that indicates whether the institution that owns the teller terminal supports this transaction type regardless of whether the transaction is on-us or not-on-us. Valid descriptions are as follows:

YES	= Transaction is supported.
NO	= Transaction is not supported.
LOG ONLY	= Transaction is logged but does not affect balances.

OUR CUST-NOT ON US TERM — A text description that indicates whether the institution that owns the account allows the transaction to be performed by their customer at a teller terminal owned by another institution. Valid descriptions are as follows:

YES = Transaction is supported.

NO = Transaction is not supported.

AUTH LEVEL — A text description indicating whether BASE24 will process the transaction if it is an on-us transaction. Valid descriptions are as follows:

NOT SUPPORTED = Transaction is not supported when transaction is on-us.

ONLINE = Transaction is supported if transaction is authorized online.

OFFLINE = Transaction is supported if transaction is authorized offline.

LOG ONLY = Transaction is supported in that it is logged; balances are not affected.

SEARCH WHFF — A text description indicating whether BASE24 must search the Warning/Hold/Float File (WHFF) for this transaction. Valid descriptions are as follows:

YES = Search the WHFF for this transaction.

NO = Do not search the WHFF for this transaction.

COMPLETIONS TO HOST — A text description indicating whether BASE24-teller sends a completion message to the host for this transaction. Valid descriptions are as follows:

NO COMPLETIONS = No completions are sent to the host.

APPROVED TRANS = Send completions for approved transactions only.

DENIED TRANS = Send completions for declined transactions only.

APPROVED/DENIED = Send completions for both approved and declined transactions.

PREAUTH — A code indicating whether preauthorization holds are considered when determining the available balance. Valid values are as follows:

Y = Yes, include preauthorization hold amounts in the available balance.

N = No, do not include preauthorization hold amounts in the available balance.

Warning/Hold/Float File (WHFF) Database Report

The Warning/Hold/Float File (WHFF) Database Report provides a listing of the information in the Warning/Hold/Float File (WHFF). The WHFF contains records of warnings, holds, and deposit floats that have been placed on accounts. One WHFF Database Report is produced for each WHFF defined in the logical network. The central institution can use this report to verify the information in the BASE24-teller database.

This report is written to the spooler location specified when the report is generated. Refer to section 5 for more information on generating this report.

The Warning/Hold/Float File (WHFF) Database Report is shown on the following page, followed by descriptions of its fields.

WARNING/HOLD/FLOAT FILE DATABASE REPORT

PRODUCED ON: MM/DD/YY HH:MM

FIID	ACCOUNT NUMBER	ACCT TYPE	RECORD TYPE	AMOUNT	DATE	TIME	EXP DATE	DESCRIPTION
BK01	44444444	01	DEPOSIT FLOAT	53.26	921212	15443200	930101	

END

Format Description

FIID — The FIID of the financial institution owning this account.

ACCOUNT NUMBER — The account number of the account associated with this WHFF record.

ACCT TYPE — A code indicating the type of customer account associated with this WHFF record. Refer to the ***BASE24-teller Transaction Processing Manual*** for valid account types.

RECORD TYPE — A text description of the type of WHFF record being reported. Valid descriptions are as follows:

WARNING

HOLD

DEPOSIT FLOAT

AMOUNT — The amount, in whole and fractional currency units, for which this WHFF record has been created.

DATE — The date (YYMMDD) this record was added to the WHFF.

TIME — The time (HHMMSSTT) this record was added to the WHFF.

EXP DATE — The date (YYMMDD) that this WHFF record will expire.

DESCRIPTION — A message that the institution placed in the WHFF regarding this record. If the institution did not place a comment in the WHFF for this record, this field is blank.

Section 4

Configuring Cutover and Reporting

This section provides an overview of the configuration tasks that a user must perform to establish BASE24-teller cutover and reporting.

Configuring Cutover

BASE24-teller institution and logical network cutover are configured via information in the Institution Definition File (IDF) and the Logical Network Configuration File (LCONF). BASE24-teller does not control teller terminal cutover; teller terminal cutover must be performed manually by a teller at a time dictated by the institution.

Terminal Cutover

BASE24-teller is not involved in teller terminal cutover. Tasks such as balancing the cash drawers and closing each terminal's business day, and the time at which these tasks are performed, are left to the discretion of each institution. This enables each institution to establish its own business practices at the terminal level.

Terminal cutover is controlled by the individual institution. Institutions base the end time for their business day on the time at which they will continue to accept deposits but will no longer credit accountholder's accounts for deposits that day. For example, an institution can determine that deposits made after 2:00 p.m. will not be credited to accountholder accounts until the next day. In this case, the teller terminals must be cut over to the next day by 2:00 p.m. so that deposit transactions (and all other transactions) are logged to the next day's business.

Because teller terminal cutover is a manual task left to the discretion of each institution, it does not require any configuration.

Institution Cutover

BASE24-teller automatically cuts each institution over to a new business day and the institution then begins logging transactions to the next day's log file.

Institution cutover is controlled via fields in the IDF and assigns in the Logical Network Configuration File (LCONF).

IDF Fields Used for Institution Cutover

Each IDF field that impacts institution cutover is listed and briefly described below. For more information on these fields, refer to the ***BASE24 Base Files Maintenance Manual***.

CURRENT BUSINESS DATE — The current business date (YYMMDD) for the institution. This field is located on IDF screen 25.

NEXT BUSINESS DATE — The next business date (YYMMDD) for the institution. This field is located on IDF screen 25.

TELLER CUTOVER START TIME — The time, in military time, that the institution allows individual tellers to begin cutting over to a new business day. This field is located on IDF screen 25.

TELLER CUTOVER END TIME — The time, in military time, that the institution cuts over. All tellers must be cut over by this time. The time in this field must be at least one-half hour before logical network cutover time. This field is located on IDF screen 25.

TTLF WORK DAYS — A code indicating whether or not BASE24-teller processes transactions on weekends and holidays. This field is located on IDF screen 27.

HOLIDAY SCHEDULE — A list of holiday dates during which BASE24-teller will not process transactions. This field is located on IDF screen 27.

LCONF Assigns Used for Institution Cutover

Each LCONF assign that impacts institution cutover is listed and briefly described below. For more information on these assigns, refer to the ***BASE24 Logical Network Configuration File (LCONF) Manual***.

IDF assign — The symbolic name of the Institution Definition File (IDF). BASE24-teller uses this assign to access the correct IDF and obtain the appropriate settlement processing information for each institution.

TLR-TTDF assign — The symbolic name of the Teller Terminal Data File (TTDF). BASE24-teller uses this assign to access the TTDF and obtain the terminal ID and terminal posting date.

TLR-TTLF assign — The symbolic name of the Teller Transaction Log File (TTLF). BASE24-teller uses this assign to log transactions to the next day's log file after institution cutover.

Logical Network Cutover

BASE24-teller automatically cuts the logical network over to a new business day. The time at which BASE24-teller cuts over the logical network and the tasks completed during logical network cutover are controlled by several LCONF params. Each of these params is listed and briefly described below. For more information on each param, refer to the ***BASE24 Logical Network Configuration File (LCONF) Manual***.

TLR-LN-CUTOVER param — The time at which BASE24-teller cuts over the logical network. At this time, the current Teller Transaction Log File (TTLF) is closed and transactions must be logged to the next day's TTLF.

TLR-SETL-NOTIFY param — The symbolic name of each BASE24-teller Authorization process and Device Handler process that the BASE24-teller Settlement Initiator process must notify after logical network cutover.

TLR-SETL-TTLF-FILE-RETENTION param — The number of days a Teller Transaction Log File (TTLF) is to remain on the system after it has been closed. After the indicated number of days, the BASE24-teller Settlement Initiator process deletes the file from the system at logical network cutover.

TLR-RPT-FILE-RETENTION param — The number of days of records to retain in the Report Transactions by Time Block File (RTTB) and the Report Transactions by Type File (RTTF). After the indicated number of days, the records from these files are deleted at logical network cutover.

TLR-SETL-MASTER param — The symbolic name of the Settlement Initiator process that is responsible for settlement functions. Only one Settlement Initiator process can be running at one time. If a Settlement Initiator process begins to initialize and its symbolic name is not in this param, the process abends.

Configuring Reports to Run

The BASE24-teller reporting process is configured via information in the Logical Network Configuration File (LCONF), the Institution Definition File (IDF), and the COBNAMES table.

Note: To run BASE24-teller reports on the Tandem system, alternate keys must be configured for the Teller Transaction Log File (TTLF). If alternate keys have not been configured for the TTLF, BASE24-teller is unable to produce reports. Alternate keys are configured via a template file when BASE24-teller is installed. Refer to the ***BASE24-teller Files Maintenance Manual*** for more information on the TTLF.

Logical Network Configuration File

BASE24-teller uses a number of LCONF assigns and params when running reports. These assigns and params must be configured before BASE24-teller can produce reports. Each assign and param BASE24-teller uses for reporting is identified and briefly defined below. Refer to the ***BASE24 Logical Network Configuration File (LCONF) Manual*** for more information on each assign and param.

TLR-RPT-CRD-ACTIVITY assign — The spooler location to which the Daily Institution Cardholder Activity Report is written.

TLR-RPT-DLY-DETAIL assign — The spooler location to which the Daily Detail Report is written.

TLR-RPT-DLY-TIM assign — The spooler location to which the Daily Summary by Teller ID and Time Block Report is written.

TLR-RPT-DLY-TLR assign — The spooler location to which the Daily Summary by Teller ID Report is written.

TLR-RPT-DLY-TYP assign — The spooler location to which the Daily Summary by Type Report is written.

TLR-RPT-NTWK-CLEARINGS assign — The spooler location to which the Daily Network Clearings Statement Report is written.

TLR-RPT-PERIODIC-TIM assign — The spooler location to which the Periodic Summary by Time Block Report is written.

TLR-RPT-PERIODIC-TLR assign — The spooler location to which the Periodic Summary by Teller ID Report is written.

TLR-RPT-PERIODIC-TYP assign — The spooler location to which the Periodic Summary by Type Report is written.

TLR-RTTB assign — The symbolic name of the Report Transaction by Time Block File (RTTB) used for periodic reports. Records are added to this file each time the daily reports are run.

TLR-RTTF assign — The symbolic name of the Report Transaction by Type File (RTTF) used for periodic reports. Records are added to this file each time the daily reports are run.

TLR-TTLF assign — The symbolic name of the Teller Transaction Log File (TTLF) used for logging daily transaction activity. This file is used to produce the daily reports.

TLR-TTF assign — The symbolic name of the Teller Transaction File (TTF) used for identifying teller transaction types. This file is used to produce the daily reports.

TLR-RPT-FILE-RETENTION param — The number of days of records BASE24-teller must retain in the Report Transactions by Time Block File (RTTB) and Report Transactions by Type File (RTTF).

TLR-RPT-PRNT-TKN-ERR param — In addition to transaction information, the Daily Detail Report (Report 01) lists token processing error messages for each transaction in which they occur. Not all of these error messages are critical. Non-critical error messages can be suppressed by setting the TLR-RPT-PRNT-TKN-ERR param in the LCONF to N. If this param is not set to N, BASE24-teller prints all the error messages on the report output.

Institution Definition File

The Institution Definition File (IDF) contains one record for each institution in the logical network. The settings in these records determine how transactions are processed and reported.

Two fields in the IDF must be set before BASE24-teller can produce periodic reports. These fields do not have any impact on daily reports or database reports. The IDF fields that must be set before BASE24-teller can produce periodic reports are listed below:

- RTTF REPORT INDICATOR
- RTTBF REPORT INDICATOR

Both of these fields are located on IDF screen 26. Refer to the ***BASE24 Base Files Maintenance Manual*** for more information on these fields.

COBNAMES File

Some information that appears on the BASE24-teller reports can be customized for a particular logical network. For example, ACI assigns descriptions to response codes that appear on BASE24-teller reports where applicable. These descriptions can be changed to better fit the needs of the logical network. Such changes are made in the COBNAMES file.

The COBNAMES file contains tables of information and is used by all BASE24 products during processing. Each product accesses particular tables in the COBNAMES file to complete certain processing. The information tables that BASE24-teller uses in settlement and reporting contain response code descriptions.

After making changes to the COBNAMES file, the reports that access the COBNAMES file must be recompiled and the object code must be placed in the appropriate volume and subvolume.

Applied Communications, Inc.

Section 5

Settlement and Reporting Operations

This section describes the tasks that an operator must perform to manage settlement and reporting from day to day. These tasks include cutting over and balancing a teller terminal, requesting daily reports, requesting periodic reports, and generating database reports.

Cutting Over and Balancing a Teller Terminal

BASE24-teller does not perform teller terminal balancing or teller terminal cutover. Tellers must manually balance their teller terminals. Teller terminals can be balanced as many times a day as an institution requires. Tellers must also manually cut over each teller terminal before the institution cuts over. If a teller terminal is not cut over before the institution cuts over, BASE24-teller denies all transactions initiated at that terminal.

To cut over a teller terminal, the teller must submit an administrative transaction. Possible administrative transactions are listed and defined below.

SIGN ON — Used to sign on to the start of a new business day. When submitting a SIGN ON transaction, the teller must enter the business date of the open TTLF to which they plan to log transactions. The Device Handler compares the date entered by the teller to the IDF dates in memory before accepting the logon transaction. The date entered by the teller cannot be a date prior to the current system date from the IDF because the TTLFs for prior dates have already been closed.

SIGN OFF — Used to sign off from the current business day. This transaction ends the current business day. At terminal cutover, the teller must submit a SIGN OFF transaction. Before submitting a SIGN OFF transaction, the teller can balance the terminal's cash drawer and calculate the daily terminal totals according to procedures established by the institution. The teller must submit a SIGN OFF transaction before submitting a SIGN ON transaction to start the next business day.

LOG OFF — Used to temporarily close out the terminal within the business day. A teller may use the LOG OFF transaction periodically throughout the business day to balance the terminal's cash drawer. For example, before going to lunch or before changing shifts, the teller can log off the BASE24-teller system and balance the terminal according to procedures established by the institution.

LOG ON — Used to open the terminal within the same business day. Tellers must use the LOG ON transaction after a LOG OFF transaction to continue initiating transactions for the current business day. The teller must submit a date with this transaction.

Generating BASE24-teller Reports

The Teller Report Generator (TRPT) screen is used to initiate daily and periodic report generation. To generate reports, an operator must complete data fields on the TRPT screen and enter the date by pressing particular function keys.

When an operator chooses to run daily reports, all daily reports are generated sequentially. When an operator chooses to run periodic reports, the operator must select and run each report individually.

The TRPT screen is shown below, followed by descriptions of its fields and function keys.

```

BASE24-TLR  TELLER REPORT INIT      R501      YY/MM/DD  HH:MM  01 OF 01
              TELLER REPORT GENERATOR
DAILY REPORT DATE: YYMMDD (YYMMDD)

REPORT START DATE: YYMMDD (YYMMDD)    REPORT END DATE: YYMMDD (YYMMDD)
              FIID:                      TELLER ID:

1. TO GENERATE DAILY DETAIL REPORTS, PLEASE ENTER DAILY REPORT DATE AND
   PRESS THE CORRESPONDING FUNCTION KEY.

2. TO GENERATE PERIODIC REPORTS, PLEASE ENTER REPORT START DATE, REPORT END
   DATE, FIID AND TELLER ID AND PRESS THE CORRESPONDING FUNCTION KEY.

NOTE: * REPORT START DATE, REPORT END DATE, AND FIID ARE REQUIRED FIELDS
      * FOR ALL PERIODIC REPORTS.
      * FIID MAY CONTAIN A SPECIFIC FIID OR THE VALUE 'ALL '.
      * TELLER ID IS REQUIRED FOR RPT13 ONLY, TELLER ID MAY CONTAIN A
        SPECIFIC TELLER ID OR THE VALUE 'ALL '.

***** BASE24 *****
              FILE DESTINATION:          NEW LOGICAL NETWORK ID:
              F12-HELP

```

DAILY REPORT DATE — The date (YYMMDD) of the TTLF to use for generating daily reports.

Field Length:	6 numeric characters
Required Field:	Yes, for Report 01, Report 02, Report 03, and Report 04
Default:	Current date
Data Name:	N/A

REPORT START DATE — The beginning date (YYMMDD) for data appearing on the periodic report. The date in this field must be an earlier date than the one entered in the REPORT END DATE field.

Field Length: 6 numeric characters
Required Field: Yes, for Report 12, Report 13, and Report 14
Default: current date
Data Name: N/A

REPORT END DATE — The ending date (YYMMDD) for data appearing on the periodic report. The date in this field must be a later date than the one entered in the REPORT END DATE field.

Field Length: 6 numeric characters
Required Field: Yes, for Report 12, Report 13, and Report 14
Default: current date
Data Name: N/A

FIID — The FIID of the institution for which periodic reports are to be generated. Either a specific FIID can be entered, or the word ALL can be entered to generate periodic reports for all institutions in the network.

Field Length: 1-4 alphanumeric characters
Required Field: Yes, for Report 12, Report 13, and Report 14
Default Value: The FIID previously entered.
Data Name: N/A

TELLER ID — The identification number of the teller whose transactions are being selected for Report 13. The user should enter ALL in this field if all tellers are to be included on the report.

Field Length: 1-8 alphanumeric characters
Required Field: Yes, for Report 13
Data Name: N/A

Function Keys

The use of the function keys on the TRPT screen differs from that specified for the standard function keys explained in the ***BASE24 CRT Access Manual***. The use of these function keys is explained below.

The first column shows the BASE24 function keys. The second column describes the operation of the function keys on the TRPT screen.

Key	Description
F1	Runs Report 01, Report 02, Report 03, and Report 04 from the terminal owner's perspective.
F2	Runs the Periodic Summary by Type Report (Report 12).
F3	Runs the Periodic Summary by Teller ID Report (Report 13).
F4	Runs the Periodic Summary by Time Block Report (Report 14).
F5	Runs Report 01 from the account owner's perspective.
F6	Runs the Network Clearings Statement Report (SETL01).
F7	Runs the Daily Institution Cardholder Activity Report (STAT07).

Generating Daily Reports

To generate daily reports, perform the following steps:

1. Access the Teller Report Generator (TRPT) screen.
2. Enter the date for which the reports will be run in the DAILY REPORT DATE field. The date must be in YYMMDD format.
3. Press the appropriate function key.
 - a. To generate Report 01, Report 02, Report 03, and Report 04 from the terminal owner's perspective, press the **F1** key.
 - b. To generate Report 01 from the account owner's perspective, press the **F5** key. The **F5** key causes BASE24-teller to produce only Report 01. Report 02, Report 03, and Report 04 are not produced because they are designed to be from the terminal owner's perspective only.
 - c. To generate the Network Clearings Statement Report (SETL01), press the **F6** key.
 - d. To generate the Daily Institution Cardholder Activity Report (STAT07), press the **F7** key.

Note: BASE24-teller produces Report 02, Report 03, and Report 04 only if the RTTF REPORT INDICATOR and RTTB REPORT INDICATOR fields on screen 26 of the IDF are both set to 0. Refer to the **BASE24 Base Files Maintenance Manual** for more information about these fields.

Generating Periodic Reports

To generate periodic reports, perform the following steps:

1. Access the Teller Report Generator (TRPT) screen.
2. Enter the FIID of the institution if the report should include only one institution. If the report should include all institutions, enter the word ALL in the FIID field.
3. Enter a specific teller ID in the TELLER ID field if producing Report 13 and only one teller should be included on the report. If producing Report 13 and all tellers should be included on the report, enter the word ALL in the TELLER ID field. If not producing Report 13, the TELLER ID field can be left blank.
4. Leave the DAILY REPORT DATE field blank.
5. Enter dates of the period that is to be reported. The starting date of the period must be entered in the REPORT START DATE field. The ending date of the period must be entered in the REPORT END DATE field. Both dates must be in YYMMDD format.
6. Press the appropriate function key.
 - a. To generate the Periodic Summary by Type Report (Report 12), press the **F2** key.
 - b. To generate the Periodic Summary by Teller ID Report (Report 13), press the **F3** key.
 - c. To generate the Periodic Summary by Time Block Report (Report 14), press the **F4** key.

Note: BASE24-teller can produce periodic Report 13 and Report 14 for an institution only if the RTTBF REPORT INDICATOR field on screen 26 of the IDF record is set to either 0 or 1. BASE24-teller can produce periodic Report 12 for the institution only if the RTTF REPORT INDICATOR field on screen 26 of the IDF record is set to either 0 or 1. If either of these fields is set to 2, BASE24-teller does not create the corresponding periodic report file and, therefore, cannot produce periodic reports. Daily reports must also have been run for the period being requested. If daily reports have not been run, the periodic files (RTTF and RTTB) do not contain data.

Generating Database Reports

Database reports can be run only on the Tandem; they cannot be generated by the host processor. Database reports can be divided into two groups—Enform reports and TAL reports. Enform reports are produced by executing Tandem edit files. TAL reports are produced by executing report files.

Running Enform Database Reports

The following reports are Enform database reports:

- Override Response File (ORF) Database Report
- Stop Payment File (SPF) Database Report
- Teller Terminal Data File (TTDF) Database Report
- Teller Transaction File (TTF) Database Report
- Warning/Hold/Float File (WHFF) Database Report

Each report has its own Tandem edit file from which it is run. The concept of each Tandem edit file is essentially the same; therefore, only one example is shown in this manual.

- VOLUME volume subvolume

My first thought is that

4. Run the report and send it to a spooler location by entering the following command at the TACL prompt:

ENFORM/IN *filename*, OUT \$S.#*filename*/

For example, the command to run the example Tandem edit file and send the report to a spooler location might be as follows:

ENFORM/IN ENFORF, OUT \$S.#ORF/

Once the report is in the spooler, it can be perused online or sent to a printer location. If the report is perused online, it must be manually purged from the spooler before the report is run again.

Running TAL Database Reports

The following reports are TAL database reports:

- Institution Definition File (IDF) Database Report
- Account Routing File (ARF) Database Report

Institution Definition File (IDF) Database Report

The Institution Definition File (IDF) Database Report is generated by entering a command at the TACL prompt. The syntax for this command is described below. Items enclosed in square brackets ([]) are optional. Items not enclosed in square brackets are required and must be entered exactly as they appear. Italicized items are variables and are defined in the paragraphs that follow.

Syntax

RUN \$*volume*.TR50RPT.IDFRPT[/IN *IDF-name*]

volume — The Tandem volume where the source and object files for BASE24-teller are located.

IDF-name — The name of the IDF to be reported. This variable is optional. If it is not included in the command, the IDF on the current subvolume will be used.

Once the report is in the spooler, it can be perused online or sent to a printer location. If the report is perused online, it must be manually purged from the spooler before the report is run again.

Account Routing File (ARF) Database Report

The Account Routing File (ARF) Database Report is generated by entering a command at the TACL prompt. The syntax for this command is described below.

Syntax

`RUN $volume.TR50RPT.ARF RPT[/IN ARF-name]`

volume — The Tandem volume where the source and object files for BASE24-teller are located.

ARF-name — The name of the ARF to be reported. This variable is optional. If it is not included in the command, the ARF on the current subvolume will be used.

Once the report is in the spooler, it can be perused online or sent to a printer location. If the report is perused online, it must be manually purged from the spooler before the report is run again.

Applied Communications, Inc.

Appendix A

Processing Information

This appendix includes the following processing information as it pertains to the BASE24-teller Settlement Initiator process:

- Supplementary information for process configuration
- A description of initialization processing
- A description of warmboot processing
- Descriptions of the processing that occurs when the timers used in cutover and settlement expire
- A list of NCS commands that the Settlement Initiator process can receive

Process Configuration

The following configuration issues relate to the BASE24-teller Settlement Initiator process.

Startup Logic

Because the Settlement Initiator process maintains timers for cutting over the business day, the Settlement Initiator process is designed to run continuously and should be assigned a startup logic of BOJ (Beginning of Job) in the Network Environment Source File (NEFS). A startup logic of BOJ means that the process starts automatically when the resource node is initiated. The process restarts automatically should it ever fail.

Multiple Copies

Only one Settlement Initiator process can be running in the BASE24-teller resource node at one time. Other Settlement Initiator processes may be configured in the resource node; however, if they initialize, they abend during initialization.

The TLR-SETL-MASTER param in the LCONF specifies which Settlement Initiator process is to run in the resource node. The symbolic name of a Settlement Initiator process must be specified in this param. If more than one copy of the Settlement Initiator process are configured in the system, only the process whose name is in this param can be initialized. Other Settlement Initiator processes abend during initialization.

Log Messages

The BASE24-teller Settlement Initiator process generates log messages using a standard routing code of 3.

Initialization

The Settlement Initiator process initializes when the resource node is started. When the INI command is entered from the Network Control Supervisor (NCS) at system startup, the Nucleus sends a startup message to the Settlement Initiator process causing it to go through the following initialization steps:

1. Reads the name of the BASE24 Logical Network Configuration File (LCONF) into memory.

The startup message from the Nucleus contains the name of the BASE24 LCONF, which the Settlement Initiator process reads into memory. This name allows the Settlement Initiator process to access the LCONF for the assigns and params it uses in processing.

2. Opens the LCONF and retrieves the following assigns and params that it uses during processing:

Assigns

IDF (required)

TLR-TTLF (required)

LMCF (required)

Params

TLR-SETL-NOTIFY (required)

TLR-SETL-MASTER (required)

TLR-LN-CUTOVER (required)

TLR-SETL-TTLF-FILE-RETENTION

If the Settlement Initiator process does not find all required assigns and params, the process abends.

3. Initializes the network logging process. If the Settlement Initiator process is unable to initialize the network logging process, the Settlement Initiator process abends.
4. Reads the Log Message Configuration File (LMCF) for its modified log messages.

The LMCF contains a record for each modified log message in the system. The Settlement Initiator process opens the LMCF, retrieves its own modified log messages, and closes the LMCF. Whenever the Settlement Initiator process generates a log message, it checks these LMCF records in memory to determine whether the message needs to be modified.

5. Opens the Institution Definition File (IDF) with read/write access. If the Settlement Initiator process cannot open the IDF, the process abends.

6. Determines the current and next business dates.

To do this, the Settlement Initiator process uses the current date known to the system for the current date and adds one to this date to determine the next business date.

7. Opens or creates and opens any Teller Transaction Log Files (TTLFs) and corresponding alternate key files necessary to meet the following requirements:
 - If the Settlement Initiator process was started before logical network cutover, six TTLFs should be open—one for the current calendar date and five for the days immediately following the current calendar date.
 - If the Settlement Initiator process was started after logical network cutover, seven TTLFs should be open—one for the current calendar date and six for the days immediately following the current calendar date.
8. Initializes the first record in each TTLF for use during extract.
9. Determines whether it is past logical network cutover for the current day. To do this, the Settlement Initiator process checks the current time against the TLR-LN-CUTOVER param in the LCONF.

If it is past the logical network cutover time, the Settlement Initiator process increases its own dates for today and tomorrow by one and then checks IDF records to verify that all institutions are operating on these new dates. The Settlement Initiator process also notifies all processes in its notify table of the new processing dates. If it is past cutover and an institution is not operating on these dates, all transactions issued from that institution are denied.

10. Initializes its timer tables in extended memory. This is the memory area in which the Settlement Initiator process places its timers.
11. Sets the following timers for processing:
 - a. FI-CUTOVER-TIMERS — The Settlement Initiator process reads the IDF and sets a timer for each institution. These timers are set according to the TELLER CUTOVER END TIME field on screen 25 of the IDF. The timers must be set to expire at least one half hour before logical network cutover. The logical network cutover time is specified in the TLR-LN-CUTOVER param in the LCONF. If an FI-CUTOVER-TIMER is set to expire less than one half hour before logical network cutover, the Settlement Initiator process cuts the institution over at logical network cutover regardless of the FI-CUTOVER-TIMER value.
 - b. LOGICAL-NETWORK-CUTOVER-TIMER — The Settlement Initiator process sets this timer to expire at logical network cutover. The logical network cutover time is specified in the TLR-LN-CUTOVER param in the LCONF.

Warmboot Processing

The Settlement Initiator process can be warmbooted by issuing a warmboot command at the Network Control Supervisor (NCS) screen. When the Settlement Initiator process is warmbooted, it performs exactly as described for initialization with the following exceptions:

- The Settlement Initiator process reads the LCONF and resets its processing timers.
- The Settlement Initiator process closes and reopens any files that it would open during initialization.
- The Settlement Initiator process does not create new TTLFs.

For more information about the warmboot command, including a detailed description and the command syntax, refer to the ***BASE24 Text Command Reference Manual***.

Timer Processing

The BASE24-teller cutover and settlement process is controlled by two timers—an institution cutover timer and a logical network cutover timer. The processing of each of these timers is described below.

Financial Institution Cutover Timer

The financial institution cutover timer, set in the TELLER CUTOVER END TIME field on screen 25 of the IDF, triggers institution cutover. When this timer expires, the Settlement Initiator process takes action to cut over the institution. The Settlement Initiator process maintains a separate timer for each institution in the logical network.

The Settlement Initiator sets the financial institution cutover timers at initialization and at logical network cutover. When a financial institution cutover timer expires, the Settlement Initiator performs the following steps:

1. Reads the IDF record for the institution being cut over.
2. Calculates the new current and next business dates and places them in the CUR-BUS-DAT and NXT-BUS-DAT fields in the IDF.
 - a. To calculate the new current business date, the Settlement Initiator process increases the date in the CUR-BUS-DAT field in the IDF record to match the date in the NXT-BUS-DAT field. If the new date in the CUR-BUS-DAT field appears on the HOLIDAY SCHEDULE in the IDF, the Settlement Initiator process increases the date by one until the CUR-BUS-DAT field contains a valid business date.
 - b. To calculate the new next business date, the Settlement Initiator process increases the NXT-BUS-DAT field in the IDF record by one calendar day. If the date in the NXT-BUS-DAT field appears on the BASE24-teller HOLIDAY SCHEDULE in the IDF or if the date is a weekend date and the institution does not process on weekends according to the WRK-DAY field in the IDF, the Settlement Initiator process increases the date by one until the NXT-BUS-DAT field contains a valid business date.
3. Sends broadcast messages to the process listed in the broadcast table in the LCONF to notify the process that financial institution cutover for this institution is complete and passes the new processing dates.

Logical Network Cutover Timer

The logical network cutover timer, set in the TLR-LN-CUTOVER param in the LCONF, triggers logical network cutover. When this timer expires, the Settlement Initiator process begins taking action to cut over the logical network.

The Settlement Initiator sets the logical network cutover timers at initialization and at logical network cutover. When a logical network cutover timer expires, the Settlement Initiator performs the following steps:

1. Closes the current day's TTLF.
2. Purges old TTLF(s) according to the TLR-SETL-TTLF-FILE-RETENTION param in the LCONF.
3. Opens or creates and opens any TTLFs necessary to meet the following requirements:
 - If the Settlement Initiator process was started before logical network cutover, six TTLFs should be open—one for the current calendar date and five for the days immediately following the current calendar date.
 - If the Settlement Initiator process was started after logical network cutover, seven TTLFs should be open—one for the current calendar date and six for the days immediately following the current calendar date.
4. Broadcasts a cutover message to the processes specified in the TLR-SETL-NOTIFY param in the LCONF.

The LCONF is read at initialization and the Settlement Initiator process maintains the broadcast list in memory. The cutover message contains the current date (the day just ending) and is used to notify each process to go through its cutover procedures.

5. Generates the log message "Cutover completed for YYMMDD."
6. Increases dates in the Settlement Initiator process' internal memory fields for the current day and next day.
7. Resets the logical network cutover timer.

Network Control Supervisor (NCS) Commands

The Settlement Initiator process can receive and process the following Network Control Supervisor (NCS) commands:

- Warmboot
- LCONF Assign Information
- LCONF Param Information
- Debug
- Trace On/Off

For more information, including descriptions and command syntax, refer to the ***BASE24 Text Command Reference Manual***.

Index

A

- Account Routing File (ARF), [1-11](#)
- Account Routing File (ARF) Database Report
 - description, [3-69](#)
 - field descriptions, [3-72](#)
 - generating, [5-11](#)
 - overview, [1-13](#)
 - sample, [3-69](#)
- Accountholders, [1-4](#)
- Administrative cutover transactions
 - log off, [5-2](#)
 - log on, [5-2](#)
 - sign off, [1-16](#), [5-2](#)
 - sign on, [5-2](#)
- Authorization process, [1-16](#)

B

- Business day
 - institution cutover, [1-7](#), [1-8](#)
 - logical network cutover, [1-7](#), [1-8](#)
 - terminal cutover, [1-7](#), [1-8](#)

C

- Cards, [1-4](#)
- Central institution, [1-6](#), [1-9](#), [2-3](#), [2-5](#), [2-9](#), [2-10](#)
- COBNAMEs file, [4-11](#)
- Configuration
 - logical network cutover, [4-6](#)
 - reports, [4-7](#)
 - Settlement Initiator process, [A-2](#)
 - terminal cutover, [4-3](#)
- Cutover
 - configuration, [4-2](#)
 - cutover operations, [1-16](#)
 - cutover process, [1-15](#)
 - hierarchy diagram, [1-7](#)
 - institution cutover, [1-7](#), [1-15](#), [1-16](#), [4-4](#), [A-6](#)
 - logical network cutover, [1-7](#), [1-15](#), [1-16](#), [4-6](#), [A-7](#)
 - terminal cutover, [1-7](#), [1-15](#), [1-16](#), [2-2](#), [2-4](#), [4-3](#)
 - terminal cutover window, [1-8](#)
 - timer processing, [A-6](#)

- Cutover operations
 - extract, [1-16](#)
 - institution cutover, [1-16](#)
 - reporting, [1-17](#)
 - settlement initiation, [1-16](#)
 - sign off, [1-16](#)
 - sign on, [5-2](#)
 - terminal cutover, [1-16](#)

- Cutover timers
 - financial institution cutover timer, [A-6](#)
 - logical network cutover timer, [A-7](#)

- Cutover transactions
 - log off, [5-2](#)
 - log on, [5-2](#)
 - sign off, [5-2](#)
 - sign on, [5-2](#)

D

- Daily Detail Report
 - description, [3-13](#)
 - field descriptions, [3-18](#)
 - overview, [1-12](#)
 - print location, [3-14](#)
 - sample, [3-14](#)
- Daily Institution Cardholder Activity Report
 - description, [3-8](#)
 - field descriptions, [3-11](#)
 - overview, [1-12](#)
 - print location, [3-8](#)
 - sample, [3-8](#)
- Daily Network Clearings Statement Report
 - description, [3-2](#)
 - field descriptions, [3-7](#)
 - overview, [1-12](#)
 - print location, [3-2](#)
 - sample, [3-5](#)
 - transactions included on, [3-2](#)
 - use in settlement, [2-8](#), [2-10](#), [2-11](#)
- Daily reports
 - configuration of, [4-8](#)
 - Daily Detail Report, [1-12](#), [3-13](#)
 - Daily Institution Cardholder Activity Report, [1-12](#), [3-8](#)
 - Daily Network Clearings Statement Report, [1-12](#), [2-8](#), [2-10](#), [2-11](#), [3-2](#)

Daily reports *continued*

- Daily Summary by Teller ID and Time Block Report, [1-13](#), [3-45](#)
- Daily Summary by Teller ID Report, [1-13](#), [3-40](#)
- Daily Summary by Type Report, [1-12](#), [3-29](#)
- generation of, [5-6](#)
- Daily Summary by Teller ID and Time Block Report
 - description, [3-45](#)
 - field descriptions, [3-49](#)
 - overview, [1-13](#)
 - print location, [3-45](#)
 - sample, [3-45](#)
- Daily Summary by Teller ID Report
 - description, [3-40](#)
 - field descriptions, [3-44](#)
 - overview, [1-13](#)
 - print location, [3-40](#)
 - sample, [3-40](#)
- Daily Summary by Type Report
 - description, [3-29](#)
 - field descriptions, [3-33](#)
 - overview, [1-12](#)
 - print location, [3-29](#)
 - sample, [3-29](#)
- Database
 - Account Routing File (ARF), [1-11](#)
 - Institution Definition File (IDF), [1-11](#)
 - Logical Network Configuration File (LCONF), [1-9](#)
 - Override Response File (ORF), [1-11](#)
 - Report Transactions by Time Block File (RTTB), [1-11](#), [1-17](#)
 - Report Transactions by Type File (RTTF), [1-11](#), [1-17](#)
 - Stop Payment File (SPF), [1-11](#)
 - Teller Terminal Data File (TTDF), [1-8](#), [1-11](#)
 - Teller Transaction File (TTF), [1-11](#)
 - Teller Transaction Log File (TTLF), [1-2](#), [1-4](#), [1-7](#), [1-8](#), [1-10](#), [1-15](#), [2-2](#), [2-7](#)
 - Warning/Hold/Float File (WHFF), [1-11](#)
- Database reports
 - Account Routing File (ARF) Database Report, [1-13](#), [3-69](#)
 - Enform database reports, [3-81](#), [3-84](#), [3-87](#), [3-90](#), [3-94](#)
 - Enform report generation, [5-8](#)
 - Institution Definition File (IDF) Database Report, [1-13](#), [3-75](#)
 - Override Response File (ORF) Database Report, [1-13](#), [3-81](#)
 - Stop Payment File (SPF) Database Report, [1-13](#), [3-84](#)
 - TAL database reports, [3-69](#), [3-75](#)
 - TAL report generation, [5-10](#)
 - Teller Terminal Data File (TTDF) Database Report, [1-13](#), [3-87](#)
 - Teller Transaction File (TTF) Database Report, [1-14](#), [3-90](#)
 - Warning/Hold/Float File (WHFF) Database Report, [1-14](#), [3-94](#)
- Device Handler process, [1-16](#)

E

- Enform database reports
 - generation of, [5-8](#)
 - Override Response File (ORF) Database Report, [3-81](#), [5-8](#)
 - print location, [5-10](#)
 - Stop Payment File (SPF) Database Report, [5-8](#)
 - Teller Terminal Data File (TTDF) Database Report, [3-87](#), [5-8](#)
 - Teller Transaction File (TTF) Database Report, [3-90](#), [5-8](#)
 - Warning/Hold/Float File (WHFF) Database Report, [3-94](#), [5-8](#)

I

- Individual customer accounts, [2-7](#)
- Individual institution accounts, [2-10](#)
- Institution cutover
 - configuration, [4-4](#)
 - financial institution cutover timer, [A-6](#)
 - Institution Definition File (IDF), [4-4](#)
 - Logical Network Configuration File (LCONF), [4-5](#)
- Institution Definition File (IDF)
 - institution cutover configuration, [1-8](#), [1-16](#), [4-4](#)
 - report configuration, [4-10](#)
- Institution Definition File (IDF) Database Report
 - description, [3-75](#)
 - field descriptions, [3-77](#)
 - generating, [5-10](#)
 - overview, [1-13](#)
 - sample, [3-75](#)
- Institutions
 - central, [1-6](#), [1-9](#), [2-5](#), [2-10](#)
 - participating, [1-5](#)
 - settlement, [2-2](#), [2-5](#)
- Interchanges, [1-4](#)

L

- Log messages
 - routing code, [A-2](#)
- Logical network account, [2-8](#)
- Logical network clearings account, [2-10](#)
- Logical Network Configuration File (LCONF)
 - institution cutover configuration, [4-5](#)
 - logical network cutover configuration, [1-9](#), [4-6](#)
 - report configuration, [4-8](#)
 - Settlement Initiator process, [A-2](#)
- Logical network cutover
 - BASE24-teller's role in, [1-8](#)
 - configuration, [4-6](#)
 - defining, [1-9](#), [1-15](#)
 - Logical Network Configuration File (LCONF), [4-6](#)
 - logical network cutover timer, [A-7](#)
 - reports, generating, [1-9](#)
- Logical network settlement, [2-9](#)

M

Master teller account, [2-6](#)
 Movement of funds, [1-2](#), [1-3](#), [2-2](#), [2-3](#), [2-8](#), [2-9](#)

N

NCS commands, [A-8](#)
 Network Environment Source File (NEFS), [A-2](#)
 Network participants
 acountholders, [1-4](#)
 cardholders, [1-4](#)
 central institution, [1-6](#), [2-3](#), [2-5](#), [2-9](#), [2-10](#)
 interchanges, [1-4](#)
 participating institutions, [1-5](#), [2-3](#)
 teller terminals, [1-4](#)
 tellers, [1-5](#)

O

Operations
 daily report generation, [5-6](#)
 database report generation, [5-8](#)
 periodic report generation, [5-7](#)
 report generation, [5-3](#)
 terminal balancing, [5-2](#)
 terminal cutover, [5-2](#)
 Override Response File (ORF), [1-11](#)
 Override Response File (ORF) Database Report
 description, [3-81](#)
 field descriptions, [3-83](#)
 generating, [5-8](#)
 overview, [1-13](#)
 sample, [3-81](#)

P

Participating institutions, [1-5](#), [2-3](#)
 Periodic reports
 generation of, [5-7](#)
 Periodic Summary by Teller ID Report, [1-13](#), [3-57](#)
 Periodic Summary by Time Block Report, [1-13](#), [3-62](#)
 Periodic Summary by Type Report, [1-13](#), [3-51](#)
 Report Transactions by Time Block File (RTTB), [1-11](#)
 Report Transactions by Type File (RTTF), [1-11](#)
 Periodic Summary by Teller ID Report
 description, [3-57](#)
 field descriptions, [3-60](#)
 overview, [1-13](#)
 print location, [3-57](#)
 sample, [3-57](#)
 Periodic Summary by Time Block Report
 description, [3-62](#)
 field descriptions, [3-66](#)
 overview, [1-13](#)
 print location, [3-62](#)
 sample, [3-62](#)

Periodic Summary by Type Report

 description, [3-51](#)
 field descriptions, [3-55](#)
 overview, [1-13](#)
 print location, [3-51](#)
 sample, [3-51](#)

R

Recommended accounts
 individual customer accounts, [2-7](#)
 individual institution accounts, [2-10](#)
 logical network account, [2-8](#)
 logical network clearings account, [2-10](#)
 master teller account, [2-6](#)
 teller terminal settlement accounts, [2-7](#)
 vault cash account, [2-6](#)
 Report configuration
 COBNAMEs file, [4-11](#)
 Institution Definition File (IDF), [4-10](#)
 Logical Network Configuration File (LCONF), [4-8](#)
 Report generation
 daily reports, [5-6](#)
 Enform database reports, [5-8](#)
 periodic reports, [5-7](#)
 TAL database reports, [5-10](#)
 Teller Report Generator (TRPT) screen, [5-3](#)
 Report Transactions by Time Block File (RTTB)
 contents of, [1-11](#)
 creation of, [1-17](#)
 Report Transactions by Type File (RTTF)
 contents of, [1-11](#)
 creation of, [1-17](#)
 Report types
 daily reports, [1-12](#)
 database reports, [1-12](#), [1-13](#)
 periodic reports, [1-12](#), [1-13](#)
 settlement reports, [1-12](#)
 statistical reports, [1-12](#)
 Reporting operations
 daily report generation, [5-6](#)
 database report generation, [5-8](#)
 periodic report generation, [5-7](#)
 report generation, [5-3](#)
 Reports
 Account Routing File (ARF) Database Report, [1-13](#), [3-69](#)
 configuration of, [4-7](#)
 Daily Detail Report, [1-12](#), [3-13](#)
 Daily Institution Cardholder Activity Report, [1-12](#), [3-8](#)
 Daily Network Clearings Statement Report, [1-12](#), [2-8](#), [2-10](#), [2-11](#), [3-2](#)
 daily report generation, [5-6](#)
 Daily Summary by Teller ID and Time Block Report, [1-13](#), [3-45](#)
 Daily Summary by Teller ID Report, [1-13](#), [3-40](#)
 Daily Summary by Type Report, [1-12](#), [3-29](#)

Reports *continued*

- Enform database report generation, [5-8](#)
- generation of, [5-3](#)
- Institution Definition File (IDF) Database Report, [1-13](#), [3-75](#)
- Override Response File (ORF) Database Report, [1-13](#), [3-81](#)
- periodic report generation, [5-7](#)
- Periodic Summary by Teller ID Report, [1-13](#), [3-57](#)
- Periodic Summary by Time Block Report, [1-13](#), [3-62](#)
- Periodic Summary by Type Report, [1-13](#), [3-51](#)
- Stop Payment File (SPF) Database Report, [1-13](#), [3-84](#)
- TAL database report generation, [5-10](#)
- Teller Terminal Data File (TTDF) Database Report, [1-13](#), [3-87](#)
- Teller Transaction File (TTF) Database Report, [1-14](#), [3-90](#)
- Warning/Hold/Float File (WHFF) Database Report, [1-14](#), [3-94](#)

S

Settlement

- BASE24-teller's role in, [1-2](#)
- definition of, [1-3](#)
- institution's role in, [1-2](#)
- movement of funds, [1-2](#), [1-3](#), [2-2](#), [2-3](#), [2-8](#), [2-9](#)
- recommended accounts, [2-2](#), [2-3](#), [2-6](#), [2-9](#)

Settlement Initiator process

- cutover operations, [1-16](#)
- initialization, [A-3](#)
- log messages, [A-2](#)
- Logical Network Configuration File (LCONF), [A-2](#)
- multiple copies, [A-2](#)
- NCS commands, [A-8](#)
- Network Environment Source File (NEFS), [A-2](#)
- startup logic, [A-2](#)
- warmboot processing, [A-5](#)

Settlement operations

- terminal balancing, [5-2](#)
- terminal cutover, [5-2](#)

Settlement stages

- institution settlement, [2-2](#), [2-5](#)
- logical network settlement, [2-3](#), [2-9](#)
- terminal balancing, [2-2](#), [2-4](#)

Settlement tools

- Daily Network Clearings Statement Report, [1-12](#), [2-2](#), [2-8](#), [2-10](#), [2-11](#), [3-2](#)
- statistical reports, [2-2](#)
- Teller Transaction Log File (TTLF), [2-2](#)

Statistical reports

- Daily Detail Report, [1-12](#), [3-13](#)
- Daily Institution Cardholder Activity Report, [1-12](#), [3-8](#)
- Daily Summary by Teller ID and Time Block

- Report, [1-13](#), [3-45](#)

- Daily Summary by Teller ID Report, [1-13](#), [3-40](#)
- Daily Summary by Type Report, [1-12](#), [3-29](#)
- Periodic Summary by Teller ID Report, [1-13](#), [3-57](#)
- Periodic Summary by Time Block Report, [1-13](#), [3-62](#)
- Periodic Summary by Type Report, [1-13](#), [3-51](#)

- Stop Payment File (SPF), [1-11](#)

Stop Payment File (SPF) Database Report

- description, [3-84](#)
- field descriptions, [3-86](#)
- generating, [5-8](#)
- overview, [1-13](#)
- sample, [3-84](#)

T

TAL database reports

- Account Routing File (ARF) Database Report, [3-69](#), [5-11](#)
- generation of, [5-10](#)
- Institution Definition File (IDF) Database Report, [3-75](#), [5-10](#)

Teller Report Generator (TRPT) screen

- example of, [5-3](#)
- field descriptions, [5-3](#)
- function key descriptions, [5-5](#)

Teller Terminal Data File (TTDF), [1-8](#), [1-11](#), [1-16](#)

Teller Terminal Data File (TTDF) Database Report

- description, [3-87](#)
- field descriptions, [3-89](#)
- generating, [5-8](#)
- overview, [1-13](#)
- sample, [3-87](#)

Teller terminal settlement accounts, [2-7](#)Teller terminals, [1-4](#)Teller Transaction File (TTF), [1-11](#)

Teller Transaction File (TTF) Database Report

- description, [3-90](#)
- field descriptions, [3-92](#)
- generating, [5-8](#)
- overview, [1-14](#)
- sample, [3-90](#)

Teller Transaction Log File (TTLF)

- contents of, [1-2](#), [1-4](#), [1-7](#), [1-10](#), [1-15](#), [2-4](#)
- creation of, [1-10](#)
- deletion of, [1-10](#)
- extraction of, [1-10](#), [1-16](#), [2-5](#)
- perusal of, [1-15](#)
- transactions, posting, [2-5](#)

Tellers, [1-5](#)Terminal balancing, [2-2](#), [2-4](#)

Terminal cutover

- BASE24-teller's role in, [1-8](#), [1-15](#), [2-2](#), [2-4](#), [5-2](#)
- configuration, [4-3](#)
- cutover window, [1-8](#)
- operations, [5-2](#)
- teller's role in, [1-8](#), [1-15](#), [2-2](#), [2-4](#), [5-2](#)

V

Vault cash account, [2-6](#)

W

Warning/Hold/Float File (WHFF), [1-11](#)

Warning/Hold/Float File (WHFF) Database Report

description, [3-94](#)

field descriptions, [3-96](#)

generating, [5-8](#)

overview, [1-14](#)

sample, [3-94](#)

Applied Communications, Inc.