

# Diebold 10XX/478X SSB Manual

BASE24-atm<sup>®</sup>



**© 2009 by ACI Worldwide, Inc. All rights reserved.**

All information contained in this documentation, as well as the software described in it, is confidential and proprietary to ACI Worldwide, Inc., or one of its subsidiaries, is subject to a license agreement, and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of ACI Worldwide, Inc., or one of its subsidiaries.

ACI, ACI Worldwide, and the ACI product names used in this documentation are trademarks or registered trademarks of ACI Worldwide, Inc., or one of its subsidiaries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

# Contents

---

|                                                      |             |
|------------------------------------------------------|-------------|
| <b>Preface</b> .....                                 | <b>ix</b>   |
| <b>Conventions Used in this Manual</b> .....         | <b>xiii</b> |
| <b>1: Introduction</b> .....                         | <b>1-1</b>  |
| Diebold Hardware Requirements .....                  | 1-2         |
| Wincor-Nixdorf Hardware Options .....                | 1-3         |
| BNA Module .....                                     | 1-3         |
| CPM Module .....                                     | 1-4         |
| SSB Product Modules .....                            | 1-5         |
| SSB Device Handler Extension .....                   | 1-6         |
| Additional Transaction Support .....                 | 1-6         |
| Check Imaging .....                                  | 1-8         |
| MICR Data Processing .....                           | 1-8         |
| Coin Dispensing .....                                | 1-8         |
| Document Bin Sorting .....                           | 1-8         |
| Check Proof Listing .....                            | 1-9         |
| Bulk Note Acceptor and Enhanced Note Acceptor .....  | 1-9         |
| SSB Enhanced ATM Application .....                   | 1-10        |
| Transaction Time Windows .....                       | 1-10        |
| Split Deposit Transaction .....                      | 1-10        |
| Configurable Bill Dispensing .....                   | 1-11        |
| Configurable Depository Print .....                  | 1-11        |
| Statement Print Host Communications .....            | 1-11        |
| Super Teller .....                                   | 1-12        |
| SSB Enhanced Check Processing Application .....      | 1-13        |
| Enhanced Check Authorization .....                   | 1-13        |
| Enhanced MICR Data Processing and Manipulation ..... | 1-13        |
| Check-Cashing Cards .....                            | 1-14        |
| Registered Check Processing .....                    | 1-14        |

SSB Enhanced Check Processing Application *continued*

|                                                         |            |
|---------------------------------------------------------|------------|
| Stop Payment Verification .....                         | 1-15       |
| Preapproved and Predeclined Check Processing .....      | 1-15       |
| Enhanced Document Bin Sorting .....                     | 1-15       |
| <b>2: BASE24-atm SSB Device Handler Extension .....</b> | <b>2-1</b> |
| Additional Transaction Support .....                    | 2-2        |
| Envelope Deposit with Cash Back Transaction .....       | 2-2        |
| Check Deposit with Cash Back Transaction .....          | 2-3        |
| Check Cashing Transaction .....                         | 2-3        |
| Check Deposit Transaction .....                         | 2-4        |
| Exact Amount Withdrawal Transaction .....               | 2-5        |
| Check Imaging .....                                     | 2-6        |
| MICR Data Processing .....                              | 2-7        |
| Coin Dispensing .....                                   | 2-8        |
| Document Bin Sorting .....                              | 2-9        |
| Check Proof Listing .....                               | 2-10       |
| Bulk Note Acceptor or Enhanced Note Acceptor .....      | 2-12       |
| SSB Device Handler Extension Configuration .....        | 2-13       |
| Modifying the C100NAMS .....                            | 2-15       |
| Modifying the Diebold Configuration File .....          | 2-17       |
| Modifying the Logical Network Configuration File .....  | 2-31       |
| Modifying the Acquirer Processing Code File .....       | 2-32       |
| Modifying the BASE24-atm Terminal Data Files .....      | 2-34       |
| Modifying the Receipt File .....                        | 2-37       |
| Modifying the Terminal Receipt File .....               | 2-49       |
| Modifying the Token File .....                          | 2-50       |
| <b>3: BASE24-atm SSB Enhanced ATM Application .....</b> | <b>3-1</b> |
| Transaction Time Windows .....                          | 3-2        |
| Split Deposit Transaction .....                         | 3-5        |
| Configurable Bill Dispensing .....                      | 3-6        |
| Least Bills Method .....                                | 3-6        |
| Configurable Dispense Algorithm Method .....            | 3-6        |
| Thresholds Method .....                                 | 3-7        |

**BASE24-atm SSB Enhanced ATM Application *continued***

|                                                                      |            |
|----------------------------------------------------------------------|------------|
| Configurable Depository Print .....                                  | 3-13       |
| Statement Print Host Communications.....                             | 3-14       |
| Super Teller.....                                                    | 3-15       |
| Super Teller Card Differences .....                                  | 3-15       |
| Super Teller Transaction Flow .....                                  | 3-17       |
| Super Teller State Path .....                                        | 3-18       |
| SSB Enhanced ATM Application Configuration .....                     | 3-20       |
| Modifying the C100NAMS .....                                         | 3-23       |
| Modifying the Diebold Configuration File.....                        | 3-24       |
| Modifying the Acquirer Processing Code File.....                     | 3-30       |
| Modifying the BASE24-atm Terminal Data Files .....                   | 3-32       |
| Modifying the Card Prefix File.....                                  | 3-39       |
| Modifying the Cardholder Authorization File .....                    | 3-42       |
| Modifying the Host Configuration File .....                          | 3-47       |
| Modifying the Enhanced Interchange Configuration File .....          | 3-50       |
| Modifying the Institution Definition File .....                      | 3-51       |
| Modifying the Issuer Processing Code File .....                      | 3-52       |
| Modifying the Logical Network Configuration File.....                | 3-53       |
| Modifying the Negative Card File .....                               | 3-54       |
| Modifying the Receipt File.....                                      | 3-57       |
| Modifying the Terminal Receipt File .....                            | 3-63       |
| Modifying the Token File.....                                        | 3-64       |
| <b>4: BASE24-atm SSB Enhanced Check Processing Application .....</b> | <b>4-1</b> |
| Enhanced Check Authorization .....                                   | 4-2        |
| Check Transaction Limits and Totals.....                             | 4-3        |
| Negative Authorization with Usage Accumulation Method.....           | 4-8        |
| Positive and Positive Balance Authorization Methods.....             | 4-13       |
| Super Teller Card Impacts .....                                      | 4-18       |
| Enhanced MICR Data Processing and Manipulation .....                 | 4-19       |
| Processing MICR Data .....                                           | 4-19       |
| Manipulating MICR Data .....                                         | 4-20       |
| Formatting MICR Data.....                                            | 4-20       |
| Check-Cashing Cards .....                                            | 4-22       |

**BASE24-atm SSB Enhanced Check Processing Application *continued***

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| Registered Check Processing .....                               | 4-23           |
| Stop Payment Verification .....                                 | 4-24           |
| Preapproved and Predeclined Check Processing .....              | 4-25           |
| Enhanced Document Bin Sorting .....                             | 4-27           |
| Check-Related Transaction Response .....                        | 4-27           |
| Device Handler Processing Overview .....                        | 4-28           |
| SSB Enhanced Check Processing Application Configuration .....   | 4-29           |
| Modifying the Account Routing File .....                        | 4-32           |
| Modifying the BASE24-atm Terminal Data Files .....              | 4-35           |
| Modifying the Bin Sort File .....                               | 4-39           |
| Modifying the Card Prefix File .....                            | 4-43           |
| Modifying the Cardholder Authorization File .....               | 4-55           |
| Modifying the Check Status File .....                           | 4-69           |
| Modifying the Corporate Check File .....                        | 4-74           |
| Modifying the Diebold Configuration File .....                  | 4-78           |
| Modifying the Institution Definition File .....                 | 4-80           |
| Modifying the Logical Network Configuration File .....          | 4-85           |
| Modifying the Negative Card File .....                          | 4-86           |
| Modifying the Receipt File .....                                | 4-89           |
| Modifying the Stop Payment File .....                           | 4-91           |
| Modifying the Terminal Receipt File .....                       | 4-93           |
| Modifying the Token File .....                                  | 4-93           |
| Viewing the Usage Accumulation File .....                       | 4-95           |
| <br><b>5: Daily Operations .....</b>                            | <br><b>5-1</b> |
| Servicing the Terminal Using the Check Proof List File .....    | 5-2            |
| Performing a Check Proof List Transaction using the DCT .....   | 5-3            |
| Performing a Check Proof List Transaction at the Terminal ..... | 5-3            |
| DCT Balancing .....                                             | 5-5            |
| Viewing the Transaction Log File .....                          | 5-6            |
| Process Commands .....                                          | 5-7            |
| Corporate Check File .....                                      | 5-7            |
| Bin Sort File .....                                             | 5-7            |
| File Refreshing .....                                           | 5-8            |

|                                                |                     |
|------------------------------------------------|---------------------|
| <b>A: SSB Reports</b> .....                    | <b>A-1</b>          |
| SSB Report Data .....                          | A-2                 |
| Daily Terminal Detail Transaction Log .....    | A-3                 |
| Daily Institution Detail Transaction Log ..... | A-9                 |
| Daily Terminal Depository Report .....         | A-12                |
| Transaction Detail Report .....                | A-16                |
| <br><b>Index</b> .....                         | <br><b>Index-1</b>  |
| <br><b>Index by Field Name</b> .....           | <br><b>Index-7</b>  |
| <br><b>Index by Data Name</b> .....            | <br><b>Index-11</b> |

*ACI Worldwide, Inc.*



# Preface

---

The *BASE24-atm Diebold 10XX/478X SSB Manual* provides users of the BASE24-atm self-service banking (SSB) add-on product for Diebold 10XX/478X ATMs, including Modular Delivery System (MDS), *ix*-series terminals, and Opteva terminals, with a product overview and explanation of features. In addition, this manual contains instructions for configuration and day-to-day operational activities, as well as examples of the BASE24-atm reports provided with the SSB product.

## Audience

This manual is intended for use by technical personnel responsible for configuring and maintaining the BASE24-atm SSB product in conjunction with the Diebold 10XX/478X ATMs.

## Prerequisites

Readers of this manual should be familiar with the BASE24 user access system, BASE24 files maintenance, BASE24 reports, BASE24-atm transaction processing, device and network control functions performed from the BASE24 Device Control Terminal (DCT), and the Diebold 10XX/478X ATM Configuration File. This manual is not intended as a substitute for vendor literature relating to Diebold ATMs. Individuals making decisions on BASE24-atm Diebold 10XX/478X ATM processing should be familiar with the vendor literature available for the type of Diebold ATM they are using.

## Additional Documentation

The BASE24 documentation set is arranged so that each BASE24 manual presents a topic or group of related topics in detail. When one manual presents a topic that has already been covered in detail in another manual, the topic is summarized and the reader is directed to the other manual for additional information. Information

has been arranged in this manner to be more efficient for readers who do not need the additional detail and at the same time provide the source for readers who require the additional information.

This manual contains references to the following BASE24 publications:

- The ***BASE24-atm Diebold 10XX/478X Device Support Manual*** describes how to configure the Diebold 10XX/478X Device Handler process. It also describes the configurable dispense algorithm method of bill dispensing.
- The ***BASE24 User Security Manual*** describes how to log on to the BASE24 user access system, how to use the BASE24 data entry screens, and how to restrict operator access to the screens.
- The ***BASE24-atm Files Maintenance Manual*** describes the data files specific to the BASE24-atm product, and the screens used to maintain these files.
- The ***BASE24 Base Files Maintenance Manual*** describes the data files used by all BASE24 products, and the screens used to maintain these files.
- The ***BASE24 Logical Network Configuration File Manual*** describes the Logical Network Configuration File (LCONF), which determines various system parameters and file locations at the logical network level, and the data entry screens used to maintain this file.
- The ***BASE24 Device Control Manual*** includes instructions for such actions as downloading information to the terminal and displaying information about the terminal.
- The ***BASE24-atm Transaction Processing Manual*** describes the transactions allowed by the BASE24-atm product, and the Standard Internal Message (STM) used by the BASE24-atm product to send messages to and from the ATM.
- The ***BASE24 Tokens Manual*** describes the tokens added to the STM to carry additional information.
- The ***BASE24-atm Settlement and Reporting Manual*** describes the reports that the BASE24-atm product generates.
- The ***BASE24 Text Command Reference Manual*** describes the network control commands that can be sent to the Diebold 10XX/478X Device Handler process.
- The ***BASE24 Refresh and Extract Operators Manual*** describes how to perform file refreshes.

## Software Release

This manual documents standard processing as of its publication date. Software that is not current and custom software modifications (CSMs) may result in processing that differs from the material presented in this manual. The customer is responsible for identifying and noting these changes.

## Manual Summary

The following is a summary of the contents of this manual.

“Conventions Used in this Manual” follows this preface and describes notation and documentation conventions necessary to understand the information in the manual.

**Section 1, “Introduction,”** provides an overview of the features of the BASE24-atm Diebold 10XX/478X SSB product.

**Section 2, “BASE24-atm SSB Device Handler Extension,”** describes the features of the BASE24-atm Diebold 10XX/478X SSB Device Handler Extension and how it is configured.

**Section 3, “BASE24-atm SSB Enhanced ATM Application,”** describes the features of the BASE24-atm Diebold 10XX/478X SSB Enhanced ATM Application and how it is configured.

**Section 4, “BASE24-atm SSB Enhanced Check Processing Application,”** describes the features of the BASE24-atm Diebold 10XX/478X SSB Enhanced Check Processing Application and how it is configured.

**Section 5, “Daily Operations,”** describes procedures used by operators for the daily maintenance of the SSB product.

**Appendix A, “BASE24-atm SSB Reports,”** provides examples of the modified BASE24-atm reports that are available with the BASE24-atm Diebold SSB product.

Readers can use the index by field name to locate information about a particular screen field and the index by data name to locate information about a particular field from a file or record structure.

## Publication Identification

Three entries appearing at the bottom of each page uniquely identify this BASE24 publication. The publication number (for example, AT-DA152-01 for the *BASE24-atm Diebold 10XX/478X SSB Manual*) appears on every page to assist readers in identifying the manual from which a page of information was printed. The publication date (for example, Dec-2009 for December 2009) indicates the issue of the manual. The software release information (for example, R6.0v10 for release 6.0, version 10) specifies the software that the manual describes. This information matches the document information on the copyright page of the manual.

# Conventions Used in this Manual

---

This section explains how field descriptions and unlabeled fields on screens are documented in this manual.

## Field Descriptions

Each field appearing on a file maintenance screen is listed by name and then described. Field descriptions briefly summarize the contents, purpose, and permissible values, as shown in the following example taken from screen 1 of the Check Status File (CSF).

### Example

---

**REGISTERED PAN NUMBER** — The cardholder primary account number (PAN). This number corresponds to the PAN in the Card Authorization File (CAF), Negative Card File (NEG), or Usage Accumulation File (UAF).

If this record is for a registered check for a specific cardholder, enter the PAN of the cardholder. If this record is for a preapproved or predeclined check, this field requires only the default entry (asterisks) since those records apply to all cardholders.

|                 |                                                                           |
|-----------------|---------------------------------------------------------------------------|
| Field Length:   | 1–19 numeric characters                                                   |
| Required Field: | Yes                                                                       |
| Default Value:  | *****                                                                     |
| Data Name:      | CSF.RGSTR-PAN                                                             |
| SSB Feature:    | Preapproved and predeclined check processing, registered check processing |

***Explanation***

---

Each field description is completed by one or more of the following items of information:

| Item           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example        | Illustrates a possible entry for the field to further clarify the value or values that can be entered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Field Length   | <p>Specifies the size of the field and the type of characters that can be entered. This length refers to the field and valid values for the file maintenance screen, not the field in the DDLs. Possible values are alphabetic, alphanumeric, hexadecimal, and numeric. The term <i>alphanumeric</i> includes all alphabetic, numeric, and special characters that can be entered from a keyboard without using a control sequence. The term <i>hexadecimal</i> includes all numbers and the letters A through F.</p> <p>When a field value cannot be modified by the operator, the field length is <i>System protected</i>.</p> |
| Occurs         | Indicates the number of times the field can be displayed on the screen. This information is provided only when the field can be displayed multiple times.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Required Field | Specifies whether a value has to be entered in the field. Possible values are Yes and No. Some fields are required only under certain conditions. In this case, the entry is Yes, followed by the conditions that determine when the field is required.                                                                                                                                                                                                                                                                                                                                                                          |
| Default Value  | Specifies the value that is automatically placed in the field when the screen is first displayed or when the <b>F8</b> key is pressed to clear the screen.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Data Name      | Provides the DDL name associated with the field appearing on the screen. Data names are included in the documentation to assist in communicating screen and field issues to your technical staff. Note that screen data is not always stored in the BASE24 database as it appears on the screen or as it is described in the field description. If you need information on how screen data is actually stored, consult the DDLs.                                                                                                                                                                                                 |

| Item        | Description                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SSB Feature | Indicates one or more features in the BASE24-atm self service banking (SSB) product that require this field to be modified for proper configuration of the features. |

## Unlabeled Fields on Screens

Angle brackets (< >) indicate an unlabeled field on a screen. An unlabeled field is a field that is present on a screen but is not preceded by an identifying literal label. For the purposes of documenting the field, a label has been assigned and appears inside the angle brackets. A multiple line field is displayed as a shaded area and also has a label in angle brackets.

In the field descriptions for the screen, the unlabeled field appears according to its place on the screen and is identified by the same label.

Unlabeled fields are not included in the index by field name; they appear by subject in the main index.

*ACI Worldwide, Inc.*



# 1: Introduction

---

This section provides an overview of the BASE24-atm self-service banking (SSB) add-on product and the features that this product provides for Diebold 10XX/478X terminals. This product supports the Modular Delivery System (MDS), *ix*-series terminals, and Opteva terminals, which, for the purposes of this manual, are collectively referred to as 10XX/478X terminals.

Self-service banking is a series of three modules that can be added to the BASE24-atm product: SSB Device Handler Extension, SSB Enhanced ATM Application, and SSB Enhanced Check Processing Application. These modules allow financial institutions to expand their automated financial services to include banking functions previously available only through tellers or personal bankers.

The SSB product provides a wide range of self-service banking options designed to take advantage of the latest technology in ATM terminals as well as increased consumer acceptance of ATM financial services. The SSB product can be implemented using an institution's existing ATM network therefore leveraging and enhancing the value of that investment.

SSB features can be implemented by terminal, by transaction, and by service. This provides a great deal of flexibility in deploying SSB services. SSB services can be implemented at specific ATM locations for target marketing purposes. Then, after an initial implementation phase with a single application or a single terminal, the financial institution can implement additional services or expand SSB services throughout the entire network.

## Diebold Hardware Requirements

The BASE24-atm SSB add-on product features and functions can vary depending on the capabilities of the terminals with which they are used and the additional hardware and software that can be added. This product supports the Modular Delivery Service (MDS), *ix*-series terminals, and Opteva terminals.

# Wincor-Nixdorf Hardware Options

The BASE24-atm Diebold 10XX/478X Device Handler process uses bindable extensions to support bunch note acceptor (BNA) and check processing module (CPM) functionality in Wincor-Nixdorf ATMs loaded with firmware that conforms to the Shared DDC CashIn or CheckIn specification, respectively.

## BNA Module

Wincor-Nixdorf calls its BNA module the CashIn module, enabling customers to deposit a stack of bills (notes) or number of coins into a secured part of the ATM without using an envelope. The ATM validates and counts notes and coins, rejects any invalid or unrecognizable notes or coins, and sends the transaction to the Shared DDC BNA extension of the BASE24-atm Device Handler process. The notes and coins can be of different denominations as well as up to four different currencies that are supported by the ATM. The BNA can be present in Wincor-Nixdorf model CRS, CCDM or RM2 ATMs.

While the Wincor ATMs can be configured to support recycling of notes, BASE24 does not support recycling of notes at the ATM.

The ATM is configured with signature files. Each of these files provides the ATM with the information needed to recognize a particular denomination of note. The ATM is also configured with a Note ID List that determines which denomination of a particular currency it can accept. Valid signature files must exist for particular note denominations before they are configured in the Note ID List, and the Note ID List must contain details of all note denominations for which signature files exist, although certain note denominations can be set as not being accepted.

BASE24 also maintains a Note ID File, detailing the denominations of the notes that can be accepted at the ATM, and BASE24 uses this file to determine the transaction amount deposited at the ATM. The customer must ensure that the ATM's Note ID List and the BASE24-atm Note ID File are kept in synch. Failure to do so will result in the cardholder being credited for an amount different from the amount of money that was deposited at the ATM. See the ***BASE24-atm Files Maintenance Manual*** for additional information on configuring the BASE24-atm Note ID File.

BASE24 builds the Note ID File into an extended memory table, the NIDFEMT, which is accessed by the Diebold 10XX/478X Device Handler process. If changes are made to the Note ID File, the NIDFEMT must be rebuilt, and any processes with the NIDFEMT open must be warmbooted in order to pick up these changes.

Two bindable extensions for the BASE24-atm Diebold 10XX/478X Device Handler process support bunch note acceptor (BNA) functionality in Wincor-Nixdorf ATMs. The Shared BNA extension supports CashIn deposits, accepting deposits made in any of the denominations of the terminal's currency, configured in the Note ID file as being accepted at the particular ATM. The BNA Multiple Currency extension is required if any ATM accepts more than just the terminal's currency. In this case the Note ID file contains details of denominations in a maximum of four different currencies that can be accepted by the ATM.

The Device Control Terminal (DCT) allows the customer to inquire as to the ATM's detailed configuration for accepting notes, change whether a particular note denomination is accepted or rejected, warmboot processes using the NIDFEMT, and collect count information from the CashIn device.

## CPM Module

The BASE24-atm Diebold 10XX/478X Device Handler process uses the Wincor-Nixdorf Check Cash Deposit Module (CCDM) for its CPM capabilities. Wincor-Nixdorf refers to its CPM processing as ChequeIn. This module enables cardholders to deposit check bundles into the ATM. The ATM accepts bundles of checks and processes each check as a separate transaction.

Multiple checks may be entered in a single session, but the total number of checks in the bundle must not exceed 50.

The CCDM module supports three bins: a default check bin, a reject/retract bin, and a default cash bin. The default cash bin can be used for checks if cash in transactions are not supported at the ATM.

## SSB Product Modules

The BASE24-atm SSB add-on product consists of three separate software extensions or applications which can be purchased in a modular fashion to provide the range of features needed for your installation. The three modules are as follows:

- SSB Device Handler Extension
- SSB Enhanced ATM Application
- SSB Enhanced Check Processing Application

The SSB Device Handler Extension can be implemented as a stand-alone application. The SSB Enhanced ATM Application can be added to the SSB Device Handler Extension to further expand SSB functionality for Diebold 10XX/478X terminals. Similarly, the SSB Enhanced Check Processing Application can be added to the SSB Device Handler Extension and the SSB Enhanced ATM Application to extend SSB functionality to its full range. The SSB Enhanced ATM Application must have the SSB Device Handler Extension installed, and the SSB Enhanced Check Processing Application must have both the SSB Device Handler Extension and the SSB Enhanced ATM Application installed.

Each extension or application provides the financial institution with a series of features that can be used alone or in conjunction with one another. The features implemented in each module are determined by your configuration of the BASE24-atm screens and the Diebold-specific files, which are the subject of this manual.

**Note:** The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send data needed for many of the features in the SSB product to a host or co-processor.

## SSB Device Handler Extension

The SSB Device Handler Extension provides check-related transactions, currency acceptor-related transactions, and time-saving features for the institution. This module can be used as a stand-alone application or in conjunction with the SSB Enhanced ATM Application. The SSB Device Handler Extension is required to use the SSB Enhanced Check Processing Application.

The SSB Device Handler Extension supports the following features for Diebold 10XX/478X terminals:

- Additional transaction support
- Check imaging
- Magnetic ink character recognition (MICR) data processing
- Coin dispensing
- Document bin sorting
- Check proof listing
- Bulk note acceptor
- Enhanced note acceptor

Each feature is summarized below.

See section 2 for additional descriptions of the features and information on how to configure the SSB Device Handler Extension.

## Additional Transaction Support

The SSB Device Handler Extension provides support for the following five additional transactions at the ATM:

- Envelope deposit with cash back
- Check deposit with cash back
- Check cashing
- Check deposit
- Exact amount withdrawal

Each transaction type is briefly described below.

## **Envelope Deposit with Cash Back Transaction**

The envelope deposit with cash back transaction allows the cardholder to deposit one or more checks into the terminal in an envelope, with the option to receive part of the amount back in cash. This eliminates the need to perform an account deposit transaction and then initiate a second transaction to perform an account withdrawal.

## **Check Deposit With Cash Back Transaction**

The check deposit with cash back transaction enables the cardholder to deposit a portion of a check entered into the terminal without an envelope into a single account (checking or savings) and receive the remainder of the check amount in cash with a single transaction. This eliminates the need to perform an account deposit transaction and then initiate a second transaction to perform an account withdrawal. The cardholder is given the opportunity to view each check on the terminal screen to verify that the terminal received it.

## **Check Cashing Transaction**

The check cashing transaction allows the cardholder to insert a check directly into the terminal without an envelope and receive full cash payment in the exact amount of the check. With this transaction, the cardholder can view the check on the terminal screen to verify that the terminal received it.

## **Check Deposit Transaction**

The check deposit transaction allows the cardholder to insert one or more checks directly into the terminal without an envelope and deposit the entire amount of the check to a single checking or savings account. With this transaction, the cardholder can view each check on the terminal screen to verify that the terminal received it.

Check deposit transactions are processed by the BASE24-atm product in essentially the same manner as standard envelope deposit transactions. The only difference is that the checks are inserted into the terminal without an envelope and the BASE24 product keeps track of that mode of entry.

## **Exact Amount Withdrawal Transaction**

The withdrawal transaction is expanded to allow the cardholder to specify a withdrawal amount that is not an integer amount.

## **Check Imaging**

The check imaging feature is used with check-related transactions when the check is placed in the ATM without first being placed in an envelope. The ATM scans an image of the check (front or front and back) as defined by the financial institution, and displays the image on the ATM screen. The ATM cardholder can then verify the check amount entered against a picture of the check. The cardholder, by seeing the check on the screen, is reassured that the ATM has received the check.

## **MICR Data Processing**

MICR data read from the check is placed in the MICR Data token and sent in the transaction request to the BASE24 system. This information can be processed online to the host or captured by the BASE24 system for later processing and reconciliation purposes. No data conversion is performed; the data is put in the token in native format.

## **Coin Dispensing**

Diebold terminals can dispense coins to allow cardholders to cash checks or request withdrawals for amounts that cannot be dispensed by bills alone.

## **Document Bin Sorting**

The document bin sorting feature allows the terminal owner or financial institution to configure the way checks are sorted into check bins at the terminal by amount thresholds. The expanded sorting feature is intended to assist in back-office check handling and reconciliation functions.

The Diebold 10XX/478X terminals can sort envelope transactions into one ATM bin and non-envelope transactions into three additional ATM bins. The Diebold 10XX/478X terminals have five bins; however, the terminal uses the fifth bin to turn checks over during check processing.



## **Check Proof Listing**

The check proof listing feature enables the BASE24-atm product to track the checks cashed and deposited at each terminal and to provide this information back to terminals for printing proof lists. These proof listings can be printed on either the ATM audit printer or the receipt printer or both. Check proof listings are intended to facilitate balancing and reconciling check-related transactions by institution personnel. Check proof lists contain details of check activity by terminal bin and include the MICR information read from the check.

## **Bulk Note Acceptor and Enhanced Note Acceptor**

The Bulk Note Acceptor (BNA) or Enhanced Note Acceptor (ENA) feature enables customers to deposit a stack of currency of a single currency type into the ATM without using an envelope. Depending on the currency acceptor's configuration, currency of various denominations can be accepted or rejected. The currency is validated and counted by the BNA or ENA before a transaction request message is sent to the Device Handler process. Invalid currency or deposits made using multiple currencies will be rejected. This feature is supported by the Agilis 91x/Opteva-series only.

## SSB Enhanced ATM Application

The SSB Enhanced ATM Application provides various additional capabilities to the BASE24-atm product. This module must be purchased in conjunction with the SSB Device Handler Extension, and can optionally be purchased in conjunction with the SSB Enhanced Check Processing Application. The SSB Enhanced ATM Application supports the following features for Diebold 10XX/478X terminals:

- Transaction time windows
- Split deposit transaction
- Super Teller
- Configurable bill dispensing
- Configurable depository print
- Statement print host communications

Each of these features is summarized below.

See section 3 for additional descriptions of the features and information on how to configure the SSB Enhanced ATM Application.

### Transaction Time Windows

Transaction time windows enable you to control the types of transactions performed at the terminal during specific times of the day and days of the week. Using this feature, you can restrict time-consuming transactions to off-peak time periods.

For example, statement print transactions take a significant amount of time to complete and can impact the availability of the terminal. Thus, you may want to limit the availability of these transactions during peak terminal usage time periods.

### Split Deposit Transaction

With a split deposit transaction, an ATM cardholder can make a deposit into two accounts in a single transaction. For example, a cardholder can deposit \$100 (U.S. dollars) to a checking account and \$200 to a savings account from a \$300 deposit.

A deposit can be split between a maximum of two accounts. The following options are available:

- Two checking accounts
- Two savings accounts
- One checking account and one savings account

You can control which of these split deposit transactions are available to your cardholders. The authorization method used by an institution affects which split deposit transactions can be offered.

## **Configurable Bill Dispensing**

The configurable bill dispensing feature gives you the flexibility to determine, by terminal, which noncurrency items, nonvalue items, or bill denominations are dispensed during a transaction. This facilitates support of the larger denominations required for the check cashing function and ensures that the terminal can accommodate enough currency for check cashing and withdrawal functions until the next replenishment by operations personnel.

## **Configurable Depository Print**

To facilitate the back-office depository settlement process, you can configure depository print data by terminal-owning institution and transaction type, eliminating the need to verify the envelope total against the journal. You determine what information you want to have printed on the deposit envelope.

## **Statement Print Host Communications**

Statement print transactions contain more lines of information than other types of ATM transactions. As a result, these transactions take longer to send and place a heavier burden on processing. The SSB Enhanced ATM Application provides improved communications efficiency for statement print transactions by allowing for a separate connection to the host that can be defined solely for use with statement print transactions. This feature separates statement print transaction messages from those of other live transactions being sent to the host.

## Super Teller

Super Teller cards are special ATM cards that institutions can issue to institution personnel for the purpose of demonstrating ATM services to cardholders or assisting in performing ATM transactions. Using the Super Teller cards, institution personnel can assist consumers in a variety of circumstances, from those who do not have their ATM card with them, to those who cannot remember their PINs. Using a Super Teller card, institution employees can perform transactions that would typically have been performed at the teller window.

Super Teller cards can perform any transaction allowed by the BASE24-atm product, and their limits and usages are configurable. The card has a unique prefix with configurable limits and usage accumulations. Super Teller cards can be used only at specific terminals (up to a maximum of ten) that are defined by the card-issuing institution as Super Teller terminals. Transactions performed with the Super Teller card are uniquely identified within the BASE24-atm system and logged as Super Teller transactions for settlement, audit, and tracking purposes.

# SSB Enhanced Check Processing Application

The SSB Enhanced Check Processing Application expands the check cashing and processing features of the SSB Device Handler Extension and the SSB Enhanced ATM Application to provide the financial institution with the full capabilities of the SSB features. This module must be purchased in conjunction with both the SSB Device Handler Extension and the SSB Enhanced ATM Application. The SSB Enhanced Check Processing Application supports the following features for Diebold 10XX/478X terminals:

- Enhanced check authorization
- Enhanced magnetic ink character recognition (MICR) data processing and manipulation
- Check-cashing cards
- Registered check processing
- Stop payment verification
- Preapproved and predeclined check processing
- Enhanced document bin sorting

Each of these features is summarized below.

See section 4 for additional descriptions of the features and configuration of the SSB Enhanced Check Processing Application.

## Enhanced Check Authorization

The SSB Enhanced Check Processing Application allows enhanced authorization controls and prescreening for check-related transactions, based on the institution that issued the check rather than on the cardholder performing the check transaction. The SSB Enhanced Check Processing Application also supports check cashing limits and usages for the individual cardholder such as aggregate limits, cash advance limits, and cash withdrawal limits.

## Enhanced MICR Data Processing and Manipulation

With the SSB Enhanced Check Processing Application, the BASE24 product has the ability to interpret the MICR information sent from the terminal on check-related transactions. By interpreting the MICR data, the BASE24 product

determines the routing and transit number of the institution that issued the check as well as the account number associated with that routing and transit number. This means that the BASE24 product can authorize check-related transactions based on the institution and account number of the check-issuing institution and can facilitate the settlement process by sorting checks according to the institution that issued them. This information can be sent to the host for additional processing or captured by the BASE24 system for later processing and reconciliation purposes.

## Check-Cashing Cards

The check-cashing cards feature makes it possible for an institution to issue special-use check-cashing cards to non-cardholders—individuals who do not have an account at the institution—for the purpose of cashing checks at the ATM of the institution. The objective is to divert check-related cash disbursement transactions from the teller lines to the ATM.

With this feature, the authorizing institution can establish a relationship with the business issuing the checks in order to allow that business' employees to cash checks at the institution whether or not the employee has an account with the institution. In this case, the institution is relying on the credibility of the check-issuing business rather than the cardholder. The check-cashing cards contain a unique prefix and can be used for check-cashing purposes only.

## Registered Check Processing

The registered check processing feature allows cardholders to cash recurring checks, such as payroll checks or dividend checks, at an ATM at their own convenience. Registered check processing enables an individual cardholder to register checks that he or she receives at predictable intervals with the financial institution. The institution can then establish check cashing limits for these registered checks. These limits and usages can be tested in conjunction with the base aggregate and withdrawal limits specified for the standard BASE24-atm product.

Approval for the check-cashing transaction is based on the cardholder's primary account number (PAN), special check-related transaction limits, the routing and transit number of the check-issuing institution, and the account number of the check writer.

## Stop Payment Verification

Stop payment processing allows for stop payment verification on check-related transactions. Under this feature, the BASE24-atm product verifies the transaction against its stop payments based on financial institution identifier (FIID), account, and check number. If a stop payment is located, the check-related transaction is denied and the check is retained by the terminal. Stop payments can be defined for a single check number or for a range of check numbers.

## Preapproved and Predeclined Check Processing

Preapproved check processing allows you to preapprove a certain category or class of checks based on the specific institution that issues the check. For example, with this feature, you can decide to preapprove all Social Security check-related transactions for all of your cardholders. You can establish check cashing limits and usages at the prefix and cardholder level for preapproved checks. These limits and usages are tested in addition to or instead of the base limits and usages specified for the standard BASE24-atm product.

You can also define predeclined checks. Predeclined checks are those denoted as unacceptable for processing for all cardholders (for example, checks issued by an institution whose assets have been frozen).

## Enhanced Document Bin Sorting

Enhanced bin sorting expands the check pocket sorting feature provided in the SSB Device Handler Extension. The terminal owner can configure pocket sorts based on the institution that issued the check and the amount of the check. In addition, this feature adds support for one additional check bin, for a total of one envelope bin and three check bins.

*ACI Worldwide, Inc.*



## 2: BASE24-atm SSB Device Handler Extension

---

The BASE24-atm self-service banking (SSB) Device Handler Extension is one of three modules that make up the BASE24-atm SSB product. This module can be used as a stand-alone application.

This section describes the processing enhancements that each feature of the SSB Device Handler Extension provides. The files and fields that must be modified to properly configure the SSB Device Handler Extension are also described. Information on the files and fields required for individual features is also included if you want to configure only certain features.

The SSB Device Handler Extension supports the following features for Diebold 10XX/478X terminals:

- Additional transaction support
- Check imaging
- Magnetic ink character recognition (MICR) data processing
- Coin dispensing
- Document bin sorting
- Check proof listing
- Bulk note acceptor or enhanced note acceptor

## Additional Transaction Support

The SSB Device Handler Extension adds the following transactions to the ATM transaction set:

- Envelope deposit with cash back
- Check deposit with cash back
- Check cashing
- Check deposit
- Exact amount withdrawal

Three transactions—check deposit with cash back, check cashing, and check deposit—allow the terminal to accept checks that are not in envelopes. A fourth transaction allows a cash back option on checks inserted into the terminal in envelopes. Checks accepted without envelopes are inserted in the terminal before the transaction is passed to the BASE24 system, while a check in an envelope is not inserted in the terminal until after the BASE24 Authorization process approves the transaction. A fifth transaction, the exact amount withdrawal, expands the functionality of the existing withdrawal transaction.

See the *BASE24-atm Transaction Processing Manual* for the transaction codes used by these additional transactions.

## Envelope Deposit with Cash Back Transaction

The envelope deposit with cash back transaction enables the cardholder to insert one or more checks in an envelope and, in one transaction, specify that a portion of the amount is credited to a single account (checking or savings) and the remainder of the amount is returned to the cardholder in cash.

The BASE24-atm Diebold 10XX/478X Device Handler process updates the terminal activity in the BASE24-atm Terminal Data Dynamic File—general data (ATDD1) as follows:

1. Adds 1 to the deposit count total.
2. Adds the total check amount to the deposit amount total.
3. Adds the total check amount to the terminal debits total.
4. Adjusts the hopper totals for the amount of cash dispensed.

5. Adds cash back amount to the terminal credits total.
6. Adds the total check amount to the on-us credits total for on-us transactions only.
7. Adds the cash back amount to the on-us debits total for on-us transactions only.

## **Check Deposit with Cash Back Transaction**

The check deposit with cash back transaction enables the cardholder to insert a check into the terminal without an envelope and receive cash back from the deposit. In one transaction, the cardholder can specify that a portion of the check be credited to a single account (checking or savings) and the remainder of the check amount be returned to the cardholder in cash. The cardholder can receive coins as part of the cash back amount.

The Device Handler process updates the terminal activity in the ATDD1 as follows:

1. Adds 1 to the check count total.
2. Adds the total check amount to the check amount total.
3. Adds the total check amount to the terminal debits total.
4. Adjusts the hopper totals for the amount of cash dispensed.
5. Adds the cash back amount to the terminal credits total.
6. Adds the total check amount to the on-us credits total for on-us transactions only.
7. Adds the cash back amount to the on-us debits total for on-us transactions only.

## **Check Cashing Transaction**

The check cashing transaction provides the cardholder with full cash payment for the amount of a check inserted into the terminal without an envelope. The cardholder can receive exact cash back, including coins.

The Device Handler process updates the terminal activity in the ATDD1 as follows:

1. Adds 1 to the check count total.
2. Adds the total check amount to the check amount total.
3. Adds the total check amount to the terminal credits total.
4. Adjusts the hopper totals for the amount of cash dispensed.
5. Adds the total check amount to the on-us debits total for on-us transactions only.

If the check cashing transaction cannot be completed, you can specify whether the check is returned to the cardholder or whether the terminal retains the check and performs a deposit transaction for the full amount. If you specify not to deposit the check for the full amount, the cardholder can proceed to the teller window with the returned check for check cashing authorization.

## Check Deposit Transaction

The check deposit transaction enables the cardholder to insert a check into the terminal without an envelope. The cardholder can deposit the entire amount of the check to a single account.

The split deposit transaction allows deposits to be split between different accounts and is a feature of the SSB Enhanced ATM Application. See section 3 for additional information about the split deposit transaction.

The Device Handler process updates the terminal activity in the ATDD1 as follows:

1. Adds 1 to the check count total.
2. Adds the total check amount to the check amount total.
3. Adds the total check amount to the terminal debits total.
4. Adds the total check amount to the on-us credits total for on-us transactions only.

## **Exact Amount Withdrawal Transaction**

The withdrawal transaction is expanded to allow the cardholder to specify a withdrawal amount that is not an integer amount. While this is not a new transaction, it does increase the flexibility of a withdrawal transaction.

## Check Imaging

Diebold terminals can scan checks that are deposited without an envelope. The scanned image of the check is displayed on the terminal screen to assist the cardholder in verifying that the correct amount was entered for the transaction.

# MICR Data Processing

Diebold terminals that are equipped with a check depository have a check reader which reads the MICR information on the bottom of a check. The Device Handler process places this information in the MICR Data token without changing any of the characters.

The MICR data can be used to identify the financial institution against which the check is written and the account number of the person who wrote the check. The detailed description of each check on the check proof list contains the first 43 bytes of the check MICR information. This data can also be printed on the journal and the daily reports.

The characters 0 through 9, blanks, and the nonnumeric separators listed below represent valid MICR information.

T = Transit symbol  
\$ = Amount symbol  
H = On-us symbol  
– = Dash symbol

Any unrecognizable character appears as an underbar character ( \_ ) on the check proof list. The transaction is denied if there is an unrecognizable character in the MICR information.

**Note:** The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send this data to a host or co-processor.

## Coin Dispensing

Check cashing and cash withdrawals can include both bills and coins. If coins are required for a transaction and the terminal coin dispenser is unavailable, the transaction is denied.

For Diebold terminals, one hopper in the ATD record contains the total value of all coins in the terminal. When setting up the ATD record, the bill hoppers are entered first, then the coin hopper. The hopper designated to dispense coins must be added immediately after the last bill hopper. There can be no unused hoppers between the last hopper designated to dispense bills and the hopper designated to dispense coins. If coins are involved in a transaction, the Device Handler process updates the coin hopper total as well as the bill hopper totals.



# Document Bin Sorting

The SSB Device Handler Extension supports check bin sorting for three check bins at the terminal, in addition to the envelope bin. Checks can be sorted according to a check amount specified at the logical network level. Checks that are under a specific amount are placed in the first check bin (logical bin 1). Checks that equal or exceed that amount are placed in second check bin (logical bin 2). Checks can also be placed in the third check bin (logical bin 0) when errors occur (for example, bin full) with the other check bins. The Check Proof List File (CPLF) is available to keep track of the checks accepted at the terminal.

**Note:** The SSB Enhanced Check Processing Application adds a fourth check bin (logical bin 3) that can be used for sorting checks. It also supports institution-defined check sorting amounts based on check-issuing institution routing and transit number. See section 4 for additional information about the SSB Enhanced Check Processing Application.

## Check Proof Listing

To keep track of the checks accepted at the terminal, the SSB Device Handler Extension stores information in the Check Proof List File (CPLF). You can print the contents of the file using either an administrative check proof list transaction at the terminal or a command from the Device Control Terminal (DCT). You can also delete the CPLF records after an administrative check proof list transaction. The steps for printing the CPLF and deleting the records if needed are described in section 6.

The CPLF contains a record for each check accepted at the terminal using the check and envelope depository. A record is written to the CPLF for each approved check transaction performed at the terminal. A record is also written to the CPLF for each denied transaction where the check cannot be returned to the cardholder.

When a dispenser fault occurs during a cash check or deposit with cash back transaction and the check is returned to the cardholder, the check record is deleted from the CPLF. If the cardholder does not take the check before the terminal times out, the terminal places the check in the bin specified for envelopes and rejects (bin 0) and a record is written to the CPLF for that bin.

Check data is kept in the file until it is printed using the check proof list administrative transaction or a DCT command. When a DCT command is used to print the check proof list, the CPLF records are automatically deleted after the list is printed. When an administrative transaction at the terminal is used to print the check proof list, the service person must specify that CPLF records should be deleted.

The CPLF contains the following information for each check transaction:

- The terminal number of the terminal that accepted the check.
- The number of the bin in which the check is retained.
- The four-digit BASE24 sequence number assigned to the check transaction. Each transaction is assigned a sequence number by the Diebold 10XX/478X Device Handler process. This number remains unchanged through the life of the transaction.
- The first 43 bytes of magnetic ink character recognition (MICR) data on the check.
- The transaction amount.

- The status used to identify suspect checks (0 = OK or 1 = unapproved check retained). This status is assigned by the Diebold 10XX/478X Device Handler process. The unapproved check is presented to the cardholder, and if the check is not taken by the cardholder before the card removal timer (timer 9) expires, the terminal recaptures the check and sends a status message to the Device Handler process.

## **Bulk Note Acceptor or Enhanced Note Acceptor**

ATMs equipped with a currency acceptor (such as a bulk note acceptor or enhanced note acceptor) can enable customers to deposit a stack of currency of a single currency type into the ATM without an envelope. Currency of various denominations can be accepted or rejected, depending on how the currency acceptor is configured. This feature also validates and counts the currency before sending a transaction request message to the Device Handler process. Deposits made using invalid currency or multiple currency types will be rejected. The Bulk Note Acceptor and Enhanced Note Acceptor features are only supported by the Agilis 91x/Opteva-series.

## SSB Device Handler Extension Configuration

All features in the SSB Device Handler Extension require Diebold 10XX/478X terminals that are using the Diebold 10XX/478X Device Handler process. The BASE24-atm SSB Device Handler Extension requires Diebold 10XX/478X ATMs that are using 912 check and coin firmware and are equipped with a coin dispenser and check depository. The Bulk Note Acceptor (BNA) feature and Enhanced Note Acceptor (ENA) require Opteva-series devices equipped with a currency acceptor.

In addition, Device Installation Terminal (DIT) settings for the check depository must be configured at the ATM. See the appropriate Diebold 10XX/478X vendor documentation related to the Check Processing Module for further information on DIT settings.

The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send data for the MICR data processing feature to a host or co-processor.

Before configuring the SSB Device Handler Extension, the application must be properly installed and the BASE24-atm network must be up and available for file maintenance. In addition, you must have security access to the appropriate screens listed in the following table. For more information about screen security access, refer to the *BASE24 User Security Manual*.

The following table lists the features of the SSB Device Handler Extension and the BASE24 and Diebold-specific screens and files needed to configure each feature. This table gives an overview of the modifications needed and allows you to configure the features from this module that you want to offer to your cardholders. The pages following the table describe these screens and files.

If a screen or file is described in another manual in the BASE24 manual set, only those fields that have specific SSB requirements are listed. If a screen is not described elsewhere, this section includes an illustration of the screen and descriptions of all fields on the screen.

| Screen or File                       | Additional Transaction Support | Check Imaging | MICR Data Processing | Coin Dispensing | Document Bin Sorting | Check Proof Listing | Bulk Note Acceptor or Enhanced Note Acceptor |
|--------------------------------------|--------------------------------|---------------|----------------------|-----------------|----------------------|---------------------|----------------------------------------------|
| C100NAMS                             | ✓                              |               |                      |                 |                      |                     | ✓                                            |
| CNFGIX                               | ✓                              | ✓             | ✓                    |                 | ✓                    |                     | ✓                                            |
| LCONF                                |                                |               |                      |                 | ✓                    | ✓                   |                                              |
| Acquirer Processing Code File (APCF) | ✓                              |               |                      |                 |                      |                     |                                              |
| ATD Screen 1                         | ✓                              | ✓             | ✓                    | ✓               | ✓                    | ✓                   |                                              |
| ATD Screen 2                         | ✓                              |               |                      |                 |                      |                     |                                              |
| ATD Screen 4                         |                                |               |                      | ✓               |                      |                     |                                              |
| ATD Screen 5                         |                                |               |                      | ✓               |                      |                     |                                              |
| ATD Diebold 10XX/478X Screen 7       | ✓                              | ✓             | ✓                    | ✓               | ✓                    | ✓                   |                                              |
| ATD Diebold 10XX/478X Screen 8       | ✓                              |               |                      |                 |                      |                     |                                              |
| Receipt File (RCPT)                  | ✓                              |               |                      |                 |                      | ✓                   | ✓                                            |
| Terminal Receipt File (TRF)          | ✓                              |               |                      |                 |                      |                     |                                              |
| Token File (TKN)                     |                                |               | ✓                    | ✓               |                      |                     | ✓                                            |

## Modifying the C100NAMS

The C100NAMS is an edit file that contains a series of tables used by the SSB Device Handler Extension. You can edit these tables to customize specific types of information displayed on ATM receipts or screens. At the time the SSB Device Handler Extension is compiled, the information in the C100NAMS is incorporated into the SSB Device Handler Extension object file. Therefore, you must either make the changes to this file during the SSB installation procedures before the code is compiled or, if changes are necessary after the installation is complete, you must recompile the code.

### Transaction Naming Table

The transaction naming table (diebold\_1000\_tran\_tbl) in the C100NAMS supports the check deposit and deposit with cash back transactions. The transaction naming table includes the additional transactions supported by the SSB Device Handler Extension. You are not required to make any changes to this table to support the SSB product. However, you can modify the default text.

The default text is assigned according to the BASE24-atm transaction codes carried in the BASE24-atm Standard Internal Message (STM). Each of the entries in this list has one text entry. The entries in the C100NAMS include text for eight languages. See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on the default entries in the C100NAMS file. The BASE24-atm transaction codes are as follows:

11 = CASH CHECK <sup>1</sup>  
20 = DEPOSIT <sup>2</sup>  
24 = DP CSH BCK <sup>3</sup>

<sup>1</sup> The CASH CHECK entry already exists in the transaction naming table.

<sup>2</sup> The DEPOSIT and SPLIT DEP entries share transaction code 20. The split deposit transaction is part of the SSB Enhanced ATM Application.

<sup>3</sup> This DP CSH BCK entry is used for all deposit with cash back transactions.

### Response Code Text Table

The response code text table (diebold\_1000\_response\_text) in the C100NAMS is used in conjunction with the #RT (response text) field type code when that field is used in a receipt template for denied financial transactions. The response code text

table provides additional receipt text for denied transaction receipts. This text gives the cardholder an explanation for the denied transaction. This table includes four values (41, 42, 44, and 45) and corresponding text for the four additional transactions supported by the SSB Device Handler Extension. These entries in the C100NAMS include text for eight languages.

The response codes in the response code text table are used internally by the Device Handler process and do not match the BASE24-atm response codes carried in the BASE24-atm Standard Internal Message (STM). For example, response code 42 in the response code text table is mapped to BASE24-atm response code 67 (invalid cash back amount).

The response code text table entries used for denied transactions are as follows:

41 = UNABLE TO DISPENSE COINS  
42 = INVALID CASH BACK AMOUNT  
44 = NO CHECK ENTERED  
45 = UNABLE TO ACCEPT CHECKS  
62 = UNABLE TO DEPOSIT

See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on the default entries in the C100NAMS. You are not required to make any changes to this table to support the SSB product, however, you can modify the default text.



## Modifying the Diebold Configuration File

The Diebold 10XX/478X Configuration File (CNFGIX) can be accessed through the Diebold entry program and downloaded to the ATM using the Device Control Terminal (DCT). Through the CNFGIX, changes can be made to Diebold ATM screen displays, state tables, data from the financial institution tables (FIT), configuration parameters, and timers. The CNFGIX must be modified to control the capture and display of check images on the terminal screen, allow the transmission of MICR data to the BASE24 system, allow check-related transactions, and allow up to three dollar amounts in the transaction request message.

See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on the Diebold 10XX/478X Configuration File and the Diebold entry program.

## Load Group Contents

All of the information in the CNFGIX is included in load groups. Two load groups can be downloaded to a Diebold 10XX/478X ATM. Group 0, which can be loaded to any Diebold 10XX/478X ATM, maintains basic information about screens, states, and the FITs used by all terminals. A second, customized load group maintains information specific to certain types of terminals and is loaded only to those terminals.

For example, if only certain terminals support fast cash transactions or color graphics, special states and screens are set up in the CNFGIX to implement fast cash transactions or color graphics at these terminals. These special states and screens are set up as a customized load group with a unique load group number. When a change is made, an operator can download a specific load group to the ATM using the DCT without physically going to the terminal.

Load group 12 adds the states and screens necessary to support the BASE24-atm SSB Device Handler Extension. Load group 812 adds the states and miscellaneous data necessary to support the Enhanced Note Acceptor.

## Load Group 12 Contents

ACI supplies a unique load group, group 12, for the state table data and ATM screen displays necessary to support the BASE24-atm SSB Device Handler Extension. This load group is selected in the **TERMINAL GROUP** field on

Diebold 10XX/478X screen 7 of the BASE24-atm Terminal Data files (ATD). Note that the Cent Check state (state type G) is not valid for transactions that allow cents to be entered.

Load group 12 contains the following changes to the CNFGIX:

- The Deposit state (state type C) allows the configuration of check depository operations, designation of envelope and check deposit bins, and options for capturing the check image.

The Deposit State screen includes an extension state that can be used with the Deposit state to provide more flexibility for screen displays and fault actions. This extension state is not included in the sample load group that ACI supplies with the BASE24-atm SSB Device Handler Extension. However, it is documented with the Deposit State screen in this section if you want to add additional screen displays or fault actions.

- The Transaction Request state (state type I) allows the MICR data to be transmitted from the ATM to the BASE24-atm network. The BASE24-atm product does not verify the MICR data and passes up to 80 bytes of MICR data on to the host. The BASE24-atm product supports this state, logging MICR data to the Transaction Log File (TLF) if the Token File (TKN) record is configured to do so. MICR data also can be passed to hosts using the BASE24-atm ISO Host Interface process.
- The Copy Buffer state (state type =) is used for transactions that require more than one dollar entry state. Using this state, up to three dollar amounts can be included in the transaction request message. The ability to include more than one amount in a single transaction request message reduces the number of messages required between the ATM and the BASE24 system. For example, with the deposit with cash back transaction, two amounts—the deposit amount and the cash back amount—can be included in a single transaction request message for the transaction.
- The ATM Standard Display Screen contains control sequences for the SSB Device Handler Extension allow configuration of ATM screens to display a check image to the cardholder. The ATM scans the check and stores the face of the check in a format that allows it to be displayed on the ATM screen. The check display assists the cardholder in verifying that the correct amount is entered.

The check reader at the ATM uses the MICR data to determine whether it is scanning the face or reverse side of a document. Therefore, to display the check face image, MICR reading (Option 5) must be enabled in the Device Installation Terminal (DIT). If MICR reading is not enabled, the device assumes that the top side of the document, as entered into the depository, is the face.

## Modifying the Deposit State

The Diebold Deposit State screen is used to configure the Diebold Deposit state (state type C), including check depository operations, envelope and check bins, and check image capture.

The Diebold Deposit State screen can be accessed via the Diebold State Table screen. The Diebold State Table screen is accessed by entering function code 2 on the Diebold Entry Program Menu screen. The Diebold State Table screen allows you to reconfigure states and conditions that are associated with various ATM transaction states and groups. See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on state tables.

The Deposit State screen is shown below, followed by a description of the fields related to the SSB Device Handler Extension.

```

INTERBOLD STATE TABLE
Type C      Deposit/Unlock Depository Door
State Number 000      Group 0000

ATM with an IDM:

Good Next State .....
Screen Number .....
Timeout/Cancel Next State
Fault Next State .....
Operation .....
Deposit Bin ID .....
Image Capture .....

Extension State      :
Check Accepted Screen ...
Handling Delay Screen ...
Handling Delay Time ....
MICR Fault Next State ...
Media Fault Next State ..
Cancel Next State .....
Handling Error Next State
Override MICR DIT Setting

ATM without IDM:
Next State .....

=====
F1=CHANGE STATE TYPE      F2=READ      F3=ADD      F4=DELETE      F5=UPDATE
                          F9=NEXT      F10=PRINT   F16=EXIT

```

**Type** — A code indicating the current state screen. A value of C in this field indicates the Deposit State screen.

**Good Next State** — The state to which the terminal proceeds if the current operation is completed successfully.

SSB Feature:          Additional transactions

**Screen Number** — The screen to display at the ATM during the execution of the state. If the screen display is to remain the same for the next state, use 000 in this field.

SSB Feature: Additional transactions

**Timeout/Cancel Next State** — The state to which the terminal proceeds if the cardholder presses the Cancel key, if Timer 4 expires during Operation 001 or 002, or if Timer 9 expires during Operation 004.

SSB Feature: Additional transactions

**Fault Next State** — The state to which the terminal proceeds if a fault occurs.

SSB Feature: Additional transactions

**Operation** — A code indicating the depository operation to perform. With the BASE24-atm SSB Device Handler Extension, the depository operation value should be set to 002 for the check deposit and deposit with cash back transactions. Valid codes are as follows:

- 000 = Unlock deposit supplies door. Once the deposit supplies door is unlocked, the terminal goes to the state specified in the GOOD NEXT STATE field.
- 001 = Envelope check deposit. If there is no document in the escrow position, enable the depository for a complete envelope deposit to the envelope cassette. If a document is in the escrow position, move the document to the check bin specified in the DEPOSIT BIN ID field and continue with the envelope deposit. Timeout of this operation is controlled by Timer 4. The Cancel key on the ATM keyboard is enabled.

- 002 = Enable the depository to accept a document. If there is no document in the escrow position, enable the depository to accept a document, read the MICR line as directed by depositor DIT option 5, capture the image(s) from the front and/or endorsement side(s) of the check as directed by the state or function image capture entry, and hold the document in the escrow position.

If a document is in the escrow position, move the document to the check bin specified in the deposit state data or the deposit function command (if no bin is specified, use bin 1), and continue with the check deposit. Timeout of this operation is controlled by Timer 4. The Cancel key on the keyboard is enabled. This operation is similar to depository operation 001, except the inserted document is held in the escrow position. It is intended to be the first step of a check deposit sequence.

- 003 = Retain check. Move the document from the escrow position to the check bin specified in the deposit state data or deposit function command (if no bin is specified, the default bin is used). If print data exists, print it on the check. Timeout and cancel do not apply with this operation. The Cancel key on the keyboard is not enabled.

- 004 = Return check with printing. Move the document from the escrow position to the depositor input to allow retrieval by the cardholder. If print data exists, print it on the check. Timeout of this operation is controlled by Timer 9. If a timeout occurs, capture the document and place it in the check bin specified in the deposit state data or the deposit function command (if no bin is specified, the default bin is used). Cancel does not apply to this operation. The Cancel key on the keyboard is not enabled.

SSB Feature: Additional transactions, check imaging, MICR data processing, document bin sorting

**Deposit Bin ID** — A value indicating whether a document is retained in the envelope bin or a check bin. This entry is required for depository operations 003 and 004. Valid values are as follows:

- 000 = Envelope
- 001 = Check bin #1
- 002 = Check bin #2

**Note:** This entry should be set to 000 for depository operation 000.

With the BASE24-atm SSB Device Handler Extension, the ATM-DH-CHK-BIN-THRHLDPARAM in the Logical Network Configuration File (LCONF) is used to determine which check bin is used to sort check transactions. Therefore, this field is not required for check transactions performed with the SSB Device Handler Extension.

SSB Feature: Additional transactions

**Image Capture** — This entry applies only to depository operation 002. Scanned check images can be accessed in three different ways: “real-time” display (not supported by the BASE24 product), external applications (not supported by the BASE24 product), and consumer screen data (supported by the BASE24 product).

The BASE24 product supports the following values:

000 = No image capture  
001 = Front image only  
002 = Back image only  
003 = Front and back images

**Note:** This entry should be set to 000 for depository operations other than 002.

SSB Feature: Check imaging

**Extension State** — The state number is not displayed, but if it is configured, it is one less than the current state number.

SSB Feature: Additional transactions, MICR data processing

**Check Accepted Screen** — The screen to display on the ATM when the check is accepted by the terminal without being read or scanned. An entry of 000 causes no screen change.

SSB Feature: Additional transactions

**Handling Delay Screen** — The screen to display on the ATM if the time specified in the Check Handling Delay Time transpires after the check is accepted. This screen can be used to assure the cardholder that his or her check is still being handled in case the terminal has difficulty moving it through the transport. An entry of 000 causes no screen change.

SSB Feature: Additional transactions

**Handling Delay Time** — The length of time, in 800 millisecond increments, the ATM should wait from the time a check is accepted before displaying the Check Handling Delay screen. A value of 255 disables this feature. The suggested value for this entry is 25 (20 seconds).

SSB Feature: Additional transactions

**MICR Fault Next State** — The state to which the terminal proceeds if the terminal can move the check through the transport, but cannot read the MICR line.

SSB Feature: MICR data processing

**Media Fault Next State** — The state to which the terminal proceeds if the terminal does not attempt to read the MICR line or scan the image because of the size or condition of the document. The terminal holds the document in escrow.

SSB Feature: Additional transactions

**Cancel Next State** — The state to which the terminal proceeds if the cardholder presses the Cancel key before inserting a check or envelope during a check or envelope deposit operation.

SSB Feature: Additional transactions

**Handling Error Next State** — The state to which the terminal proceeds if the document cannot be transported properly through the terminal. The check can be returned and the deposit can be tried again.

SSB Feature: Additional transactions

**Override MICR DIT Setting** — Overrides the MICR read position enable and preference setting contained in the Depositor DIT, option 5. Refer to the vendor documentation for further information on valid values for this field.

SSB Feature: MICR data processing

## Modifying the Transaction Request State

The Diebold Transaction Request State screen is used to configure the Diebold Transaction Request state (state type I) that sends cardholder requests to the BASE24-atm system and executes function commands received from the BASE24-atm system. The Transaction Request state specifies the information to be included in the request message to the BASE24-atm system. To support the BASE24-atm SSB Device Handler Extension, the Transaction Request state must be modified to specify that MICR data from the bottom of a check is to be sent to the BASE24-atm system. This is specified using the SEND TRACK 3 field on the Transaction Request State screen.

The Diebold Transaction Request State screen can be accessed through the Diebold State Table screen. The Diebold State Table screen is accessed by entering function code 2 on the Diebold Entry Program Menu. The Diebold State Table screen allows you to reconfigure states and conditions that are associated with various ATM transaction states and groups. See the ***BASE24-atm Diebold 10XX/478X Device Support Manual*** for more information on state tables.

The Transaction Request State screen is shown below, followed by a description of the fields related to the SSB Device Handler Extension.

| INTERBOLD STATE TABLE               |         |                           |            |           |
|-------------------------------------|---------|---------------------------|------------|-----------|
| Type                                | I       | Transaction Request State |            |           |
| State Number                        | 000     | Group                     | 0000       |           |
| Screen Displayed                    | .....   |                           | 000        |           |
| Network Timeout Next State          | ..      |                           | 000        |           |
| Send Track 2                        | .....   |                           | 000        |           |
| <b>Send Track 1, 3, and/or MICR</b> |         |                           | <b>000</b> |           |
| Send Operation Key Buffer           | ...     |                           | 000        |           |
| Send Dollar Buffer                  | .....   |                           | 000        |           |
| Send PIN Buffer                     | .....   |                           | 000        |           |
| Send Buffer B and/or C              | .....   |                           | 000        |           |
| =====                               |         |                           |            |           |
| F1=CHANGE STATE TYPE                | F2=READ | F3=ADD                    | F4=DELETE  | F5=UPDATE |
|                                     | F9=NEXT | F10=PRINT                 |            | F16=EXIT  |

**Type** — A code indicating the current state screen. A value of I in this field indicates the Transaction Request State screen.



**Send Track 1, 3, and/or MICR** — A code specifying the information to be sent in the transaction request message to the BASE24-atm system. The BASE24-atm product passes up to 80 bytes of MICR data on to the host. Valid values are as follows:

- 000 = Send no additional tracks.
- 001 = Send Track 3.
- 002 = Send Track 1.
- 003 = Send Track 1 and 3.
- 004 = Send MICR data only.
- 005 = Send MICR data and Track 3.
- 006 = Send MICR data and Track 1.
- 007 = Send MICR data and Track 1 and 3.

**Note:** This code must be set to a value of 004 through 007 to support sending MICR data to the host with the SSB Device Handler Extension. The BASE24-atm product can log MICR data to the TLF if the TKN record is configured to do so. MICR data also can be passed to hosts using the BASE24-atm ISO Host Interface process.

SSB Feature:           MICR data processing

## Modifying the Copy Buffer State

The Diebold Copy Buffer State screen is used to configure the Diebold Copy Buffer state (state type =) that supports split deposits and other operations that require more than one dollar-entry state. Using the Copy Buffer state allows the deposit with cash back transaction to be performed using a single transaction request from the ATM to the BASE24 system, thus reducing the number of messages required.

The Copy Buffer state allows the dollar buffer to be copied into a general purpose buffer. General purpose buffers B and C can be included in a transaction request message. By following dollar entry states with copy buffer states, and by changing the appropriate entry in the Transaction Request state, up to three dollar amounts can be included in the transaction request message without requiring changes to the format of the message.

The Diebold Copy Buffer State screen can be accessed via the Diebold State Table screen. The Diebold State Table screen is accessed by entering function code 2 on the Diebold Entry Program Menu screen. The Diebold State Table screen allows

you to reconfigure states and conditions that are associated with various ATM transaction states and groups. See the ***BASE24-atm Diebold 10XX/478X Device Support Manual*** for more information on state tables.

The Copy Buffer State screen is shown below, followed by a description of the fields related to the SSB Device Handler Extension

INTERBOLD STATE TABLE  
Type = Copy Buffer State  
State Number 000 Group 000  
  
Next State ..... 000  
Source Buffer ID ..... 000  
Destination Buffer ID 000

=====

F1=CHANGE STATE TYPE    F2=READ    F3=ADD    F4=DELETE    F5=UPDATE  
F9=NEXT    F10=PRINT    F16=EXIT

**Type** — A code indicating the current state screen. A value of = in this field indicates the Copy Buffer State screen.

**Next State** — The state to which the terminal proceeds immediately following the completion of the Copy Buffer state.

SSB Feature:        Additional transactions

**Source Buffer ID** — A code that identifies the buffer to be copied. Copying does not affect the source buffer. The valid value is 001 (Dollar buffer). All other values are reserved.

SSB Feature:        Additional transactions

**Destination Buffer ID** — A code that identifies the buffer to which the source buffer is to be copied. Valid values are as follows:

002 = General purpose buffer B  
003 = General purpose buffer C

SSB Feature:            Additional transactions

## Modifying the ATM Display Screens

The ATM display screens are part of the CNFGIX and allow modification of the screens displayed on the ATM. These screens can be accessed by entering function code 1 on the Diebold Entry Program Menu screen.

ATM screens can be displayed in a high- or low-level mode for configuration. You can move between the two modes by pressing the **F1** key. The high-level mode screen is displayed first, and is called the InterBold i Series/MDS Display screen. You must use the InterBold Low-level Display screen to configure the check image display because check image displays use special control codes that can only be entered on the InterBold Low-level Display screen:

- The ESC-Q control code causes the check face image to be displayed on the ATM screen. An ESC-Q control code has no effect if the check face image does not exist. The check face image is erased when the cardholder completes all transactions.
- The Escape-M (ESC-M) control code adjusts the screen resolution on ATMs equipped with a VGA monitor to permit the check face image to be displayed on the ATM screen. The value 03 must be used with this control code, which is necessary with VGA monitors only.

See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on the ATM Standard Display screens accessed through the Diebold entry program, or use the help screens, accessed by pressing the **Shift-F2** keys.

**Interbold High-Level Display Screen.** Screen 144 in load group 12 uses the ESC-Q control code to display the check face image on the ATM screen. The high-level display of screen 144 is shown below. The check image would be displayed on the upper part of the ATM screen.

```

Screen 000  Lang Bank 000          @ABCDEFGH IJKLMNO0123456789:;<=>?PQRSTU VW
Group 0000  Clear Screen? Y      @ >                                     @
                                     A >                                     A
                                     B >                                     B
*****
* INTERBOLD i Series/MDS *        C >                                     C
*   DISPLAY SCREEN   *            D >                                     D
*****
                                     E >                                     E
                                     F >                                     F
Overlays: 1.  N/A                G >                                     G
                2.                H >                                     H
                3.                F >I >                                I< A
                4.                J >          PLEASE ENTER THE CHECK AMOUNT J
                5.                K >                                     K
                                     G >L >                                @                                L< B
                                     M >                                     M
                                     N >                                     N
| NOTE: use '^' to |                H >O >                                PRESS IF YES----->O< C
| display Track1 |                0 >                                     0
| Name. Use '@' to |                1 >                                     1
| position cursor |                I >2 >                                PRESS IF NO----->2< D
| for data entry. |                3 >          TO VOID TRANSACTION PRESS CANCEL 3
+-----+
                                     @ABCDEFGH IJKLMNO0123456789:;<=>?PQRSTU VW

F1=LO  F2=RD  SF2=RD-OVRLAY  F3=ADD  F4=DEL  F5=UPDT  F9=NXT  F10=PRNT  F16=EXIT

```

**InterBold Low-level Display Screen.** The low-level display of screen 144 is shown below. Line 1 contains the ESC-Q control code.

```

INTERBOLD DISPLAY SCREEN, LOW-LEVEL      Screen 144   Lang Bank 000   Group 0012
.....1.....2.....3.....4.....5.....6.....7.....
1 FF,ESC-Q
2 SI,JE
3 "PLEASE ENTER THE CHECK AMOUNT"
4 SO,494
5 SI,OL,"PRESS IF YES"
6 SI,2L,"PRESS IF NO"
7 SI,3E
8 "TO VOID TRANSACTION PRESS CANCEL"
9 SI,LJ
10
11
12
13
14
15
16
17
18
19
20
Record read O.K.
F1=HI  F2=RD  SF2=HELP  F3=ADD  F4=DEL  F5=UPDT  F9=NXT  F10=PRNT  F16=EXIT

```

**InterBold Low-level Display Screen with the ESC-M Sequence.** When ATMs are equipped with VGA monitors, the resolution must be adjusted by adding the ESC-M control code with the value 03 prior to the ESC-Q control code, as shown below.

```
INTERBOLD DISPLAY SCREEN, LOW-LEVEL      Screen 144   Lang Bank 000   Group 0012
.....1.....2.....3.....4.....5.....6.....7.....
1 FF,ESC-M,03,ESC-Q
2 SI,JE
3 "PLEASE ENTER THE CHECK AMOUNT"
4 SO,494
5 SI,OL,"PRESS IF YES"
6 SI,2L,"PRESS IF NO"
7 SI,3E
8 "TO VOID TRANSACTION PRESS CANCEL"
9 SI,LJ
10
11
12
13
14
15
16
17
18
19
20
Record read O.K.
F1=HI  F2=RD  SF2=HELP  F3=ADD  F4=DEL  F5=UPDT  F9=NXT  F10=PRNT  F16=EXIT
```

## Modifying the Logical Network Configuration File

The Logical Network Configuration File (LCONF) enables you to define the locations of files and processes, and to define processing parameters. For more information on the LCONF, see the *BASE24 Logical Network Configuration File Manual*.

The following assign in the LCONF is used to locate the appropriate file in the Check Proof List File (CPLF).

**ATM-DH-MDS1000-CPLF** — The fully-qualified file name of the CPLF for Diebold 10XX/478X ATMs (for example, \B24.\$DATA.PRO1DATA.CPLF100A). Each Device Handler process can have a separate CPLF, or the logical network can have a single CPLF.

SSB Feature:            Check proof listing

The following params in the LCONF are used for setting processing values at the logical network level.

**ATM-DH-CHK-BIN-THRHLD** — Indicates the threshold of the first check bin. Check amounts that equal or exceed this threshold value are retained in the second check bin. All others are retained in the first bin. Valid values include any whole amount from 0 through 9999999999. A value of 0 indicates sorting is not performed, and all checks are retained in the second bin. The default value is 0.

**Note:** This param is not necessary if you have installed the SSB Enhanced Check Processing Application and are using the Bin Sort File (BSF).

SSB Feature:            Document bin sorting

**ATM-DH-CHK-DISP-FAULT-ACT** — Specifies what action the Diebold 10XX/478X Device Handler process takes when the ATM cannot dispense the full transaction amount during a cash check transaction.

Valid values are as follows:

- 0 = Cancel and reverse the cash check transaction. Return the check and do not deliver any cash to the cardholder. Disable the ATM cassette that faulted.
- 1 = Allow the cash check transaction to complete by retaining the check and dispensing the cash that is available; the BASE24 system then generates either a full or partial reversal to reflect that the check was accepted but the full amount could not be dispensed.

If the customer does not have an account relationship with the transaction acquirer and a partial dispense occurs, the customer must contact the transaction acquirer to obtain the amount not dispensed.

**Note:** If this field is set to 0 and coins were already dispensed for the cash check transaction before it was determined that the full amount could not be dispensed, a partial reversal is performed. The completed amount of the transaction is then equal to the amount of change dispensed.

SSB Feature:            Additional transaction support

**ATM-DH-MDS1000-CPLF-REQ** — Specifies whether the CPLF is required for processing. If the value in this param indicates that the CPLF is required, and the ATM-DH-MDS1000-CPLF assign is not present, the Device Handler process abends. Valid values are as follows:

- Y = Yes, the CPLF is required.
- N = No, the CPLF is not required.

SSB Feature:            Check proof listing

## Modifying the Acquirer Processing Code File

Institutions can specify the transactions allowed at its terminals in the Acquirer Processing Code File (APCF). Not-on-us cardholders are defined by BASE24-atm as those cardholders completing transactions at a terminal owned by a different institution than the institution that issued their card. That is, the terminal-owning institution and the card-issuing institution are not the same.

BASE24 terminal owners can specify ISO processing codes for transactions supported by individual terminals or by groups of terminals. The Device Handler process passes all transaction codes to the Authorization process. The Authorization process checks the TRANSACTION ALLOWED field on APCF screen 2 when the transaction is a not-on-us transaction.



The following transaction codes are used with the deposit with cash back and check cashing transactions:

| <b>Transaction</b>                 | <b>Transaction Code</b> | <b>To Account Type</b> | <b>From Account Type</b> |
|------------------------------------|-------------------------|------------------------|--------------------------|
| Deposit to Checking with Cash Back | 24                      | 00                     | 01                       |
| Deposit to Savings with Cash Back  | 24                      | 00                     | 11                       |
| Deposit to Other with Cash Back    | 24                      | 00                     | 60                       |
| Cash Check                         | 11                      | 00                     | 00                       |

Refer to the ***BASE24 Base Files Maintenance Manual*** for more information about the APCF screens. Refer to the ***BASE24-atm Transaction Processing Manual*** for more information about how the Diebold 10XX/478X Device Handler process uses the APCF.

## Modifying the BASE24-atm Terminal Data Files

The BASE24-atm Terminal Data files (ATD) contains configuration information for each individual terminal in your institution's network. The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for more information on the ATD.

### ATD Screen 1

ATD screen 1 enables you to identify the terminal type.

**DEVICE TYPE** — Indicates the model and manufacturer of the terminal. You must enter type code 30 for Diebold 10XX/478X terminals.

SSB Feature:           All SSB Device Handler Extension features

### ATD Screen 2

Entries on ATD screen 2 determine the types of transactions allowed for not-on-us cardholders at a particular terminal. Not-on-us cardholders are defined by the BASE24-atm product as those cardholders completing transactions at a terminal owned by a different institution than the institution that issued their card. That is, the terminal-owning institution and the card-issuing institution are not the same.

**ACQUIRER TXN PROFILE** — A code identifying the BASE24-atm transaction processing codes supported at this terminal. The acquirer transaction profile allows one or more acquirers to share processing code definitions and transactions allowed information. The value in this field is part of the key used to read the Acquirer Processing Code File (APCF) and it overrides the acquirer transaction profile defined at the institution level in the IDF. The value entered in this field must match a transaction profile named in the APCF.

SSB Feature:           Additional transaction support

## ATD Screens 4 and 5

ATD screens 4 and 5 allow you to assign the contents and bill value of each hopper. One hopper in the ATD contains the total value of all coins in the terminal. Screen 4 contains information on hoppers 1, 2, and 3, and screen 5 contains hoppers 4, 5, and 6. Depending on the hopper to be used for coins, access either screen 4 or 5.

The terminal can be set up to have from two to four bill hoppers and one coin hopper in use; however, the coin hopper must be the last hopper listed in the ATD. The hoppers must be consecutive. No blank hoppers (that is, bill value equal to zero) can be placed between the last bill hopper and the coin hopper. If these conditions are not met, an error message is displayed on the screen and the ATD record cannot be added or updated. If coins are required for a transaction and the terminal coin dispenser is unavailable, the transaction is denied.

**CONTENTS** — Specifies the contents of each hopper. Valid values are as follows:

|       |   |                              |
|-------|---|------------------------------|
| 00    | = | Cash                         |
| 01    | = | Coin                         |
| 02    | = | Travelers checks             |
| 03–10 | = | Cash value or nonvalue items |

SSB Feature:        Coin dispensing

**BILL VAL** — Indicates the denomination of contents of the hopper. If the value in the CONTENTS field is 01 through 10, the BILL VAL field can contain decimal values. If the value in the CONTENTS field is 03 through 10, this field can contain a zero value. For example, for a system using U.S. currency, a value of 5 indicates that the hopper contains \$5.00 bills, a value of .25 indicates that the hopper contains quarters (\$0.25), and a value of 0 indicates that the hopper contains nonvalue items.

Hopper 1 always contains the bills with the lowest denomination, with each successive hopper containing higher bill denominations. If the terminal has two dispensers with the same denomination, the ATD can have one hopper defined for that denomination with the totals for both dispensers.

SSB Feature:        Coin dispensing

**STD BEG CASH** — The standard amount of money used to replenish cartridge cash dispensers. The standard amount of money must be divisible by the value entered in the BILL VAL field.

SSB Feature:        Coin dispensing

**BEG CASH** — The amount of money in the hopper at the start of the current balancing period. The amount of money must be divisible by the value entered in the BILL VAL field.

SSB Feature:        Coin dispensing

**END CASH** — The amount of money in this hopper.

SSB Feature:        Coin dispensing

## **ATD Diebold 10XX/478X Screen 7**

ATD Diebold 10XX/478X screen 7 is a device-specific screen. ATD Diebold 10XX/478X screen 7 indicates the terminal load group to which this terminal belongs. Screen display for each device is dependent on the setting in the DEVICE TYPE field on ATD screen 1, which must be 30 for Diebold 10XX/478X terminals.

**TERMINAL GROUP** — Indicates the terminal load group to which this terminal belongs. This code indicates the SSB states and screens that are to be loaded to this terminal when a download command is sent from the Device Control Terminal (DCT). The SSB Device Handler Extension uses load group 12.

SSB Feature:        All SSB Device Handler Extension features

## **ATD Diebold 10XX/478X Screen 8**

ATD Diebold 10XX/478X screen 8 specifies the terminal receipt profile. The terminal receipt profile is used to determine whether the institution deems that a receipt should be printed for the cash check, deposit, and deposit with cash back transactions (both check and envelope), and to which printers the receipt will be sent. Note that the optional receipts feature can override these values. See the ***BASE24-atm Diebold 10XX/478X Device Support Manual*** for more information on optional receipts.

ATD Diebold 10XX/478X screen 8 is a device-specific screen. Screen display for each device is dependent on the setting in the DEVICE TYPE field on ATD screen 1, which must be 30 for Diebold 10XX/478X terminals.

**TERMINAL RECEIPT PROFILE** — The terminal receipt profile for the terminal that initiated the transaction. The terminal receipt profile allows one or more terminals to share receipt options for approved and denied transactions. The value entered in this field must match a terminal receipt profile named in the Terminal Receipt File (TRF).

## Modifying the Receipt File

Cardholder receipts can be configured through a series of receipt templates in the Receipt File (RCPT). The RCPT provides you with the ability to establish ATM receipt formats that are unique to the terminal. Receipt templates are used to determine the actual text and format to be printed on a receipt.

If you have configured the optional receipt feature, it will affect the cash check and deposit with cash back transactions. This feature allows the cardholder to determine if a receipt should be printed for a transaction.

For a complete description of configurable receipts, the optional receipt feature, receipt templates, and examples of receipt templates for transactions performed at the Diebold ATMs, see the ***BASE24-atm Diebold 10XX/478X Device Support Manual***. See the ***BASE24-atm Files Maintenance Manual*** for a complete description of the RCPT.

The SSB Device Handler Extension adds configurable cardholder receipt support for cash check and deposit with cash back transactions to the configurable receipts available with the Diebold 10XX/478X Device Handler process.

Because each additional transaction has two cardholder receipts, depending on whether the proper cash amount can be dispensed, the following receipt templates have been established in the RCPT:

- Cash check
- Partial cash check
- Deposit with cash back
- Partial deposit with cash back

In addition, the check proof list administrative receipts and administrative subtotal receipts are shown.

## Field Type Code Descriptions

Field type code data is retrieved from the BASE24-atm Standard Internal Message (STM) and the BASE24-atm Terminal Data files (ATD). For more information on the STM and its fields, see the *BASE24-atm Transaction Processing Manual*.

The following table describes the standardized field type codes that are used in the default receipt templates provided for the SSB Device Handler Extension. Data names are included in parentheses after each field type code description. You can modify these receipt templates to use the additional field type codes described in the *BASE24-atm Diebold 10XX/478X Device Support Manual*.

| Code | Description                                                                                                             | Length   |
|------|-------------------------------------------------------------------------------------------------------------------------|----------|
| A1   | The first transaction amount (STM.RQST.AMT-1). In a partial deposit with cash back, this amount is the check total.     | 15 bytes |
| A2   | The transaction amount (STM.RQST.AMT-2). In a partial deposit with cash back, this amount is the cash requested.        | 15 bytes |
| A3   | The transaction amount (STM.RQST.AMT-3). In a partial deposit with cash back, this amount is the cash received.         | 15 bytes |
| BN   | The bin number 0–2 generated by the Device Handler process (SSB.CPLF-SAVE.BIN-PROC).                                    | 1 byte   |
| CQ   | The transaction sequence number (CPLF.CPLF-KEY.SEQ-NUM). This code is allowed only for CPLF records.                    | 4 bytes  |
| KA   | The total amount of the checks (SSB.CPLF-SAVE.AMT-CHK-DEP). The totals line is generated by the Device Handler process. | 16 bytes |
| KN   | The total number of checks (SSB.CPLF-SAVE.NUM-CHK-DEP). The totals line is generated by the Device Handler process.     | 4 bytes  |
| MD   | The MICR information from the check (CPLF.CPLF-KEY.MICR). This code is allowed only for CPLF records.                   | 43 bytes |

| Code            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Length   |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| ND              | The net deposit amount (STM.RQST.AMT-1 minus STM.RQST.AMT-2).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 15 bytes |
| NP              | The net deposit amount for a partial dispense transaction (STM.RQST.AMT-1 minus STM.RQST.AMT-3).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 15 bytes |
| PA              | The amount of the check (CPLF.AMT). This code is allowed only for CPLF records.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 15 bytes |
| PN              | The page number (SSB.CPLF-SAVE.PAGE). The page number is generated by the Device Handler process.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 4 bytes  |
| PS              | The status of the check (CPLF.STAT). This code is allowed only for CPLF records.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1 byte   |
| RC              | The response code (STM.RQST.RESP).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2 bytes  |
| RT              | The response text (located in the C100NAMS, in the diebold_1000_response_text table). This code is used with denied transaction receipts. The printed receipt text depends on the value of STM.RQST.RESP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 24 bytes |
| SQ              | The four-digit BASE24 sequence number assigned to the transaction (ATDD1.ATDD1-CORE.TRAN-SEQ-NUM).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4 bytes  |
| TOL, <i>r,c</i> | <p>The <i>to</i> account number (STM.RQST.TO-ACCT). If the STM.RQST.TO-ACCT is all blanks or zeros, the Device Handler process uses the account description from the diebold_1000_appl_tbl table in the C100NAMS file. The value of STM.RQST.TO-ACCT-TYP and the language indicator determine which table entry is used.</p> <p>The three variables (<i>l</i> for characters starting from the left, <i>r</i> for characters starting from the right, and <i>c</i> for the character code) are used to control the truncation of the card number. If the variables are not present, the account number will be printed in its entirety. For additional information about how these variables are used in account number truncation, see the <i>BASE24-atm Diebold 10XX/478X Device Support Manual</i>.</p> | 19 bytes |

| Code | Description                                                                                                                                                                                                                                                                                                                                     | Length   |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| TT   | The transaction type (located in the C100NAMS diebold_1000_tran_tbl table). The transaction code printed depends on the value in the STM.TRAN-CDE field. The Device Handler process searches the diebold_1000_tran_tbl table in the C100NAMS to find a match on the transaction code. The corresponding text is then moved to the print buffer. | 10 bytes |



## Cash Check Receipt

The receipt type CACK is used for a cash check transaction. No account is associated with cash check transactions. The Diebold 10XX/478X ATM default receipt template defined in the RCPT is shown below, followed by a graphic example of the default receipt for a cash check transaction.

```
#E (@RECORD NO.          #SQ>
@CASH CHECK#A1$>>
```

```

1      CUSTOMER LOGO SCREEN
2
3      DATE      TIME      STATION
4      YY/MM/DD  HH:MM      S1A10035
5
6
7      CARD NUMBER
8      1234567890123456789-000
9
10     LOCATION
11     330 SOUTH 108TH AVE
12
13
14     RECORD NO.      838
15     CASH CHECK      $27.35
16
17
18
19
20
21
```

```

1      2
1234567890123456789012345678
```

## Deposit With Cash Back Receipt

The receipt type DPCB is used for a deposit with cash back transaction, where the deposit is made either by envelope or by inserting the check directly into the terminal. The Diebold 10XX/478X ATM default receipt template defined in the RCPT is shown below, followed by a graphic example of the default receipt for a check deposit with cash back transaction.

```
#E(@RECORD NO.          #SQ>
@DEPOSIT AMOUNT #A1$>
@LESS CASH BACK  #A2$>
@NET DEPOSIT    #ND$>>
@TO  #TO>>
```

|    |                         |           |          |
|----|-------------------------|-----------|----------|
| 1  | CUSTOMER LOGO SCREEN    |           |          |
| 2  |                         |           |          |
| 3  | DATE                    | TIME      | STATION  |
| 4  | YY/MM/DD                | HH:MM     | S1A10035 |
| 5  |                         |           |          |
| 6  |                         |           |          |
| 7  | CARD NUMBER             |           |          |
| 8  | 1234567890123456789-000 |           |          |
| 9  |                         |           |          |
| 10 | LOCATION                |           |          |
| 11 | 330 SOUTH 108TH AVE     |           |          |
| 12 |                         |           |          |
| 13 |                         |           |          |
| 14 | RECORD NO.              | 840       |          |
| 15 | DEPOSIT AMOUNT          | \$1000.00 |          |
| 16 | LESS CASH BACK          | \$400.00  |          |
| 17 | NET DEPOSIT             | \$600.00  |          |
| 18 |                         |           |          |
| 19 | TO SAVINGS              |           |          |
| 20 |                         |           |          |
| 21 |                         |           |          |

1                      2  
1234567890123456789012345678

## Partial Cash Check Receipt

The receipt type PCCK is used for a cash check transaction when the full amount cannot be dispensed. No account is associated with cash check transactions; therefore the amount not dispensed is not credited to the cardholder. In this case, the customer must contact the transaction acquirer to obtain the amount not dispensed. The receipt should be configured to reflect what action the customer must take.

The Diebold 10XX/478X ATM default receipt template defined in the RCPT is shown below, followed by a graphic example of the default receipt for a partial cash check transaction.

```
#E(@RECORD NO.          #SQ>
@CASH CHECK      #A1$>
@CASH RECEIVED  #A2$>>
```

```

1      CUSTOMER LOGO SCREEN
2
3      DATE      TIME      STATION
4      YY/MM/DD  HH:MM     S1A10035
5
6
7      CARD NUMBER
8      1234567890123456789-000
9
10     LOCATION
11     330 SOUTH 108TH AVE
12
13
14     RECORD NO.      838
15     CASH CHECK      $40.00
16     CASH RECEIVED   $20.00
17
18
19
20
21
```

```

1      2
1234567890123456789012345678
```

## Partial Deposit with Cash Back Receipt

The receipt type PDPC is used for a deposit with cash back transaction, in which only a partial amount of the requested cash back is dispensed. The deposit can be made either by envelope or by inserting the check directly into the terminal. The Diebold 10XX/478X ATM default receipt template defined in the RCPT is shown below, followed by a graphic example of the default receipt for a partial deposit with cash back.

```
#E(@RECORD NO.          #SQ>
@DEPOSIT AMOUNT #A1$>
@LESS CASH BACK  #A2$>
@NET DEPOSIT     #ND$>>
@TO   #TO>>
```

|    |                         |           |          |
|----|-------------------------|-----------|----------|
| 1  | CUSTOMER LOGO SCREEN    |           |          |
| 2  |                         |           |          |
| 3  | DATE                    | TIME      | STATION  |
| 4  | YY/MM/DD                | HH:MM     | S1A10035 |
| 5  |                         |           |          |
| 6  |                         |           |          |
| 7  | CARD NUMBER             |           |          |
| 8  | 1234567890123456789-000 |           |          |
| 9  |                         |           |          |
| 10 | LOCATION                |           |          |
| 11 | 330 SOUTH 108TH AVE     |           |          |
| 12 |                         |           |          |
| 13 |                         |           |          |
| 14 | RECORD NO.              | 840       |          |
| 15 | DEPOSIT AMOUNT          | \$1000.00 |          |
| 16 | LESS CASH BACK          | \$400.00  |          |
| 17 | NET DEPOSIT             | \$600.00  |          |
| 18 |                         |           |          |
| 19 | TO SAVINGS              |           |          |
| 20 |                         |           |          |
| 21 |                         |           |          |

1
2

1234567890123456789012345678

## Denied Transaction Receipt

The receipt type DENY can be used to inform the cardholder why a transaction was denied. The Diebold 10XX/478X ATM default receipt template defined in the RCPT is shown below, followed by a graphic example of the default receipt for a denied transaction.

```
#E^4@RECORD NO.#E^A#SQ>
#E^4#TT>>
#E^4@TRANSACTION DECLINED>
#E^4#RC>
#E^4#RT>
```

|    |                         |       |          |
|----|-------------------------|-------|----------|
| 1  | CUSTOMER LOGO SCREEN    |       |          |
| 2  |                         |       |          |
| 3  | DATE                    | TIME  | STATION  |
| 4  | YY/MM/DD                | HH:MM | S1A10035 |
| 5  |                         |       |          |
| 6  |                         |       |          |
| 7  | CARD NUMBER             |       |          |
| 8  | 1234567890123456789-000 |       |          |
| 9  |                         |       |          |
| 10 | LOCATION                |       |          |
| 11 | 330 SOUTH 108TH AVE     |       |          |
| 12 |                         |       |          |
| 13 |                         |       |          |
| 14 | RECORD NO.              | 908   |          |
| 15 | CASH CHECK              |       |          |
| 16 |                         |       |          |
| 17 | TRANSACTION DECLINED    |       |          |
| 18 | 0                       |       |          |
| 19 | UNABLE TO ACCEPT CHECKS |       |          |

|                                |   |   |
|--------------------------------|---|---|
| 1                              | 2 | 3 |
| 123456789012345678901234567890 |   |   |

## Check Proof List Administrative Receipt

The check proof list administrative receipt consists of three parts: header, check information, and totals. Each part has its own template in the RCPT.

**Header Template.** The header contains the number of the bin being processed and the page number. The check proof list for each check bin is kept separate and is preceded by the standard transaction header. On the first page of the check proof list, the bin number is printed on the line preceding the list of transactions. On subsequent pages, the number of the bin being processed and the page number are printed at the top of the page. The following is the default template for the check proof list header (receipt type CPLH):

```
#E@@BIN #BN #PN>
```

**Detail Template.** The detailed description for each check contains the check MICR information (first 43 bytes), a BASE24-atm sequence number, and the check amount. The check amounts are formatted with the number of decimal places configured for the system. A maximum of 43 bytes of MICR information are printed. The MICR information is allowed to wrap to the next line if it exceeds 35 characters. The \* appears just after the sequence number for checks that are suspect (for example, unapproved check retained status). A line feed and carriage return are included at the end of each receipt line.

The MICR information contains two symbols to separate the sequential check number, the transit field and the account field; however, these symbols are lower case letters and the default font for the terminal does not have a lower case alphabet, so they appear as other characters.

The following is the default template for the check proof list check information (receipt type CPLC):

```
#E(#MD @SEQ#PS #CQ #PA$>
```

**Subtotal Template.** A subtotal line is printed after each bin. The subtotal line is preceded by a blank line and followed by a form feed to break the page. This line includes the bin number in parentheses, the number of checks in the bin, and the total amount of the checks in the bin. The following is the default template for the check proof list totals information (receipt type CPLT):

```
>#E(@TOTALS(#BN@): NO. #KN>  
@AMOUNT #KA$>>
```

**Sample Check Proof List Administrative Receipt.** An example of a Diebold 10XX/478X ATM receipt for an administrative check proof list transaction for bin 1 is shown below. The first page of the receipt shows receipt type CPLH on line 14, followed by multiple occurrences of receipt type CPLC. The second page of the receipt shows an additional occurrence of receipt type CPLC, followed by receipt type CPLT.

```

1      CUSTOMER LOGO SCREEN
2
3      DATE      TIME      STATION
4      YY/MM/DD   HH:MM     S1A10035
5
6
7      CARD NUMBER
8      1234567890123456789-000
9
10     LOCATION
11     330 SOUTH 108TH AVE
12
13
14     BIN #1
15     001020* T043000096T 00000000*
16           SEQ 0777           $10.00
17     001026* T043000096T 00000000*
18           SEQ 0779           $12.50
19     001021* T043000096T 00000000*
20           SEQ 0780           $22.00
21     001024* T043000096T 00000000*
22           SEQ 0789           $20.00
23     001017* T043000096T 00000000*
24           SEQ 0791           $22.22
25     001027* T043000096T 00000000*
26           SEQ 0824           $35.00
27     001027* T043000096T 00000000*
28           SEQ 0833           $35.00
29     001017* T043000096T 00000000*
30           SEQ 0860           $10.00

```

|   |              |                |          |
|---|--------------|----------------|----------|
| 1 | BIN #1       | PAGE           | 02       |
| 2 | 043000096T   | 0137*10000004* |          |
| 3 | SEQ          | 0877           | \$20.00  |
| 4 |              |                |          |
| 5 | TOTALS (1) : | NO.            | 09       |
| 6 |              | AMOUNT         | \$186.72 |

**Administrative Subtotals Receipt.** The administrative subtotal transaction includes two receipt formats—hopper information (receipt type ADHO) and totals information (receipt type ADTO). The coin and check totals are highlighted. The check total is the total number of checks accepted at the terminal. Separate totals are provided for each check bin. If no coin hopper exists, the coin totals are not included on the receipt. The TOT item is the total number of envelope deposits, commercial deposits, payments enclosed, messages enclosed, and checks. An example of a Diebold 10XX/478X ATM receipt for an administrative subtotal transaction is shown below.



```

1      CUSTOMER LOGO SCREEN
2
3      DATE      TIME      STATION
4      YY/MM/DD   HH:MM     S1A10035
5
6
7      CARD NUMBER
8      1234567890123456789-000
9
10     LOCATION
11     330 SOUTH 108TH AVE
12
13
14     C0 STR    $10000
15     C0 INC      $0   C0 DEC      $0
16     C0 OUT     $15   C0 END     $9985
17     C1 STR    $10000
18     C1 INC      $0   C1 DEC      $0
19     C1 OUT     $110  C1 END     $9890
20     C2 STR    $10000
21     C2 INC      $0   C2 DEC      $0
22     C2 OUT     $320  C2 END     $9680
23     C3 STR    $10000
24     C3 INC      $0   C3 DEC      $0
25     C3 OUT     $80   C3 END     $9920
26     CN STR    $200.00
27     CN INC      $0.00   CN DEC      $0.00
28     CN OUT     $0.00   CN END     $200.00
29
30

```

## Modifying the Terminal Receipt File

Receipt requirements for approved and denied transactions are defined in the Terminal Receipt File (TRF). Transactions are designated by an ISO processing code consisting of the transaction code, *from* account type, and *to* account type.

The following transaction codes are used with the deposit with cash back and check cashing transactions:

| <b>Transaction</b>                 | <b>Transaction Code</b> | <b>To Account Type</b> | <b>From Account Type</b> |
|------------------------------------|-------------------------|------------------------|--------------------------|
| Deposit to Checking with Cash Back | 24                      | 00                     | 01                       |
| Deposit to Savings with Cash Back  | 24                      | 00                     | 11                       |
| Deposit to Other with Cash Back    | 24                      | 00                     | 60                       |
| Cash Check                         | 11                      | 00                     | 00                       |

Refer to the ***BASE24-atm Files Maintenance Manual*** for more information about the TRF screens. Refer to the ***BASE24-atm Transaction Processing Manual*** for more information about how the Diebold 10XX/478X Device Handler process uses the TRF.

## Modifying the Token File

The SSB Device Handler Extension uses the Token File (TKN) to configure data tokens that carry additional information in internal messages. These tokens are logged to various files, are extracted, or are sent to the host. The TKN specifies the following information:

- The tokens that get logged to the BASE24-atm Transaction Log File (TLF) and the Interchange Log File (ILF).
- The tokens that get extracted from the transaction log files by the Super Extract process. Extracting allows the token information to be processed by the host.
- The tokens that get sent to the host with each transaction in the ISO-based external message.

The SSB Device Handler Extension uses the MICR Data token (token ID 12) to carry the MICR data. This token is used by the MICR data processing feature.

The TKN must be modified to ensure that this token is logged to the appropriate transaction log files, to ensure that this token is extracted from the TLF, and to ensure that this token is sent from the BASE24 system to the ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process in the external message.

See the ***BASE24 Tokens Manual*** for complete information on the MICR Data token and on using the TKN to specify tokens to be sent in the external message. For more information on field descriptions for the TKN screen, see the ***BASE24 Base Files Maintenance Manual***.

*ACI Worldwide, Inc.*

# 3: BASE24-atm SSB Enhanced ATM Application

---

The BASE24-atm self-service banking (SSB) Enhanced ATM Application is one of three add-on applications that make up the BASE24-atm self-service banking product. This module requires the use of the SSB Device Handler Extension and can optionally be used in conjunction with the SSB Enhanced Check Processing Application.

This section describes the processing that each feature of the SSB Enhanced ATM Application provides. The files and fields that must be modified to properly configure the SSB Enhanced ATM Application are also described. Information on the fields and files required for individual features is also included if you want to configure only certain features.

The SSB Enhanced ATM Application supports the following features in conjunction with Diebold 10XX/478X terminals:

- Transaction time windows
- Split deposit transaction
- Configurable bill dispensing
- Configurable depository print
- Statement print host communications
- Super Teller

## Transaction Time Windows

Transaction time windows enable you to control the types of transactions performed at the ATM during specific times during the day and days of the week. Using this feature, you can restrict time consuming transactions to off-peak time periods.

For example, statement print transactions take a significant amount of time to complete and can impact the availability of the terminal. You can specify that these transactions take place only during low volume transaction traffic periods.

When the Diebold 10XX/478X Device Handler process is initialized, the ATM-DH-PEAK-LEAD-TIME param in the LCONF is read. Then, the transaction window information is read from the PEAK WINDOW LOAD GROUP, STANDARD WINDOW LOAD GROUP, PEAK TIME START, and PEAK TIME END fields in the BASE24-atm Terminal Data files (ATD) record of each terminal to determine which terminals are using the transaction time window feature. Two load groups must be configured and at least one pair of the transaction peak time start and end fields in the ATD must contain nonzero values for a terminal to use the transaction time window feature.

Values in the following LCONF param and fields on ATD Diebold screen 11 determine when to load the transaction load group specified for the peak transaction period:

- The ATM-DH-PEAK-LEAD-TIME param in the LCONF indicates how many minutes prior to the time in the PEAK TIME START field the download of the transaction load group specified in the PEAK WINDOW LOAD GROUP field should begin. Valid values are 0 through 1440 minutes.
- PEAK WINDOW LOAD GROUP and STANDARD WINDOW LOAD GROUP fields on ATD Diebold screen 11 indicate whether the Device Handler process uses transaction time windows.

If the values in these fields are equal or if the value in either field is 0, the Diebold 10XX/478X Device Handler process does not perform peak window timing.

When these fields contain nonzero values that are unequal, the Diebold 10XX/478X Device Handler process uses the groups specified in the PEAK WINDOW LOAD GROUP and STANDARD WINDOW LOAD GROUP fields as the transaction load groups.

- **WORKDAY PEAK TIME START** and **WEEKEND/HOLIDAY PEAK TIME START** field settings on ATD Diebold screen 11 indicate when the transaction load group specified in the **PEAK WINDOW LOAD GROUP** field is loaded.
- **WORKDAY PEAK TIME END** and **WEEKEND/HOLIDAY PEAK TIME END** field settings on ATD Diebold screen 11 indicate when the transaction load group specified in the **STANDARD WINDOW LOAD GROUP** field is loaded.

If the transaction time window feature has not been specified, the Device Handler process uses the load group specified in the **TERMINAL GROUP** field on ATD Diebold 10XX/478X screen 7 and does not perform the steps described here. Note that the Diebold 10XX/478X Device Handler process must wait until ATMs using the Diebold 10XX/478X Dial-Up Device Handler extension are connected before performing these steps.

For each terminal that is up, open, and has the time window feature specified, the Device Handler process performs the following steps to ensure that the appropriate transaction load group is loaded at the proper time:

1. Determines whether the current day is a weekend or holiday by using the holiday table in the Institution Definition File (IDF). This enables the Device Handler process to determine whether to use the **WORKDAY PEAK TIME START** field or the **WEEKEND/HOLIDAY PEAK TIME START** field in the ATD (screen 11) to calculate the initial peak transaction load time.
2. Calculates the load time for the peak period load group by subtracting the time specified in the **ATM-DH-PEAK-LEAD-TIME** param from the initial time in either the **WORKDAY PEAK TIME START** field or the **WEEKEND/HOLIDAY PEAK TIME START** field.
3. Compares the current system time, adjusted by the value in the **TIME OFFSET** field on ATD screen 1, with the peak transaction load time from step 2 to determine if the current day's peak period start time has already passed.

If the current day's peak period start time has not passed, the Device Handler process sets a timer for the current day's peak period start time. When this timer expires, processing continues with step 4.

If the current day's peak period start time has passed, the Device Handler process performs steps 1 and 2 for the next day instead of the current day, then sets a timer for the next day's peak period start time. When this timer expires, processing continues with step 4.

The peak period transaction load group is not used for the current day when the Device Handler process is initialized or reloaded after the current day's peak period start time has passed, even if the peak period end time has not yet been reached.

4. Performs the load group request in the same manner as if it had received a load group request through the Device Control Terminal (DCT) except it uses the value in the PEAK WINDOW LOAD GROUP field of the ATD rather than the value in the TERMINAL GROUP field of the ATD.
5. Sets an end peak timer based on the time in either the WORKDAY PEAK TIME END field or the WEEKEND/HOLIDAY PEAK TIME END field. When this timer expires, processing continues with step 6.
6. Performs the load group request in the same manner as if a load group request had been received from the DCT except it uses the value in the STANDARD WINDOW LOAD GROUP field of the ATD rather than the value in the TERMINAL GROUP field of the ATD.
7. Sets a timer for the peak transaction load time for the next day. The Device Handler process determines whether the next day is a weekend or holiday by using the holiday table in the IDF. The process then goes through the same processing as outlined above.

The Device Handler process has either a start peak window timer or an end peak window timer set at all times for each terminal that is using the transaction time window feature.

**Note:** Care must be taken in the timing of operator-initiated loads to avoid overriding the special transaction load groups defined with the SSB Enhanced ATM Application.

System performance is impacted by the additional load sequence prior to and following the specified peak window period. Therefore, you should consider using small peak window and standard window load groups. Ideally, these load groups contain only menu screens and states.



# Split Deposit Transaction

With a split deposit transaction, an ATM cardholder can deposit money into two accounts in a single transaction. For example, a cardholder can deposit \$100 (U.S. dollars) to a checking account and \$200 to a savings account from a \$300 deposit. The deposit can be made either by envelope or by inserting the check directly into the terminal.

A deposit can be split between a maximum of two accounts. The following options are available:

- Two checking accounts
- Two savings accounts
- One checking account and one savings account

You can control which of these split deposit transactions are available to your cardholders. Each transaction type has its own flag in the IDF. See the ***BASE24-atm Transaction Processing Manual*** for the transaction codes used by the split deposit transaction.

The authorization method affects which split deposit transactions can be offered. All three split deposit transactions can be offered with the Positive Authorization and Positive Balance Authorization methods because the BASE24 database contains individual account numbers in the Cardholder Authorization File (CAF). Having account numbers available permits the BASE24-atm Authorization process to distinguish between two accounts of the same type (two checking accounts or two savings accounts).

Only a split deposit transaction to a checking and a savings account can be offered with the Negative Authorization with Usage Accumulation, Negative Authorization without Usage Accumulation, or host authorization methods. These methods do not use the CAF, therefore they do not have account numbers available. As a result, the BASE24-atm Authorization process must use the account type to distinguish between two accounts.

**Note:** The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send this data to a host or co-processor.

## Configurable Bill Dispensing

The configurable bill dispensing feature gives you the flexibility to determine, by terminal, which bill denominations are dispensed during a transaction. This flexibility provides you with more terminal servicing controls. The method used to dispense bills from the terminal is defined on Diebold 10XX/478X screen 7 of the BASE24-atm Terminal Data files (ATD).

The following three methods are provided for dispensing bills:

- Least bills method
- Configurable dispense algorithm method
- Thresholds method

### Least Bills Method

The DISPENSE ALGORITHM must be set to zero to use the least bills method of bill dispensing. When the least bills method is used, the Diebold 10XX/478X Device Handler process calculates the hopper bill counts from high to low bill denomination for the bill dispensing. For a withdrawal of \$422 (U.S. dollars), for example, a terminal that contains \$1, \$5, \$20, and \$50 bills will determine the number of bills to be dispensed by dispensing as many \$50 bills as possible (8 bills), then when the amount left to be dispensed is below \$50, one \$20 bill and two \$1 bills will be dispensed, for a total of 11 bills. This method is the same as that used with the BASE24-atm standard product and is used if you enter zero in the DISPENSE ALGORITHM field on ATD Diebold 10XX/478X screen 7. For more information on the least bills method of bill dispensing, see the ***BASE24-atm Diebold 10XX/478X Device Support Manual***.

### Configurable Dispense Algorithm Method

To use the configurable dispense algorithm method of bill dispensing, the DISPENSE ALGORITHM field on ATD Diebold 10XX/478X screen 7 must be set to a value of 2, and three values on ATD Diebold 10XX/478X screen 13 need to be defined in the following fields: the START DISPENSE AMT, STOP DISPENSE AMT, and MAX BILLS. The algorithm uses the start and stop amounts with the maximum number of bills allowed to calculate the correct number of bills to dispense.

The START DISPENSE AMT field contains a monetary value at which the hopper begins to dispense bills. This field is optional. For example, if a hopper contains \$50 (U.S. dollars) bills and the value in this field is set to 200, the terminal would only dispense \$50 bills if the amount to be dispensed is \$200 or more.

The STOP DISPENSE AMT field establishes the amount at which the terminal stops dispensing from that hopper. This field is required. For example, if a hopper contains \$50 bills and the value in this field is set to 100, the terminal would dispense \$50 bills until the amount remaining to be dispensed is less than \$100. Using the start dispense scenario described above and a \$200 transaction, the terminal would dispense \$100 from the \$50 bill hopper and the remaining amount from the hopper with the next highest bill value.

The MAX BILLS field specifies the maximum number of bills to be dispensed from a particular hopper for any transaction.

For more information on the configurable dispense algorithm method of bill dispensing, see the ***BASE24-atm Diebold 10XX/478X Device Support Manual***.

## Thresholds Method

The thresholds method enables you to have more control over the bills that are dispensed. To use the thresholds method, set the DISPENSE ALGORITHM field on ATD Diebold 10XX/478X screen 7 to a value of 1, and define two fields at the terminal hopper level on ATD Diebold screen 11: THRESHOLD and MAX BILLS. These values are used in combination to determine the monetary amount and the number of bills dispensed from each hopper for a given transaction.

The value of the MAX BILLS field establishes the maximum number of bills of a particular denomination that can be dispensed from a particular hopper on any given transaction. This value allows you to limit the number of bills of one value to be dispensed (to conserve the amount of currency in the hopper).

The value of the THRESHOLD field establishes a lower limit for the currency amount that can be dispensed from a particular hopper. This value allows you to limit the amount of currency dispensed in one bill type for the cardholder's convenience. For example, if a terminal is dispensing U.S. dollars and the threshold for a particular hopper is set at 200, then only an amount greater than or equal to \$200 can be dispensed from that hopper on any given transaction.

The transaction amount is compared to the value of the THRESHOLD field for the hopper containing the highest bill value. If the transaction amount is greater than or equal to the threshold, a bill is dispensed; otherwise, the next highest hopper is

checked by the same comparison. After each bill is dispensed, the Diebold 10XX/478X Device Handler process checks that the amount remaining to be dispensed is greater than or equal to the threshold value. Also, it checks that the number of bills already dispensed is less than or equal to the value of the MAX BILLS field. At the time the transaction dispensing fails to meet either of these criteria, the hopper with the next highest denomination is used to dispense the currency; otherwise, another bill is dispensed from the same hopper. Examples of the thresholds method are shown below.

## Thresholds Method Examples

The following examples are provided if you want to implement the thresholds method. Example 1 includes a table illustrating the step-by-step calculations performed as each bill is dispensed. In all three of these examples, the terminals are configured to dispense U.S. dollars.

The following is an example of how a terminal hopper could be configured in the ATD Diebold 10XX/478X screen 7 fields:

| Hopper | BILL VAL | THRESHOLD | MAX BILLS |
|--------|----------|-----------|-----------|
| 1      | 50 (\$)  | 200       | 50        |

In this example, hopper 1 is configured for \$50 bills and any amount over \$200 can be dispensed from this hopper for any individual transaction up to a maximum number of 50 bills.

## Example 1 of Thresholds Method

The following example gives an example of how the ATD fields could be configured for each hopper.

| ATD Field | Hopper 1 | Hopper 2 | Hopper 3 | Hopper 4 |
|-----------|----------|----------|----------|----------|
| BILL VAL  | 1        | 5        | 20       | 50       |
| THRESHOLD | 1        | 5        | 20       | 200      |
| MAX BILLS | 5        | 15       | 50       | 50       |

Using the above example, for a transaction amount of \$422, the bills are dispensed as follows:

| Denomination | Number Dispensed | Amount Dispensed |
|--------------|------------------|------------------|
| \$50         | 5 bills          | \$250            |
| \$20         | 8 bills          | \$160            |
| \$5          | 2 bills          | \$10             |
| \$1          | 2 bills          | \$2              |
| Total        | 17 bills         | \$422            |

The amount remaining to be dispensed and the number of bills already dispensed determine whether additional bills of a currency can be dispensed. Both of these calculations are made after each bill is dispensed. A total of 17 bills were dispensed in example 1.

In the following table, each step shows the calculations made before dispensing each bill. The amount remaining to be dispensed and the value of the THRESHOLD field are compared to determine the hopper, then the number of bills and the value of the MAX BILLS field are compared to determine whether another bill can be dispensed from the selected hopper. The hopper number changes in steps 6, 14, and 16. In step 6, a \$20 bill is dispensed instead of another \$50 bill, even though the amount remaining to be dispensed is greater than \$50, because the amount remaining to be dispensed at this point (\$172) is below the \$200 threshold that is set for \$50 bills. The maximum number of bills is not a factor in this example.

| <b>Step</b> | <b>Amount Remaining<br/>to be Dispensed</b> | <b>THRESHOLD</b> | <b>Hopper</b> | <b>BILL VAL</b> | <b>Number of Bills<br/>Dispensed</b> | <b>MAX BILLS</b> | <b>Total Amount<br/>Dispensed</b> |
|-------------|---------------------------------------------|------------------|---------------|-----------------|--------------------------------------|------------------|-----------------------------------|
|             |                                             |                  |               |                 |                                      |                  | 0                                 |
| 1           | \$422                                       | \$200            | 4             | \$50            | 1                                    | 50               | \$50                              |
| 2           | \$372                                       | \$200            | 4             | \$50            | 2                                    | 50               | \$100                             |
| 3           | \$322                                       | \$200            | 4             | \$50            | 3                                    | 50               | \$150                             |
| 4           | \$272                                       | \$200            | 4             | \$50            | 4                                    | 50               | \$200                             |
| 5           | \$222                                       | \$200            | 4             | \$50            | 5                                    | 50               | \$250                             |
| 6           | \$172                                       | \$20             | 3             | \$20            | 1                                    | 50               | \$270                             |
| 7           | \$152                                       | \$20             | 3             | \$20            | 2                                    | 50               | \$290                             |
| 8           | \$132                                       | \$20             | 3             | \$20            | 3                                    | 50               | \$310                             |
| 9           | \$112                                       | \$20             | 3             | \$20            | 4                                    | 50               | \$330                             |
| 10          | \$92                                        | \$20             | 3             | \$20            | 5                                    | 50               | \$350                             |
| 11          | \$72                                        | \$20             | 3             | \$20            | 6                                    | 50               | \$370                             |
| 12          | \$52                                        | \$20             | 3             | \$20            | 7                                    | 50               | \$390                             |
| 13          | \$32                                        | \$20             | 3             | \$20            | 8                                    | 50               | \$410                             |
| 14          | \$12                                        | \$5              | 2             | \$5             | 1                                    | 15               | \$415                             |
| 15          | \$7                                         | \$5              | 2             | \$5             | 2                                    | 15               | \$420                             |
| 16          | \$2                                         | \$1              | 1             | \$1             | 1                                    | 5                | \$421                             |
| 17          | \$1                                         | \$1              | 1             | \$1             | 2                                    | 5                | \$422                             |
|             | 0                                           |                  |               |                 |                                      |                  |                                   |

## Example 2 of Thresholds Method

The following example shows a different ATD configuration than that used in example 1:

| ATD Field | Hopper 1 | Hopper 2 | Hopper 3 | Hopper 4 |
|-----------|----------|----------|----------|----------|
| BILL VAL  | 1        | 5        | 20       | 50       |
| THRESHOLD | 1        | 1        | 1        | 1        |
| MAX BILLS | 5        | 20       | 50       | 6        |

Using the above example, for a transaction amount of \$422, the bills are dispensed as follows:

| Denomination | Number Dispensed | Amount Dispensed |
|--------------|------------------|------------------|
| \$50         | 6 bills          | \$300            |
| \$20         | 6 bills          | \$120            |
| \$5          | 0 bills          | 0                |
| \$1          | 2 bills          | \$2              |
| Total        | 14 bills         | \$422            |

## Example 3 of Thresholds Method

The following example shows a different ATD configuration than was shown for examples 1 or 2:

| ATD Field | Hopper 1 | Hopper 2 | Hopper 3 | Hopper 4 |
|-----------|----------|----------|----------|----------|
| BILL VAL  | 1        | 5        | 20       | 50       |
| THRESHOLD | 1        | 10       | 20       | 200      |
| MAX BILLS | 5        | 15       | 50       | 50       |

Using the above example, for a transaction amount of \$29, the transaction is declined because there is no bill combination defined that adds up to \$9.

To correct this situation, you could increase the \$1 max bills to 9 resulting in the following bill breakdown:

| <b>Denomination</b> | <b>Number Dispensed</b> | <b>Amount Dispensed</b> |
|---------------------|-------------------------|-------------------------|
| \$50                | 0 bills                 | 0                       |
| \$20                | 1 bill                  | \$20                    |
| \$5                 | 0 bills                 | 0                       |
| \$1                 | 9 bills                 | \$9                     |
| Total               | 10 bills                | \$29                    |

Or, you could lower the \$5 threshold amount to 5 resulting in the following bill breakdown:

| <b>Denomination</b> | <b>Number Dispensed</b> | <b>Amount Dispensed</b> |
|---------------------|-------------------------|-------------------------|
| \$50                | 0 bills                 | 0                       |
| \$20                | 1 bill                  | \$20                    |
| \$5                 | 1 bill                  | \$5                     |
| \$1                 | 4 bills                 | \$4                     |
| Total               | 6 bills                 | \$29                    |



# Configurable Depository Print

To facilitate the back-office depository settlement process, you can configure depository print data by terminal-owning institution and transaction type. With the SSB Enhanced ATM Application installed, the Diebold 10XX/478X Device Handler process can format configurable depository print data using the same concept used to format configurable receipt data. The Device Handler process converts the information in the depository print template in the same manner that it converts the information in the receipt templates that support formatting ATM receipts.

A depository print template determines the information printed on documents placed in the terminal depository. The BASE24-atm Receipt File (RCPT) contains one default depository print template (receipt type DPPR) that is used for the following transactions:

- Envelope deposit
- Envelope split deposit
- Message enclosed
- Payment enclosed
- Envelope deposit with cash back

The terminal-owning institution can configure its own depository print format based on the default depository print template. The depository print data template uses one standard marker and its own set of data codes. If an invalid code is found when scanning the depository print template, the Device Handler process generates a log message and continues to scan the template. The Device Handler process reads each of the depository print data codes and fills in the Deposit Print Data buffer with the corresponding information until the maximum of 80 characters has been reached.

## Statement Print Host Communications

To achieve communications efficiency, the statement print host communications feature allows the option of separating statement print transaction messages from those of other live transactions being sent to the host. A separate link to the host can be defined to be used only for statement print transactions. The ISO Host Interface routes the statement print transaction to the dedicated send and receive station connection. This feature does not affect BASE24 performance, but can increase the host's efficiency in processing financial transactions because these transactions are not waiting for the lengthy statement print transaction messages to be sent.

**Note:** The ISO-based BASE24 Host Interface process must be used to send this data to the host. The ANSI-based BASE24 Host Interface process and the ANSI-based BIC Interface process do not have the routing capability needed for statement print host communications.

## Super Teller

The Super Teller function allows you to issue an ATM card to bank personnel for the specific purpose of demonstrating ATM services or assisting cardholders with performing transactions at the ATM. These cardholders may be those who do not own debit or check cashing cards, who do not have their personal ATM cards in their possession, or who cannot remember their PINs.

The Super Teller card is valid only at a maximum of ten specific terminals. The card can perform any transaction allowed by the BASE24-atm product, and its limits and usages are configurable. Transactions performed with Super Teller cards are logged as Super Teller transactions for settlement and tracking purposes.

The Super Teller feature requires configuration changes to the Card Prefix File (CPF). It also requires changes to the Cardholder Authorization File (CAF) or to the Negative Card File (NEG), depending on the authorization method used by the institution. You can differentiate the routing of Super Teller transactions by establishing a unique record in the Institution Definition File (IDF) or a unique CPF routing group.

In addition to configuring the CPF, CAF, and NEG, additional states and screens and a financial institution table (FIT) entry are required in the Diebold 10XX/478X Configuration File (CNFGIX) and must be downloaded to the terminal.

For complete information on the CPF, the CAF, the NEG, and the IDF, see the ***BASE24 Base Files Maintenance Manual***. See the ***BASE24-atm Diebold 10XX/478X Device Support Manual*** for more information on the CNFGIX.

**Note:** The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send this data to a host or co-processor. The external messages used by the ANSI-based BASE24 Host Interface process and the ANSI-based BIC Interface process do not carry the data needed for Super Teller support.

## Super Teller Card Differences

Several important differences exist between a Super Teller card and a card issued to a cardholder. A Super Teller card is issued to a financial institution employee or representative instead of a cardholder. The individual with a Super Teller card can assist persons using an ATM for services that otherwise are available only at the financial institution teller window. Because of this arrangement, Super Teller

cards have card-level activity limits and totals, but have no accounts or balances associated with them. The following are the differences between a Super Teller card and a card issued to a cardholder:

- Super Teller cards cannot make PIN changes to the account that is being accessed.
- The card-level activity limits and totals are tracked based on the card usage by the employee rather than by the cardholders that the employee serves.
- Super Teller cards do not have accounts or balances of their own, and there is no online posting to the account balances or usages of the cardholder served.

The latter two differences are described in more detail below.

## Activity Limits and Totals

Like limits for any other BASE24-atm card, the activity limits and totals are established at the card level with the AGGR, CASH WDL, and CASH ADV fields on screen 1 of the CPF or CAF and the CASH WDL and CASH ADV fields on screen 4 of the CPF or screen 8 of the CAF. The important difference is that, because these cards are used by employees or representatives throughout a business day to assist multiple cardholders, these limits will probably be set much higher for Super Teller cards than for cards held by cardholders. Limits should still be considered for Super Teller cards in case of loss, theft, or misuse, just like any other ATM card.

**Note:** If you also have configured the SSB Enhanced Check Processing Application, be aware that the limits for Super Teller cards are affected by the enhanced check authorization feature. See section 4 for more information about Super Teller card impacts.

## Account Balances and Usages

With the Positive Authorization method, the BASE24-atm product uses the CAF (screens 3 and 4) to associate cardholder accounts with a typical ATM card. With the Positive Balance Authorization method, the BASE24-atm Authorization process uses the CAF to associate cardholder accounts with a typical ATM card and uses the Positive Balance File (PBF) to maintain balances for the accounts.

CAF records for Super Teller cards do not contain any account information on CAF screens 3 and 4 or have any associated PBF records. Transactions performed with a Super Teller card involve accounts and balances that belong to the


cardholder instead of the Super Teller cardholder so the BASE24-atm system cannot access the cardholder's accounts or balances. As a result, if a cardholder's account balances must be updated, they can be individually adjusted by the employee following completion of the Super Teller transaction or in a batch mode through the Transaction Log File (TLF) extract followed by a refresh of the CAF, PBF, or both, depending on the authorization method used.

## Super Teller Transaction Flow

Specific types of Super Teller transactions cause performance impacts to the system. All two amount and two account Super Teller transactions (for example, a split deposit transaction initiated with a Super Teller card) cause additional transaction message traffic between the Diebold 10XX/478X Device Handler process and the terminal.

Two-amount and two-account Super Teller transactions require that transaction request information be transmitted to the Device Handler process in two separate messages.

The diagram below represents the message flow for a two-account and two-amount Super Teller transaction.

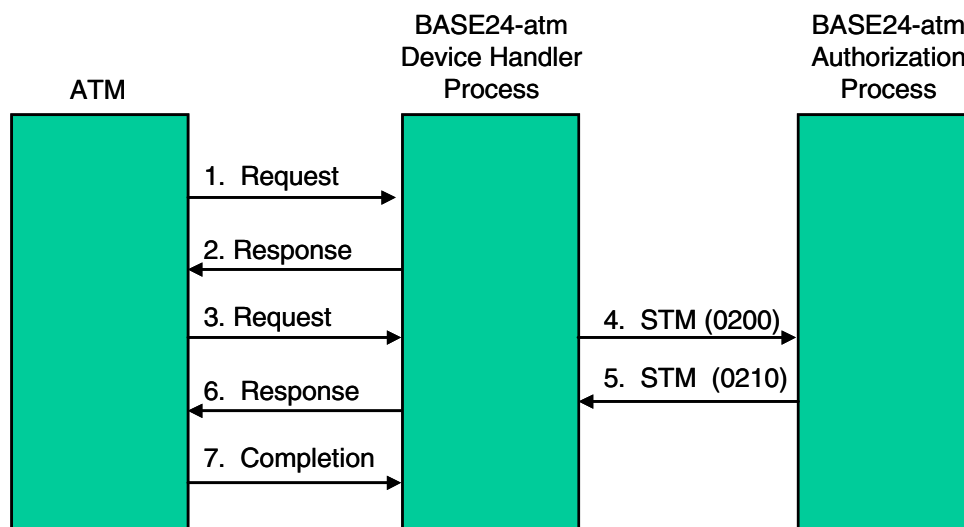

The numbers on the diagram shown above are explained as follows. Note that all messages between the ATM and the Device Handler process, and the Device Handler process and the Authorization process, pass through the XPNET process.


1. The ATM sends an initial request to the Device Handler process for a two-account and two-amount Super Teller transaction. This transaction request contains two account numbers and the first transaction amount.
2. The Device Handler process sends a response to the terminal to retrieve the second transaction amount.
3. The ATM sends a request to the Device Handler process containing the second transaction amount.
4. The Device Handler process forwards the BASE24-atm Standard Internal Message (STM), message type 0200, to the Authorization process.
5. The Authorization process returns the BASE24-atm Standard Internal Message (STM), message type 0210, to the Device Handler process.
6. The Device Handler process sends a response to the terminal defining the outcome of the transaction.
7. The terminal sends a completion message to the Device Handler process.

## Super Teller State Path

The states are sequential instructions which provide the terminal with the information to perform cardholder and administrative transactions. Each state typically has a screen number and the next state to perform, as well as other parameters.

Two additional steps are performed when the Super Teller card is used. The Account Number Entry state (state 402) and Clear Keys state (state 490) are only performed during a Super Teller transaction. A typical withdrawal transaction does not use these states, but goes from the Indirect Next state (state 400) to the Dollar Entry state (state 074) and from the Indirect Next state (state 091) to the Transaction Request state (state 491). Byte 7 of the operation key buffer is preset to a value of D whenever the terminal reads a Super Teller card. The Device Handler process looks for the cardholder account number in the native message if the transaction is a Super Teller transaction, which is indicated by byte 7.

The following diagram illustrates the differences between a sample state path for a typical withdrawal transaction initiated by a cardholder and a sample state path for a withdrawal transaction initiated for a cardholder by an employee with a Super Teller card. The state numbers from the Configuration File (CNFGIX) as distributed with SSB are also shown on the diagram.

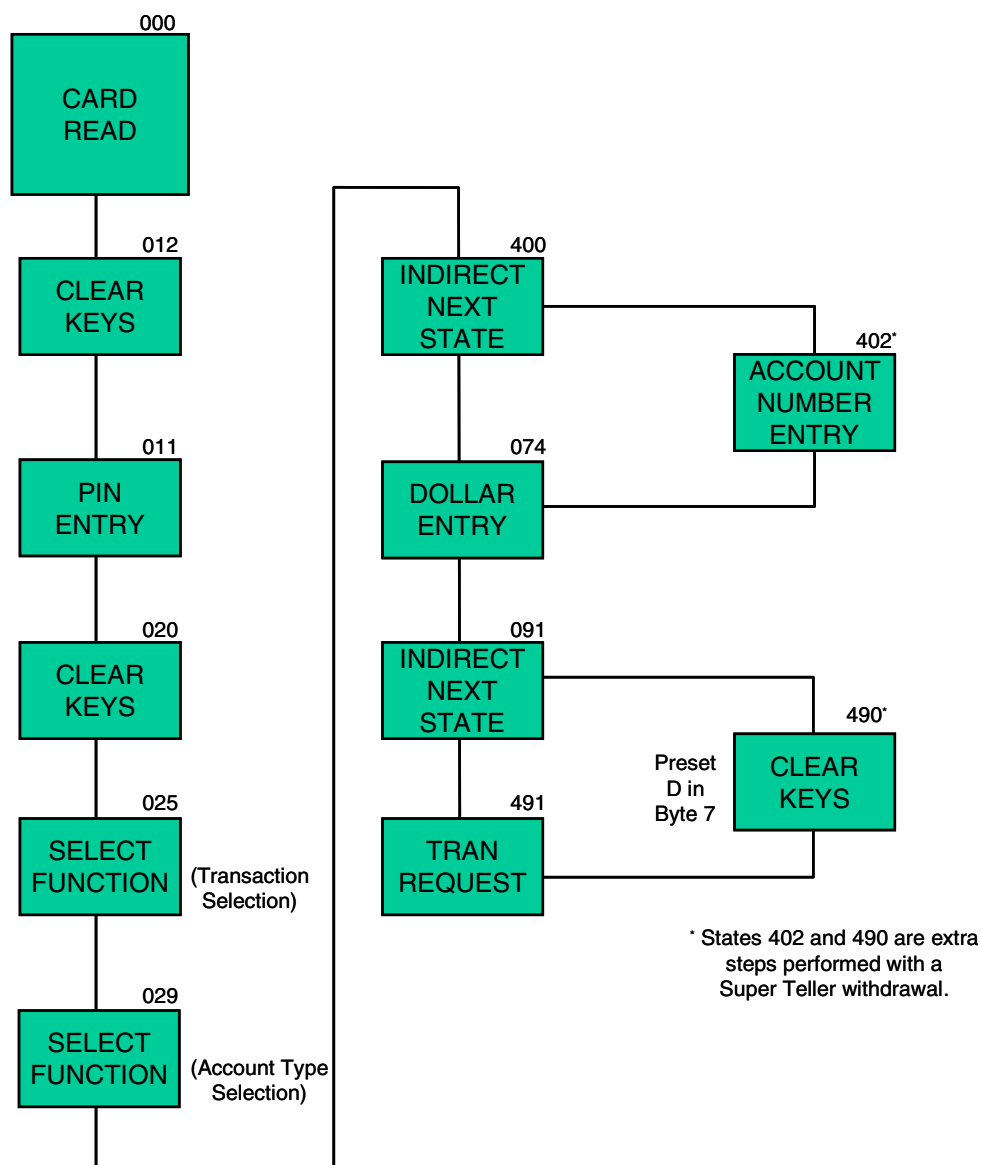

## SSB Enhanced ATM Application Configuration

The SSB Enhanced ATM Application requires Diebold 10XX/478X terminals that are using 912 check and coin firmware, and that have the BASE24-atm Diebold 10XX/478X Device Handler process installed. This product also requires the SSB Device Handler Extension.

Before you can configure the SSB Enhanced ATM Application, the application must be properly installed and the BASE24-atm network must be up and available for file maintenance.

The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send data to a host or co-processor for split deposit transactions, the Super Teller card, and statement print host communications. The external messages used by the ANSI-based BASE24 Host Interface process and the ANSI-based BIC Interface process do not carry the data needed for these features.

The table on the following pages lists the features of the SSB Enhanced ATM Application, and the BASE24 and Diebold-specific screens and files needed to configure each feature. This table gives an overview of the modifications needed and allows you to select those features from this module that you want to offer to your cardholders. The following pages describe these screens and files. Note that security access must be given to the operator modifying the BASE24 screens. Refer to the ***BASE24 User Security Manual*** for more information about screen security access.

If a screen or file is described in another manual in the BASE24 manual set, only those fields that have specific SSB requirements are listed. If a screen is not described elsewhere, this section includes an illustration of the screen and descriptions of all fields on the screen.



| Screen or File                                                | Transaction<br>Time Windows | Split Deposit<br>Transaction | Configurable<br>Bill Dispensing | Configurable<br>Depository Print | Statement<br>Print Host<br>Communications | Super Teller |
|---------------------------------------------------------------|-----------------------------|------------------------------|---------------------------------|----------------------------------|-------------------------------------------|--------------|
| C100NAMS                                                      |                             | ✓                            |                                 |                                  |                                           |              |
| CNFGIX                                                        | ✓                           | ✓                            |                                 |                                  |                                           | ✓            |
| Acquirer Processing<br>Code File (APCF)                       |                             | ✓                            |                                 |                                  |                                           |              |
| BASE24-atm Terminal<br>Data files (ATD)<br>Screen 1           | ✓                           | ✓                            | ✓                               | ✓                                | ✓                                         | ✓            |
| ATD Screen 2                                                  |                             | ✓                            |                                 |                                  |                                           |              |
| ATD Diebold 10XX/<br>478X Screen 7                            | ✓                           | ✓                            | ✓                               | ✓                                | ✓                                         | ✓            |
| ATD Diebold Screen 11                                         | ✓                           |                              | ✓                               |                                  |                                           |              |
| CPF Screen 1                                                  |                             |                              |                                 |                                  |                                           | ✓            |
| CPF Screen 2                                                  |                             |                              |                                 |                                  |                                           | ✓            |
| CPF Screen 4                                                  |                             |                              |                                 |                                  |                                           | ✓            |
| CAF Screen 1                                                  |                             |                              |                                 |                                  |                                           | ✓            |
| CAF Screen 2                                                  |                             |                              |                                 |                                  |                                           | ✓            |
| CAF Screen 8                                                  |                             |                              |                                 |                                  |                                           | ✓            |
| CAF Screen 14                                                 |                             |                              |                                 |                                  |                                           | ✓            |
| HCF Screen 2                                                  |                             |                              |                                 |                                  | ✓                                         |              |
| HCF Screen 20                                                 |                             |                              |                                 |                                  | ✓                                         |              |
| Enhanced Interchange<br>Configuration File<br>(ICFE) Screen 8 |                             | ✓                            |                                 |                                  |                                           |              |

| Screen or File                        | Transaction<br>Time Windows | Split Deposit<br>Transaction | Configurable<br>Bill Dispensing | Configurable<br>Depository Print | Statement<br>Print Host<br>Communications | Super Teller |
|---------------------------------------|-----------------------------|------------------------------|---------------------------------|----------------------------------|-------------------------------------------|--------------|
| IDF Screen 5                          |                             | ✓                            |                                 |                                  | ✓                                         | ✓            |
| IDF Screen 9                          |                             | ✓                            |                                 |                                  |                                           |              |
| Issuer Processing Code<br>File (IPCF) |                             | ✓                            |                                 |                                  |                                           |              |
| LCONF                                 | ✓                           |                              |                                 |                                  |                                           |              |
| NEG Screen 1                          |                             |                              |                                 |                                  |                                           | ✓            |
| NEG Screen 3                          |                             |                              |                                 |                                  |                                           | ✓            |
| RCPT                                  |                             | ✓                            |                                 | ✓                                |                                           |              |
| Terminal Receipt File<br>(TRF)        |                             | ✓                            |                                 |                                  |                                           |              |
| TKN                                   |                             | ✓                            |                                 |                                  |                                           | ✓            |

## Modifying the C100NAMS

The C100NAMS is an edit file that contains a series of tables used by the SSB Enhanced ATM Application. You can edit these tables to customize specific types of information displayed on ATM receipts or screens. At the time the SSB Enhanced ATM Application is compiled, the information in the C100NAMS is incorporated into the SSB Enhanced ATM Application object file. Therefore, you must either make the changes to this file during the SSB installation procedures before the code is compiled, or if you need to make changes after the installation is complete, you must recompile the code.

### Split Deposit Tables

The transaction naming table (diebold\_1000\_tran\_tbl) in the C100NAMS supports the check deposit and deposit with cash back transactions. The transaction naming table provided with the application includes the additional transaction supported by the SSB Enhanced ATM Application. You are not required to make any changes to this table to support the SSB product. However, you can modify the default text.

The text is assigned according to the BASE24-atm transaction codes carried in the BASE24-atm Standard Internal Message (STM). Each of the entries in this list has one text entry. The entries in the C100NAMS include text for eight languages. See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on the default entries in the C100NAMS.

20 = SPLIT DEP

**Note:** The DEPOSIT and SPLIT DEP entries share transaction code 20. The deposit transaction is part of the SSB Device Handler Extension.

The split deposit verbiage table (diebold\_1000\_split\_dep\_verbage) contains the text that will appear with the two accounts if they are the same type. The default text is “FIRST” for the first account, and “SECOND” for the second account. This default text is combined with the account type, for instance FIRST CHK or FIRST SAV.

## Modifying the Diebold Configuration File

The Diebold 10XX/478X Configuration File (CNFGIX) can be accessed through the Diebold entry program and downloaded to the ATM through the Device Control Terminal (DCT). Through the Diebold 10XX/478X Configuration File, changes can be made to Diebold ATM screen displays, state tables, FIT data, configuration parameters, and timers. This file must be modified to allow the Super Teller cards, split deposit transactions, and transaction time windows.

All of the information in the CNFGIX is included in one of two data groups. Group 0, which can be loaded to any ATM, maintains basic information about screens, states, and FITs used by all terminals. A second, customized load group maintains information specific to certain types of terminals and is loaded only to those terminals.

For example, if only certain terminals support fast cash transactions or color graphics, special states and screens are set up in the Diebold 10XX/478X Configuration File to implement fast cash transactions or color graphics at these terminals. These special states and screens are set up as a customized load group with a unique load group number. When a change is made, an operator can download a specific load group to the ATM through the DCT without physically going to the terminal.

See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on the Diebold 10XX/478X Configuration File and the Diebold entry program.

### Load Group Contents

ACI supplies the following unique load groups for the state table data and FITs necessary to support the BASE24-atm SSB Enhanced ATM Application.

- Load group 52 supports the split deposit transaction.
- Load group 54 supports transaction time windows.
- Load group 56 supports the Super Teller card.

ACI supplies load group 12 for the SSB Device Handler Extension. The load group for each SSB Enhanced ATM Application feature to be used must be combined manually with load group 12 for downloading.

Load groups 52, 54, and 56 contain the following changes to the Diebold 10XX/478X Configuration File:

- The Transaction Request state (state type I) transmits the ATM cardholder's request to the BASE24 system and executes the function commands received from the BASE24 system. Relative to the SSB Enhanced ATM Application, this state allows the transmittal of two account numbers or two amounts for a two-account Super Teller transaction. The first account number or amount is placed in General Purpose Buffer B. The second account number or amount is placed in General Purpose Buffer C. This requires setting a value in the Transaction Request State screen through the Diebold entry program.
- The Copy Buffer state (state type =) supports operations that require more than one dollar entry state. Using this state, up to three dollar amounts can be included in the transaction request message. The ability to include more than one amount in a single transaction request message reduces the number of messages required between the ATM and the BASE24 system. For example, with the split deposit transaction, two amounts—the total deposit amount and the first deposit amount—can be included in a single transaction request message for the transaction. This requires setting values in the Copy Buffer State screen through the Diebold entry program.
- The FIT is a set of data and instructions used in the PIN encryption and verification process. Since Super Teller cards have a unique prefix, a new FIT entry is required with a modified value in the PSTDX field that points to an entry in the Indirect Next State table. This allows a separate cardholder state path and a separate Super Teller state path (refer to the diagram later in this section). Load group 56 contains FIT 000 for Super Teller cards and FIT 001 as a default entry for other cards. See the appropriate Diebold vendor documentation for complete information about configuring the Diebold FIT.
- The Indirect Next state (state type K) contains indexing data referenced in the FIT for selecting the appropriate next state used in processing card data. This state must be modified to allow separate processing for the Super Teller transaction based on a match on the PSTDX field in the FIT.

The following pages describe the changes necessary for Transaction Request state and Copy Buffer state to support the SSB Enhanced ATM Application.

**Note:** Two modifications are necessary when ACI-supplied load groups 52 and 56 are combined (that is, both load groups are added to load group 12):

- Change the good next state for state number 30 in load group 12 to 023.
- Move SO 496 to the end of line 4 of the low-level update instructions for screen 31 in load group 12.

## Modifying the Transaction Request State

The Diebold Transaction Request state (state type I) sends cardholder requests to the BASE24-atm Device Handler process and executes function commands received from the BASE24-atm Device Handler process. The Transaction Request state data specifies the information to be included in the request message to the BASE24-atm system. To support a two-account Super Teller transaction, the Transaction Request state must be modified to specify that both buffers B and C must be sent to accommodate both account numbers. This is specified by the SEND BUFFER B field on the Transaction Request State screen.

The Diebold Transaction Request State screen can be accessed through the Diebold State Table screen. The Diebold State Table screen is accessed by entering function code 2 on the Diebold Entry Program Menu screen. The Diebold State Table screen allows you to reconfigure states and conditions that are associated with various ATM transaction states and groups. See the ***BASE24-atm Diebold 10XX/478X Device Support Manual*** for more information on state tables.

The Transaction Request State screen is shown below, followed by a description of the field related to the Super Teller transaction.

| INTERBOLD STATE TABLE               |            |                           |      |  |
|-------------------------------------|------------|---------------------------|------|--|
| Type                                | I          | Transaction Request State |      |  |
| State Number                        | 000        | Group                     | 0000 |  |
| Screen Displayed .....              | 000        |                           |      |  |
| Network Timeout Next State ..       | 000        |                           |      |  |
| Send Track 2 .....                  | 000        |                           |      |  |
| Send Track 1, 3, and/or MICR        | 000        |                           |      |  |
| Send Operation Key Buffer ...       | 000        |                           |      |  |
| Send Dollar Buffer .....            | 000        |                           |      |  |
| Send PIN Buffer .....               | 000        |                           |      |  |
| <b>Send Buffer B and/or C .....</b> | <b>000</b> |                           |      |  |

|                      |         |           |           |           |
|----------------------|---------|-----------|-----------|-----------|
| =====                |         |           |           |           |
| F1=CHANGE STATE TYPE | F2=READ | F3=ADD    | F4=DELETE | F5=UPDATE |
|                      | F9=NEXT | F10=PRINT |           | F16=EXIT  |

**Send Buffer B and/or C** — A code specifying the buffers to be sent in the transaction request message to the BASE24-atm system. Valid values are as follows:

- 000 = Send no general purpose buffers.
- 001 = Send B buffer.
- 002 = Send C buffer.
- 003 = Send both B and C buffers.

**Note:** This value must be set to 003 to support the two-account Super Teller transaction.

SSB Feature:        Super Teller

## Modifying the Copy Buffer State

The Diebold Copy Buffer state (state type =) supports split deposit transactions and other operations that require more than one dollar entry state. Using the Copy Buffer state with the split deposit transaction allows the total deposit amount from the amount buffer to be copied to general purpose buffer B. This enables the amount buffer to be used again for the first deposit account amount entry.

The Diebold Copy Buffer State screen can be accessed through the Diebold State Table screen. The Diebold State Table screen is accessed by entering function code 2 on the Diebold Entry Program Menu screen. The Diebold State Table screen allows you to reconfigure states and conditions that are associated with various ATM transaction states and groups. See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on state tables.

The Copy Buffer State screen is shown below, followed by a description of the fields related to the SSB Enhanced ATM Application.

```

INTERBOLD STATE TABLE
Type =      Copy Buffer State
State Number 000  Group 0000

Next State ..... 000
Source Buffer ID ..... 000
Destination Buffer ID 000
  
```

---

```

=====
F1=CHANGE STATE TYPE  F2=READ      F3=ADD      F4=DELETE   F5=UPDATE
                      F9=NEXT      F10=PRINT   F16=EXIT
  
```

**Source Buffer ID** — A code that identifies the buffer to be copied. Copying does not affect the source buffer. The valid value is 001 (dollar buffer). All other values are reserved.

SSB Feature:          Super Teller, Split deposit transaction



**Destination Buffer ID** — A code that identifies the buffer to which the source buffer is to be copied. Valid values are as follows:

002 = General Purpose Buffer B. This field must be set to this value to support Super Teller transactions.

003 = General Purpose Buffer C.

All other values are reserved.

SSB Feature:        Super Teller, Split deposit transaction

## Modifying the Acquirer Processing Code File

Institutions can specify the transactions allowed at its terminals in the Acquirer Processing Code File (APCF). Not-on-us cardholders are defined by BASE24-atm as those cardholders completing transactions at a terminal owned by a different institution than the institution that issued their card. That is, the terminal-owning institution and the card-issuing institution are not the same.

BASE24 terminal owners can specify ISO processing codes for transactions allowed by individual terminals or by groups of terminals. The following transaction codes are used with the split deposit transaction:

| <b>Transaction</b>                          | <b>Transaction Code</b> | <b>To Account Type</b> | <b>From Account Type</b> |
|---------------------------------------------|-------------------------|------------------------|--------------------------|
| Split Deposit—Two Checking Accounts         | 20                      | 01                     | 01                       |
| Split Deposit—Checking and Savings Accounts | 20                      | 01                     | 11                       |
| Split Deposit—Checking and Other Accounts   | 20                      | 01                     | 60                       |
| Split Deposit—Savings and Checking Accounts | 20                      | 11                     | 01                       |
| Split Deposit—Two Savings Accounts          | 20                      | 11                     | 11                       |
| Split Deposit—Savings and Other Accounts    | 20                      | 11                     | 60                       |
| Split Deposit—Other and Checking Accounts   | 20                      | 60                     | 01                       |
| Split Deposit—Other and Savings Accounts    | 20                      | 60                     | 11                       |
| Split Deposit—Two Other Accounts            | 20                      | 60                     | 60                       |

Refer to the ***BASE24 Base Files Maintenance Manual*** for more information about the APCF screens. Refer to the ***BASE24-atm Transaction Processing Manual*** for more information about how the Diebold 10XX/478X Device Handler process uses the APCF.

## Modifying the BASE24-atm Terminal Data Files

The BASE24-atm Terminal Data files (ATD) contain configuration information for each individual terminal in your institution's network. The SSB Enhanced ATM Application requires settings in the ATD to indicate whether you offer transaction processing for the SSB Enhanced ATM Application. Three ATD screens require settings: screens 1, 7, and 11. Other BASE24 screens used to access the ATD are not used to support the SSB Enhanced ATM Application. The fields described below have specific SSB requirements. See the ***BASE24-atm Files Maintenance Manual*** for more information on the ATD.

### ATD Screen 1

ATD screen 1 enables you to identify whether a terminal supports multiple account selection. This screen is required for split deposits between like accounts.

**DEVICE TYPE** — Indicates the model and manufacturer of the terminal. You must enter type 30 for Diebold 10XX/478X terminals.

SSB Feature: All SSB Enhanced ATM Application features

**MULTIPLE ACCT SELECT** — Indicates whether this terminal is capable of supporting multiple account selections. You must set this field to Y to allow a split deposit transaction to two accounts of the same type (for example, the cardholder wants to deposit a check into two different savings accounts).

SSB Feature: Split deposit transaction

### ATD Diebold 10XX/478X Screen 7

ATD Diebold 10XX/478X screen 7 is a device-specific screen. The screen display for each device is dependent on the setting in the DEVICE TYPE field on ATD screen 1, which must be type 30 for Diebold 10XX/478X terminals. This screen also is used to specify the bill dispense algorithm

**TERMINAL GROUP** — Indicates the terminal load group to which this terminal belongs. This code indicates the SSB states and screens that are to be loaded to this terminal when a download command is sent from the Device Control Terminal

(DCT). Terminal group 52 (split deposit), terminal group 54 (transaction time windows), and terminal group 56 (Super Teller) are specific to the SSB Enhanced ATM Application

SSB Feature:        Split deposit transaction, transaction time windows, Super Teller

**DISPENSE ALGORITHM** — Indicates which dispense algorithm is to be used at the terminal. Valid values are as follows:

- 0    = Use the least number of bills algorithm.
- 1    = Use the threshold amounts for self-service banking.
- 2    = Use start and stop amounts for the configurable dispense algorithm.

SSB Feature:        Configurable bill dispensing

## **ATD Diebold Screen 11**

ATD Diebold screen 11 must be updated to support the transaction time windows and configurable bill dispensing features in the SSB Enhanced ATM Application. Changes to ATD Diebold screen 11 are necessary to accomplish the following:

- Determine the combination of bills dispensed at the terminal.
- Specify the inactivity timer information used in conjunction with the transaction time window feature.
- Specify the transaction load group to be used for the peak transaction time period and the load group to be used when the peak transaction time period ends. With the SSB Enhanced ATM Application, the Diebold 10XX/478X Device Handler process uses these fields to control the types of transactions a cardholder can perform at a terminal during peak and nonpeak periods. The Device Handler process automatically alternates between two transaction load groups at the specified times.

ATD Diebold screen 11 is shown below, followed by its field descriptions. This screen is a device-specific screen. Screen display for each device is dependent on the setting in the DEVICE TYPE field on ATD screen 1, which must be type 30 for Diebold terminals. ATD Diebold screen 11 is specific to the SSB Enhanced ATM Application.

```

BASE24-ATM  TERMINAL DATA          LLLL      YY/MM/DD  HH:MM  11 OF 21
TERM ID:                FIID:        REGION:    BRANCH:    LN: LLLL

                                DIEBOLD SELF SERVICE BANKING BASE

                                BILL MIX INFORMATION
                                HOPPER 1      HOPPER 2      HOPPER 3      HOPPER 4
                                BILL VAL:
                                THRESHOLD:      0              0              0              0
                                MAX BILLS:      0              0              0              0
DISPENSE ALGORITHM: 0  (LEAST NUMBER OF BILLS)

                                TRANSACTION TIME WINDOW INFORMATION
WORKDAY PEAK TIME 00:00 TO 00:00      WEEKEND/HOLIDAY PEAK TIME 00:00 TO 00:00
PEAK WINDOW LOAD GROUP:      0          STANDARD WINDOW LOAD GROUP:      0

***** BASE24 *****
NEW PAGE:                FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                                F12-HELP

```

**TERM ID** — An identifier (terminal ID) for the terminal associated with this record. This field is entered on ATD screen 1.

**FIID** — The FIID of the financial institution that owns the terminal. This field is entered on ATD screen 1.

**REGION** — The region ID for the region in which this terminal is located. This field is entered on ATD screen 1.

**BRANCH** — The branch ID for the branch from which this terminal is operated. This field is entered on ATD screen 1.

**LN** — The name of the logical network to which the terminal owner belongs. To change the logical network, enter a new value in the NEW LOGICAL NETWORK ID field at the bottom of the screen and press the **F13** key.

## DIEBOLD SELF SERVICE BANKING BASE

All fields on this screen are specific to the SSB Enhanced ATM Application.

### BILL MIX INFORMATION

The following four fields are used to specify how bill denominations are dispensed at the terminal.

**BILL VAL** — The bill denominations associated with hoppers 1 through 4.

The values displayed in these fields are obtained from the BILL VAL fields on ATD screens 4 and 5, not directly from the ATD record. If the BILL VAL fields on ATD screens 4 and 5 are changed and ATD Diebold screen 11 is displayed before the record is updated, the BILL VAL fields on ATD Diebold screen 11 contain values from ATD screens 4 and 5 instead of the ATD record.

Field Length:      System protected  
Data Name:        Not applicable

**THRESHOLD** — A value specifying the threshold value for each hopper. The threshold values are used to determine the bills to be dispensed. Refer to the topic “Thresholds Method” previously described in this section for more information about using this field. Valid values are 1–999999999.

Field Length:      1–8 numeric characters  
Required Field:    Yes, if the value in the DISPENSE ALGORITHM field is 1.  
Default Value:     0  
Data Name:        ATDS1.[atds1-dev-info-diebold-10xx].BILL-MIX.HOPR-  
                         THRSHLDS  
SSB Feature:       Configurable bill dispensing

**MAX BILLS** — The maximum number of bills from each hopper of the corresponding denomination that can be used in any one bill dispensing operation. The values in these fields are used to determine the bills to be dispensed. Refer to the topic “Thresholds Method” previously described in this section for more information about using this field.

Field Length: 1–4 numeric characters  
Required Field: Yes, if the value in the DISPENSE ALGORITHM field is 1.  
Default Value: 0  
Data Name: ATDS1.[atds1-dev-info-diebold-10xx].BILL-MIX.MAX-BILLS  
SSB Feature: Configurable bill dispensing

**DISPENSE ALGORITHM** — A value that specifies which algorithm the Device Handler process uses during a bill dispensing operation. The value in this field is entered on ATD screen 7. Valid values are as follows:

- 0 = Use the least number of bills algorithm.
- 1 = Use threshold amounts when Self Service Banking is enabled.
- 2 = Use start and stop amounts for the configurable dispense algorithm.

Refer to the topic “Configurable Bill Dispensing” previously described in this section for a description of these methods.

Field Length: System protected  
Data Name: ATDS1.[atds1-dev-info-diebold-10xx].DISP-ALGO  
SSB Feature: Configurable bill dispensing

## TRANSACTION TIME WINDOW INFORMATION

The following fields are used to define peak and nonpeak processing periods and specify the transaction load group that is used for each period.



**WORKDAY PEAK TIME START** — The time when the transaction load group specified in the PEAK WINDOW LOAD GROUP field should be downloaded to the terminal. If either the WORKDAY PEAK TIME START field or the WORKDAY PEAK TIME END field is set to 0000, no download will occur. Valid values are 0000–2359.

Field Length: 4 numeric characters  
Required Field: Yes  
Default Value: 0000  
Data Name: ATDS1.[atds1-dev-info-diebold-10xx].WRKDAY-STRT-PEAK-LOAD-WINDOW  
SSB Feature: Transaction time windows

**WORKDAY PEAK TIME END** — The time when the transaction load group specified in the STANDARD WINDOW LOAD GROUP field should be downloaded to the terminal. If either the WORKDAY PEAK TIME START field or the WORKDAY PEAK TIME END field is set to 0000, no download will occur. Valid values are 0000–2359.

Field Length: 4 numeric characters  
Required Field: Yes  
Default Value: 0000  
Data Name: ATDS1.[atds1-dev-info-diebold-10xx].WRKDAY-END-PEAK-LOAD-WINDOW  
SSB Feature: Transaction time windows

**WEEKEND/HOLIDAY PEAK TIME START** — The time on weekends and holidays when the transaction load group specified in the PEAK WINDOW LOAD GROUP field should be downloaded to the terminal. The Device Handler process uses the holiday table from the Institution Definition File (IDF) record (screen 4) when setting load group timers for holiday periods. If either the WEEKEND/HOLIDAY PEAK TIME START field or the WEEKEND/HOLIDAY PEAK TIME END field is set to 0000, no download will occur. Valid values are 0000–2359.

Field Length: 4 numeric characters  
Required Field: Yes  
Default Value: 0000  
Data Name: ATDS1.[atds1-dev-info-diebold-10xx].WKND-STRT-PEAK-LOAD-WINDOW  
SSB Feature: Transaction time windows

**WEEKEND/HOLIDAY PEAK TIME END** — The time on weekends and holidays when the transaction load group specified in the STANDARD WINDOW LOAD GROUP field should be downloaded to the terminal. The Device Handler process uses the holiday table from the Institution Definition File (IDF) record (screen 4) when setting load group timers for holiday periods. If either the WEEKEND/HOLIDAY PEAK TIME START field or the WEEKEND/HOLIDAY PEAK TIME END field is set to 0000, no download will occur. Valid values are 0000–2359.

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| Field Length:   | 4 numeric characters                                          |
| Required Field: | Yes                                                           |
| Default Value:  | 0000                                                          |
| Data Name:      | ATDS1.[atds1-dev-info-diebold-10xx].WKND-END-PEAK-LOAD-WINDOW |
| SSB Feature:    | Transaction time windows                                      |

**PEAK WINDOW LOAD GROUP** — The device configuration load group that is loaded at the beginning of the peak-period window. This load group typically contains a limited transaction set.

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| Field Length:   | 1–4 numeric characters                                  |
| Required Field: | Yes                                                     |
| Default Value:  | 0                                                       |
| Data Name:      | ATDS.[atds1-dev-info-diebold-10xx].PEAK-WINDOW-LOAD-GRP |
| SSB Feature:    | Transaction time windows                                |

**STANDARD WINDOW LOAD GROUP** — The device configuration load group that is loaded at the end of the peak-period window. This load group typically contains a limited transaction set that overwrites the changes made by the load group specified in the PEAK WINDOW LOAD GROUP field.

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| Field Length:   | 1–4 numeric characters                                  |
| Required Field: | Yes                                                     |
| Default Value:  | 0                                                       |
| Data Name:      | ATDS1.[atds1-dev-info-diebold-10xx].STD-WINDOW-LOAD-GRP |
| SSB Feature:    | Transaction time windows                                |

## Modifying the Card Prefix File

The Card Prefix File (CPF) defines the characteristics of each card prefix that can be processed within a BASE24 logical network. The CPF also contains prefix-specific parameters that allow you to define portions of the authorization processing that can be controlled at the prefix level. One record must exist in the CPF for each card prefix to be processed.

You must configure CPF screens 1, 2, and 4 for each card prefix being used for Super Teller cards. The card's specialized use should be considered when establishing the values for the ACTIVITY LIMITS fields on CPF screens 1 and 4. Otherwise, all fields on CPF screens 1, 2, and 4 should be completed according to your institution's standard procedure for establishing a new card prefix. The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for screen samples and field descriptions for these screens.

### CPF Screen 1

CPF screen 1 contains general information about card prefixes.

**CARD TYPE** — A code identifying the type of card associated with the prefix. Enter the value ST in the CARD TYPE field to indicate that the card is a Super Teller card.

SSB Feature:        Super Teller

### ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm and BASE24-pos products combined for this card prefix during an institutionally defined single usage accumulation period. The transactions controlled by these limits are cash disbursements against credit and noncredit accounts and purchases made against noncredit accounts. Credit card purchases are not governed by these limits.

**TOTAL CASH WDL** — The maximum amount of purchases and cash withdrawals allowed against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature:        Super Teller

**OFFLINE CASH WDL** — The maximum amount of purchases and cash withdrawals allowed offline against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**TOTAL CASH ADV** — The maximum amount of cash advances allowed against credit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE CASH ADV** — The maximum amount of cash advances allowed offline against credit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**TOTAL AGGR** — The maximum aggregate amount of cash disbursements allowed against credit and noncredit accounts and purchases allowed against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE AGGR** — The maximum aggregate amount of cash disbursements allowed offline against credit and noncredit accounts and purchases allowed offline against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

## CPF Screen 4

CPF screen 4 contains BASE24-atm authorization information, including activity limits for the BASE24-atm product during one usage accumulation period, and deposit credit information.

## ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm product for this card prefix during an institutionally defined single usage accumulation period. The transactions controlled by these limits are cash disbursements against credit and noncredit accounts.

**TOTAL CASH WDL** — The maximum amount of cash withdrawals allowed against noncredit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE CASH WDL** — The maximum amount of cash withdrawals allowed offline against noncredit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**TOTAL CASH ADV** — The maximum amount of cash advances allowed against credit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE CASH ADV** — The maximum amount of cash advances allowed offline against credit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CPF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CPF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected

## Modifying the Cardholder Authorization File

The Cardholder Authorization File (CAF) contains authorization parameters and usage accumulation information for the card issuer's cardholders and are used in authorizing transaction requests. You must configure CAF screens 1, 2, 8, and 14 to define each Super Teller card when the institution is using the Positive Authorization or the Positive Balance Authorization methods. All fields on CAF screens 1, 2, and 8 should be completed according to your institution's standard procedure for establishing a new CAF record, including the option of using CPF limits instead of CAF limits by setting the value in the TOTAL AGGR field on CAF screen 1 to 0. The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for screen samples and field descriptions for these screens.

### CAF Screen 1

CAF screen 1 contains general information about the card.

**CARD TYPE** — A code identifying the type of card associated with the primary account number (PAN). Enter the value ST in the CARD TYPE field to indicate that the card is a Super Teller card.

**Note:** The requirement for at least one account number on CAF screen 3 is not applicable when the CARD TYPE field on CAF screen 1 contains the value ST.

SSB Feature:        Super Teller

### ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by both the BASE24-atm and BASE24-pos products for this cardholder during an institutionally defined single usage accumulation period. When the value in the TOTAL AGGR field is set to something other than zero, these limits override the corresponding group of limits on CPF screen 1. The transactions controlled by these limits are cash disbursements made against credit and noncredit accounts and purchases made against noncredit accounts. Credit purchases are not governed by these limits.

**TOTAL CASH WDL** — The maximum amount of purchases and cash withdrawals allowed against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE CASH WDL** — The maximum amount of purchases and cash withdrawals allowed offline against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**TOTAL CASH ADV** — The maximum amount of cash advances allowed against credit accounts. The value in this field is for informational purposes only.

Field Length: System protected

**OFFLINE CASH ADV** — The maximum amount of cash advances allowed offline against credit accounts. The value in this field is for informational purposes only.

Field Length: System protected

**TOTAL AGGR** — The maximum aggregate amount of cash disbursements allowed against credit and noncredit accounts, plus purchases allowed against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE AGGR** — The maximum aggregate amount of cash disbursements allowed offline against credit and noncredit accounts and purchases allowed offline against noncredit accounts. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

## CAF Screen 8

CAF screen 8 enables you to establish BASE24-atm cardholder limits for an institutionally defined single usage accumulation period.

### ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm product for this cardholder during an institutionally defined single usage accumulation period. When the value in the TOTAL AGGR field on CAF screen 1 is set to something other than zero, these limits override the corresponding group of limits on CPF screen 4. The transactions controlled by these limits are cash disbursements against credit and noncredit accounts.

**TOTAL CASH WDL** — The maximum amount of cash withdrawals allowed against noncredit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE CASH WDL** — The maximum amount of cash withdrawals allowed offline against noncredit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**TOTAL CASH ADV** — The maximum amount of cash advances allowed against credit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller

**OFFLINE CASH ADV** — The maximum amount of cash advances allowed offline against credit accounts through the BASE24-atm product. Take into consideration the special use of the Super Teller card in setting this value.

SSB Feature: Super Teller



**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CAF screen 1. This field is intended for informational purposes only.

Field Length:        System protected

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CAF screen 1. This field is intended for informational purposes only.

Field Length:        System protected

## CAF Screen 14

CAF screen 14 enables you to associate a Super Teller card with up to 10 terminals. CAF screen 14 is shown below, followed by a description of the SUPER TELLER TERMINAL ID field.

```
BASE24-SSBB  CARDHOLDER FILE          LLLL          YY/MM/DD  HH:MM  14 OF 20

      PAN:                                MEMBER: 000      FIID:

                        ATM SELF SERVICE BANKING BASE

      SUPER TELLER TERMINAL ID:

*****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                        F12 - HELP
```

**PAN** — The card number or primary account number (PAN) identifying the card. This field is entered on CAF screen 1.

**MEMBER** — The member number for the card. When multiple cards are issued with the same card number, the value in this field distinguishes among the cards. This field is entered on CAF screen1.

**FIID** — The FIID of the financial institution that issued the card. This field is entered on CAF screen 1.

## **ATM SELF SERVICE BANKING BASE**

The following field is specific to the SSB Enhanced ATM Application.

**SUPER TELLER TERMINAL ID** — This field associates a Super Teller card with up to 10 terminals. If this Super Teller card is used at any other terminals, the transaction is denied.

|                 |                                                                                                       |
|-----------------|-------------------------------------------------------------------------------------------------------|
| Field Length:   | 16 alphanumeric characters                                                                            |
| Occurs:         | Up to 10 times                                                                                        |
| Required Field: | Yes, at least one terminal is required if the CARD TYPE field on CAF screen 1 is set to a value of ST |
| Default Value:  | No default value                                                                                      |
| Data Name:      | CAF.SUPER-TLR-TERM-ID                                                                                 |
| SSB Feature:    | Super Teller                                                                                          |

## Modifying the Host Configuration File

The Host Configuration File (HCF) defines BASE24-to-host communication links for transaction message traffic routed to a host authorization system. Its coordination of BASE24-to-host activity ensures that the host receives requests from the BASE24 system and that the BASE24 processes respond properly to the requests from the host. The HCF contains one record for each unique data processing center (DPC) and Host Interface process pair in the logical network.

The statement print host communications feature of the SSB Enhanced ATM Application allows you to establish a separate physical link to the host for the sole purpose of processing statement print transactions. This separate link for statement print transactions enables the terminal to segregate statement print transaction traffic from that of other live transactions being sent to the host. Isolating statement print traffic results in greater communications efficiencies.

The SSB Enhanced ATM Application requires settings in the HCF to establish processing for the statement print host communications feature. Two HCF screens require settings: screen 2 and screen 20. Other BASE24 screens used to access the HCF are not used to support the SSB Enhanced ATM Application. The fields described below have specific SSB requirements. For additional information about the HCF, see the *BASE24 Base Files Maintenance Manual*.

### HCF Screen 2

HCF screen 2 enables you to define the stations associated with each DPC. Up to 32 entries can be made on screen 2. This screen allows you to define a separate send and receive station that is used only for statement print transactions.

**STATION** — A symbolic name identifying the station associated with this DPC. The entry in the STATION field for the station that is dedicated to statement print transactions must match a symbolic station name in the XPNET configuration and be unique within the logical network.

SSB Feature:            Statement print host communications

**TYPE** — A code defining the type of station named in the STATION field on the same line of the table. Enter a value of 2 to indicate a send and receive station dedicated to only statement print transactions.

SSB Feature:            Statement print host communications

## HCF Screen 20

Once a statement print send and receive station has been established on HCF screen 2, an additional setting is required in the HCF to specify whether a host wants to divert statement print transactions to another station if the designated statement print send and receive station is unavailable. This alternate routing of statement print transactions, which is specific to the SSB Enhanced ATM Application, is specified on HCF screen 20.

Screen 20 of the HCF is shown below, followed by a description its fields.

```
BASE24-SSBB  HOST CONFIGURATION      LLLL      YY/MM/DD  HH:MM  20 OF 25
              DPC NUMBER:              HISF NAME:

              ATM SELF SERVICE BANKING BASE

              STATEMENT PRINT ALTERNATE ROUTE:
```

```
***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
              F12-HELP
```

**DPC NUMBER** — The number of the institution's data processing center (DPC), that is the host computer that processes messages received from the BASE24 system. This field is entered on HCF screen 1.

**HISF NAME** — The symbolic name of the BASE24 Host Interface process that communicates with the specified DPC. This field is entered on HCF screen 1.

## ATM SELF SERVICE BANKING BASE

The following field is specific to the SSB Enhanced ATM Application.

**STATEMENT PRINT ALTERNATE ROUTE** — Specifies whether the Host Interface process should divert statement print transactions to another station when the statement print send and receive station is unavailable. Valid values are as follows:

- Y = Yes, the Host Interface process routes statement print transactions to the host through an alternate send and receive station when the statement print connection is unavailable.
- N = No, the Host Interface process does not route statement print transactions to the host. The Host Interface process denies all statement print transactions until the statement print send and receive station connection has been reestablished.

|                 |                                     |
|-----------------|-------------------------------------|
| Field Length:   | 1 alphabetic character              |
| Required Field: | Yes                                 |
| Default Value:  | Y                                   |
| Data Name:      | HCF.STMT-PRNT-ALT-RTE               |
| SSB Feature:    | Statement print host communications |

## Modifying the Enhanced Interchange Configuration File

The Enhanced Interchange Configuration File (ICFE) contains parameters for interchange transaction processing. The split deposit feature of the SSB Enhanced ATM Application requires configuration changes to ICFE screen 8 to accomplish the following:

- Allow a split deposit transaction to be received from an interchange
- Allow a split deposit transaction request to be sent to an interchange

There is one ICFE record for each Interchange Interface process. Other BASE24 screens used to access the ICFE are not used to support the SSB Enhanced ATM Application. The fields described below have specific SSB requirements. See the *BASE24 Base Files Maintenance Manual* for more information on the ICFE.

### ICFE Screen 8

ICFE screen 8 specifies the acquirer transaction profile and the issuer transaction profile used to define BASE24-atm allowable transactions. The acquirer transaction profile is part of the key to the Acquirer Processing Code File (APCF). The issuer transaction profile is part of the key to the Issuer Processing Code File (IPCF).

**ACQUIRER TXN PROFILE** — A code identifying a group of BASE24-atm transaction processing codes allowed from this interchange. The value of this field is part of the key used to read the Acquirer Processing Code File (APCF).

SSB Feature:            Split deposit transaction

**ISSUER TXN PROFILE** — A code identifying a group of BASE24-atm transaction processing codes allowed to be sent to this interchange. The value of this field is part of the key used to read the issuer Processing Code File (IPCF).

SSB Feature:            Split deposit transaction

Refer to the *BASE24-atm Transaction Processing Manual* for more information about how the Interchange Interface process uses the issuer transaction profile. Refer the *BASE24 Base Files Maintenance Manual* for more information about ICFE screen 8 and the IPCF.

## Modifying the Institution Definition File

The Institution Definition File (IDF) defines processing for each institution participating on the logical network. Each institution has one record in the IDF. IDF screens 5 and 6 and screen 9 require settings for the SSB Enhanced ATM Application. Other BASE24 screens used to access the IDF are not needed to support the SSB Enhanced ATM Application. The fields described below have specific SSB requirements. See the *BASE24 Base Files Maintenance Manual* for more information on the IDF.

### IDF Screens 5 and 6

IDF screens 5 and 6 contain flags identifying which segments used by the Authorization process can be included in the file belonging to this institution. IDF screens 5 and 6 allow you to set the flag for the SSB Enhanced ATM Application. You must turn on the flag for the SSB Enhanced ATM Application in the Product Indicator Table File (PITABLE) before you can set the flag at the institution level.

**SSB BASE** — A flag specifying whether the authorization files carry the information needed for the SSB Enhanced ATM Application. Set the flag to Y. (The flag for the ATM segment must also be set to Y, if it has not already been changed to that value.)

SSB Feature:            Split deposit transaction, Super Teller, and statement print host communications

### IDF Screen 9

IDF screen 9 contains a field that identifies a group of BASE24-atm transaction codes allowed at ATMs owned by this institution. You can use the following field to specify an acquirer transaction profile for the split deposit transaction.

**ACQUIRER TXN PROFILE** — A code identifying a group of default BASE24-atm transaction processing codes allowed at ATMs owned by this institution. The value of this field is part of the key used to read the Acquirer Processing Code File (APCF).

SSB Feature:            Split deposit transaction

## Modifying the Issuer Processing Code File

A card-issuing institution can specify which transaction types are allowed for its cardholders at its ATMs and at other institutions' ATMs using the Issuer Processing Code File (IPCF).

Card-issuing institutions can specify by cardholder, prefix, institution, groups of prefixes, or groups of institutions which transactions are allowed. The following transaction codes are used with the split deposit transaction:

| <b>Transaction</b>                          | <b>Transaction Code</b> | <b>To Account Type</b> | <b>From Account Type</b> |
|---------------------------------------------|-------------------------|------------------------|--------------------------|
| Split Deposit—Two Checking Accounts         | 20                      | 01                     | 01                       |
| Split Deposit—Checking and Savings Accounts | 20                      | 01                     | 11                       |
| Split Deposit—Checking and Other Accounts   | 20                      | 01                     | 60                       |
| Split Deposit—Savings and Checking Accounts | 20                      | 11                     | 01                       |
| Split Deposit—Two Savings Accounts          | 20                      | 11                     | 11                       |
| Split Deposit—Savings and Other Accounts    | 20                      | 11                     | 60                       |
| Split Deposit—Other and Checking Accounts   | 20                      | 60                     | 01                       |
| Split Deposit—Other and Savings Accounts    | 20                      | 60                     | 11                       |
| Split Deposit—Two Other Accounts            | 20                      | 60                     | 60                       |

Refer to the ***BASE24 Base Files Maintenance Manual*** for more information about the IPCF screens. Refer to the ***BASE24-atm Transaction Processing Manual*** for more information about how the BASE24 system uses the IPCF.



## Modifying the Logical Network Configuration File

The Logical Network Configuration File (LCONF) enables you to define the locations of files and processes and the processing parameters. For more information about the LCONF, see the ***BASE24 Logical Network Configuration File Manual***. The following param in the LCONF is used for setting a processing value at the logical network level:

**ATM-DH-PEAK-LEAD-TIME** — Specifies the lead time (in minutes) before the peak-period transaction load group is to be downloaded to the terminal. This param is used in conjunction with the peak time windows defined on ATD Diebold screen 11. The BASE24 product uses a default value of 10 minutes if this param is missing or contains an invalid value. Valid values are 0–1440.

SSB Feature:        Transaction time windows

## Modifying the Negative Card File

The Negative Card File (NEG) is used to flag cards that require some type of special processing. The Authorization process checks this file to determine if a transaction request should be approved and, if not, what action should be taken with the card. You must configure NEG screens 1 and 3 to define Super Teller terminals for each card when the institution is using the Negative Authorization without Usage Accumulation or Negative Authorization with Usage Accumulation methods. A new NEG record is required to define which terminals can run Super Teller transactions, so NEG screen 1 must be configured according to normal institution procedures before NEG screen 3 can be completed. The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for more information on the NEG.

### NEG Screen 1

NEG screen 1 gives you the ability to identify certain cards for special processing, retain specific cards when they are used in the system, and deny transactions attempted with certain cards for a set time.

**CARD TYPE** — A code identifying the type of card associated with the PAN. Enter the value ST in the CARD TYPE field to indicate that the card is a Super Teller card.

SSB Feature:        Super Teller

**REASON ON FILE** — The reason the card is in the NEG. Enter the value 0 (account open) for Super Teller cards.

SSB Feature:        Super Teller

## NEG Screen 3

NEG screen 3 is shown below, followed by the description of the field that is used by the SSB Enhanced ATM Application.

```
BASE24-SSBB  NEGATIVE FILE          LLLL          YY/MM/DD  HH:MM  03 OF 04
```

```
PAN:                                MEMBER: 000      FIID:
```

```
ATM SELF SERVICE BANKING BASE
```

```
SUPER TELLER TERMINAL ID:
```

```
***** BASE24 *****
```

```
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:  
                  F12-HELP
```

**PAN** — The card number or primary account number (PAN) identifying the card. This field is entered on NEG screen 1.

**MEMBER** — The member number for the card. When multiple cards are issued with the same card number, the value in this field distinguishes among the cards. This field is entered on NEG screen 1.

**FIID** — The FIID of the financial institution that issued the card. This field is entered on NEG screen 1.

## ATM SELF SERVICE BANKING BASE

The following field is specific to the SSB Enhanced ATM Application.

**SUPER TELLER TERMINAL ID** — This field associates a Super Teller card with up to 10 terminals. If a Super Teller card is used at any other terminal, the transaction is denied.

|                 |                                                                                                       |
|-----------------|-------------------------------------------------------------------------------------------------------|
| Field Length:   | 16 alphanumeric characters                                                                            |
| Occurs:         | Up to 10 times                                                                                        |
| Required Field: | Yes, at least one terminal is required if the CARD TYPE field on NEG screen 1 is set to a value of ST |
| Default Value:  | No default value                                                                                      |
| Data Name:      | NEG.SUPER-TLR-TERM-ID                                                                                 |
| SSB Feature:    | Super Teller                                                                                          |

## Modifying the Receipt File

The SSB Enhanced ATM Application adds configurable cardholder receipt support for split deposit transactions and configurable depository print to the configurable receipts available with the Diebold 10XX/478X Device Handler process. ACI has established receipt templates for split deposit transactions and depository print in the Receipt File (RCPT). The configurable depository print feature allows printing on the outside of a deposited envelope.

If you have configured the optional receipt feature, it will affect the split deposit transaction. This feature allows the cardholder to determine if a receipt should be printed for a transaction.

For a complete description of configurable receipts, the optional receipt feature, receipt templates, and examples of templates for transactions performed at the Diebold 10XX/478X terminals, see the ***BASE24-atm Diebold 10XX/478X Device Support Manual***. For more information on the RCPT, see the ***BASE24-atm Files Maintenance Manual***.

The split deposit transaction cardholder receipt template and the configurable depository print templates use the field type codes shown on the following pages. The data is retrieved from the BASE24-atm Standard Internal Message (STM) and the BASE24-atm Terminal Data files (ATD). Data names are included in parentheses after each field type code description. See the ***BASE24-atm Transaction Processing Manual*** for further explanation of the STM data names.

Field lengths are included with each description. The maximum number of bytes that can be printed on configurable depository print is 80. This is a limitation of the Diebold 10XX/478X terminal.

### Field Type Code Descriptions

The following table describes the standardized field type codes that are used in the default receipt templates provided for the SSB Enhanced ATM Application. You can modify these receipt templates to use the additional field type codes described in the ***BASE24-atm Diebold 10XX/478X Device Support Manual***.

| Code            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Length   |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| A1              | The first deposit amount in a split deposit (STM.RQST.AMT-1).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 14 bytes |
| A2              | The second deposit amount in a split deposit (STM.RQST.AMT-2).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 14 bytes |
| AM              | The transaction amount (STM.RQST.AMT-1 + STM.RQST.AMT-2 for split deposit transactions, STM.RQST.AMT-1 for other transactions).                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 14 bytes |
| CN              | The card number from the ATM card (atm.d1000.crd-num) and the member number from the ATM card (3 bytes) (STM.RQST.MBR-NUM).                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 19 bytes |
| CX <i>l,r,c</i> | <p>The card number from the ATM card (atm.d1000.crd-num). This data code does not include the member number.</p> <p>The three variables (<i>l</i> for characters starting from the left, <i>r</i> for characters starting from the right, and <i>c</i> for the character code) are used to control the truncation of the card number. If the variables are not present, the account number will be printed in its entirety. See the <b><i>BASE24-atm Diebold 10XX/478X Device Support Manual</i></b> for additional information about how these variables are used in account number truncation.</p> | 19 bytes |
| DA              | The transaction date. The format printed (MM/DD or DD/MM) is dependent on the value specified in the DATE-DISPLAY-TYPE param in the Logical Network Configuration File (LCONF).                                                                                                                                                                                                                                                                                                                                                                                                                      | 4 bytes  |

| Code                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Length   |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| FRL, <i>r</i> , <i>c</i> | <p>The <i>from</i> account number of the first account (STM.RQST.FROM-ACCT or STM.STMT-INFO.FROM-ACCT). If the STM.RQST.FROM-ACCT is all blanks or zeros, the Device Handler process uses the account description from the diebold_1000_appl_tbl table in the C100NAMS file. The value of STM.RQST.FROM-ACCT-TYP and the language indicator determine which table entry is used.</p> <p>The three variables (<i>l</i> for characters starting from the left, <i>r</i> for characters starting from the right, and <i>c</i> for the character code) are used to control the truncation of the card number. If the variables are not present, the account number will be printed in its entirety. See the <b><i>BASE24-atm Diebold 10XX/478X Device Support Manual</i></b> for additional information about how these variables are used in account number truncation.</p> | 19 bytes |
| MB                       | The member number from the ATM card (STM.RQST.MBR-NUM).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3 bytes  |
| NS                       | No space.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |
| SP                       | Inserts a space before the next field (default).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |
| SQ                       | The BASE24 sequence number assigned to the transaction (ATDD1.ATDD1-CORE.TRAN-SEQ-NUM).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 4 bytes  |
| TA                       | The <i>to</i> account type (located in C100NAMS diebold_1000_appl_tbl) printed on the depository envelope. The account type printed depends on the language indicator and the value of STM.TO-ACCT-TYP. The Device Handler process matches account type numbers to a two-character account type description in the acct_typ_tbl table in the C100NAMS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 11 bytes |
| TE                       | All 16 bytes of the terminal ID (STM.TERM-ID).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 16 bytes |
| TI                       | The time the transaction took place (STM.TRAN-TIM).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4 bytes  |
| TM                       | The first 8 bytes of the terminal ID (STM.TERM-ID).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 8 bytes  |

| Code            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Length   |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| TOL, <i>r,c</i> | <p>The <i>to</i> account number of the second account (STM.RQST.TO-ACCT) printed on the receipt. If the STM.RQST.TO-ACCT is all blanks or zeros, the Device Handler process uses the account description from the diebold_1000_appl_tbl table in the C100NAMS file. The value of STM.RQST.TO-ACCT-TYP and the language indicator determine which table entry is used.</p> <p>The three variables (<i>l</i> for characters starting from the left, <i>r</i> for characters starting from the right, and <i>c</i> for the character code) are used to control the truncation of the card number. If the variables are not present, the account number will be printed in its entirety. See the <b><i>BASE24-atm Diebold 10XX/478X Device Support Manual</i></b> for additional information about how these variables are used in account number truncation.</p> | 19 bytes |
| TT              | <p>The transaction type (located in C100NAMS diebold_1000_tran_tbl). The transaction text printed depends on the value in the STM.TRAN-CDE field. The Device Handler process searches the diebold_1000_tran_tbl table in the C100NAMS to find a match on the transaction code. The corresponding text is then moved to the print buffer.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 10 bytes |



## Split Deposit Receipt

The receipt type SDP is used for a split deposit transaction. The Diebold 10XX/478X ATM default receipt template defined in the RCPT is shown below, followed by a graphic example of the default receipt for a split deposit transaction.

```
#E(@RECORD NO.          #SQ>
@SPLIT DEPOSIT>
@FIRST AMOUNT  #A1$>
@TO  #FR>>
@SECOND AMOUNT #A2$>
@TO  #TO>>
```

```

1      CUSTOMER LOGO SCREEN
2
3      DATE      TIME      STATION
4      YY/MM/DD  HH:MM     S1A10035
5
6
7      CARD NUMBER
8      1234567890123456789-000
9
10     LOCATION
11     330 SOUTH 108TH STREET
12
13
14     RECORD NO.      776
15     SPLIT DEPOSIT
16     FIRST AMOUNT    $50.00
17     TO  3301101
18
19     SECOND AMOUNT    $100.00
20     TO  3311102
21
```

```

1      2
1234567890123456789012345678
```

## Sample Configurable Depository Print Template

The receipt type DPPR is used for printing depository information on envelopes. The order in which the depository data codes appear in the template is the order in which they are printed on the envelope. If a spacing identifier is the first entry in the template, then either one space (SP) before each field or no spaces (NS) is used for the entire template. Spacing can be altered field by field with the use of these identifiers. If no spacing identifier is specified, a default of one space is used before each field.

The Diebold 10XX/478X ATM default receipt template for the depository print template as defined in the RCPT is shown below.

```
#TM#SQ#A1$#CN#TO#DA#NS#TI#TT
```

The following is an example of the DPPR receipt:

---

```
S1A100000776 000 $50.00 1234567890123456789 SAVINGS MM/DDHH:MM DEPOSIT
```

---

**Note:** The maximum printer data is 55 bytes for a standard depositor or 80 bytes for the Intelligent Depository Module (IDM). If the BASE24-atm SSB Enhanced ATM application drives both ATMs with the standard depositor and ATMs with the Intelligent Depository Module (IDM), you must configure the DPPR template for a maximum of 55 bytes of data or configure separate DPPR templates for the standard depositor and IDM receipt groups.

## Modifying the Terminal Receipt File

Receipt requirements for approved and denied transactions are defined in the Terminal Receipt File (TRF). Transactions are designated by an ISO processing code consisting of the transaction code, *from* account type, and *to* account type.

The following transaction codes are used with the split deposit transaction:

| <b>Transaction</b>                          | <b>Transaction Code</b> | <b>To Account Type</b> | <b>From Account Type</b> |
|---------------------------------------------|-------------------------|------------------------|--------------------------|
| Split Deposit—Two Checking Accounts         | 20                      | 01                     | 01                       |
| Split Deposit—Checking and Savings Accounts | 20                      | 01                     | 11                       |
| Split Deposit—Checking and Other Accounts   | 20                      | 01                     | 60                       |
| Split Deposit—Savings and Checking Accounts | 20                      | 11                     | 01                       |
| Split Deposit—Two Savings Accounts          | 20                      | 11                     | 11                       |
| Split Deposit—Savings and Other Accounts    | 20                      | 11                     | 60                       |
| Split Deposit—Other and Checking Accounts   | 20                      | 60                     | 01                       |
| Split Deposit—Other and Savings Accounts    | 20                      | 60                     | 11                       |
| Split Deposit—Two Other Accounts            | 20                      | 60                     | 60                       |

Refer to the *BASE24-atm Files Maintenance Manual* for more information about the TRF screens. Refer to the *BASE24-atm Transaction Processing Manual* for more information about how the Diebold 10XX/478X Device Handler process uses the TRF.

## Modifying the Token File

The SSB Enhanced ATM Application uses the Token File (TKN) to configure data tokens that carry additional information in internal messages. These tokens are logged to various files, are extracted, or are sent to the host. The TKN specifies the following information:

- The tokens that get logged to the BASE24-atm Transaction Log File (TLF) and the Interchange Log Files (ILFs).
- The tokens that get extracted from the transaction log files by the Super Extract process. Extracting allows the token information to be processed by the host.
- The tokens that get sent to the host with each transaction in the ISO-based external message.

The SSB Enhanced ATM Application uses the Self-Service Banking Base token (token ID 07) to carry information about two of the features: split deposit and Super Teller. For split deposit, the token contains a field for the second account's deposit balance credit. For Super Teller, the token contains a flag indicating whether this transaction was initiated by a Super Teller card.

The TKN must be modified to ensure that this token gets logged to the appropriate transaction log files, to ensure that this token is extracted from the TLF, and to ensure that this token gets sent from the BASE24 system to the ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process in the external message.

See the ***BASE24 Tokens Manual*** for complete information on the Self Service Banking Base token and on using the TKN to specify tokens to be sent in the external message. For detailed field descriptions for the TKN screen, see the ***BASE24 Base Files Maintenance Manual***.

## 4: BASE24-atm SSB Enhanced Check Processing Application

---

The BASE24-atm self-service banking (SSB) Enhanced Check Processing Application is one of three add-on applications that make up the BASE24-atm self-service banking product. This module requires the use of the SSB Device Handler Extension and the SSB Enhanced ATM Application installed.

This section describes the processing enhancements that each feature of the SSB Enhanced Check Processing Application provides. The files and fields that must be modified to properly configure the SSB Enhanced Check Processing Application are also described. Information on the fields and files required for individual features is also included if you want to configure only certain features.

The SSB Enhanced Check Processing Application supports the following features for Diebold 10XX/478X terminals:

- Enhanced check authorization
- Enhanced magnetic ink character recognition (MICR) data processing and manipulation
- Check-cashing cards
- Registered check processing
- Stop payment verification
- Preapproved and predeclined check processing
- Enhanced document bin sorting

## Enhanced Check Authorization

Authorization controls can be established through the SSB Enhanced Check Processing Application for check-related transactions based on the institution that issued the check rather than on the cardholder performing the check transaction. The application also supports check cashing limits and usages for the individual cardholder and check disposition options.

The SSB Enhanced Check Processing Application requires a number of file settings that affect transaction authorization for check-related transactions. The BASE24-atm Authorization process reads several standard BASE24-atm files as well as several application-specific files during check-related transaction processing.

Authorization controls must be defined to support the following:

- Check-related cash disbursement transaction limits and usages
- Prescreening checks

In addition, authorization controls impact the following SSB features, and are described along with those features:

- Enhanced MICR data processing and manipulation
- Check-cashing cards
- Registered check processing
- Stop payment verification
- Preapproved and predeclined check processing

The Super Teller feature in the SSB Enhanced ATM Application can also be affected by the authorization controls set in the SSB Enhanced Check Processing Application. These impacts are described later in this section under the topic “Super Teller Card Impacts.”

With the SSB Enhanced Check Processing Application, the BASE24-atm Authorization process is able to parse the check MICR data from the MICR Data token to determine the routing and transit number, the account number, and the check number. Using MICR data to determine the institution that issued the check and the account number on the check enables the BASE24-atm product to support check authorization parameters based on a specific check issuer and a specific

account. Check-related cash disbursement transactions can be approved or declined for checks issued by specific institutions or for a specific account from a specific institution.

The Diebold 10XX/478X Device Handler process initially interprets the MICR information at the time the check-related transaction request message is received from the terminal. The Device Handler process then forwards the MICR information to the Authorization process in the MICR Data token as part of the transaction request. The Authorization process uses the MICR information to access the SSB Enhanced Check Processing Application files to determine the authorization parameters defined by the institution based on the authorization method used by the institution.

## **Check Transaction Limits and Totals**

Before approving a transaction, the BASE24-atm Authorization process maintains totals and compares these values with limits established by each institution. The SSB Enhanced Check Processing Application makes additional limits and totals available. The limits and totals available depend on the authorization method being used, as summarized on the following pages. Transaction limits and totals are not affected by transactions that do not involve cash disbursements (for example, deposit without cash back).

## **Impact of the SSB Enhanced Check Processing Application**

Without the SSB Enhanced Check Processing Application, the BASE24-atm product uses transaction totals located in the Usage Accumulation File (UAF) and limits located in the Card Prefix File (CPF) for the Negative Authorization with Usage Accumulation method. The BASE24-atm product uses transaction totals located in the Cardholder Authorization File (CAF) and limits located in the CAF or CPF for the Positive and Positive Balance Authorization methods.

With the SSB Enhanced Check Processing Application, BASE24-atm processes still uses the CAF, CPF, and UAF. However, an SSB Check (SSBC) segment is added to each of these files. Without the SSB Enhanced Check Processing Application, check-related transactions (cash check and check deposit with cash back) use BASE24-atm withdrawal limits. With the SSB Enhanced Check Processing Application, these two transactions can use check limits in the SSBC segment. Cash disbursement transactions that do not involve checks use BASE24-atm withdrawal limits with or without the SSB Enhanced Check Processing Application.

## Definition of Transaction Amount

In the following summaries, the transaction amount used to perform each of the tests depends on the transaction being performed.

For withdrawal and cash check transactions, the transaction amount is contained in the AMT-1 field of the BASE24-atm Standard Internal Message (STM). For check deposit with cash back transactions, the transaction amount is the cash back portion contained in the AMT-2 field of the STM.

## Types of Cash Disbursement Limits

The BASE24 product maintains the following sets of limits in the CAF and CPF for cash disbursements that occur during an institutionally defined usage accumulation period:

- Aggregate limits specify the maximum aggregate amount of cash disbursements permitted against credit and noncredit accounts and purchases permitted against noncredit accounts. (Purchases are BASE24-pos transactions.)
- Cash advance limits specify the maximum amount of cash advances permitted against credit accounts. These limits can be maintained at the base level and at product-specific levels.
- Cash withdrawal limits specify the maximum amount of purchases and cash withdrawals permitted against noncredit accounts. These limits can be maintained at the base level and at product-specific levels. These limits are called check usage limits at the SSB level. SSB-level check usage limits are tested instead of terminal-level cash withdrawal limits for cash check and check deposit with cash back transactions.

The BASE24-atm Authorization process tests a cash disbursement transaction against the aggregate limits before it tests the transaction against any base or product level limits. This includes transactions initiated with a check-cashing card (card type SP) or Super Teller card (card type ST).

The BASE24-atm Authorization process maintains a total for each base and product level cash disbursement limit. However, instead of maintaining an aggregate total, the BASE24-atm Authorization process uses the base cash advance and cash withdrawal totals with the aggregate limit.



Cash disbursement limits and totals for check-related transactions are optional at the SSB level and the base level. Therefore, you must take care and ensure that limits are set at one level or the other for each account. One or both of these limits must be configured in order to have usage accumulation period limits for check-related cash disbursement transactions. Omitting the cash disbursement limits and totals at both levels results in having only per-transaction limits for check-related cash disbursement transactions.

There are two types of SSB limits for check-related cash disbursement transactions. One SSB limit is for transactions that match a record in the Check Status File (CSF). The second SSB limit is for other transactions. Each SSB limit includes an amount and a flag identifying whether the base limits are tested. The following examples do not distinguish between the two SSB limit types, and are shown in U.S. dollars.

The following examples demonstrate the processing possibilities for check-related cash disbursement limits with and without the SSB and base limits. The accumulation that exceeds the limit is shown in bold. All four examples use the same combination of chained transactions.

**Example 1.** The following example uses both the SSB and base limits to authorize transactions.

Aggregate limit: \$700  
 Base limit: \$700  
 ATM limit: \$300  
 SSB limit: **\$300**  
 Base limit tests: Yes

The accumulations for each transaction are shown below.

| Transaction Description               | Total Accumulation |       |              |
|---------------------------------------|--------------------|-------|--------------|
|                                       | Base               | ATM   | SSB          |
| 1. \$200 cash withdrawal              | \$200              | \$200 | \$0          |
| 2. \$300 cash check                   | \$500              | \$200 | \$300        |
| 3. Check deposit with \$200 cash back | \$700              | \$200 | <b>\$300</b> |

In this example, transaction number 3 is declined because the base accumulation passes the aggregate and base limit tests, but the SSB accumulation would exceed the SSB limit.

**Example 2.** The following example uses the base limit without the SSB limit to authorize transactions.

Aggregate limit: \$700  
Base limit: \$700  
ATM limit: \$300  
SSB limit: \$0 (SSB test is not performed)  
Base limit tests: Yes

The accumulations for each transaction are shown below.

| Transaction Description               | Total Accumulation |       |     |
|---------------------------------------|--------------------|-------|-----|
|                                       | Base               | ATM   | SSB |
| 1. \$200 cash withdrawal              | \$200              | \$200 |     |
| 2. \$300 cash check                   | \$500              | \$200 |     |
| 3. Check deposit with \$200 cash back | \$700              | \$200 |     |

All three transactions are approved because the SSB limit that caused transaction number 3 to be declined in example 1 is not used in this example.

**Example 3.** The following example uses the SSB limit without testing the base limit to authorize transactions.

Aggregate limit: \$700  
Base limit: \$700  
ATM limit: \$300  
SSB limit: **\$300**  
Base limit tests: No

The accumulations for each transaction are shown below.

| Transaction Description               | Total Accumulation |       |              |
|---------------------------------------|--------------------|-------|--------------|
|                                       | Base               | ATM   | SSB          |
| 1. \$200 cash withdrawal              | \$200              | \$200 | \$0          |
| 2. \$300 cash check                   | \$200              | \$200 | \$300        |
| 3. Check deposit with \$200 cash back | \$200              | \$200 | <b>\$300</b> |

Transaction number 3 is declined because the SSB accumulation would exceed the SSB limit. Transaction numbers 2 and 3 do not affect the base total accumulation because the base limit tests are not being performed.

**Example 4.** The following example does not use either the base limit or the SSB limit to authorize transactions.

Aggregate limit: \$700  
 Base limit: \$700  
 ATM limit: \$300  
 SSB limit: \$0 (SSB test is not performed)  
 Base limit tests: No

The accumulations for each transaction are shown below.

| Transaction Description               | Total Accumulation |       |     |
|---------------------------------------|--------------------|-------|-----|
|                                       | Base               | ATM   | SSB |
| 1. \$200 cash withdrawal              | \$200              | \$200 |     |
| 2. \$300 cash check                   | \$200              | \$200 |     |
| 3. Check deposit with \$200 cash back | \$200              | \$200 |     |

All three transactions (as well as any additional cash check or check deposit with cash back transactions) are approved because cash check and check deposit with cash back transactions are not tested against SSB, base, or aggregate limits. Check transactions can be tested on a per transaction basis using information in the Check Status File (CSF) or Corporate Check File (CCF), but cannot be tested on a usage accumulation period basis.

## Negative Authorization with Usage Accumulation Method

The BASE24-atm Authorization process can test limits and update totals in four different combinations for check transactions involving cash disbursements with the Negative Authorization with Usage Accumulation method.

### Without the SSBC Segment

Without the SSB Enhanced Check Processing Application, the SSBC segment is not present, so the BASE24-atm Authorization process performs the following steps:

1. Determines the number of card uses, including check-related cash disbursement transactions.

The values of the following fields are used in determining the number of card uses.

|                             |              |
|-----------------------------|--------------|
| TIMES USED PER PERIOD LIMIT | CPF screen 4 |
| TIMES USED THIS PERIOD      | UAF screen 4 |

2. Determines the total amount of aggregate cash disbursement activity, including check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |              |
|-------------------------------|--------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |
| CASH ADV ACTIVITY THIS PERIOD | UAF screen 1 |

3. Determines the total amount of base withdrawal activity, including check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of base withdrawal activity.

|                               |              |
|-------------------------------|--------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |

4. Determines the total amount of terminal withdrawals, including check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of terminal withdrawals.

|                               |              |
|-------------------------------|--------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 4 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 4 |

## With the SSBC Segment and a Check-Cashing Card

When a cardholder uses a check-cashing card (card type SP), the BASE24-atm Authorization process must find a match for the transaction in the Corporate Check File (CCF) or the transaction is declined. With the SSBC segment and a CCF match, the BASE24-atm Authorization process performs the following steps.

1. Determines the number of card uses.

The values of the following fields are used in determining the number of card uses.

|                             |              |
|-----------------------------|--------------|
| TIMES USED PER PERIOD LIMIT | CPF screen 4 |
| TIMES USED THIS PERIOD      | UAF screen 4 |

2. Determines the total amount of aggregate cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of Y.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |              |
|-------------------------------|--------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |
| CASH ADV ACTIVITY THIS PERIOD | UAF screen 1 |

3. Determines the total amount of base cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of Y.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |              |
|-------------------------------|--------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |

4. Determines the total amount of transactions.

The values of the following fields are used in determining the total amount of transactions.

|                            |               |
|----------------------------|---------------|
| CHECK ACTIVITY LIMITS      | CPF screen 14 |
| CHECK ACTIVITY THIS PERIOD | UAF screen 10 |

5. Determines the amount of each transaction.

The value of the following field is used in determining the amount of each transaction.

MAXIMUM AMOUNT CCF screen 1

6. Determines the amount of cash dispensed with each transaction.

The value of the following field is used in determining the amount of cash dispensed with each transaction.

MINIMUM DISPENSE AMOUNT CPF screen 14

**Note:** Steps 2 and 3 are not performed if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of N.

## With the SSBC Segment and Check Status File Match

When a cardholder uses a card other than a check-cashing card, the BASE24-atm Authorization process searches the Check Status File (CSF) for a record that matches the transaction. With the SSBC segment and a CSF match, the BASE24-atm Authorization process performs the following steps.

1. Determines the number of checks accepted.

The values of the following fields are used in determining the number of checks accepted.

CSF CHECKS ALLOWED PER PERIOD CPF screen 14  
CSF CHECKS ACCEPTED THIS PERIOD UAF screen 10

2. Determines the total amount of aggregate cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of Y.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

AGGR ACTIVITY LIMITS CPF screen 1  
CASH WDL ACTIVITY THIS PERIOD UAF screen 1  
CASH ADV ACTIVITY THIS PERIOD UAF screen 1

3. Determines the total amount of base cash disbursement activity if the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of Y.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |              |
|-------------------------------|--------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |

4. Determines the total amount of check-related cash disbursement transactions if the CSF CHECK ACTIVITY LIMITS fields on CPF screen 14 contain values other than 0.

The values of the following fields are used in determining the total amount of check-related cash disbursement transactions.

|                                |               |
|--------------------------------|---------------|
| CSF CHECK ACTIVITY LIMITS      | CPF screen 14 |
| CSF CHECK ACTIVITY THIS PERIOD | UAF screen 10 |

5. Determines the amount of individual check-related cash disbursement transactions.

The value of the following field is used in determining the amount of individual check-related cash disbursement transactions.

|             |              |
|-------------|--------------|
| CHECK LIMIT | CSF screen 1 |
|-------------|--------------|

6. Determines the amount of cash dispensed with individual check-related cash disbursement transactions.

The value of the following field is used in determining the amount of cash dispensed with individual check-related cash disbursement transactions.

|                         |               |
|-------------------------|---------------|
| MINIMUM DISPENSE AMOUNT | CPF screen 14 |
|-------------------------|---------------|

**Note:** Steps 2 and 3 are not performed if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of N. Step 4 is not performed if the CSF CHECK ACTIVITY LIMITS fields on CPF screen 14 are set to 0.

## With SSBC Segment and no Check Status File Match

When a cardholder uses a card other than a check-cashing card, the BASE24-atm Authorization process searches the CSF for a record that matches the transaction. With the SSBC segment and no CSF match, the BASE24-atm Authorization process performs the following steps.

1. Determines the number of card uses, including check-related cash disbursement transactions.

The values of the following fields are used in determining the number of card uses.

|                             |              |
|-----------------------------|--------------|
| TIMES USED PER PERIOD LIMIT | CPF screen 4 |
| TIMES USED THIS PERIOD      | UAF screen 4 |

2. Determines the total amount of aggregate cash disbursement activity if the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of Y.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |              |
|-------------------------------|--------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |
| CASH ADV ACTIVITY THIS PERIOD | UAF screen 1 |

3. Determines the total amount of base cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of Y.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |              |
|-------------------------------|--------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | UAF screen 1 |

4. Determines the total amount of check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of check-related cash disbursement transactions.

|                            |               |
|----------------------------|---------------|
| CHECK ACTIVITY LIMITS      | CPF screen 14 |
| CHECK ACTIVITY THIS PERIOD | UAF screen 10 |

5. Determines the amount of cash dispensed with each check-related cash disbursement transaction.

The value of the following field is used in determining the amount of cash dispensed with each check-related cash disbursement transaction.

|                         |               |
|-------------------------|---------------|
| MINIMUM DISPENSE AMOUNT | CPF screen 14 |
|-------------------------|---------------|

**Note:** Steps 2 and 3 are not performed if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 is set to a value of N.



## Positive and Positive Balance Authorization Methods

The BASE24-atm Authorization process can test limits and update totals for check-related cash disbursement transactions in four different combinations with the Positive and Positive Balance Authorization methods. With both of these methods, the limits can be established at the card prefix level in the CPF or at the individual card level in the CAF. The value in the TOTAL AGGR ACTIVITY LIMIT field on CAF screen 1 controls whether CAF or CPF limits are used for a particular account.

### Without the SSBC Segment

Without the SSB Enhanced Check Processing Application, the SSBC segment is not present, so the BASE24-atm Authorization process performs the following steps:

1. Determines the number of card uses, including check-related cash disbursement transactions.

The values of the following fields are used in determining the number of card uses.

|                             |                              |
|-----------------------------|------------------------------|
| TIMES USED PER PERIOD LIMIT | CPF screen 4 or CAF screen 8 |
| TIMES USED THIS PERIOD      | CAF screen 8                 |

2. Determines the total amount of aggregate cash disbursement activity, including check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |
| CASH ADV ACTIVITY THIS PERIOD | CAF screen 1                 |

3. Determines the total amount of base cash disbursement activity, including check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |

4. Determines the total amount of terminal withdrawals, including check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of terminal withdrawals.

|                               |                              |
|-------------------------------|------------------------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 4 or CAF screen 8 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 8                 |

## **With the SSBC Segment and a Check-Cashing Card**

When a cardholder uses a check-cashing card (card type SP), the BASE24-atm Authorization process must find a match for the transaction in the CCF or the transaction is declined. With the SSBC segment and a CCF match, the BASE24-atm Authorization process performs the following steps.

1. Determines the number of card uses.

The values of the following fields are used in determining the number of card uses.

|                             |                              |
|-----------------------------|------------------------------|
| TIMES USED PER PERIOD LIMIT | CPF screen 4 or CAF screen 8 |
| TIMES USED THIS PERIOD      | CAF screen 8                 |

2. Determines the total amount of aggregate cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 15 is set to a value of Y.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |
| CASH ADV ACTIVITY THIS PERIOD | CAF screen 1                 |

3. Determines the total amount of base cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 15 is set to a value of Y.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |

4. Determines the total amount of transactions.

The values of the following fields are used in determining the total amount of transactions.

|                            |                                   |
|----------------------------|-----------------------------------|
| CHECK ACTIVITY LIMITS      | CPF screen 14 or<br>CAF screen 15 |
| CHECK ACTIVITY THIS PERIOD | CAF screen 15                     |

5. Determines the amount of each transaction.

The value of the following field is used in determining the amount of each transaction.

|                |              |
|----------------|--------------|
| MAXIMUM AMOUNT | CCF screen 1 |
|----------------|--------------|

6. Determines the amount of cash dispensed with each transaction.

The value of the following field is used in determining the amount of cash dispensed with each transaction.

|                         |               |
|-------------------------|---------------|
| MINIMUM DISPENSE AMOUNT | CPF screen 14 |
|-------------------------|---------------|

**Note:** Steps 2 and 3 are not performed if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 15 is set to N.

## With the SSBC Segment and Check Status File Match

When a cardholder uses a card other than a check-cashing card, the BASE24-atm Authorization process searches the CSF for a record that matches the transaction. With the SSBC segment and a CSF match, the BASE24-atm Authorization process performs the following steps.

1. Determine the number of checks accepted.

The values of the following fields are used in determining the number of checks accepted.

|                                 |                                   |
|---------------------------------|-----------------------------------|
| CSF CHECKS ALLOWED PER PERIOD   | CPF screen 14 or CAF<br>screen 16 |
| CSF CHECKS ACCEPTED THIS PERIOD | CAF screen 16                     |

2. Determine the total amount of aggregate cash disbursement activity if the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 16 is set to a value of Y.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |
| CASH ADV ACTIVITY THIS PERIOD | CAF screen 1                 |

- Determines the total amount of base cash disbursement activity if the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 16 is set to a value of Y.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |

- Determines the total amount of check-related cash disbursement transactions if the CSF CHECK ACTIVITY LIMITS fields on either CPF screen 14 or CAF screen 16 contain values other than 0.

The values of the following fields are used in determining the total amount of check-related cash disbursement transactions.

|                                |                                |
|--------------------------------|--------------------------------|
| CSF CHECK ACTIVITY LIMITS      | CPF screen 14 or CAF screen 16 |
| CSF CHECK ACTIVITY THIS PERIOD | CAF screen 16                  |

- Determines the amount of each check-related cash disbursement transaction.

The value of the following field is used in determining the amount of each check-related cash disbursement transaction.

|             |              |
|-------------|--------------|
| CHECK LIMIT | CSF screen 1 |
|-------------|--------------|

- Determines the amount of cash dispensed with each check-related cash disbursement transaction.

The value of the following field is used in determining the amount of cash dispensed with each check-related cash disbursement transaction.

|                         |               |
|-------------------------|---------------|
| MINIMUM DISPENSE AMOUNT | CPF screen 14 |
|-------------------------|---------------|

**Note:** Steps 2 and 3 are not performed if the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 16 is set to a value of N. Step 4 is not performed if the CSF CHECK ACTIVITY LIMITS fields on either CPF screen 14 or CAF screen 16 are set to a value of 0.

## With SSBC Segment and no Check Status File Match

When a cardholder uses a card other than a check-cashing card, the BASE24-atm Authorization process searches the Check Status File (CSF) for a record that matches the transaction. With the SSBC segment and no CSF match, the BASE24-atm Authorization process performs the following steps.

1. Determines the number of card uses, including check-related cash disbursement transactions.

The values of the following fields are used in determining the number of card uses.

|                             |                              |
|-----------------------------|------------------------------|
| TIMES USED PER PERIOD LIMIT | CPF screen 4 or CAF screen 8 |
| TIMES USED THIS PERIOD      | CAF screen 8                 |

2. Determines the total amount of aggregate cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 15 is set to a value of Y.

The values of the following fields are used in determining the total amount of aggregate cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| AGGR ACTIVITY LIMITS          | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |
| CASH ADV ACTIVITY THIS PERIOD | CAF screen 1                 |

3. Determines the total amount of base cash disbursement activity if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 15 is set to a value of Y.

The values of the following fields are used in determining the total amount of base cash disbursement activity.

|                               |                              |
|-------------------------------|------------------------------|
| CASH WDL ACTIVITY LIMITS      | CPF screen 1 or CAF screen 1 |
| CASH WDL ACTIVITY THIS PERIOD | CAF screen 1                 |

4. Determines the total amount of check-related cash disbursement transactions.

The values of the following fields are used in determining the total amount of check-related cash disbursement transactions.

|                            |                                |
|----------------------------|--------------------------------|
| CHECK ACTIVITY LIMITS      | CPF screen 14 or CAF screen 15 |
| CHECK ACTIVITY THIS PERIOD | CAF screen 15                  |

5. Determines the amount of cash dispensed with each check-related cash disbursement transaction.

The value of the following field is used in determining the amount of cash dispensed with each check-related cash disbursement transaction.

MINIMUM DISPENSE AMOUNT

CPF screen 14

**Note:** Steps 2 and 3 are not performed if the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on either CPF screen 14 or CAF screen 15 is set to a value of N.

## Super Teller Card Impacts

Adding the SSBC segment also affects the limits established for the Super Teller card offered with the SSB Enhanced ATM Application. Like it does for other card types with the SSB Enhanced Check Processing Application, the BASE24-atm Authorization process maintains a separate SSBC segment for check-related cash disbursement transactions initiated with a Super Teller card (card type ST). As a result, CPF screen 14 or CAF screens 15 and 16 must be completed for Super Teller cards just as they are completed for any other card type. Limits for Super Teller cards should reflect their specialized use.

# Enhanced MICR Data Processing and Manipulation

With the SSB Enhanced Check Processing Application, the BASE24 product has the ability to interpret the MICR information sent from the terminal on check-related transactions. By interpreting the MICR information, the BASE24 product can determine the routing and transit number of the institution that issued the check as well as the account number associated with that routing and transit number. This means that the BASE24 product can authorize check-related transactions based on the institution and account number of the check-issuing institution. In addition, the BASE24 product can facilitate the settlement process by sorting checks according to the institution that issued them, using the enhanced bin sorting feature that is described later in this section.

## Processing MICR Data

The Authorization process parses the MICR information to determine the routing and transit number of the check-issuing institution, the account number, and the check number.

The terminal reads the MICR data on a check when a check-related transaction is initiated. This MICR information is placed in the MICR Data token in the transaction request message sent from the Diebold 10XX/478X Device Handler process to the BASE24-atm Authorization process.

The characters 0 through 9, blanks, and the non-numeric separators listed below represent valid MICR information sent by the Diebold 10XX/478X terminal.

T = Transit symbol  
\$ = Amount symbol  
\* = On-us symbol  
– = Dash symbol

Any unrecognizable character appears as an underbar character (\_) on the check proof list. The transaction is denied if there is an unrecognizable character in the MICR information.

If the Authorization process finds the amount symbol (\$) in the check MICR information, indicating that the check was previously processed, the transaction is declined with a response code of 71 (contact bank).

If the Authorization process finds the routing and transit number, account number, and check serial number in the MICR information, the Account Routing File (ARF) is searched for possible MICR manipulation instructions and the Stop Payment File (SPF) is searched for possible stop payments.

If the Authorization process finds the routing and transit number and account number, but no check serial number in the MICR information, the ARF is searched for possible MICR manipulation instructions, but the SPF is not searched.

If the Authorization process is unable to locate the routing and transit number or the account number in the MICR information, the transaction is authorized based on standard BASE24-atm cardholder authorization parameters.

## Manipulating MICR Data

After the BASE24-atm Authorization process parses the MICR information in the MICR Data token, the process searches the ARF to determine whether changes need to be made to the MICR information retrieved from the check. The MICR Data token must contain the routing and transit number and the account number before the Authorization process attempts to search the ARF. The ARF provides routing information to supplement the account information entered at the terminal so that the account can be located in the BASE24 database.

For example, when two financial institutions merge and both institutions have cardholders with the same account number, the ARF provides the Authorization process with the guidelines necessary to convert MICR information on the check to locate the correct account in the BASE24 database.

If the Authorization process must alter the MICR information, the altered data is logged to the BASE24-atm Transaction Log File (TLF) and, if applicable, routed to the host.

For a complete description of the ARF and its screen layouts, see the ***BASE24 Base Files Maintenance Manual***.

## Formatting MICR Data

If the MICR information is configured to be logged to the BASE24-atm TLF, the MICR information can be formatted as follows:

- The routing and transit number is enclosed by two transit symbols (T).



- The account number associated with the routing and transit number is followed by an on-us symbol (\*) and is preceded with an on-us symbol (\*) or a transit symbol (T).
- The check serial number can be placed in one of three locations: at the beginning of the MICR information; between the routing and transit number, and the account number; or at the end of the MICR information.

It can be enclosed with two on-us symbols (\*), preceded with a transit symbol (T) and followed by an on-us symbol (\*), or it can be preceded only by an on-us symbol (\*).

The check serial number must be at least four digits in length. The BASE24-atm Authorization process ignores check serial numbers that are less than four digits in length.

The following examples illustrate how the routing and transit number (B), account number (A), and check serial number (C) can be formatted within the MICR information:

\*CCCCCC\* TBBBBBBBBBTAAAAAA\*

\*CCCCCC\* TBBBB-BBBBTAAAAAA\*

TBBBBBBBBBTCCCC\*AAAAAA\*

TBBBB-BBBBTCCCC\*AAAAAA\*

TBBBBBBBBBTCCCC\*AA-AAA-AA\*

TBBBBBBBBBTAAAAAA\*CCCCCC

## Check-Cashing Cards

The check-cashing cards feature makes it possible for an institution to issue special-use check-cashing cards to individuals who have no account ties to the institution. The objective is to divert check-related cash disbursement transactions from the teller lines to the ATM.

With this feature, the authorizing institution must rely on the credibility of the check-issuing institution rather than the cardholder. A direct tie between the check-cashing card and the corporation issuing the check is required. Special-use check-cashing cards are assigned a unique prefix and card type within the BASE24-atm product.

The following is an example of how the check-cashing card can be used: Corporation ABC is physically located near Bank Y. Corporation ABC and Bank Y can establish a relationship in which Bank Y distributes check-cashing cards to the employees of Corporation ABC. The employees of Corporation ABC can then cash their payroll checks using check-cashing cards at Bank Y's terminals even if they do not have an account relationship at Bank Y.

# Registered Check Processing

Registered check processing enables an individual cardholder to register checks with the financial institution (for example, dividend checks or payroll checks) that he or she receives at predictable intervals. The institution establishes check-cashing limits for these registered checks on an individual cardholder basis, which can be higher than the usual withdrawal limits since the possibilities of fraud are lessened. These limits and usages can be configured in conjunction with the base aggregate and withdrawal limits used with the standard BASE24-atm product. The registered checks can then be cashed or deposited at a terminal at the cardholder's convenience.

This feature is applicable for the following transactions when the check is placed in the terminal without first being placed inside an envelope:

- Cash check
- Check deposit
- Check deposit with cash back
- Check split deposit

For example, a cardholder can receive a dividend check drawn on an out-of-state bank once a month. The cardholder can register this check with his or her own institution that has the Enhanced Check Processing Application by establishing a relationship between the out-of-state bank account and the cardholder's account at the institution.

To do this, the institution wanting to use the registered check processing feature sets up a CSF record that contains the routing and transit number and account number of the bank on which the check is drawn, along with the PAN and the member number of the cardholder who is registering the check. In addition, the CSF contains a check limit amount, a check retention flag, and an option to accept the registered check for all types of check transactions or for deposit only.

When the registered check is presented at the terminal and a transaction request is sent to the Authorization process, the process reads the routing and transit number and account number from the MICR information in the MICR Data token as well as the PAN and member number from the cardholder's card and locates the CSF record established for the check. The transaction is approved or declined based on the parameters in the CSF record plus the card limits in the CPF or CAF for the card used to initiate the transaction.

## Stop Payment Verification

Stop payment verification searches for stop payment items in the Stop Payment File (SPF) during transaction authorization. If a stop payment is located, the check transaction is declined and the check is retained. Stop payments can be defined for a single check number or for a range of check numbers.

The SPF is used to define a check or range of checks designated for stop payment. The SSB Enhanced Check Processing Application allows the BASE24-atm Authorization process to access the SPF to determine whether any stop payment records exist prior to authorizing check-related transactions. The Authorization process searches the SPF only when the card issuer and the check issuer are the same institution. The SPF contains one record for each institution- or cardholder-initiated stop payment item that indicates a check or range of checks that should not be honored at terminals. If a match is found in the SPF, the Authorization process declines the check transaction and instructs the acquirer to retain the check.

# Preapproved and Predeclined Check Processing

Preapproved and predeclined check processing allows both proprietary and debit cardholders to initiate check-related transactions at a terminal when the authorizing institution has defined the check for approval (that is, preapproved) for all cardholders. Preapproved checks are issued by the same institution or entity (for example, Social Security checks or payroll checks).

The institution can establish check-cashing limits and usages at the prefix and cardholder level for preapproved checks. These limits and usages are configured in addition to or instead of the base limits and usages configured with the standard BASE24-atm product.

The authorizing institution can also define predeclined checks. Predeclined checks are those denoted as unacceptable for processing for all cardholders (for example, checks issued by an institution whose assets have been frozen).

For preapproved or predeclined checks, the Check Status File (CSF) is used to define the check-issuing institution and the account at that institution as well as to define the check status, the check disposition if the transaction is declined, and the maximum acceptable check amount.

The institution can also use the CSF to preapprove or predecline a specific category of checks for all cardholders. This is accomplished by using an entry of asterisks (\*) in the REGISTERED PAN NUMBER field of the CSF record. A check must be preapproved or predeclined for all cardholders because the approval or denial for a category of checks is based on the specific routing and transit number and account number read from the MICR information on the check rather than on cardholder information.

For example, you can decide to preapprove all Social Security checks presented at terminals that are configured for the SSB Enhanced Check Processing Application. To do this, you can set up a CSF record for the routing and transit number and account number for Social Security checks. When a Social Security check is presented at the terminal and a transaction request is sent to the Authorization process, the process reads the routing and transit number and account number from the MICR information on the check, and locates the CSF record established for the check. The transaction is approved based on the parameters in the CSF record, assuming the card limits in the CPF or CAF for the card used to initiate the transaction would not be exceeded.

In contrast, an institution can decide to predecline a particular category of checks. For example, an institution can deny all ATM transactions involving checks issued from a specific corporation or institution whose assets have been frozen by the

Internal Revenue Service. To do this, you can set up a CSF record for the routing and transit number and account number used by the entity. When checks issued from this entity are presented at the terminal and a transaction request is sent to the Authorization process, the process reads the routing and transit number and account number from the MICR information on the check, locates the CSF record established for the check, and declines the check based on the parameters in the CSF record.

This feature is applicable for the following transactions when the check is placed in the terminal without first being placed inside an envelope:

- Cash check
- Check deposit
- Check deposit with cash back
- Check split deposit

## Enhanced Document Bin Sorting

Document bin sorting, described in section 2, allows the terminal to sort incoming checks into different pockets or bins depending on the amount of the check. The enhanced document bin sorting feature adds the ability to specify this amount based on the institution that issued the check by using the Bin Sort File (BSF).

### Check-Related Transaction Response

If the check transaction is approved, the Device Handler process must update the ATD bin count and amount totals and instruct the terminal to divert the check to the appropriate bin.

The ATD bin count for the appropriate bin is increased by one, and the ATD bin amount for the appropriate bin is increased by the following amounts depending on the transaction type:

| Transaction                  | Increase in ATD Bin Amount                                                |
|------------------------------|---------------------------------------------------------------------------|
| Check deposit                | The value in the RQST.AMT-1 field in the STM.                             |
| Check deposit with cash back | The value in the RQST.AMT-1 field in the STM.                             |
| Cash check                   | The value in the RQST.AMT-1 field in the STM.                             |
| Check split deposit          | The sum of the values in the RQST.AMT-1 and RQST.AMT-2 fields in the STM. |

If the check transaction is declined, the Device Handler process must instruct the terminal to retain or return the check. The BASE24-atm Authorization process provides the Device Handler process with this information in the Self-Service Banking Check token in the transaction response message. The Authorization process adds this information to the Self-Service Banking Check token from the CHECK RETAIN FLAG field in the CSF during the transaction authorization process. The CSF is described later in this section. If a check has a record in the SPF, the check is always retained.

## Device Handler Processing Overview

The following processing overview describes how the Diebold 10XX/478X Device Handler process uses the information in the ATD and the BSF when processing check-related transactions.

Prior to check authorization, the Diebold 10XX/478X Device Handler process must determine which bin is to receive an approved check and assign a bin sequence number for the check. The BSF and ATD records are used to determine this information.

The Device Handler process uses the terminal bin group located in the ATD and the routing and transit number from the MICR information on the check to locate the BSF record in extended memory. When a BSF record is located, the Device Handler process compares the amount of the check to the CHECK AMOUNT field specified in the BSF. If the check amount in the transaction request is greater than or equal to the BSF CHECK AMOUNT, the check is diverted to the bin number defined in the ABOVE AMOUNT field in the BSF when the check is approved. If the check amount is less than the BSF currency amount, the check is diverted to the bin number defined in the UNDER AMOUNT field in the BSF.

Once the bin number has been determined, the Device Handler process calculates a bin sequence number for the check transaction by increasing the bin sequence number by one from the previous check-related transaction for that bin and combining that number with the bin position number. Each bin is assigned its own series of sequence numbers.

If the Device Handler process cannot locate a BSF record, the process uses the default depository bin as defined in the ATD to calculate the bin sequence number and divert the check.

At this point in the transaction, the Device Handler process originates data for the Self-Service Banking Check token and the MICR Data token and places them in the BASE24-atm Standard Internal Message (STM). The Device Handler process adds the MICR information to the MICR Data token and the depository bin and bin sequence number to the Self-Service Banking Check token. See the ***BASE24 Tokens Manual*** for more information on BASE24 tokens. For complete information on the STM, see the ***BASE24-atm Transaction Processing Manual***.



# SSB Enhanced Check Processing Application Configuration

The SSB Enhanced Check Processing Application requires Diebold 10XX/478X terminals that are using 912 check and coin firmware, and that have the BASE24-atm Diebold 10XX/478X Device Handler process installed. The SSB Enhanced Check Processing Application cannot be implemented without the SSB Device Handler Extension and the SSB Enhanced ATM Application.

Before you can configure the SSB Enhanced Check Processing Application, the application must be properly installed and the BASE24-atm network must be up and available for file maintenance.

The ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process must be used to send the data for the SSB Enhanced Check Processing Application to a host or co-processor. The external messages used by the ANSI-based BASE24 Host Interface process and the ANSI-based BIC Interface process do not carry the data needed.

The table on the following pages lists the features of the SSB Enhanced Check Processing Application, and the BASE24 and Diebold-specific screens and files needed to configure each feature. This table gives an overview of the modifications needed, and allows you to select those features from this module that you want to offer to your cardholders. The following pages describe these screens and files. Note that security access must be given to the operator modifying the BASE24 screens. Refer to the ***BASE24 User Security Manual*** for more information about screen security access.

If a screen or file is described in another manual in the BASE24 manual set, only those fields that have specific SSB requirements are listed. If a screen is not described elsewhere, this section includes an illustration of the screen and descriptions of all fields on the screen.

| Screen or File                 | Enhanced Check Authorization | Enhanced MICR Data Processing and Manipulation | Check-Cashing Card | Registered Check Processing | Stop Payment Verification | Preapproved and Predeclined Check Processing | Enhanced Document Bin Sorting |
|--------------------------------|------------------------------|------------------------------------------------|--------------------|-----------------------------|---------------------------|----------------------------------------------|-------------------------------|
| ARF Screen 1                   | ✓                            |                                                |                    |                             |                           |                                              |                               |
| ATD Screen 1                   | ✓                            | ✓                                              | ✓                  | ✓                           | ✓                         | ✓                                            | ✓                             |
| ATD Diebold 10XX/478X Screen 7 |                              |                                                | ✓                  |                             |                           |                                              |                               |
| ATD Diebold Screen 12          | ✓                            | ✓                                              | ✓                  | ✓                           | ✓                         | ✓                                            | ✓                             |
| BSF Screen 1                   |                              |                                                |                    |                             |                           |                                              | ✓                             |
| CPF Screen 1                   | ✓                            |                                                | ✓                  | ✓                           |                           |                                              |                               |
| CPF Screen 2                   | ✓                            |                                                | ✓                  | ✓                           |                           |                                              |                               |
| CPF Screen 4                   | ✓                            |                                                | ✓                  | ✓                           |                           |                                              |                               |
| CPF Screen 14                  | ✓                            |                                                | ✓                  | ✓                           |                           |                                              |                               |
| CAF Screen 1                   | ✓                            |                                                | ✓                  | ✓                           |                           |                                              |                               |
| CAF Screen 2                   |                              |                                                | ✓                  |                             |                           |                                              |                               |
| CAF Screen 3                   |                              |                                                | ✓                  |                             |                           |                                              |                               |
| CAF Screen 4                   |                              |                                                | ✓                  |                             |                           |                                              |                               |
| CAF Screen 5                   |                              |                                                | ✓                  |                             |                           |                                              |                               |
| CAF Screen 8                   |                              |                                                | ✓                  |                             |                           |                                              |                               |
| CAF Screen 15                  | ✓                            |                                                | ✓                  |                             |                           |                                              |                               |
| CAF Screen 16                  | ✓                            |                                                | ✓                  |                             |                           |                                              |                               |
| CSF Screen 1                   |                              |                                                |                    | ✓                           |                           | ✓                                            |                               |
| CCF Screen 1                   |                              |                                                | ✓                  |                             |                           |                                              |                               |
| CNFGIX                         |                              |                                                | ✓                  |                             |                           |                                              | ✓                             |

| Screen or File              | Enhanced Check Authorization | Enhanced MICR Data Processing and Manipulation | Check-Cashing Card | Registered Check Processing | Stop Payment Verification | Preapproved and Predeclined Check Processing | Enhanced Document Bin Sorting |
|-----------------------------|------------------------------|------------------------------------------------|--------------------|-----------------------------|---------------------------|----------------------------------------------|-------------------------------|
| IDF Screen 1                |                              |                                                |                    |                             | ✓                         |                                              |                               |
| IDF Screens 5 and 6         | ✓                            | ✓                                              | ✓                  | ✓                           | ✓                         | ✓                                            |                               |
| IDF Screen 37               | ✓                            |                                                | ✓                  | ✓                           | ✓                         |                                              |                               |
| LCONF                       | ✓                            | ✓                                              | ✓                  |                             | ✓                         | ✓                                            | ✓                             |
| NEG Screen 1                |                              |                                                | ✓                  |                             |                           |                                              |                               |
| NEG Screen 4                |                              |                                                | ✓                  |                             |                           |                                              |                               |
| RCPT                        |                              |                                                |                    |                             |                           |                                              | ✓                             |
| SPF Screen 1                |                              |                                                |                    |                             | ✓                         |                                              |                               |
| Terminal Receipt File (TRF) | ✓                            |                                                |                    |                             |                           |                                              |                               |
| TKN                         | ✓                            | ✓                                              | ✓                  | ✓                           | ✓                         | ✓                                            | ✓                             |
| UAF Screen 1                | ✓                            |                                                |                    |                             |                           |                                              |                               |
| UAF Screen 4                | ✓                            |                                                |                    |                             |                           |                                              |                               |
| UAF Screen 10               | ✓                            |                                                |                    |                             |                           |                                              |                               |

## Modifying the Account Routing File

The Account Routing File (ARF) provides routing information to locate accounts in the Positive Balance File (PBF) and Stop Payment File (SPF). The Authorization process searches the ARF when there is a check-related transaction involved and the ARF has been configured. The ARF can be used by the BASE24-atm Authorization process to modify the routing and transit number or account number from the check so that it matches the account number carried in the BASE24 database. For example, the ARF is used to convert a check's magnetic ink character recognition (MICR) data in those cases where two financial institutions have merged and, as a result, both institutions have cardholders with the same account number. Account number format changes allow the Authorization process to manipulate the check MICR information to subsequently access the Stop Payment File (SPF), Corporate Check File (CCF), or Check Status File (CSF).

The ARF is also required if any FIIDs use the enhanced MICR data processing and manipulation feature of the SSB Enhanced Check Processing Application. No BASE24 database setting identifies whether an institution is using this feature.

ARF screen 2 contains detail information for one ARF record and ARF screen 3 contains summary information for up to ten ARF records. Screens 2 and 3 have three formats based on the ARF record type. Enter 03 (institution ID routing) in the RECORD TYPE field on screen 1 to access the information used by the SSB Enhanced Check Processing Application. The institution ID routing screens contain information to identify all bank routing codes appearing on checks that can be cashed at ATMs. For each bank routing code that can appear on checks being cashed at ATMs, the institution ID routing screens contain the transit and routing number, FIID, and the account number modifications necessary to locate the correct account in the BASE24 database. The key to records displayed on these screens is a combination of the values in the RECORD TYPE, ACCOUNT TYPE, ACCOUNT LENGTH, and INST ID NUM (CHECK) fields.

When a partial key (that is, one or more of the optional key fields is omitted) is entered from ARF screen 2 and the **F2** key is pressed, all ARF records matching the partial key are displayed on ARF screen 3. From ARF screen 3, you can move the cursor to the desired record and press the **F7** key. This procedure retrieves ARF screen 2 and displays the desired record in detail.

The fields described below have specific SSB requirements. For a complete description of the ARF and its screen layouts, see the ***BASE24 Base Files Maintenance Manual***.

## ARF Screen 1

ARF screen 1 allows you to identify which of the three available ARF record formats is to be accessed. ARF screen 2 is automatically displayed when the record format is selected and the **F1** key is pressed.

**RECORD TYPE** — A code that indicates the type of routing information defined in the record. The only valid value for the SSB Enhanced Check Processing Application is 03.

SSB Feature:       Enhanced MICR data processing and manipulation

## ARF Screen 2—Institution ID Routing Detail

ARF screen 2 contains detail information for one ARF record. ARF screen 2 has three possible formats, depending on the type of record selected on ARF screen 1. When the value in the RECORD TYPE field is 03, ARF screen 2 contains routing information for an institution ID number.

**RECORD TYPE** — A code that indicates the type of routing information defined in the record. Code 03 identifies the institution ID routing information used by the SSB Enhanced Check Processing Application.

Field Length:       System protected

**ACCOUNT TYPE** — The type of account for which the routing information applies. The account type is not carried in the MICR data that is captured when a check is cashed at an ATM with the SSB Enhanced Check Processing Application. Therefore, the account type for all of these transactions is assumed to be 01 (Checking/DDA).

SSB Feature:       Enhanced MICR data processing and manipulation

**ACCOUNT LENGTH** — The length of the account number for which the routing information applies.

SSB Feature:       Enhanced MICR data processing and manipulation

**INST ID NUM (CHECK)** — The routing and transit number or issuer identification number contained in the MICR information encoded on the check to be cashed at an ATM.

This field contains the institution identification information on the check and the INST ID NUM (BASE24) field contains the institution identification used in the BASE24 database. The SSB Enhanced Check Processing Application uses the values in these fields to match a check with the proper institution record in the BASE24 database when the two values do not agree.

SSB Feature:       Enhanced MICR data processing and manipulation

**INST ID NUM (BASE24)** — The routing and transit number or issuer identification number of the institution that currently owns the account.

This field contains the institution identification information used in the BASE24 database and the INST ID NUM (CHECK) field contains the institution identification appearing on the check. The SSB Enhanced Check Processing Application uses the values in these fields to match a check with the proper institution record in the BASE24 database when the two identification values do not agree.

SSB Feature:       Enhanced MICR data processing and manipulation

**ACCOUNT NUMBER INSERT POSN** — The position within the original account number shown on checks where characters can be inserted to create the account number carried in the BASE24 database.

SSB Feature:       Enhanced MICR data processing and manipulation

**ACCOUNT NUMBER INSERT VALUE** — The numeric characters to be inserted in the original account number to create the account number carried in the BASE24 database.

SSB Feature:       Enhanced MICR data processing and manipulation

## Modifying the BASE24-atm Terminal Data Files

The BASE24-atm Terminal Data files (ATD) must be configured for the terminals that support the functionality of the SSB Enhanced Check Processing Application. Changes to the ATD are necessary to accomplish the following:

- Specify the terminal bin group for the terminal. The terminal bin group allows terminals that use the same check sorting method to be grouped together. The terminal bin group is also defined in the Bin Sort File (BSF).
- Specify the default depository bin for the terminal. Checks are diverted to the default depository bin if a record cannot be found in the BSF.

The ATD also contains totals fields for the number and amount of checks in each depository bin. The fields described below have specific SSB requirements. For more information on the ATD, see the *BASE24-atm Files Maintenance Manual*.

### ATD Screen 1

ATD screen 1 enables you to identify whether a terminal supports multiple account selection. This screen is required for split deposits between like accounts.

**DEVICE TYPE** — Indicates the model and manufacturer of the terminal. You must enter 30 for Diebold 10XX/478X terminals.

SSB Feature:        All features

### ATD Diebold 10XX/478X Screen 7

ATD Diebold 10XX/478X screen 7 is a device-specific screen. Screen display for each device is dependent on the setting in the DEVICE TYPE field on ATD screen 1, which must be 30 for Diebold 10XX/478X terminals. ATD Diebold 10XX/478X screen 7 indicates the terminal load group to which this terminal belongs.

**TERMINAL GROUP** — Indicates the terminal load group to which this terminal belongs. This code indicates the SSB states and screens that are to be loaded to this terminal when a download command is sent from the Device Control Terminal (DCT). Terminal group 58 (check-cashing card group) is specific to the SSB Enhanced Check Processing Application.

SSB Feature:        Check-cashing cards

## ATD Diebold Screen 12

ATD Diebold screen 12 is a device-specific screen. The screen display for each device is dependent on the setting in the DEVICE TYPE field on ATD screen 1, which must be 30 for Diebold 10XX/478X terminals. ATD Diebold screen 12 is shown below, followed by field descriptions.

```
BASE24-ATM  TERMINAL DATA  LLLL  YY/MM/DD  HH:MM  12 OF 21
TERM ID:      FIID:      REGION:      BRANCH:      LN: LLLL

                DIEBOLD SELF SERVICE BANKING CHECK

        CHECK SUPPORT:  N
        TERMINAL BIN GROUP:  0
        DEFAULT DEPOSITORY BIN:  0

        DEPOSITORY BIN #      COUNT      AMOUNT
            0                  0          .00
            1                  0          .00
            2                  0          .00
            3                  0          .00

***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                F12-HELP
```

**TERM ID** — An identifier (terminal ID) for the terminal associated with this record. This field is entered on ATD screen 1.

**FIID** — The FIID of the financial institution that owns the terminal. This field is entered on ATD screen 1.

**REGION** — The region ID for the region in which this terminal is located. This field is entered on ATD screen 1.

**BRANCH** — The branch ID for the branch in which this terminal is located. This field is entered on ATD screen 1.



**LN** — The name of the logical network to which the terminal owner belongs. This field is entered on ATD screen 1. To change the logical network, enter a new value in the NEW LOGICAL NETWORK ID field at the bottom of the screen and press the **F13** key.

## **DIEBOLD SELF SERVICE BANKING CHECK**

The following six fields are used to define the SSB Enhanced Check Processing Application.

**CHECK SUPPORT** — A code specifying whether this terminal supports SSB Enhanced Check Processing Application functionality. Valid values are as follows:

- Y = Yes, this terminal supports the SSB Enhanced Check Processing Application.
- N = No, this terminal does not support the SSB Enhanced Check Processing Application.

|                 |                                   |
|-----------------|-----------------------------------|
| Field Length:   | 1 alphabetic character            |
| Required Field: | Yes                               |
| Default Value:  | N                                 |
| Data Name:      | ATDD1.ATDD1-CORE.SSBC.CHK-SUPPORT |
| SSB Feature:    | All features                      |

**TERMINAL BIN GROUP** — The group of terminals with like depository bin sorting methods to which this terminal belongs.

This value provides the link between the ATD and the BSF. The BSF defines the check sorting method to be used for this terminal for the institution that issued the check. Valid values are 0 through 9999.

|                 |                               |
|-----------------|-------------------------------|
| Field Length:   | 1–4 numeric characters        |
| Required Field: | Yes                           |
| Default Value:  | 0                             |
| Data Name:      | ATDS1.ATDS1-CORE.SSBC.BIN-GRP |
| SSB Feature:    | Enhanced document bin sorting |

**DEFAULT DEPOSITORY BIN** — The default bin used to retain a check if the Device Handler process could not locate a BSF record for a particular check-related transaction. Valid values are 0 through 3.

Field Length: 1 numeric character  
Required Field: Yes  
Default Value: 0  
Data Name: ATDS1.ATDS1-CORE.SSBC.DFLT-BIN  
SSB Feature: Enhanced document bin sorting

**DEPOSITORY BIN NUMBER** — The number of the bin to which values in the COUNT and AMOUNT fields apply.

Field Length: System protected  
Data Name: Not applicable  
SSB Feature: Enhanced document bin sorting

**COUNT** — The number of checks currently retained in the depository bin identified in the DEPOSITORY BIN NUMBER field.

Field Length: System protected  
Data Name: ATDD1.ATDD1-CORE.SSBC.DEP-BIN $x$ .SSBC-NUM-CHK where  $x$  is the bin number  
SSB Feature: Enhanced document bin sorting

**AMOUNT** — The total amount of checks currently retained in the depository bin identified in the DEPOSITORY BIN NUMBER field.

Field Length: System protected  
Data Name: ATDD1.ATDD1-CORE.SSBC.DEP-BIN $x$ .SSBC-AMT-CHK where  $x$  is the bin number  
SSB Feature: Enhanced document bin sorting

## Modifying the Bin Sort File

The Bin Sort File (BSF) is used to define the terminal check sorting method based on the check issuer and the amount of the check. Configuring the BSF is necessary to accomplish the following:

- Specify the terminal bin group for the terminal. The terminal bin group allows terminals that use the same check sorting method to be grouped together. The terminal bin group is also defined in the BASE24-atm Terminal Data files (ATD).
- Define the routing and transit number or the identification number of the check-issuing institution. The check sorting method is defined for a specific check-issuing institution. For example, checks issued from Bank A can be diverted to bins 1 and 2 while checks issued from Bank B can be diverted to bins 1 and 3. The Diebold 10XX/478X Device Handler process uses the MICR information from the check to locate the routing and transit number in the BSF.
- Specify the transaction amount used to determine the specific depository bin for each check.

You can access the BSF from the ATM Product Menu by placing the cursor beside BSF and pressing the **F1** key. For detailed instructions on accessing the BSF, refer to the ***BASE24 User Security Manual***. BSF screen 1 is shown below, followed by field descriptions.

```
BASE24-SSBC  BIN SORT FILE          LLLL      YY/MM/DD  HH:MM  01 OF 01
TERM BIN GROUP: 0000
INSTITUTION ID NUMBER: 000000000000

      BIN INFORMATION

CHECK AMOUNT:                        0

      CHECK DEPOSITORY BIN

UNDER AMOUNT:      0
ABOVE AMOUNT:      0

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                  F12-HELP
```

**TERM BIN GROUP** — An identifier used to link the BSF with the ATD or group of ATD records. The terminal bin group is a portion of the key and is derived from the ATD bin group. This field should have a corresponding value in the **TERMINAL BIN GROUP** field on ATD Diebold screen 12. ATD Diebold screen 12 is described earlier in this section.

Field Length: 4 numeric characters  
Required Field: Yes  
Default Value: 0000  
Data Name: BSF.BIN-GRP  
SSB Feature: Enhanced document bin sorting

**INSTITUTION ID NUMBER** — The routing and transit number of the check-issuing institution or the identification number of the check issuer as imprinted on the check. The check sorting method defined in this BSF record is used for the check-issuing institution defined in this field. The Device Handler process compares the routing and transit number from the MICR information on the check

to this number to locate the appropriate BSF record. This comparison is made before any manipulation of the MICR information takes place. The identification number is a portion of the key to the BSF.

Field Length: 11 numeric characters  
Required Field: Yes  
Default Value: 00000000000  
Data Name: BSF.INST-ID-NUM  
SSB Feature: Enhanced document bin sorting

## **BIN INFORMATION**

The following field defines the threshold value that the UNDER AMOUNT and ABOVE AMOUNT fields use to determine the bin in which to place checks, for checks issued by the institution specified in this BSF record.

**CHECK AMOUNT** — The amount, expressed as a whole currency value, that is compared to the check transaction amount, as entered by the cardholder, to determine to which depository bin the check is directed.

Field Length: 1–15 numeric characters  
Required Field: Yes  
Default Value: 0  
Data Name: BSF.AMT  
SSB Feature: Enhanced document bin sorting

## **CHECK DEPOSITORY BIN**

The following fields specify the depository bin in which a check is placed based on the amount of the transaction.

**UNDER AMOUNT** — The depository bin for the check when the transaction is approved or the check is retained, and the transaction amount is less than the value in the CHECK AMOUNT field. Valid values are 0 through 3.

Field Length: 1 numeric character  
Required Field: Yes  
Default Value: 0  
Data Name: BSF.UNDR-BIN-NUM  
SSB Feature: Enhanced document bin sorting

**ABOVE AMOUNT** — The depository bin for the check when the transaction is approved or the check is retained, and the transaction amount is greater than or equal to the value in the CHECK AMOUNT field. Valid values are 0 through 3.

Field Length: 1 numeric character  
Required Field: Yes  
Default Value: 0  
Data Name: BSF.OVR-BIN-NUM  
SSB Feature: Enhanced document bin sorting

## Modifying the Card Prefix File

The Card Prefix File (CPF) defines each card prefix that can be processed within a BASE24 logical network. CPF records define the characteristics of each prefix and also contain prefix-specific parameters that allow institutions to define portions of their authorization processing that can be controlled at the prefix level.

The CPF supports an additional CPF segment required for the SSB Enhanced Check Processing Application. The CPF is used to establish check-related cash disbursement transaction limits for all cards. Check-cashing cards have their own unique prefix; therefore, a CPF record must be added to specify the card prefix, security information, and activity limits for the check-cashing card.

If you have implemented the SSB Enhanced Check Processing Application you can establish check-related cash disbursement transaction limits at the prefix level using CPF screen 14. These limits are in addition to the standard BASE24-atm withdrawal limits and are used in place of the BASE24-atm withdrawal limits for cash check and check deposit with cash back transactions.

Existing BASE24 cards can be used for cashing registered checks and preapproved checks. However, you should review the CPF or Cardholder Authorization File (CAF) records that control the activity limits for the cards used to cash registered or preapproved checks. A transaction involving a check that passes the tests established in the CSF will still be declined if it exceeds the activity limits in the CPF or CAF record for the cardholder's card.

The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for screen samples and field descriptions for these screens.

### CPF Screen 1

You must configure CPF screen 1 for each card prefix being used for check-cashing cards. All fields on CPF screen 1 should be completed according to your institution's standard procedure for establishing a new card prefix.

**CARD TYPE** — A code identifying the type of card associated with the prefix. The code for check-cashing cards is SP (special purpose).

SSB Feature:            Check-cashing cards

## ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm and BASE24-pos products combined for this card prefix during an institutionally defined single usage accumulation period. The transactions controlled by these limits are cash disbursements against credit and noncredit accounts and purchases made against noncredit accounts. Credit card purchases are not governed by these limits.

**TOTAL CASH WDL** — The maximum amount of purchases and cash withdrawals allowed against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE CASH WDL** — The maximum amount of purchases and cash withdrawals allowed offline against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**TOTAL CASH ADV** — The maximum amount of cash advances allowed against credit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE CASH ADV** — The maximum amount of cash advances allowed offline against credit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**TOTAL AGGR** — The maximum aggregate amount of cash disbursements allowed against credit and noncredit accounts and purchases allowed against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards



**OFFLINE AGGR** — The maximum aggregate amount of cash disbursements allowed offline against credit and noncredit accounts and purchases allowed offline against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature: Check-cashing cards

## CPF Screen 2

You must configure CPF screen 2 for each card prefix being used for check-cashing cards. All fields on CPF screen 2 should be completed according to your institution's standard procedure for establishing a new card prefix.

## CPF Screen 4

CPF screen 4 contains BASE24-atm authorization information, including activity limits for the BASE24-atm product during one usage accumulation period, and deposit credit information. You must configure CPF screen 4 for each card prefix being used for check-cashing cards. All fields on CPF screen 4 should be completed according to your institution's standard procedure for establishing a new card prefix.

## ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm product for this card prefix during an institutionally defined single usage accumulation period. The transactions controlled by these limits are cash disbursements against credit and noncredit accounts.

**TOTAL CASH WDL** — The maximum amount of cash withdrawals allowed against noncredit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature: Check-cashing cards

**OFFLINE CASH WDL** — The maximum amount of cash withdrawals allowed offline against noncredit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature: Check-cashing cards

**TOTAL CASH ADV** — The maximum amount of cash advances allowed against credit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE CASH ADV** — The maximum amount of cash advances allowed offline against credit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CPF screen 1. The value in this field is intended for informational purposes only.

Field Length:       System protected

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CPF screen 1. The value in this field is intended for informational purposes only.

Field Length:       System protected

## CPF Screen 14

CPF screen 14 contains fields setting the check-related transaction limits. This screen is specific to the SSB Enhanced Check Processing Application. CPF screen 14 is shown below, followed by its field descriptions.

```

BASE24-SSBC      CARD PREFIX      LLLL      YY/MM/DD  HH:MM  14 OF 22
PREFIX:          PAN LENGTH:      FIID:

          ATM SELF SERVICE BANKING CHECK
MINIMUM DISPENSE AMOUNT:

          CHECK/CSF CHECK USAGE CONTROL
ACTIVITY LIMITS:      TOTAL      OFFLINE
CHECK:
CSF CHECK:
AGGR:

PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES:
PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES:
CSF CHECKS ALLOWED PER PERIOD:

          CHECK      CSF CHECK
DEPOSIT CREDIT PERCENT:
MAXIMUM CREDIT PER CHECK DEPOSIT:
***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F12-HELP

```

## ATM SELF SERVICE BANKING CHECK

The following fields are specific to the SSB Enhanced Check Processing Application.

**MINIMUM DISPENSE AMOUNT** — The minimum cash dispense amount allowed, expressed as a whole currency value. This value is applicable only for withdrawal, cash check, and check deposit with cash back transactions.

|                 |                              |
|-----------------|------------------------------|
| Field Length:   | 1–15 alphanumeric characters |
| Required Field: | No                           |
| Default Value:  | No default value             |
| Data Name:      | CPF.SSBC.MIN-AMT             |
| SSB Feature:    | Enhanced check authorization |

## CHECK/CSF CHECK USAGE CONTROL

The values in the following fields are activity limits defined for check-related cash disbursement transactions. The activity limits are discussed in the topic “Enhanced Check Authorization” provided previously in this section.

### ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm product during an institutionally defined single usage accumulation period for check-related cash disbursement transactions.

**TOTAL CHECK** — The total cash disbursement allowed for check-related cash disbursement transactions when a matching Check Status File (CSF) record could not be located.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains an N, the value in the TOTAL CHECK field should be greater than zero because the values in the TOTAL AGGR and TOTAL CASH WDL fields on CPF screen 1 are not used when testing check-related cash disbursement transactions.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y, the value in the TOTAL CHECK field must be less than or equal to the value in the TOTAL AGGR field on CPF screen 1.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y and the TOTAL CHECK field contains a zero, the values in the TOTAL AGGR and TOTAL CASH WDL fields on CPF screen 1 are used when testing check-related cash disbursement transactions.

|                 |                                                                     |
|-----------------|---------------------------------------------------------------------|
| Field Length:   | 1–15 alphanumeric characters                                        |
| Required Field: | Yes                                                                 |
| Default Value:  | 0                                                                   |
| Data Name:      | CPF.SSBC.GRP-LMT.TTL-CHK-LMT                                        |
| SSB Feature:    | Check-cashing cards (or checks without matching records in the CSF) |

**OFFLINE CHECK** — The total cash disbursement allowed offline for check-related cash disbursement transactions when a matching CSF record could not be located. The value in this field is used only with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains an N, the value in the OFFLINE CHECK field should be greater than zero because the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CPF screen 1 are not used when testing check-related cash disbursement transactions.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y, the value in the OFFLINE CHECK field must be less than or equal to the value in the OFFLINE AGGR field on CPF screen 1.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y and the OFFLINE CHECK field contains a zero, the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CPF screen 1 are used when testing check-related cash disbursement transactions.

|                 |                                                                     |
|-----------------|---------------------------------------------------------------------|
| Field Length:   | 1–15 alphanumeric characters                                        |
| Required Field: | Yes                                                                 |
| Default Value:  | 0                                                                   |
| Data Name:      | CPF.SSBC.GRP-LMT.OFFL-CHK-LMT                                       |
| SSB Feature:    | Check-cashing cards (or checks without matching records in the CSF) |

**TOTAL CSF CHECK** — The total cash disbursement allowed for check-related cash disbursement transactions that have matching CSF records.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains an N, the value in the TOTALCSF CHECK field should be greater than zero because the values in the TOTAL AGGR and TOTAL CASH WDL fields on CPF screen 1 are not used when testing CSF check-related cash disbursement transactions.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y, the value in the TOTALCSF CHECK field must be less than or equal to the value in the TOTAL AGGR field on CPF screen 1.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y and the TOTALCSF CHECK field contains a zero, the values in the TOTAL AGGR and TOTAL CASH WDL fields on CPF screen 1 are used when testing CSF check-related cash disbursement transactions.

Field Length: 1–15 alphanumeric characters  
Required Field: Yes  
Default Value: 0  
Data Name: CPF.SSBC.GRP-LMT.TTL-CSF-CHK-LMT  
SSB Feature: Enhanced check authorization

**OFFLINE CSF CHECK** — The total cash disbursement allowed offline for check-related cash disbursement transactions that have matching CSF records. The value in this field is used only with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains an N, the value in the OFFLINE CSF CHECK field should be greater than zero because the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CPF screen 1 are not used when testing CSF check-related cash disbursement transactions.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y, the value in the OFFLINE CSF CHECK field must be less than or equal to the value in the OFFLINE AGGR field on CPF screen 1.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y and the OFFLINE CSF CHECK field contains a zero, the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CPF screen 1 are used when testing CSF check-related cash disbursement transactions.

Field Length: 1–15 alphanumeric characters  
Required Field: Yes  
Default Value: 0  
Data Name: CPF.SSBC.GRP-LMT.OFFL-CSF-CHK-LMT  
SSB Feature: Enhanced check authorization

**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CPF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected  
Data Name: CPF.BASE.GRP-LMT.AGGR-LMT

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CPF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected  
Data Name: CPF.BASE.GRP-LMT-OFFL-AGGR-LMT

### **PROCESS CHECK TRANSACTIONS USING BASE LIMITS/**

**USAGES** — A code that indicates whether the amount of a check-related cash disbursement transaction that does not have a matching CSF record should be included in the usage amounts that are tested against the limits set in the TOTAL AGGR, OFFLINE AGGR, TOTAL CASH WDL, and OFFLINE CASH WDL fields on CPF screen 1. Valid values are as follows:

Y = Yes, test check-related cash disbursement transactions against the limits set in the specified fields on CPF screen 1. If the transaction is approved, add the transaction amount to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on UAF screen 1.

N = No, do not test check-related cash disbursement transactions against the limits set in the specified fields on CPF screen 1. Do not add approved transaction amounts to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on UAF screen 1.

Field Length: 1 alphabetic character  
Required Field: Yes  
Default Value: N  
Data Name: CPF.SSBC.CHK-BASE-FLG  
SSB Feature: Check-cashing cards

**PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/**

**USAGES** — A code that indicates whether the amount of a check-related cash disbursement transaction with a matching CSF record should be included in the usage amounts that are tested against the limits set in the TOTAL AGGR, OFFLINE AGGR, TOTAL CASH WDL, and OFFLINE CASH WDL fields on CPF screen 1. Valid values are as follows:

- Y = Yes, test CSF check-related cash disbursement transactions against the limits set in the specified fields on CPF screen 1. If the transaction is approved, add the transaction amount to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on UAF screen 1.
- N = No, do not test CSF check-related cash disbursement transactions against the limits set in the specified fields on CPF screen 1. Do not add approved transaction amounts to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on UAF screen 1.

Field Length: 1 alphabetic character  
Required Field: Yes  
Default Value: N  
Data Name: CPF.SSBC.CSF-CHK-BASE-FLG  
SSB Feature: Enhanced check authorization

**CSF CHECKS ALLOWED PER PERIOD** — The maximum number of times a card with this prefix can be used for check-related cash disbursement transactions that have a matching CSF record. For a bulk check transaction (if your system has a bulk check CSM), each check will count as a usage. Valid values are 0 through 9999.

Field Length: 1–4 numeric characters  
Required Field: Yes  
Default Value: 1  
Data Name: CPF.SSBC.CSF-CHK-USE-LMT  
SSB Feature: Enhanced check authorization

**DEPOSIT CREDIT PERCENT - CHECK** — The percentage of each non-registered check deposit added to the cardholder's available funds, subject to the settings in the MAXIMUM CREDIT PER CHECK DEPOSIT - CHECK field on this screen, and the MAXIMUM NUMBER OF DEPOSIT CREDITS and



**MAXIMUM DEPOSIT CREDIT AMOUNT** fields on CPF screen 4. The value in this field is used only with the Positive Balance Authorization method. Valid values are 0 through 100.

Field Length: 1–3 numeric characters  
Required Field: No  
Default Value: 0  
Data Name: CPF.SSBCCPF.CHK-DEP-CR-PERCENT  
SSB Feature: Enhanced check authorization

**DEPOSIT CREDIT PERCENT - CSF CHECK** — The percentage of each registered check deposit added to the cardholder’s available funds, subject to the settings in the **MAXIMUM CREDIT PER CHECK DEPOSIT - CSF CHECK** field on this screen, and the **MAXIMUM NUMBER OF DEPOSIT CREDITS** and **MAXIMUM DEPOSIT CREDIT AMOUNT** fields on CPF screen 4. The value in this field is used only with the Positive Balance Authorization method. Valid values are 0 through 100.

Field Length: 1–3 numeric characters  
Required Field: No  
Default Value: 0  
Data Name: CPF.SSBCCPF.CSF-CHK-DEP-CR-PERCENT  
SSB Feature: Enhanced check authorization

**MAXIMUM CREDIT PER CHECK DEPOSIT - CHECK** — The maximum amount (in whole currency units) each non-registered check deposit transaction can increase the cardholder’s available funds balance. Valid values are 0 through 999999999.

Field Length: 1–9 numeric characters  
Required Field: Yes. The value in this field must be greater than zero if the **DEPOSIT CREDIT PERCENT - CHECK** field contains a nonzero value.  
Default Value: 0  
Data Name: CPF.SSBCCPF.CR-PER-CHK-DEP-LMT  
SSB Feature: Enhanced check authorization

**MAXIMUM CREDIT PER CHECK DEPOSIT - CSF CHECK** — The maximum amount (in whole currency units) each registered check deposit transaction can increase the cardholder's available funds balance. Valid values are 0 through 999999999.

Field Length: 1–9 numeric characters  
 Required Field: Yes. The value in this field must be greater than zero if the DEPOSIT CREDIT PERCENT - CSF CHECK field contains a nonzero value.  
 Default Value: 0  
 Data Name: CPF.SSBCCPF.CR-PER-CSF-CHK-LMT  
 SSB Feature: Enhanced check authorization

## Modifying the Cardholder Authorization File

The Cardholder Authorization File (CAF) contains authorization parameters and usage accumulation information for the card issuer's cardholders and are used in authorizing transaction requests. The CAF supports an additional segment required for the SSB Enhanced Check Processing Application. The CAF is used to define the card type for the special-use check-cashing card and to define the corporation number that links a check-issuing corporation to the ATM card used to cash the corporation's checks. This file also includes usage limits and accumulation totals for check-related cash disbursement transactions. The CAF is used with the Positive Authorization method and the Positive Balance Authorization method.

If you have implemented the SSB Enhanced Check Processing Application you can establish check-related cash disbursement transaction limits at the cardholder level using CAF screens 15 and 16. These limits are in addition to the standard BASE24-atm withdrawal limits and are used in place of the BASE24-atm withdrawal limits for cash check and check deposit with cash back transactions. CAF screen 16 contains limits and totals for transactions involving checks with matching Check Status File (CSF) records. CAF screen 15 contains limits and totals for all other check-related cash disbursement transactions. CAF screen 15 also contains the corporation number used with check-cashing cards (card type SP).

Existing BASE24 cards can be used for cashing registered checks and preapproved checks. However, depending on the authorization method used by the institution, the CAF activity limits on screens 1 and 16 may need to be adjusted to permit checks for larger amounts to be cashed.

You should review the CPF or CAF records that control the activity limits for the cards used to cash registered or preapproved checks. A transaction involving a check that passes the tests established in the CSF will still be declined if it exceeds the activity limits in the CPF or CAF record for the cardholder's card.

If you are setting up a record for a check-cashing card, the value in the CARD TYPE field on CAF screen 1 must be set to SP (special purpose), and the card's specialized use should be considered when establishing the values for the ACTIVITY LIMITS fields on CAF screens 1 and 16.

The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for screen samples and field descriptions for the CAF. Screen samples of CAF screens 15 and 16 are shown in this section, because they are SSB-specific.

## CAF Screen 1

CAF screen 1 contains general information about the card. If you are establishing a new check-cashing card, configure CAF screen 1 according to your institution's standard procedure for establishing a new card, including the option of using CPF limits instead of CAF limits by setting the value in the TOTAL AGGR field on CAF screen 1 to 0. Otherwise, enter the primary account number (PAN), member number, and FIID to read an existing record.

**CARD TYPE** — A code identifying the type of card associated with the PAN. Enter the value SP in the CARD TYPE field to indicate that the card is a check-cashing card.

SSB Feature:        Check-cashing cards

## ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24 product for this cardholder during an institutionally defined single usage accumulation period. When the value in the TOTAL AGGR field is set to something other than zero, these limits override the corresponding group of limits on CPF screen 1. The transactions controlled by these limits are cash disbursements made against credit and noncredit accounts and purchases made against noncredit accounts. Credit purchases are not governed by these limits.

**TOTAL CASH WDL** — The maximum amount of purchases and cash withdrawals allowed against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE CASH WDL** — The maximum amount of purchases and cash withdrawals allowed offline against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**TOTAL CASH ADV** — The total amount of cash advanced against credit accounts. The value in this field is for informational purposes only.

Field Length:       System protected

**OFFLINE CASH ADV** — The total amount of cash advanced offline against credit accounts. The value in this field is for informational purposes only.

Field Length:        System protected

**TOTAL AGGR** — The maximum aggregate amount of cash disbursements allowed against credit and noncredit accounts, plus purchases allowed against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE AGGR** — The maximum aggregate amount of cash disbursements allowed offline against credit and noncredit accounts and purchases allowed offline against noncredit accounts. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

## **CAF Screens 2, 3, 4, and 5**

If you are establishing a new check-cashing card, configure CAF screens 2, 3, 4, and 5 according to your institution's standard procedure for establishing a new card.

**Note:** The requirement for at least one account number on CAF screen 3 is not applicable when the CARD TYPE field on CAF screen 1 contains the value SP for check-cashing cards.

## **CAF Screen 8**

CAF screen 8 enables you to establish BASE24-atm cardholder limits for a single usage accumulation period.

## **ACTIVITY LIMITS**

The values in the following fields limit the transaction activity allowed by the BASE24-atm product for this cardholder during an institutionally defined single usage accumulation period. When the value in the TOTAL AGGR field on CAF

screen 1 is set to something other than zero, these limits override the corresponding group of limits on CPF screen 4. The transactions controlled by these limits are cash disbursements against credit and noncredit accounts.

**TOTAL CASH WDL** — The maximum amount of cash withdrawals allowed against noncredit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE CASH WDL** — The maximum amount of cash withdrawals allowed offline against noncredit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**TOTAL CASH ADV** — The maximum amount of cash advanced allowed against credit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**OFFLINE CASH ADV** — The total amount of cash advances allowed offline against credit accounts using the BASE24-atm product. Take into consideration the special use of the check-cashing card in setting this value.

SSB Feature:        Check-cashing cards

**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CAF screen 1. This field is intended for informational purposes only.

Field Length:        System protected

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CAF screen 1. This field is intended for informational purposes only.

Field Length:        System protected

## CAF Screen 15

If you are using the SSB Enhanced Check Processing Application, you can use CAF screen 15 to associate the holder of a check-cashing card with a specific corporation and establish activity limits for the check-cashing card. This screen is displayed only when the SSB Enhanced Check Processing Application has been installed.

CAF screen 15 is shown below, followed by its field descriptions.

```
BASE24-SSBC  CARDHOLDER FILE          LLLL          YY/MM/DD  HH:MM  15 OF 20
```

```
PAN:                                MEMBER: 000    FIID:
```

```
ATM SELF SERVICE BANKING CHECK
```

```
CORPORATION NUMBER:
```

```
CHECK USAGE CONTROL
```

```
PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES:
```

| ACTIVITY LIMITS |         | ACTIVITY THIS PERIOD |         |
|-----------------|---------|----------------------|---------|
| TOTAL           | OFFLINE | TOTAL                | OFFLINE |

```
CHECK:
```

```
AGGR:
```

```
***** BASE24 *****
```

```
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
```

```
F12 - HELP
```

## ATM SELF SERVICE BANKING CHECK

The following fields are specific to the SSB Enhanced Check Processing Application.

**CORPORATION NUMBER** — The value in this field associates the holder of a check-cashing card with a specific corporation. This corporation number must have an associated record in the Corporate Check File (CCF).

|                 |                                                    |
|-----------------|----------------------------------------------------|
| Field Length:   | 10 numeric characters                              |
| Required Field: | Yes, if the CARD TYPE field on CAF screen 1 is SP. |
| Default Value:  | No default value                                   |
| Data Name:      | CAF.SSBC.CORP-NUM                                  |
| SSB Feature:    | Check-cashing cards                                |

## CHECK USAGE CONTROL

The following fields are used to set limits and to display a cardholder's activity during the usage accumulation period for check-related cash disbursement transactions that do not have matching Check Status File (CSF) records.

**PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES** — A code that indicates whether the amount of a check-related cash disbursement transaction that does not have a matching CSF record should be included in the usage amounts that are tested against the limits set in the TOTAL AGGR, OFFLINE AGGR, TOTAL CASH WDL, and OFFLINE CASH WDL fields on CAF screen 1. Valid values are as follows:

- Y = Yes, test check-related cash disbursement transactions against the limits set in the specified fields on CAF screen 1. If the transaction is approved, add the transaction amount to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on CAF screen 1.
- N = No, do not test check-related cash disbursement transactions against the limits set in the specified fields on CAF screen 1. Do not add approved transaction amounts to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on CAF screen 1.



Field Length: 1 alphabetic character  
Required Field: Yes  
Default Value: N  
Data Name: CAF.SSBC.CHK-BASE-FLG  
SSB Feature: Check-cashing cards

## ACTIVITY LIMITS

The values in the following fields limit the transaction activity allowed by the BASE24-atm product during an institutionally defined single usage accumulation period. The activity limits are discussed in the topic “Enhanced Check Authorization” provided previously in this section.

**TOTAL CHECK** — The total cash disbursement allowed for check-related cash disbursement transactions when a matching CSF record could not be located.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains an N, the value in the TOTAL CHECK field should be greater than zero because the values in the TOTAL AGGR and TOTAL CASH WDL fields on CAF screen 1 are not used when testing check-related cash disbursement transactions.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y, the value in the TOTAL CHECK field must be less than or equal to the value in the TOTAL AGGR field on CAF screen 1.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a Y and the TOTAL CHECK field contains a zero, the values in the TOTAL AGGR and TOTAL CASH WDL fields on CAF screen 1 are used when testing check-related cash disbursement transactions.

Field Length: 1–15 alphanumeric characters  
Required Field: Yes  
Default Value: 0  
Data Name: CAF.SSBC.GRP-LMT.TTL-CHK-LMT  
SSB Feature: Check-cashing cards

**OFFLINE CHECK** — The total cash disbursement allowed offline for check-related cash disbursement transactions when a matching CSF record could not be located. The value in the OFFLINE CHECK field is used only with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of N, the value in the OFFLINE CHECK field should be greater than zero because the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CAF screen 1 are not used when testing check-related cash disbursement transactions.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in the OFFLINE CHECK field must be less than or equal to the value in the OFFLINE AGGR field on CAF screen 1.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y and the OFFLINE CHECK field contains a zero, the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CAF screen 1 are used when testing check-related cash disbursement transactions.

Field Length: 1–15 alphanumeric characters  
Required Field: Yes  
Default Value: 0  
Data Name: CAF.SSBC.GRP-LMT.OFFL-CHK-LMT  
SSB Feature: Check-cashing cards

**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CAF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected  
Data Name: CAF.BASE.GRP-LMT.AGGR-LMT

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CAF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected  
Data Name: CAF.BASE.GRP-LMT-OFFL-AGGR-LMT

## ACTIVITY THIS PERIOD

The values in the following fields are totals for check-related cash disbursement transaction activity allowed by the BASE24-atm product during an institutionally defined single usage accumulation period.

**TOTAL CHECK** — The total amount of check-related cash disbursement transactions when a matching CSF record could not be located.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in the TOTAL CHECK field is included in the balance of the TOTAL CASH WDL field on CAF screen 1.

Field Length:        System protected  
Data Name:            CAF.SSBC.GRP-PRD.TTL-CHK-PRD

**OFFLINE CHECK** — The total amount of check-related cash disbursement transactions authorized by the BASE24-atm Authorization process when a matching CSF record could not be located. The amount in this field is always used with authorization level 2, and is used with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

The amount in this field is included in the balance of the TOTAL CHECK field on this screen. If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in the OFFLINE CHECK field also is included in the balance of the OFFLINE CASH WDL field on CAF screen 1.

Field Length:        System protected  
Data Name:            CAF.SSBC.GRP-PRD.OFFL-CHK-PRD

## CAF Screen 16

CAF screen 16 establishes activity limits for all types of cards except for the check-cashing card. This screen is displayed only when the SSB Enhanced Check Processing Application has been installed.

CAF screen 16 is shown below, followed by its field descriptions.

```

BASE24-SSBC  CARDHOLDER FILE          LLLL          YY/MM/DD  HH:MM  16 OF 16

      PAN:                                MEMBER: 000      FIID:

                        ATM SELF SERVICE BANKING CHECK

                        CSF CHECK USAGE CONTROL

      PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES:

                        ACTIVITY LIMITS                ACTIVITY THIS PERIOD
                        TOTAL          OFFLINE          TOTAL          OFFLINE

CSF CHECK:
  AGGR:

      CSF CHECKS ALLOWED PER PERIOD:
      CSF CHECKS ACCEPTED THIS PERIOD:

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                        F12 - HELP
  
```

## ATM SELF SERVICE BANKING CHECK

The following fields are specific to the SSB Enhanced Check Processing Application.

## CSF CHECK USAGE CONTROL

The following fields are used to set limits and to display a cardholder's activity during the usage accumulation period for check-related cash disbursement transactions with matching Check Status File (CSF) records.

**PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/**

**USAGES** — A code that indicates whether the amount of a check transaction with a matching CSF record should be included in the usage amounts that are checked against the limits set in the TOTAL AGGR, OFFLINE AGGR, TOTAL CASH WDL, and OFFLINE CASH WDL fields on CAF screen 1. Valid values are as follows:

- Y = Yes, test CSF check-related cash disbursement transactions against the limits set in the specified fields on CAF screen 1. If the transaction is approved, add the transaction amount to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on CAF screen 1.
- N = No, do not test CSF check-related cash disbursement transactions against the limits set in the specified fields on CAF screen 1. Do not add approved transaction amounts to the usage amounts in the TOTAL CASH WDL and OFFLINE CASH WDL fields on CAF screen 1.

Field Length: 1 alphabetic character  
Required Field: Yes  
Default Value: N  
Data Name: CAF.SSBC.CSF-CHK-BASE-FLG  
SSB Feature: Enhanced check authorization

**ACTIVITY LIMITS**

The values in the following fields limit the transaction activity allowed by the BASE24-atm product during an institutionally defined single usage accumulation period. The activity limits are discussed in the topic “Enhanced Check Authorization” provided previously in this section.

**TOTAL CSF CHECK** — The total cash disbursement allowed for check-related cash disbursement transactions with matching CSF records.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of N, the value in the TOTAL CSF CHECK field should be greater than zero because the values in the TOTAL AGGR and TOTAL CASH WDL fields on CAF screen 1 are not used when testing CSF check-related cash disbursement transactions.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in the TOTAL CSF CHECK field must be less than or equal to the value in the TOTAL AGGR field on CAF screen 1.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y and the TOTAL CSF CHECK field contains a zero, the values in the TOTAL AGGR and TOTAL CASH WDL fields on CAF screen 1 are used when testing CSF check-related cash disbursement transactions.

Field Length: 1–15 alphanumeric characters  
Required Field: Yes  
Default Value: 0  
Data Name: CAF.SSBC.GRP-LMT.TTL-CSF-CHK-LMT  
SSB Feature: Enhanced check authorization

**OFFLINE CSF CHECK** — The total cash disbursement allowed offline for check-related cash disbursement transactions with matching CSF records. The value in this field is used only with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of N, the value in the OFFLINE CSF CHECK field should be greater than zero because the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CAF screen 1 are not used when testing CSF check-related cash disbursement transactions.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in the OFFLINE CSF CHECK field must be less than or equal to the value in the OFFLINE AGGR field on CAF screen 1.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y and the OFFLINE CSF CHECK field contains a zero, the values in the OFFLINE AGGR and OFFLINE CASH WDL fields on CAF screen 1 are used when testing CSF check-related cash disbursement transactions.

Field Length: 1–15 alphanumeric characters  
Required Field: Yes

Default Value: 0  
Data Name: CAF.SSBC.GRP-LMT.OFFL-CSF-CHK-LMT  
SSB Feature: Enhanced check authorization

**TOTAL AGGR** — The amount entered in the TOTAL AGGR field on CAF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected  
Data Name: CAF.BASE.GRP-LMT.AGGR-LMT

**OFFLINE AGGR** — The amount entered in the OFFLINE AGGR field on CAF screen 1. The value in this field is intended for informational purposes only.

Field Length: System protected  
Data Name: CAF.BASE.GRP-LMT-OFFL-AGGR-LMT

## ACTIVITY THIS PERIOD

The values in the following two fields are totals for check-related cash disbursement transaction activity allowed by the BASE24-atm product during an institutionally defined single usage accumulation period when matching CSF records are located.

**TOTAL CSF CHECK** — The total amount of check-related cash disbursement transactions with matching CSF records.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in the TOTAL CSF CHECK field is included in the balance of the TOTAL CASH WDL field on CAF screen 1.

Field Length: System protected  
Data Name: CAF.SSBC.GRP-PRD.TTL-CSF-CHK-PRD

**OFFLINE CSF CHECK** — The total amount of check-related cash disbursement transactions made with a matching CSF record and authorized by the BASE24-atm Authorization process. The amount in this field is always used with authorization level 2, and is used with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

The amount in this field is included in the balance of the TOTAL CSF CHECK field on this screen. If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field contains a value of Y, the value in OFFLINE CSF CHECK field also is included in the balance of the OFFLINE CASH WDL field on CAF screen 1.

Field Length:        System protected  
Data Name:         CAF.SSBC.GRP-PRD.OFFL-CSF-CHK-PRD

**CSF CHECKS ALLOWED PER PERIOD** — The maximum number of times this card can be used for check-related cash disbursement transactions that have a matching CSF record. For a bulk check transaction (if your system has a bulk check CSM), each check will count as a usage. Valid values are 0 through 9999.

Field Length:        1–4 numeric characters  
Required Field:      Yes  
Default Value:       1  
Data Name:         CAF.SSBC.CSF-CHK-USE-LMT  
SSB Feature:        Enhanced check authorization

**CSF CHECKS ACCEPTED THIS PERIOD** — The number of times this card has been used for check-related cash disbursement transactions that have a matching CSF record. For a bulk check transaction (if your system has a bulk check CSM), each check will count as a usage.

Field Length:        System protected  
Data Name:         CAF.SSBC.CSF-CHK-USED-PRD



## Modifying the Check Status File

The Check Status File (CSF) contains a record for each check registered by a cardholder and a record for each preapproved or predeclined check defined by the institution. The CSF is used to define authorization parameters for registered checks and preapproved or predeclined checks. The BASE24-atm Authorization process accesses the CSF using the account number, the routing and transit number from the MICR information on the check presented at the terminal, and the primary account number (PAN) and member number from the card.

For registered checks, the CSF is used to establish a link between the individual cardholder and the check-issuing institution and to define the check status, the check disposition if the transaction is declined, and the maximum acceptable check amount.

For preapproved or predeclined checks, the CSF is used to define the check-issuing institution and the account at that institution as well as to define the check status, the check disposition if the transaction is declined, and the maximum acceptable check amount.

Reviewing the CSF is one step in the authorization process. Transactions authorized by the BASE24-atm Authorization process still must meet transaction activity limits established and maintained for the card being used. You should review the CPF or CAF records that control the activity limits for the cards used to cash registered or preapproved checks. A transaction involving a check that passes the tests established in the CSF will still be declined if it exceeds the activity limits in the CPF or CAF record for the cardholder's card.

## CSF Screen 1

You can access the CSF from the ATM Product Menu by placing the cursor beside CSF and pressing the **F1** key. For detailed instructions on accessing the CSF, refer to the *BASE24 User Security Manual*. CSF screen 1 is shown below, followed by its field descriptions.

```
BASE24-SSBC  CHECK STATUS FILE          LLLL      YY/MM/DD  HH:MM  01 OF 01
INSTITUTION ID NUMBER: 00000000000      ACCOUNT NUMBER:

CARDHOLDER/CHECK STATUS INFORMATION

REGISTERED PAN NUMBER: *****
REGISTERED MEMBER NUMBER:          ***

CHECK STATUS:                      0
CHECK RETAIN FLAG:                  0
CHECK LIMIT:                        0

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:      NEW LOGICAL NETWORK ID:
                  F12-HELP
```

**INSTITUTION ID NUMBER** — The routing and transit number of the check-issuing institution or check-issuer identification number. This value is derived from the check MICR routing and transit number and is a portion of the key to the CSF. The value is right-justified and zero filled to the left.

|                 |                                                                           |
|-----------------|---------------------------------------------------------------------------|
| Field Length:   | 11 numeric characters                                                     |
| Required Field: | Yes                                                                       |
| Default Value:  | 00000000000                                                               |
| Data Name:      | CSF.INST-ID-NUM                                                           |
| SSB Feature:    | Preapproved and predeclined check processing, registered check processing |

**ACCOUNT NUMBER** — The checking account number derived from the check MICR information. The account number is a portion of the key to the CSF. The value is left-justified and blank filled to the right.

Field Length: 1–19 numeric characters  
Required Field: Yes  
Default Value: No default value  
Data Name: CSF.ACCT-NUM  
SSB Feature: Preapproved and predeclined check processing, registered check processing

## CARDHOLDER/CHECK STATUS INFORMATION

The following fields are used to link the cardholder to the institution that issued the check, establish the maximum acceptable check amount, and define a check status and check disposition flag.

**REGISTERED PAN NUMBER** — The cardholder PAN. This number corresponds to the PAN in the Card Authorization File (CAF), Negative Card File (NEG), or Usage Accumulation File (UAF).

If this record is for a registered check for a specific cardholder, enter the PAN of the cardholder. If this record is for a preapproved or predeclined check, this field requires only the default entry (asterisks) since those records apply to all cardholders.

Field Length: 1–19 numeric characters  
Required Field: Yes  
Default Value: \*\*\*\*\*  
Data Name: CSF.RGSTR-PAN  
SSB Feature: Preapproved and predeclined check processing, registered check processing

**REGISTERED MEMBER NUMBER** — The cardholder member number. This number corresponds to the member number in the CAF, NEG, or UAF.

If this record is for a registered check for a specific cardholder, enter the member number of the cardholder. If this record is for a preapproved or predeclined check, this field requires only the default entry (asterisks).

Field Length: 1–3 numeric characters  
Required Field: Yes  
Default Value: \*\*\*  
Data Name: CSF.RGSTR-MBR-NUM  
SSB Feature: Preapproved and predeclined check processing, registered check processing

**CHECK STATUS** — A code specifying the disposition of a check with this routing and transit number and account number. Valid values are as follows:

0 = Accept all checks  
1 = Deposit only  
2 = Deny all checks

Field Length: 1 numeric character  
Required Field: Yes  
Default Value: 0  
Data Name: CSF.CHK-STAT  
SSB Feature: Preapproved and predeclined check processing, registered check processing

**CHECK RETAIN FLAG** — The retention status for declined transactions for a check with this routing and transit number and account number. Valid values are as follows:

0 = Return all checks  
1 = Retain all checks

Field Length: 1 numeric character  
Required Field: Yes  
Default Value: 0  
Data Name: CSF.RET-CHK-FLG  
SSB Feature: Preapproved and predeclined check processing, registered check processing

**CHECK LIMIT** — The maximum acceptable check amount, expressed as a whole currency value, for a check with this routing and transit number and account number. Checks above the specified limit are not authorized. This field is not required if the CHECK STATUS field value indicates that the check should be declined.

Field Length: 1–15 numeric characters

Required Field: Yes

Default Value: 0

Data Name: CSF.CHK-LMT

SSB Feature: Preapproved and predeclined check processing, registered check processing

## Modifying the Corporate Check File

The Corporate Check File (CCF) is used to define check authorization parameters as defined by the institution that issued the check instead of the institution that processes the check. The CCF is used only for check-related transactions initiated with special-use check-cashing cards.

The CCF enables the institution to establish a record for each corporation with which it has a check processing agreement. Each corporation is assigned a corporation number. This number establishes a link between the cardholder who uses a special-use check-cashing card to cash checks and the corporation that issues the checks. The corporation number is defined in the CAF or the NEG, depending on the BASE24 authorization method used by the institution. For online authorization processing (authorization level 1), the host is responsible for establishing this authorization requirement. The corporation number is also defined in the CCF. A valid routing and transit number and account number are also entered for the corporation in the CCF. In addition, a check status and a maximum transaction amount are defined for the corporation account number.

When a cash check transaction is initiated with the special-use check-cashing card and a transaction request is sent to the Authorization process; the process uses the corporation number associated with that card, located in the CAF or NEG, to access the CCF. The Authorization process then searches the CCF to find a match on the routing and transit number and the account number from the MICR data on the check. The transaction is approved or declined based on the status and the check limit defined for that account in the CCF record plus the card limits in the CPF or CAF for the card used to initiate the transaction.

Reviewing the CCF is one step in the authorization process. Transactions authorized by the BASE24-atm Authorization process still must meet transaction activity limits established and maintained for the card being used.

The BASE24-atm Authorization process checks the CCF only for cards defined in the CPF or CAF with card type SP (special purpose), so the CPF or CAF records that control the activity limits for check-cashing cards also must be set up. A transaction involving a check that passes the tests established in the CCF will still be declined if it exceeds the activity limits in the CPF or CAF record for the check-cashing card.

# CCF Screen 1

You can access the CCF from the ATM Product Menu by placing the cursor beside CCF and pressing the **F1** key. For detailed instructions on accessing the CCF, refer to the *BASE24 User Security Manual*. CCF screen 1 is shown below, followed by its field descriptions.

BASE24-SSBC

CORPORATE CHECK FILE

LLLL

YY/MM/DD

HH:MM

01 OF 01

CORPORATION NUMBER: 0000000000

DESCRIPTION:

NUMBER OF ACCOUNTS: 00

INST ID NUM

ACCOUNT NUMBER

STATUS

MAXIMUM AMOUNT

\*\*\*\*\* BASE24 \*\*\*\*\*

NEW PAGE:

FILE DESTINATION:

NEW LOGICAL NETWORK ID:

F12-HELP

**CORPORATION NUMBER** — The corporation identification number as specified in the CAF or NEG. This field provides a link between the cardholder and the check-issuing institution and is the key to the CCF.

- Field Length: 10 numeric characters
- Required Field: Yes
- Default Value: 0000000000
- Data Name: CCF.CORP-NUM
- SSB Feature: Check-cashing cards

**DESCRIPTION** — This field is used for information purposes only and provides a description for each corporation.

Field Length: 1–25 alphanumeric characters  
Required Field: No  
Default Value: No default value  
Data Name: CCF.CORP-DESCR  
SSB Feature: Check-cashing cards

**NUMBER OF ACCOUNTS** — The number of institutions and accounts associated with the corporation.

Field Length: System protected  
Data Name: CCF.CORP-CNT

**INST ID NUM** — Valid check routing and transit numbers for this corporation. For instance, in the United States, this field can contain the routing and transit number of 9 characters, which should be right-justified and zero-filled to the left. If this field is left blank, the BASE24 system fills this field with zeros.

Field Length: 1–11 numeric characters  
Required Field: No  
Default Value: No default value  
Data Name: CCF.INST-ID-NUM  
SSB Feature: Check-cashing cards

**ACCOUNT NUMBER** — Valid checking account number for each of the routing and transit numbers for this particular corporation.

Field Length: 1–19 characters  
Required Field: Yes  
Default Value: No default value  
Data Name: CCF.ACCT-NUM  
SSB Feature: Check-cashing cards



**STATUS** — Indicates whether checks will be accepted or declined for the institution identified by the values in the INST ID NUM and ACCOUNT NUMBER fields. Valid values are as follows:

0 = Accept all checks for this institution and account number.

1 = Deny all checks for this institution and account number.

Field Length: 1 numeric character

Required Field: Yes

Default Value: No default value

Data Name: CCF.ACCT-STAT

SSB Feature: Check-cashing cards

**MAXIMUM AMOUNT** — The maximum check transaction amount that can be approved for the institution identified by the values in the INST ID NUM and ACCOUNT NUMBER fields. Checks for amounts above this specified limit are not authorized. This field is not required if the STATUS field indicates that the check should not be accepted.

Field Length: 1–15 numeric characters

Required Field: Yes, if the STATUS field is set to a value of 0.

Default Value: No default value

Data Name: CCF.CHK-LMT

SSB Feature: Check-cashing cards

## Modifying the Diebold Configuration File

The Diebold 10XX/478X Configuration File (CNFGIX) can be accessed through the Diebold entry program and downloaded to the ATM using the Device Control Terminal (DCT). Through the Diebold 10XX/478X Configuration File, changes can be made to Diebold ATM screen displays, state tables, Financial Institution Table (FIT) data, configuration parameters, and timers.

All of the information in the CNFGIX is included in one of two data groups. Group 0, which can be loaded to any ATM, maintains basic information about screens, states, and FIT data used by all terminals. A second, customized load group maintains information specific to certain types of terminals and is loaded only to those terminals.

See the *BASE24-atm Diebold 10XX/478X Device Support Manual* for more information on BASE24-atm support of the Diebold 10XX/478X Configuration File and the Diebold entry program.

### Load Group 58 Contents

ACI supplies load group 58 to support the check-cashing card transaction that is included with the BASE24-atm SSB Enhanced Check Processing Application.

This load group, as well as the load groups for any BASE24-atm SSB Enhanced ATM Application features being used, must be combined manually with load group 12 for downloading.

Load group 58 contains the following changes to the Diebold 10XX/478X Configuration File:

- The FIT is a set of data and instructions used in the PIN encryption and PIN verification processes. Since special-use check-cashing cards have a unique prefix, a new FIT entry is required with a value in the PSTDX field that points to an entry in the Indirect Next State tables. This allows a separate state path for cardholders with special-use check-cashing cards and a separate state path for cardholders not using the special-use card. Load group 58 contains FIT 000 for special-use check-cashing cards and FIT 001 as a default entry for other cards. See the appropriate Diebold vendor documentation for complete information about configuring the Diebold FIT.

- The Indirect Next State (Type K) contains indexing data referenced in the FIT for selecting the appropriate next state used in processing card data. This state must be modified to allow for separate processing for the special-use check-cashing cards based on a match on the PSTDX field in the FIT.

**Note:** Screen number 142 in load group 12 must be modified when the BASE24-atm SSB Enhanced Check Processing Application is installed. This screen provides instructions for printing the Check Proof List File (CPLF) at the ATM. Screen number 142 shows 0 through 2 as the valid check bin numbers. Bins 0 through 2 are correct when the BASE24-atm SSB Device Handler Extension is installed without the BASE24-atm SSB Enhanced Check Processing Application. The BASE24-atm SSB Enhanced Check Processing Application adds bin 3 as a valid value; therefore, screen number 142 must be modified to show 0 through 3 as the valid check bin numbers.

## Modifying the Institution Definition File

The Institution Definition File (IDF) defines processing for each institution participating on the logical network. Each institution has one record in the IDF. The IDF supports an additional IDF segment required for the SSB Enhanced Check Processing Application. The IDF indicates whether the SSB Check segment is used in BASE24 authorization files and defines a check disposition indicator and three preauthorization checks for online/offline processing (authorization level 3). IDF screens 5 and 6 allow you to set the flag for the SSB Enhanced Check Processing Application at the institution level. The flag for the SSB Enhanced Check Processing Application must be set at the logical network level in the Product Indicator Table File (PITABLE) before it can be set at the institution level.

The IDF contains one record for each institution in the logical network and defines transaction processing for each institution. The following information describes the configuration changes required in the IDF to support the SSB Enhanced Check Processing Application.

The SSB Enhanced Check Processing Application requires settings in the IDF to indicate whether a financial institution offers transaction processing for the SSB Enhanced Check Processing Application. Three IDF screens require settings: screen 1, screen 5, and screen 37. Other BASE24 screens used to access the IDF are not used to support the SSB Enhanced Check Processing Application. The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for more information on the IDF.

### IDF Screen 1

With the SSB Enhanced Check Processing Application, the Authorization process can be configured to search the SPF to determine whether a stop payment has been issued for a specific check-related transaction. Settings in the IDF define the SPF name (screen 1) and if the SPF is to be searched by the Authorization process (screen 37). The MICR data retrieved from the check must contain the routing and transit number, the account number, and the check serial number before the Authorization process attempts to search the SPF.

**SPF** — The name of the Stop Payment File (SPF) used by the institution. You must enter a file name if you are using the Stop Payment feature of the SSB Enhanced Check Processing Application.

SSB Feature:            Stop payment verification

## IDF Screens 5 and 6

IDF screens 5 and 6 contain flags identifying which segments can be included in the files belonging to this institution. Segmented authorization files include the Cardholder Authorization File (CAF), Negative Card File (NEG), Positive Balance File (PBF), and Usage Accumulation File (UAF).

**SSB CHECK** — This flag permits you to specify whether the institution's authorization files should carry the information needed for the SSB Enhanced Check Processing Application. The value for the SSB base segment (that is, SSB BASE) also must be set to Y, and should have been set during SSB Enhanced ATM Application configuration.

Valid values for each indicator are as follows:

Y = Yes, include this segment.

N = No, do not include this segment.

SSB Features:      Enhanced check authorization, enhanced MICR data processing and manipulation, check-cashing cards, registered check processing, preapproved and predeclined check processing, and stop payment verification features

## IDF Screen 37

IDF screen 37 enables you to specify three prescreening checks or tests for online/offline authorization processing (authorization level 3) and a check disposition flag for the BASE24-atm Authorization process.

You can specify whether the Authorization process is to search the Check Status File (CSF), the Corporate Check File (CCF), and the Stop Payment File (SPF) prior to forwarding the check transaction to the host for authorization. These prescreening tests are not performed during online authorization processing (authorization level 1).

The check disposition flag specifies how the transaction acquirer is to handle a cash check transaction when the terminal is unable to dispense the full amount of the check being cashed.

IDF screen 37 is shown below, followed by its field descriptions.

```
BASE24-SSBC  INSTITUTION FILE          LLLL          YY/MM/DD  HH:MM  37 OF 42

          FIID:          FI-NAME:

          CARD PARAMETERS
CHECK IF HOST ONLINE  STOP PAY: N
          CHECK STATUS: N
CORPORATION CHECK: N

CASH CHECK DISPOSITION: 0 (RETURN CHECK/CANCEL TRAN)

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                  F12-HELP
```

**STOP PAY** — A code specifying whether the BASE24-atm Authorization process is to access the SPF prior to transmitting a check-related transaction request to the host for authorization. This field is applicable only for institutions using the online/offline authorization level (authorization level 3). Valid values are as follows:

Y = Yes, access the SPF prior to routing the request to the host for authorization.  
This value is valid only when the SPF file name is defined on IDF screen 1.  
N = No, do not access the SPF prior to sending the request to the host.

|                 |                           |
|-----------------|---------------------------|
| Field Length:   | 1 alphabetic character    |
| Required Field: | No                        |
| Default Value:  | N                         |
| Data Name:      | IDF.SSBC.SPF-CHK          |
| SSB Feature:    | Stop payment verification |

**CHECK STATUS** — A code specifying whether the BASE24-atm Authorization process is to access the CSF prior to transmitting a check-related cash disbursement transaction request to the host for authorization. This field is applicable only for institutions using the online/offline authorization level (authorization level 3). Valid values are as follows:

Y = Yes, access the CSF prior to routing the request to the host for authorization.

N = No, do not access the CSF prior to sending the request to the host.

Field Length: 1 alphabetic character

Required Field: No

Default Value: N

Data Name: IDF.SSBC.CSF-CHK

SSB Feature: Enhanced check authorization

**CORPORATION CHECK** — A code specifying whether the BASE24-atm Authorization process is to access the Corporate Check File (CCF) prior to transmitting a check-related cash disbursement transaction request initiated with a check-cashing card to the host for authorization. This field is applicable only for institutions using the online/offline authorization level (authorization level 3). Valid values are as follows:

Y = Yes, access the CCF prior to routing the request to the host for authorization.

N = No, do not access the CCF prior to sending the request to the host.

Field Length: 1 alphabetic character

Required Field: No

Default Value: N

Data Name: IDF.SSBC.CCF-CHK

SSB Feature: Check-cashing cards

**CASH CHECK DISPOSITION** — A code specifying how the BASE24-atm Authorization process is to instruct the transaction acquirer to handle a cash check transaction when the terminal is unable to dispense the full amount of the check. Valid values are as follows:

0 = Return check, cancel transaction, and generate a full reversal. If any coins have already been dispensed, the Device Handler process generates a partial reversal for the undispensed cash amount.

1 = Retain check, complete transaction, and generate a partial reversal for the cash amount not dispensed.

If a customer does not have an account relationship with the transaction acquirer and a partial dispense occurs, the customer must contact the transaction acquirer to obtain the amount not dispensed.

|                 |                              |
|-----------------|------------------------------|
| Field Length:   | 1 numeric character          |
| Required Field: | Yes                          |
| Default Value:  | 0                            |
| Data Name:      | IDF.SSBC.CHK-DISP            |
| SSB Feature:    | Enhanced check authorization |



## Modifying the Logical Network Configuration File

The Logical Network Configuration File (LCONF) enables you to define the locations of files and processes, and to define processing parameters. The LCONF is described in the *BASE24 Logical Network Configuration File Manual*. The following assigns in the LCONF are used to locate the appropriate files:

**ARF** — The fully qualified file name of the Account Routing File (ARF) (for example, \B24.\$DATA.PRO1DATA.ARF). The information in this file allows the BASE24-atm Authorization process to convert check MICR data in the event that two financial institutions merge resulting in duplicate account numbers.

SSB Feature:           Enhanced MICR data processing and manipulation

**SSB-BSF** — The fully qualified file name of the Bin Sort File (BSF) (for example, \B24.\$DATA.PRO1DATA.SSBBSF). This file allows for the definition of a check sorting method and is used by the Diebold 10XX/478X Device Handler process.

SSB Feature:           Enhanced document bin sorting

**SSB-CCF** — The fully qualified file name of the Corporate Check File (CCF) (for example, \B24.\$DATA.PRO1DATA.SSBCCF). This file contains check authorization parameters specified by the check issuer. This file is used by the BASE24-atm Authorization and Refresh processes.

SSB Feature:           Check-cashing cards

**SSB-CSF** — The fully qualified file name of the Check Status File (CSF) (for example, \B24.\$DATA.PRO1DATA.SSB-CSF). This file is used to specify the status of a checking account and is used by the BASE24-atm Authorization and Refresh processes.

SSB Feature:           Preapproved and predeclined check processing, registered check processing

**SPF** — The fully qualified file name of the Stop Payment File (SPF) (for example, \B24.\$DATA.PRO1DATA.SPF). This file contains stop payment records.

SSB Feature:           Stop payment verification

## Modifying the Negative Card File

The Negative Card File (NEG) supports an additional segment required for the SSB Enhanced Check Processing Application. The NEG defines the card type for the special-use check-cashing card and the corporation number that links a check-issuing corporation to the ATM card used to cash the corporation's checks. This file is used with the Negative Authorization with Usage Accumulation method or the Negative Authorization without Usage Accumulation method.

The NEG contains records for card issuers that use a negative authorization method. The BASE24-atm Authorization process searches this file to determine if a transaction request should be approved and, if not, what action should be taken with the card.

Institutions that use a negative authorization method and want to use check-cashing cards must add a record to the NEG for each check-cashing card issued in order to define the corporation number associated with the card. BASE24 products use the reserved code SP (special purpose) to identify the card type for check-cashing cards.

NEG screen 4 allows you to define the corporation number associated with a check-cashing card. The BASE24-atm Authorization process uses this corporation number to access the CCF. The CCF contains authorization criteria for use with check-cashing cards issued to a specific corporation.

The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for more information on the NEG.

### NEG Screen 1

NEG screen 1 gives you the ability to identify certain cards for special processing, retain specific cards when they are used in the system, and deny transactions attempted with certain cards for a set time.

**CARD TYPE** — A code identifying the type of card associated with the PAN. The SP code is used for the check-cashing card by the SSB Enhanced Check Processing Application.

SSB Feature:            Check-cashing cards

**REASON ON FILE** — A code identifying the reason the card has a record in the NEG. For check-cashing cards, the only valid value is 0 (account open).

SSB Feature: Check-cashing cards

## NEG Screen 4

NEG screen 4 is shown below, followed by the description of the field that is used by the SSB Enhanced Check Processing Application.

```
BASE24-SSBC  NEGATIVE FILE          LLLL          YY/MM/DD  HH:MM  04 OF 04
```

```
PAN:                      MEMBER: 000      FIID:
```

```
ATM SELF SERVICE BANKING CHECK
```

```
CORPORATION NUMBER:
```

```
***** BASE24 *****
```

```
NEW PAGE:          FILE DESTINATION:      NEW LOGICAL NETWORK ID:  
                  F12-HELP
```

## ATM SELF SERVICE BANKING CHECK

The following field is specific to the SSB Enhanced Check Processing Application.

**CORPORATION NUMBER** — The corporation identification number as specified in the CAF. This field provides a link between the cardholder and the check-issuing institution. This corporation number must also have an associated record in the CCF.

|                 |                                                                     |
|-----------------|---------------------------------------------------------------------|
| Field Length:   | 10 numeric characters                                               |
| Required Field: | Yes, if the CARD TYPE field on NEG screen 1 is set to a value of SP |
| Default Value:  | No default value                                                    |
| Data Name:      | NEG.SSBC.CORP-NUM                                                   |
| SSB Feature:    | Check-cashing cards                                                 |

## Modifying the Receipt File

Cardholder receipts can be configured through a series of receipt templates in the BASE24-atm Receipt File (RCPT). The RCPT provides the ability to establish ATM receipt formats that are unique to the terminal. Receipt templates determine the actual receipt text and format to be printed on a receipt.

If you have configured the optional receipt feature, it will affect the cash check, deposit with cash back, and split deposit transactions. This feature allows the cardholder to determine if a receipt should be printed for a transaction.

For a complete description of configurable receipts, receipt templates, and examples of receipt templates for transactions performed at the Diebold 10XX/478X terminals, see the *BASE24-atm Diebold 10XX/478X Device Support Manual*. See the *BASE24-atm Files Maintenance Manual*, for a complete description of the RCPT.

These cardholder receipt templates use the field type codes shown below. The data is retrieved from the BASE24-atm Standard Internal Message (STM) and the BASE24-atm Terminal Data files (ATD). Data names are included in parentheses after each field type code description. See the *BASE24-atm Transaction Processing Manual* for further explanation of the STM data names.

### Field Type Code Descriptions

The following table describes the standardized field type codes that are used in the default receipt templates provided for the SSB Enhanced Check Processing Application. You can modify these receipt templates to use the additional field type codes described in the *BASE24-atm Diebold 10XX/478X Device Support Manual*.

| Code | Description                              | Length   |
|------|------------------------------------------|----------|
| BA   | The total value of the checks deposited. | 19 bytes |
| BC   | The total number of checks deposited.    | 4 bytes  |
| BN   | The bin number.                          | 1 byte   |

## Administrative Subtotals Receipt

An example is shown below of a Diebold 10XX/478X ATM receipt for an administrative subtotal transaction when the Enhanced Check Processing Application and the enhanced document bin sorting feature are configured. The contents of the bins are listed separately, using the ADBI receipt type. After the individual bins are listed, the number of items deposited are listed by item type (such as payments, messages, and cards retained) using the ADTO receipt type.

```
#E(@BIN #BN @TOT CHKS #BC>
      @TOT AMT  #BA$>>
```

```
1          CUSTOMER LOGO SCREEN
2
3      DATE      TIME      STATION
4      YY/MM/DD   HH:MM     S1A10035
5
6
7      CARD NUMBER
8      1234567890123456789-000
9
10     LOCATION
11     330 SOUTH 108TH AVE
12
13
14     BIN 0      TOT CHKS 0
15              TOT AMT  $0.00
16
17     BIN 1      TOT CHKS 0
18              TOT AMT  $0.00
19
20     BIN 2      TOT CHKS 0
21              TOT AMT  $0.00
22
23     BIN 3      TOT CHKS 0
24              TOT AMT  $0.00
25
26     DEPO      01  DEP1      00  CHK      00
27     MSG       00  PAY       00
28     TOT       01  CRD       00  SUB
29
30
```

## Modifying the Stop Payment File

The Stop Payment File (SPF) is used to define a check or range of checks designated for stop payment. The SPF contains one record for each institution- or cardholder-initiated stop payment item that indicates a check or range of checks that should not be honored at terminals.

Settings in the Institution Definition File (IDF) define the SPF name and when the SPF is to be searched by the Authorization process. The MICR data retrieved from the check must contain the routing and transit number, the account number, and the check serial number before the Authorization process attempts to search the SPF. Note that the Authorization process will search the SPF only if the card issuer and check issuer are the same institution.

SPF screen 1 is a detail screen and SPF screen 2 is a summary of stop payment items. When a partial key (that is, one or more of the optional key fields is omitted) is entered from SPF screen 1, all SPF records matching the key information entered are displayed on SPF screen 2. From SPF screen 2, you can move the cursor to the desired record and press the **F7** key to display SPF screen 1 which details the selected record. For a complete description of the SPF and its screen layouts, see the *BASE24 Base Files Maintenance Manual*.

### SPF Screen 1

SPF screen 1 allows entry of details about a cardholder's record of stop payment items.

**FIID** — The FIID of the financial institution owning the account specified in the ACCOUNT NUMBER field.

SSB Feature:       Stop payment verification

**ACCOUNT NUMBER** — The account number of the cardholder's negotiable order of withdrawal (NOW) account (also referred to as in interest-bearing checking account) or checking account at the institution that has a stop payment on the check.

SSB Feature:       Stop payment verification

**ACCOUNT TYPE** — The type of cardholder account specified in the ACCOUNT NUMBER field. Valid values are as follows:

01–09 = DDA (checking account)  
21 = NOW (interest-bearing checking account)

SSB Feature: Stop payment verification

**CHECK NUMBER/HIGH CHECK NUMBER** — The check number of the check on which the stop payment order is placed. If the stop payment order is placed on a series of check numbers, this field contains the high (that is, ending) check number.

SSB Feature: Stop payment verification

**LOW CHECK NUMBER** — The check number of the low (that is, beginning) check in a series of consecutively numbered checks.

SSB Feature: Stop payment verification

**AMOUNT** — The amount, in whole and fractional currency units, of the stop payment order placed on a single check.

SSB Feature: Stop payment verification

**DATE** — The date (YYMMDD) that the stop payment order was entered.

SSB Feature: Stop payment verification

**TIME** — The time (hhmmssh) that the stop payment order was entered.

SSB Feature: Stop payment verification

**EXPIRATION DATE** — The date (YYMMDD) that the stop payment order expires. The stop payment order is still valid on the date entered in this field, then is no longer considered by BASE24 Authorization processes once the order expires.

SSB Feature: Stop payment verification



**DESCRIPTION** — An information-only field for entering a message regarding the stop payment order. The value in this field has no effect on BASE24 processing.

SSB Feature: Stop payment verification

**SYSTEM CALCULATE** — A code that specifies whether the value in the PBF STOP PAY/WARNING STATUS field is entered by the file maintenance operator or is calculated by the BASE24 system based on the records in the SPF. This field must contain Y for the SSB Enhanced Check Processing Application.

SSB Feature: Stop payment verification

**PBF STOP PAY/WARNING STATUS** — Indicates whether stop payments or warnings exist for this account. This field must be left blank when this record is used with the SSB Enhanced Check Processing Application.

SSB Feature: Stop payment verification

## Modifying the Terminal Receipt File

Receipt requirements for approved and denied transactions are defined in the Terminal Receipt File (TRF). Transactions are designated by an ISO processing code consisting of the transaction code, *from* account type, and *to* account type.

The following transaction codes are used with the deposit with cash back and check cashing transactions:

| Transaction    | Transaction Code | To Account Type | From Account Type |
|----------------|------------------|-----------------|-------------------|
| Administrative | AK               | 00              | 00                |

## Modifying the Token File

The SSB Enhanced Check Processing Application uses the Token File (TKN) to configure data tokens that carry additional information in internal messages. These tokens are logged to various files, are extracted, or are sent to the host. The TKN specifies the following information:

- The tokens that get logged to the BASE24-atm Transaction Log File (TLF) and the Interchange Log Files (ILFs).
- The tokens that get extracted from the transaction log files by the Super Extract process. Extracting allows the token information to be processed by the host.
- The tokens that get sent to the host with each transaction in the ISO-based external message.

The SSB Enhanced Check Processing Application uses the MICR Data token (token ID 12) for the enhanced MICR data processing and manipulation feature.

The SSB Enhanced Check Processing Application uses the Self-Service Banking Check token (token ID 14) to carry information about the following features:

- For enhanced check authorization, the token contains several fields indicating check disposition.
- For enhanced document bin sorting, the token contains fields indicating the bin sequence numbers and whether the check should be retained.
- For check-cashing cards, the token contains a field indicating the corporation issuing the check.
- For several of the features, the token contains a field indicating whether the transaction uses the Check Status File (CSF).

The SSB Enhanced Check Processing Application uses the Self-Service Banking Check Terminal Settlement token (token ID 15) to carry bin totals for the enhanced document bin sorting feature.

The TKN must be modified to ensure that these tokens get logged to the appropriate transaction log files, to ensure that these tokens are extracted from the TLF, and to ensure that these tokens get sent from the BASE24 system to the ISO-based BASE24 Host Interface process or the ISO-based BIC Interface process in the external message.

See the ***BASE24 Tokens Manual*** for complete information on the these tokens and on using the TKN to specify tokens to be sent in the external message. For detailed field descriptions for the TKN screen, see the ***BASE24 Base Files Maintenance Manual***.

## Viewing the Usage Accumulation File

The Usage Accumulation File (UAF) includes usage accumulation totals for check-related cash disbursement transactions for institutions using the Negative Authorization with Usage Accumulation method of the enhanced check authorization feature. UAF screens 1, 4, and 10 are system-protected screens; the values on the screen are calculated by the BASE24 system and are displayed on these screens for your information. The UAF supports an additional segment for the SSB Enhanced Check Processing Application that is displayed on UAF screen 10. The fields described below have specific SSB requirements. See the ***BASE24 Base Files Maintenance Manual*** for more information on the UAF.

### UAF Screen 1

UAF screen 1 displays card usage totals for the current usage accumulation period.

#### ACTIVITY THIS PERIOD

The following fields are accumulators for transactions during a single usage accumulation period for an individual cardholder.

The transactions added into these accumulator fields are cash disbursements against credit and noncredit accounts and purchases against noncredit accounts. Credit account purchases are not added into these fields.

**TOTAL CASH WDL** — The total amount of purchases and cash withdrawals made against noncredit accounts.

Field Length:        System protected

**TOTAL CASH ADV** — The total amount of cash advanced against credit accounts.

Field Length:        System protected

## UAF Screen 4

UAF screen 4 displays card usage totals for the current usage accumulation period.

### ACTIVITY THIS PERIOD

The following fields are accumulators for transactions during a single usage accumulation period for an individual cardholder using the BASE24-atm product.

The transactions added to these accumulator fields are cash disbursements against credit and noncredit accounts.

**TOTAL CASH WDL** — The total amount of cash withdrawals made against noncredit accounts using the BASE24-atm product.

This amount is included in the balance of the TOTAL CASH WDL field on screen 1.

Field Length:        System protected

**TOTAL CASH ADV** — The total amount of cash advanced against credit accounts using the BASE24-atm product.

This amount is included in the balance of the TOTAL CASH ADV field on screen 1.

Field Length:        System protected

**TIMES USED THIS PERIOD** — The number of times the card has been used to make cash disbursements using the BASE24-atm product during the current usage accumulation period.

Field Length:        System protected

## UAF Screen 10

UAF screen 10 displays check-related cash disbursement transaction totals. This screen is shown below, followed by its field descriptions.

```

BASE24-SSBC  USAGE ACCUMULATION          LLLL          YY/MM/DD  HH:MM  10 OF 10

PAN:                                     MEMBER NUMBER: 000    FIID:

                                ATM SELF SERVICE BANKING CHECK

                                CHECK USAGE CONTROL

                                ACTIVITY THIS PERIOD
                                TOTAL              OFFLINE

CHECK:
CSF CHECK:

CSF CHECKS ACCEPTED THIS PERIOD:      0

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                                F12-HELP

```

## ATM SELF SERVICE BANKING CHECK

The following fields are specific to the SSB Enhanced Check Processing Application.

### CHECK USAGE CONTROL

The following fields display a cardholder's check-related cash disbursement transaction activity during the usage accumulation period.

### ACTIVITY THIS PERIOD

The values in the following fields are totals for check-related cash disbursement transaction activity allowed by the BASE24-atm product during an institutionally defined single usage accumulation period.

**TOTAL CHECK** — The total amount of check-related cash disbursement transactions when a matching Check Status File (CSF) record cannot be located.

If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 contains a value of Y, the value in the TOTAL CHECK field is included in the balance of the TOTAL CASH WDL field on UAF screen 1.

Field Length:        System protected  
Data Name:            UAF.SSBC.GRP-PRD.TTL-CHK-PRD

**OFFLINE CHECK** — The total amount of check-related cash disbursement transactions made with BASE24-atm stand-in authorization when a matching CSF record cannot be located. The amount in this field is always used with authorization level 2, and is used with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

The amount in this field is included in the balance of the TOTAL CHECK field on this screen. If the PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 contains a value of Y, the value in the OFFLINE CHECK field also is included in the balance of the OFFLINE CASH WDL field on UAF screen 1.

Field Length:        System protected  
Data Name:            UAF.SSBC.GRP-PRD.OFFL-CHK-PRD

**TOTAL CSF CHECK** — The total amount of check-related cash disbursement transactions with matching CSF records.

If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 contains a value of Y, the value in this field is included in the balance of the TOTAL CASH WDL field on UAF screen 1.

Field Length:        System protected  
Data Name:            UAF.SSBC.GRP-PRD.TTL-CSF-CHK-PRD

**OFFLINE CSF CHECK** — The total amount of check-related cash disbursement transactions made with matching CSF records and BASE24-atm stand-in authorization. The amount in this field is always used with authorization level 2, and is used with authorization level 3 (online/offline) when the authorizing host is unavailable and the BASE24-atm Authorization process performs stand-in authorization.

The amount in this field is included in the balance of the TOTAL CSF CHECK field on this screen. If the PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES field on CPF screen 14 contains a Y, the value in the OFFLINE CSF CHECK field also is included in the balance of the OFFLINE CASH WDL field on UAF screen 1.

Field Length: System protected

Data Name: UAF.SSBC.GRP-PRD.OFFL-CSF-CHK-PRD

**CSF CHECKS ACCEPTED THIS PERIOD** — The number of times this card has been used for check-related cash disbursement transactions that have a matching CSF record. For a bulk check transaction (if your system has a bulk check CSM), each check will count as a usage.

Field Length: System protected

Data Name: UAF.SSBC.CSF-CHK-USED-PRD

*ACI Worldwide, Inc.*



# 5: Daily Operations

---

This section contains instructions for daily terminal maintenance and viewing BASE24 files. The way in which these maintenance functions differ because of the self-service banking (SSB) product are also described.

The SSB product requires operational support after it is installed and configured. This operational support includes the following:

- Servicing the terminal using the Check Proof List File (CPLF)
- BASE24-atm Transaction Log File (TLF) perusal
- Process control commands
- File refresh
- DCT balancing
- Terminal status

The following pages describe the ongoing operational functions that support the SSB modules.

## Servicing the Terminal Using the Check Proof List File

To keep track of the checks accepted at the terminal, the SSB Device Handler Extension provides for the use of the Check Proof List File (CPLF). Contents of the file can be printed at the terminal using an administrative check proof list transaction at the terminal or using a command from the Device Control Terminal (DCT). CPLF records can also be deleted. See section 2 of this manual for more information on the CPLF and for an example of the report.

When the check proof list function is performed using the DCT, the check proof list for all check bins is printed on the journal printer and all CPLF records are automatically deleted. The check proof list cannot be printed on the receipt printer when the DCT command is performed.

When the check proof list transaction is performed using an administrative transaction at the terminal, the check proof list can be printed on the receipt printer, the journal printer, or both.

With administrative transactions performed at the terminal, service personnel can enter a code identifying the check bin for which the check proof list is to be printed. The ATM-DH-CHK-BIN-THRHLDD param in the Logical Network Configuration File (LCONF) determines which bins are used for sorting checks for the SSB Device Handler Extension. The Bin Sort File (BSF) permits the check-issuing institution to define which bins are used for sorting checks for the SSB Enhanced Check Processing Application. Valid values are as follows:

| Code | Bin | Description                                                                                                                                                                      |
|------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | 0   | Envelope and reject bin. This bin is used as an overflow bin when one of the other bins is unavailable (for example, full).                                                      |
| 1    | 1   | Bin 1. This bin contains checks with amounts equal to or less than the amount specified in the ATM-DH-CHK-BIN-THRHLDD param in the LCONF, or the amount as specified in the BSF. |
| 2    | 2   | Bin 2. This bin contains checks with amounts greater than the amount specified in the ATM-DH-CHK-BIN-THRHLDD param in the LCONF, or the amount as specified in the BSF.          |
| 3    | 3   | Bin 3. This bin contains checks as specified by the BSF.                                                                                                                         |
| 9    |     | All bins.                                                                                                                                                                        |

If there are no CPLF records for the bin selected, the terminal prompts service personnel to select another administrative transaction. This action occurs if an invalid bin number is entered or if no check proof list exists for the check bin entered.

## Performing a Check Proof List Transaction using the DCT

The following pages contain instructions for performing check proof list transactions using DCT. See the *BASE24 Device Control Manual* for more information on this screen.

To perform a check proof list transaction using the DCT, you must take the following steps:

1. Move to DCT screen 40.
2. Enter the terminal ID and the financial institution identifier in the ATM TERMINAL ID and FIID fields.
3. Close the terminal by pressing the **F5** key. If the check proof list print DCT command is sent while the terminal is open, a log message is generated and the command is rejected.
4. Press the **F14** key to print the check proof list information.

After the check proof list has been printed at the terminal, the Diebold 10XX/478X Device Handler process logs a message indicating the completion of the check proof list command.

5. Open the terminal by pressing the **F3** key.

## Performing a Check Proof List Transaction at the Terminal

The steps necessary to print a check proof list at the terminal are described below.

1. Initiate a standard cardholder transaction at the terminal using an administrative card. The transaction is sent to the BASE24-atm Authorization process to verify the card.

When the card is verified, the terminal displays the following prompt:

SELECT ADMINISTRATIVE FUNCTION

2. Select the “PRINT CHECK PROOF LIST” transaction.

The following prompt is displayed:

```
PLEASE SELECT THE PRINTER  
LOCATION FOR  
THE CHECK PROOF LIST
```

3. Select the desired printer. When the check proof list transaction is performed using an administrative transaction at the terminal, the check proof list can be printed on the receipt printer, the journal printer, or both.

After you select the printer, the following prompt is displayed:

```
PLEASE ENTER A SPECIFIC  
CHECK BIN NUMBER (0, 1, 2 OR 3)  
OR ENTER 9 FOR ALL CHECK BINS
```

4. Enter the number of the check bin for which the check proof list is to be printed or enter 9 to print a check proof list for all bins.

If there are no CPLF records for the bin or bins selected, the terminal prompts you to select another administrative transaction. This action occurs if an invalid bin number is entered or if no check proof list exists for the check bin entered.

Note that bin 3 is only available if you are using the SSB Enhanced Check Processing Application.

After you enter the bin number, the following prompt is displayed:

```
SHOULD THE CHECK PROOF LIST  
FILE BE RESET AFTER IT IS  
PRINTED SUCCESSFULLY?
```

5. Select whether the check proof list records are to be deleted after the terminal prints the records or retained for future printing.

After you make the last selection, the transaction is sent to the BASE24-atm system for a second time. When the BASE24-atm Authorization process approves the transaction, the terminal is closed and the check proof list is printed at the printers specified in step 3. When the check proof list has been printed, the terminal is reopened automatically.

If the printer requested is unavailable at any point during the check proof list transaction, the transaction is denied. When the check proof list is being printed on both printers, the transaction is denied if either printer is unavailable.

## DCT Balancing

A subtotals administrative request can be performed using the DCT for the current cash and standard balancing methods. This request displays subtotals for each hopper specified in the terminal. These subtotals can be displayed on the Balance Current Cash screen (DCT screen 8) or on the Balance Standard Cash screen (DCT screen 9). See the ***BASE24 Device Control Manual*** for more information on these screens.

A subtotals request displays subtotals for each hopper and also includes deposit bin totals on DCT screens 8 and 9. These screens display the coin hopper if the Coin Dispensing Module (CDM) is installed. If the enhanced document bin sorting feature has been configured, deposit bin totals also are displayed on the screen.

## Viewing the Transaction Log File

All transactions occurring for each BASE24 processing day at terminals throughout the logical network are logged to the BASE24-atm Transaction Log File (TLF). The TLF records (one for each cardholder transaction and one for each terminal balancing transaction) are maintained by the BASE24 product for a set number of days. TLF information can be perused by card and member number or by terminal identifier depending on the key entered by the operator. For complete information on the TLF, see the ***BASE24-atm Files Maintenance Manual***.

With the SSB Enhanced Check Processing Application, the number and amount of checks in each terminal depository bin can be displayed on the TLF perusal screen. To ensure that the bin totals are displayed, the Self-Service Banking Check Terminal Settlement token must be logged to the TLF. Configuring the Token File (TKN) is described in section 4.

Multiple screen pages are displayed for perusing the detailed information on balancing transactions in the TLF. To access the detailed screens, place the cursor to the left of the transaction summary line, and press the **F4** key. Balancing transactions for Diebold terminals can have up to four screen pages.

When a terminal balancing transaction is displayed, information about hoppers 1, 2, and 3 is shown on the first hopper overlay screen, with information about hoppers 4, 5, and 6 shown on the next hopper overlay screen. The third screen displays ATM totals. If the SSB Check Terminal Settlement token is configured to be logged and the terminal owner supports the SSB Enhanced Check Processing Application, the depository bin totals are displayed on a fourth screen. You can move between these four screens by pressing the **F9** and **F11** keys. See the ***BASE24-atm Files Maintenance Manual*** for more information on these four screens.

## Process Commands

The network control operator's primary tool for controlling the BASE24 system is the network control command. An operator can issue inquiries and commands to the network while it is operating from a network control facility. Certain network commands can also be issued using the DCT.

Two of the application-specific files used with the SSB Enhanced Check Processing Application require the use of network commands following any file modifications.

For a complete description of network control commands, see the *BASE24 Text Command Reference Manual* or the *BASE24 Device Control Manual*.

## Corporate Check File

The Corporate Check File (CCF) can be reinitialized by issuing the INITCCF command or the WARMBOOT ALL (9501) command from the Network control facility. The BASE24-atm Authorization process places the CCF in extended memory during initialization. Therefore, whenever changes are made to the CCF, the Authorization process requires a WARMBOOT ALL command or an INITCCF command to reinitialize the extended memory segment for the CCF.

## Bin Sort File

A WARMBOOT command must be issued to the Diebold 10XX/478X Device Handler process following any modifications to the Bin Sort File (BSF).

## File Refreshing

The BASE24 Refresh process reads the following assigns in the Logical Network Configuration File (LCONF):

- SSB-CCF
- SSB-CSF

There is one Corporate Check File (CCF) and one Check Status File (CSF) per logical network; therefore, no refresh group is required.

The Refresh process supports the SSB Enhanced Check Processing Application segment of the following files:

- Cardholder Authorization File (CAF)
- Negative Card File (NEG)

For complete information on performing file refreshes, see the ***BASE24 Refresh and Extract Operators Manual***.



# A: SSB Reports

---

This section describes the reports related to the BASE24-atm self-service banking (SSB) applications. Four standard BASE24-atm reports include transaction information related to the SSB product. In this section, the descriptions for the reports are limited to an explanation of how each report differs from the standard BASE24-atm reports. For a complete explanation of these and other standard BASE24-atm reports, see the *BASE24-atm Settlement and Reporting Manual*.

The following BASE24-atm reports are included in this section:

- Daily Terminal Detail Transaction Log (STAT06-B24)
- Daily Institution Detail Transaction Log (STAT07-B24)
- Daily Terminal Depository Report (STAT08-B24)
- Transaction Detail Report for Interchange (STAT09-XXXX)

## SSB Report Data

The reports described in this appendix are provided as a part of the settlement and reporting process for the BASE24-atm product. These reports reflect cardholder and terminal activity on both a daily and monthly basis. For BASE24-atm customers that have purchased any of the self-service banking modules, these reports also provide information on self-service banking activity in a BASE24-atm system.

The SSB report headings and report data that are displayed on the BASE24-atm reports depend on the following:

- The SSB applications that the institution supports as indicated in the Institution Definition File (IDF).
- The SSB tokens that have been configured for logging to the BASE24-atm Transaction Log File (TLF).
- The SSB-related transactions that have occurred for the reporting period.

For example, the bin sequence number is displayed only if you have configured the SSB Enhanced Check Processing Application and the bin sort feature, and you have configured the Self-Service Banking Check token for logging.

See the *BASE24 Tokens Manual* for a complete description of SSB tokens.

The standard BASE24-atm reports that are modified for the BASE24-atm self-service banking add-on product are described on the following pages.

## Daily Terminal Detail Transaction Log

The Daily Terminal Detail Transaction Log (STAT06-B24) is a daily report which provides a detailed listing by terminal of all cardholder activity occurring at each terminal owned by this institution.

A sample of the report is shown on the following pages and is followed by descriptions of the SSB-specific fields. The SSB-specific fields are highlighted on the sample reports. See the ***BASE24-atm Settlement and Reporting Manual*** for descriptions of the other fields.

### Cardholder Transactions

The first page of the sample report shows the format for cardholder transactions. The SSB cardholder transaction data included on this report depends on which SSB applications that are configured and whether the following tokens have been logged to the BASE24-atm TLF:

- MICR Data token
- Self-Service Banking Base token
- Self-Service Banking Check token

### Administrative Transactions

The second page of the sample report shows the format for administrative transactions. The SSB administrative transaction data included on this report depends on which SSB applications are configured and whether the Self-Service Banking Check Terminal Settlement token has been logged to the BASE24-atm TLF.

STAT06--B24

INSTITUTION

ID NUMBER

NAME

DATE YY/MM/DD

PAGE 1

BNKA

BANK A

TERMINAL ID NUMBER

T000000001

| PAN              | MBR             | DESCRIP <d>  | RESP RC | SEQ | DATE                        | TIME | OFST  | CARD LN | AMT  |      |        |
|------------------|-----------------|--------------|---------|-----|-----------------------------|------|-------|---------|------|------|--------|
| FROM ACCT        | TO ACCT         |              |         |     |                             |      |       |         |      |      |        |
| SPLIT DEP AMT 1  | SPLIT DEP AMT 2 | <st>         | BIN     | SEQ | NUM                         | MICR |       |         |      |      |        |
| 3301000000000000 | 000             | DEP CHK/CB 3 | 3       | 001 | 313                         |      | 12/07 | 14:10   | +000 | LNET | 80.58  |
| 0000000000000000 | 3301101         |              |         |     |                             |      |       |         |      |      |        |
| 0.00             | 0.00            | ST           | 20001   |     | T012345678T11122233344455*  |      |       |         |      |      |        |
| 3301000000000000 | 000             | DEP SAV/CB 0 | 3       | 001 | 314                         |      | 12/07 | 15:39   | +000 | LNET | 100.58 |
| 0000000000000000 | 3311101         |              |         |     |                             |      |       |         |      |      |        |
| 0.00             | 0.00            |              | 10002   |     | T987654321T000000111100000* |      |       |         |      |      |        |

\* INDICATES AMOUNT REVERSED, F INDICATES FORCE POST

|                                                     |                 |           |         |                    |      |               |      |         |     |
|-----------------------------------------------------|-----------------|-----------|---------|--------------------|------|---------------|------|---------|-----|
| STAT06-B24                                          |                 |           |         |                    |      |               |      |         |     |
| LLLL DAILY TERMINAL DETAIL TRANSACTION LOG          |                 |           |         |                    |      |               |      |         |     |
| INSTITUTION                                         |                 | ID NUMBER |         | NAME               |      | DATE YY/MM/DD |      | PAGE 2  |     |
| BNKA                                                |                 | BANK A    |         | TERMINAL ID NUMBER |      | T00000001     |      |         |     |
| PAN                                                 | MBR             | DESCRIP   | RESP RC | SEQ                | DATE | TIME          | OFST | CARD LN | AMT |
| FROM ACCT                                           | TO ACCT         |           |         |                    |      |               |      |         |     |
| SPLIT DEP AMT 1                                     | SPLIT DEP AMT 2 | BIN       | SEQ NUM | MICR               |      |               |      |         |     |
| -----                                               |                 |           |         |                    |      |               |      |         |     |
| LLLL                                                |                 |           |         |                    |      |               |      |         |     |
| MM/DD HH:MM +0000 FORCED CUTOVER                    |                 |           |         |                    |      |               |      |         |     |
| BEGINNING CASH HOPPER #                             |                 |           |         |                    |      |               |      |         |     |
| CASH INCREASE HOPPER #                              |                 |           |         |                    |      |               |      |         |     |
| CASH DECREASE HOPPER #                              |                 |           |         |                    |      |               |      |         |     |
| CASH OUT HOPPER #                                   |                 |           |         |                    |      |               |      |         |     |
| ENDING CASH HOPPER #                                |                 |           |         |                    |      |               |      |         |     |
| CONTENT'S HOPPER #                                  |                 |           |         |                    |      |               |      |         |     |
| NUMBER/AMOUNT DEPOSITS                              |                 |           |         |                    |      |               |      |         |     |
| DEPOSITORY 0                                        |                 |           |         |                    |      |               |      |         |     |
| DEPOSITORY 1                                        |                 |           |         |                    |      |               |      |         |     |
| DEPOSITORY 3                                        |                 |           |         |                    |      |               |      |         |     |
| BIN 0                                               |                 |           |         |                    |      |               |      |         |     |
| BIN 1                                               |                 |           |         |                    |      |               |      |         |     |
| BIN 2                                               |                 |           |         |                    |      |               |      |         |     |
| BIN 3                                               |                 |           |         |                    |      |               |      |         |     |
| NUMBER/AMOUNT PAY ENCL                              |                 |           |         |                    |      |               |      |         |     |
| NUMBER MESSAGES TO FI                               |                 |           |         |                    |      |               |      |         |     |
| NUMBER/AMT DEPOSITORY                               |                 |           |         |                    |      |               |      |         |     |
| CARDS RETAINED                                      |                 |           |         |                    |      |               |      |         |     |
| * INDICATES AMOUNT REVERSED, F INDICATES FORCE POST |                 |           |         |                    |      |               |      |         |     |
| *** END OF REPORT ***                               |                 |           |         |                    |      |               |      |         |     |

## Format Description Page 1

The information on the first page of the report consists of detail transaction information.

**DESCRIP** — A brief description of the transaction, based on the transaction code. Examples of valid values for SSB transactions are as follows:

DEP TO CHK = Deposit to checking  
DEP SAV/CB = Deposit to savings with cash back  
DEP TO C/S = Split deposit to a checking account and a savings account  
CASH CHECK = Cash check

Note that CPM deposits are recognized as regular check deposits, because they have the same transaction code (20 or 24).

**<d>** — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. If the twelfth character of the description is not a number, the transaction is not a deposit. Valid values are as follows:

0 = The check or checks were deposited in an envelope.  
1 = The check or checks were deposited in the Securomatic deposit.  
3 = The check was inserted directly into the terminal.

**SPLIT DEP AMT 1** — The Account 1 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-1

**SPLIT DEP AMT 2** — The Account 2 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-2

**<st>** — An unlabeled field identifying transactions performed with a Super Teller card. The value ST appears when a Super Teller card is used. Otherwise, the field is blank.

Data Name: TLF.SSBC-TKN.SUPER-TLR-IND

**BIN SEQ NUM** — The depository bin sequence number in the terminal as assigned by the Device Handler process. The first byte indicates the depository bin position. The remainder of the field contains a sequence number ranging from 0001 to 9999.

Data Name:            TLF.SSBC-TKN.BIN-SEQ-NUM

**MICR** — The magnetic ink character recognition (MICR) data from a check-related transaction. This includes the routing and transit number, the account number, and the check serial number.

Data Name:            TLF.MICR-DATA-TKN.MICR-DATA

## Format Description Page 2

The information on the second page of the report consists of administrative transaction information. The format of this portion of the report depends on the administrative transaction. The example report format presented in this manual illustrates the format for an administrative transaction that initiates terminal cutover.

**DEPOSITORY 3** — The number and amount of check-related transactions in the depository. This field is calculated by adding the four bin count fields.

**BIN 0** — The number and amount of check-related transactions for bin 0 (envelope and reject bin).

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN0.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN0.AMT-CHK

**BIN 1** — The number and amount of check-related transactions for bin 1 (pocket A).

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN1.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN1.AMT-CHK

**BIN 2** — The number and amount of check-related transactions for bin 2 (pocket B).

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN2.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN2.AMT-CHK

**BIN 3** — The number and amount of check-related transactions for bin 3 (pocket C).

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN3.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN3.AMT-CHK



## Daily Institution Detail Transaction Log

The Daily Institution Detail Transaction Log (STAT07-B24) is a daily report that provides a detailed listing of all cardholder activity by institution. Transactions are listed in chronological order, according to the time they were initiated at the terminal.

The SSB transaction data included on this report depends on which SSB applications are configured and whether the following tokens have been logged to the BASE24-atm TLF.

- MICR Data token
- Self-Service Banking Base token
- Self-Service Banking Check token

A sample of the report is shown on the following page and is followed by descriptions of the SSB-specific fields. The SSB-specific fields are highlighted on the sample reports. See the *BASE24-atm Settlement and Reporting Manual* for descriptions of the other fields.

**DESCRIP** — A brief description of the transaction, based on the transaction code. Examples of valid values for SSB transactions are as follows:

DEP TO CHK = Deposit to checking  
DEP SAV/CB = Deposit to savings with cash back  
DEP TO C/S = Split deposit to a checking account and a savings account  
CASH CHECK = Cash check

**<d>** — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. If the twelfth character of the description is not a number, the transaction is not a deposit. Valid values are as follows:

0 = The check or checks were deposited in an envelope.  
1 = The check or checks were deposited in the Securomatic deposit.  
3 = The check was inserted directly into the terminal.

**SPLIT DEP AMT 1** — The Account 1 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-1

|                                                     |                 |               |        |     |      |                            |       |       |        |
|-----------------------------------------------------|-----------------|---------------|--------|-----|------|----------------------------|-------|-------|--------|
| STAT07-B24                                          |                 |               |        |     |      |                            |       |       |        |
| LLLL DAILY INSTITUTION DETAIL TRANSACTION LOG       |                 |               |        |     |      |                            |       |       |        |
| INSTITUTION                                         |                 | DATE YY/MM/DD |        |     |      |                            |       |       |        |
| ID NUMBER                                           |                 | PAGE 1        |        |     |      |                            |       |       |        |
| BNKA                                                |                 | BANK A        |        |     |      |                            |       |       |        |
| PAN                                                 | MBR             | DESCRIP       | RESP   | RC  | SEQ  | DATE                       | TIME  | OFST  | TERM   |
| FROM ACCT                                           | TO ACCT         |               |        |     | TERM | LN                         |       |       | AMT    |
| SPLIT DEP AMT 1                                     | SPLIT DEP AMT 2 | <st>          | BIN    | SEQ | NUM  | MICR                       |       |       |        |
| 3301000000000000                                    | 000             | DEP           | CHK/CB | 3   | 001  | 313                        | 12/07 | 14:10 | +000   |
| 0000000000000000                                    | 3301101         |               |        |     |      | T000001                    |       |       | LN     |
| 0.00                                                | 0.00            | ST            | 20001  |     |      | T012345678T11122233344455* |       |       | 80.58  |
| 3301000000000000                                    | 000             | DEP           | SAV/CB | 0   | 3    | 001                        | 12/07 | 15:39 | +000   |
| 0000000000000000                                    | 3311101         |               |        |     |      | T000002                    |       |       | LN     |
| 0.00                                                | 0.00            |               | 10001  |     |      | T987654321T00000111100000* |       |       | 100.58 |
| * INDICATES AMOUNT REVERSED, F INDICATES FORCE POST |                 |               |        |     |      |                            |       |       |        |

**SPLIT DEP AMT 2** — The Account 2 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-2

**<st>** — An unlabeled field identifying transactions performed with a Super Teller card. The value ST appears when a Super Teller card is used. Otherwise, the field is blank.

Data Name: TLFSSBC-TKN.SUPER-TLR-IND

**BIN SEQ NUM** — The terminal depository bin sequence number as assigned by the Device Handler process. The first byte indicates the depository bin position. The remainder of the field contains a sequence number ranging from 0001 to 9999.

Data Name: TLF.SSBC-TKN.BIN-SEQ-NUM

**MICR** — The MICR data from a check-related transaction. This includes the routing and transit number, the account number, and the check serial number.

Data Name: TLF.MICR-DATA-TKN.MICR-DATA

## Daily Terminal Depository Report

The Daily Terminal Depository Report (STAT08-B24) is a daily report that provides a complete listing, by terminal, of every approved depository transaction.

The SSB transaction data included on this report depends on which SSB applications are configured and whether the following tokens have been logged to the BASE24-atm TLF.

- MICR Data token
- Self-Service Banking Base token
- Self-Service Banking Check token
- Self-Service Banking Check Terminal Settlement token

A sample of the report is shown on the following page and is followed by descriptions of the SSB-specific fields. The SSB-specific fields are highlighted on the sample reports. See the ***BASE24-atm Settlement and Reporting Manual*** for descriptions of the other fields.

|                                      |  |  |  |  |  |  |  |  |  |                                       |  |  |  |  |  |  |  |  |  |
|--------------------------------------|--|--|--|--|--|--|--|--|--|---------------------------------------|--|--|--|--|--|--|--|--|--|
| STAT08-B24                           |  |  |  |  |  |  |  |  |  | LLLL DAILY TERMINAL DEPOSITORY REPORT |  |  |  |  |  |  |  |  |  |
| INSTITUTION                          |  |  |  |  |  |  |  |  |  | DATE YY/MM/DD                         |  |  |  |  |  |  |  |  |  |
| ID NUMBER NAME                       |  |  |  |  |  |  |  |  |  | PAGE 1                                |  |  |  |  |  |  |  |  |  |
| BNKA BANK A                          |  |  |  |  |  |  |  |  |  |                                       |  |  |  |  |  |  |  |  |  |
| TERMINAL ID NUMBER T00000001         |  |  |  |  |  |  |  |  |  |                                       |  |  |  |  |  |  |  |  |  |
| PAN FROM ACCT                        |  |  |  |  |  |  |  |  |  | DESCRIP <d>                           |  |  |  |  |  |  |  |  |  |
| MBR TO ACCT                          |  |  |  |  |  |  |  |  |  | RESP RC SEQ                           |  |  |  |  |  |  |  |  |  |
| SPLIT DEP AMT 1 SPLIT DEP AMT 2 <st> |  |  |  |  |  |  |  |  |  | BIN SEQ NUM MICR                      |  |  |  |  |  |  |  |  |  |
| 3301000000000000                     |  |  |  |  |  |  |  |  |  | 000                                   |  |  |  |  |  |  |  |  |  |
| 0000000000000000                     |  |  |  |  |  |  |  |  |  | 3301101                               |  |  |  |  |  |  |  |  |  |
| 0.00                                 |  |  |  |  |  |  |  |  |  | 0.00                                  |  |  |  |  |  |  |  |  |  |
| TOTAL DEPOSITS                       |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| DEPOSITORY 0                         |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| DEPOSITORY 1                         |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| DEPOSITORY 3                         |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| BIN 0                                |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| BIN 1                                |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| BIN 2                                |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| BIN 3                                |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| TOTAL PAY ENCL                       |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| SUBTOTAL                             |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| TOTAL MESSAGES                       |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| TOTAL DEPOSITORY                     |  |  |  |  |  |  |  |  |  | 0                                     |  |  |  |  |  |  |  |  |  |
| DEP CHK/CB 3                         |  |  |  |  |  |  |  |  |  | 001                                   |  |  |  |  |  |  |  |  |  |
| 12/07                                |  |  |  |  |  |  |  |  |  | 14:10                                 |  |  |  |  |  |  |  |  |  |
| +000                                 |  |  |  |  |  |  |  |  |  | LNET                                  |  |  |  |  |  |  |  |  |  |
| 80.58                                |  |  |  |  |  |  |  |  |  |                                       |  |  |  |  |  |  |  |  |  |
| T012345678T1122233344455*            |  |  |  |  |  |  |  |  |  |                                       |  |  |  |  |  |  |  |  |  |

**DESCRIP** — A brief description of the transaction, based on the transaction code. Examples of valid values for SSB transactions are as follows:

DEP TO CHK = Deposit to checking  
DEP SAV/CB = Deposit to savings with cash back  
DEP TO C/S = Split deposit to a checking account and a savings account  
CASH CHECK = Cash check

Note that CPM deposits are recognized as regular check deposits, because they have the same transaction code (20 or 24).

**<d>** — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. If the twelfth character of the description is not a number, the transaction is not a deposit. Valid values are as follows:

0 = The check or checks were deposited in an envelope.  
1 = The check or checks were deposited in the Securomatic deposit.  
3 = The check was inserted directly into the terminal.

**SPLIT DEP AMT 1** — The Account 1 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-1

**SPLIT DEP AMT 2** — The Account 2 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-2

**<st>** — An unlabeled field identifying transactions performed with a Super Teller card. The value ST appears when a Super Teller card is used. Otherwise, the field is blank.

Data Name: TLF.SSBC-TKN.SUPER-TLR-IND

**BIN SEQ NUM** — The terminal depository bin sequence number as assigned by the Device Handler process. The first byte indicates the depository bin position. The remainder of the field contains a sequence number ranging from 0001 to 9999.

Data Name: TLF.SSBC-TKN.BIN-SEQ-NUM

**MICR** — The MICR data from a check-related transaction. This includes the routing and transit number, the account number, and the check serial number.

Data Name: TLF.MICR-DATA-TKN.MICR-DATA.

**DEPOSITORY 1** — The number and amount of check-related transactions in the depository.

**DEPOSITORY 3** — The number and amount of check-related transactions in the depository. This field is calculated by adding the four bin count fields.

**BIN 0** — The number and amount of check-related transactions for bin 0.

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN0.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN0.AMT-CHK

**BIN 1** — The number and amount of check-related transactions for bin 1.

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN1.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN1.AMT-CHK

**BIN 2** — The number and amount of check-related transactions for bin 2.

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN2.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN2.AMT-CHK

**BIN 3** — The number and amount of check-related transactions for bin 3.

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN3.NUM-CHK

Data Name: TLF.SSBC-TERM-SETL-TKN.DEP-BIN3.AMT-CHK

## Transaction Detail Report

The Transaction Detail Report (STAT09-XXXX) is a daily report that provides a complete listing of all interchange activity with an Interchange Interface process. This report is based on those transactions logged to the current day's Interchange Log File (ILF) and is initiated by the BIC ISO Interface process after the interchange has cut over to the new business day.

The SSB transaction data included on this report depends on which SSB applications are configured and whether the MICR Data token has been logged to the ILF.

A sample of the report is shown on the following page and is followed by descriptions of the SSB-specific fields. The SSB-specific fields are highlighted on the sample reports. See the ***BASE24-atm Settlement and Reporting Manual*** for descriptions of the other fields.



|                          |                                                       |           |             |                      |               |                          |         |                           |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
|--------------------------|-------------------------------------------------------|-----------|-------------|----------------------|---------------|--------------------------|---------|---------------------------|--------------------------|------|-----|-----|------|------|------|-----|------|------|----------------------|------------------|--|--|--|
| STAT09-xxxx              | TRANSACTION DETAIL REPORT FOR xxxxxxxxxxxxxxxxxxxxxxx |           |             |                      |               |                          |         |                           |                          |      |     |     |      |      |      |     |      |      | DATE YY/MM/DD        |                  |  |  |  |
| PAGE 1                   |                                                       |           |             |                      |               |                          |         |                           |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
| -----                    |                                                       |           |             |                      |               |                          |         |                           |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
| CARDHOLDER NUMBER        | TRAN                                                  | DESC      | <d>         | PST                  | DAT           | B24                      | DAT-TIM | B24                       | RESP                     | CRD  | LN  | ATM | FROM | ACCT | #    | POS | ACCT | #    | TRAN/BAL/ORIG AMOUNT |                  |  |  |  |
| TRM LN                   | TRM                                                   | ID        | SEQUENCE    | #                    | TRACE         | #                        | SWI     | DAT-TIM                   | SWI                      | RESP | RV  | CDE | ATM  | TO   | ACCT | #   | POS  | APPR | CODE                 | COMPLETED AMOUNT |  |  |  |
| ATM                      | TRM                                                   | OWNER/POS | RETLR       | TRM                  | NAME-LOCATION | TRM                      | CITY    | TRM                       | ST                       | PRD  | B24 | TYP | SWI  | TYP  |      |     |      |      |                      |                  |  |  |  |
| SPLIT DEP AMT 1          |                                                       |           |             | SPLIT DEP AMT 2 <st> |               |                          |         | MICR                      |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
| -----                    |                                                       |           |             |                      |               |                          |         |                           |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
| 111111111111111111111111 | DEP                                                   | CHK/CB    | 3           | YMMDD                | MMDD-HHMMSS   | 7                        | 000     | CIR                       | 000000000000000000000000 |      |     |     |      |      |      |     |      |      |                      | 00-              |  |  |  |
| LNET T000001             | 0001                                                  | 056       | MMDD-HHMMSS | A001                 | 00            | 000000000000000000000000 |         |                           |                          |      |     |     |      |      |      |     | 00-  |      |                      |                  |  |  |  |
| 000000000000             | BANK                                                  | A         | CITY        | ST                   | ATM           | 210                      | 210     |                           |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
| 0.00                     |                                                       |           |             | 0.00 ST              |               |                          |         | T012345678T1122233344455* |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |
|                          |                                                       |           |             |                      |               |                          |         |                           |                          |      |     |     |      |      |      |     |      |      |                      |                  |  |  |  |

**DESC** — A brief description of the transaction, based on the transaction code. Examples of valid values for SSB transactions are as follows:

DEP TO CHK = Deposit to checking  
DEP SAV/CB = Deposit to savings with cash back  
DEP TO C/S = Split deposit to a checking account and a savings account  
CASH CHECK = Cash check

Note that CPM deposits are recognized as regular check deposits, because they have the same transaction code (20 or 24).

**<d>** — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. If the twelfth character of the description is not a number, the transaction is not a deposit. Valid values are as follows:

0 = The check or checks were deposited in an envelope.  
1 = The check or checks were deposited in the Securomatic deposit.  
3 = The check was inserted directly into the terminal.

**SPLIT DEP AMT 1** — The Account 1 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-1

**SPLIT DEP AMT 2** — The Account 2 amount involved in a split deposit transaction.

Data Name: TLF.AUTH-AMT-2

**BIN SEQ NUM** — The terminal depository bin sequence number as assigned by the Device Handler process. The first byte indicates the depository bin position. The remainder of the field contains a sequence number ranging from 0001 to 9999.

Data Name: TLF.SSBC-TKN.BIN-SEQ-NUM

**MICR** — The MICR data from a check-related transaction. This includes the routing and transit number, the account number, and the check serial number.

Data Name: TLF.MICR-DATA-TKN.MICR-DATA

# Index

---

## A

- Account Routing File (ARF)
  - configuring for SSB Enhanced Check Processing Application, [4-32](#)
  - fields on ARF screen 1, [4-33](#)
  - fields on ARF screen 2, [4-33](#)
  - file description, [4-32](#)
- Acquirer Processing Code File (APCF)
  - configuring for SSB Device Handler Extension, [2-32](#)
  - configuring for SSB Enhanced ATM Application, [3-30](#)
- Additional transaction support
  - feature overview, [2-2](#)
  - feature summary, [1-6](#)
  - fields to configure in ATD, [2-34](#)
  - params to configure in LCONF, [2-32](#)
  - receipts to configure in RCPT, [2-41](#), [2-42](#), [2-43](#), [2-44](#)
- ATM hardware options, [1-2](#)

## B

- Base Application
  - see* SSB Enhanced ATM Application
- BASE24-atm Standard Internal Message (STM), [2-38](#), [4-89](#)
- BASE24-atm Terminal Data files (ATD)
  - configuring for SSB Device Handler Extension, [2-34](#)
  - configuring for SSB Enhanced ATM Application, [3-32](#)
  - configuring for SSB Enhanced Check Processing Application, [4-35](#)
  - data on receipts, [2-38](#), [4-89](#)
  - example of ATD Diebold screen 11, [3-34](#)
  - example of ATD Diebold screen 12, [4-36](#)
  - fields on ATD Diebold 10XX/478X screen 13, [3-6](#)
  - fields on ATD Diebold screen 11, [3-34](#)
  - fields on ATD Diebold screen 12, [4-36](#)
  - fields on ATD screen 1, [2-34](#), [3-32](#), [4-35](#)
  - fields on ATD screen 2, [2-34](#)
  - fields on ATD screen 4, [2-35](#)
  - fields on ATD screen 5, [2-35](#)
  - fields on ATD Diebold 10XX/478X screen 7, [2-36](#), [3-32](#), [4-35](#)
  - fields on ATD Diebold 10XX/478X screen 8, [2-36](#)
  - file description, [2-34](#), [3-32](#), [4-35](#)
- Bill dispensing
  - see* Configurable bill dispensing

## Bin Sort File (BSF)

- configuring for SSB Enhanced Check Processing Application, [4-39](#)
  - daily operations, [5-7](#)
  - example of BSF screen 1, [4-40](#)
  - fields on BSF screen 1, [4-40](#)
  - file description, [4-39](#)
- Bin sorting
  - see* Document bin sorting; Enhanced document bin sorting
- Bulk note acceptor
  - feature overview, [2-12](#)
  - feature summary, [1-9](#)

## C

- C100NAMS
  - SSB Device Handler Extension, [2-15](#)
  - SSB Enhanced ATM Application, [3-23](#)
- Card Prefix File (CPF)
  - configuring for SSB Enhanced ATM Application, [3-39](#)
  - configuring for SSB Enhanced Check Processing Application, [4-43](#)
  - example of CPF screen 14, [4-47](#)
  - fields on CPF screen 1, [3-39](#), [4-43](#)
  - fields on CPF screen 4, [3-40](#), [4-45](#)
  - fields on CPF screen 14, [4-47](#)
  - file description, [3-39](#), [4-43](#)
- Card types
  - check-cashing, [4-22](#)
  - Super Teller, [3-15](#)
- Cardholder Authorization File (CAF)
  - configuring for SSB Enhanced ATM Application, [3-42](#)
  - configuring for SSB Enhanced Check Processing Application, [4-55](#)
  - example of CAF screen 14, [3-45](#)
  - example of CAF screen 16, [4-63](#)
  - fields on CAF screen 1, [3-42](#), [4-56](#)
  - fields on CAF screen 8, [3-44](#), [4-57](#)
  - fields on CAF screen 14, [3-45](#)
  - fields on CAF screen 15, [4-59](#), [4-60](#)
  - fields on CAF screen 16, [4-64](#)
  - file description, [3-42](#), [4-55](#)
- Check cashing transaction, [2-3](#)
  - see also* Additional transaction support
- Check deposit transaction, [2-4](#)
  - see also* Additional transaction support

- Check deposit with cash back transaction, [2-3](#)
  - see also* Additional transaction support
- Check imaging
  - feature overview, [2-6](#)
  - feature summary, [1-8](#)
- Check processing
  - preapproved checks, [4-25](#)
  - predeclined checks, [4-25](#)
  - registered checks, [4-23](#)
  - stop payment verification, [4-24](#)
- Check Proof List File (CPLF)
  - check proof list via the DCT, [5-3](#)
  - check proof list via the terminal, [5-3](#)
- Check proof listing
  - assigns to configure in LCONF, [2-31](#)
  - feature overview, [2-10](#)
  - feature summary, [1-9](#)
  - params to configure in LCONF, [2-32](#)
  - receipts to configure in RCPT, [2-46](#)
- Check Status File (CSF)
  - configuring for SSB Enhanced Check Processing Application, [4-69](#)
  - example of CSF screen 1, [4-70](#)
  - fields on CSF screen 1, [4-70](#)
  - file description, [4-69](#)
- Check-cashing cards
  - assigns to configure in LCONF, [4-85](#)
  - feature overview, [4-22](#)
  - feature summary, [1-14](#)
  - fields configured in CAF, [4-56](#)
  - fields to configure in ATD, [4-35](#)
  - fields to configure in CCF, [4-75](#)
  - fields to configure in CPF, [4-43](#)
  - fields to configure in IDF, [4-80](#)
  - fields to configure in NEG, [4-86](#)
  - tokens to configure in TKN, [4-94](#)
- Coin dispensing
  - feature overview, [2-8](#)
  - feature summary, [1-8](#)
  - fields to configure in ATD, [2-34](#)
- Configurable bill dispensing
  - configurable dispense algorithm method, [3-6](#)
  - feature overview, [3-6](#)
  - feature summary, [1-11](#)
  - fields to configure in ATD, [3-32](#)
  - least bills method, [3-6](#)
  - thresholds method, [3-7](#)
- Configurable depository print
  - feature overview, [3-13](#)
  - feature summary, [1-11](#)
  - fields to configure in ATD, [3-32](#)
  - receipts to configure in RCPT, [3-62](#)
- Configurable dispense algorithm method of bill dispensing, [3-6](#)
- Corporate Check File (CCF)
  - configuring for SSB Enhanced Check Processing Application, [4-74](#)
  - daily operations, [5-7](#)

- example of CCF screen 1, [4-75](#)
  - fields on CCF screen 1, [4-75](#)
  - file description, [4-74](#)

## D

- Daily operations
  - DCT balancing, [5-5](#)
  - file refresh, [5-8](#)
  - log file perusal, [5-6](#)
  - operator commands, [5-7](#)
- Depository print
  - see* Configurable depository print
- Device Control Terminal (DCT)
  - daily operations, check proof list file, [5-2](#)
  - DCT balancing, [5-5](#)
  - SSB Device Handler Extension, [2-10](#)
  - SSB Enhanced ATM Application, [3-24](#)
- Device Handler Extension
  - see* SSB Device Handler Extension
- Diebold 10XX/478X ATMs
  - hardware options, [1-2](#)
  - servicing the terminal, [5-2](#)
  - SSB Device Handler Extension prerequisites, [2-13](#)
  - SSB Enhanced ATM Application prerequisites, [3-20](#)
  - SSB Enhanced Check Processing Application prerequisites, [4-29](#)
- Diebold 10XX/478X Configuration File (CNFGIX)
  - SSB Device Handler Extension, [2-17](#)
  - SSB Enhanced ATM Application, [3-24](#)
  - SSB Enhanced Check Processing Application, [4-78](#)
- Dispensing currency
  - bills, [3-6](#)
  - coins, [2-8](#)
- Document bin sorting
  - feature overview, [2-9](#)
  - feature summary, [1-8](#)
  - params to configure in LCONF, [2-31](#)
  - see also* Enhanced document bin sorting

## E

- Enhanced ATM Application
  - see* SSB Enhanced ATM Application
- Enhanced check authorization
  - authorization methods, [4-8](#)
  - cash disbursement limits, [4-4](#)
  - check transaction limits and totals, [4-3](#)
  - feature overview, [4-2](#)
  - feature summary, [1-13](#)
  - fields configured in CAF, [4-56](#)
  - fields to configure in ATD, [4-35](#)
  - fields to configure in CPF, [4-43](#)
  - fields to configure in IDF, [4-80](#)
  - tokens to configure in TKN, [4-94](#)
- Enhanced Check Processing Application
  - see* SSB Enhanced Check Processing Application

Enhanced document bin sorting  
 assigns to configure in LCONF, [4-85](#)  
 feature overview, [4-27](#)  
 feature summary, [1-15](#)  
 fields to configure in ATD, [4-35](#)  
 fields to configure in BSF, [4-40](#)  
 tokens to configure in TKN, [4-94](#)  
*see also* Document bin sorting

Enhanced MICR data processing and manipulation  
 assigns to configure in LCONF, [4-85](#)  
 feature overview, [4-19](#)  
 feature summary, [1-13](#)  
 fields to configure in ARF, [4-33](#)  
 fields to configure in ATD, [4-35](#)  
 fields to configure in IDF, [4-80](#)  
 tokens to configure in TKN, [4-94](#)  
*see also* MICR data processing

Enhanced note accceptor (ENA), [1-9](#)

Envelope deposit with cash back transaction, [2-2](#)  
*see also* Additional transaction support

## F

Field type codes for receipt templates, [3-57](#)  
 SSB Device Handler Extension, [2-38](#)  
 SSB Enhanced ATM Application, [3-57](#)  
 SSB Enhanced Check Processing Application, [4-89](#)

Financial institution table (FIT)  
 SSB Enhanced ATM Application, [3-25](#)  
 SSB Enhanced Check Processing Application, [4-78](#)

## H

Hardware, Diebold 10XX/478X ATMs, [1-2](#)

High-Level Display screen, description, [2-27](#)

Host Configuration File (HCF)  
 configuring for SSB Enhanced ATM  
 Application, [3-47](#)  
 example of HCF screen 20, [3-48](#)  
 fields on HCF screen 2, [3-47](#)  
 fields on HCF screen 20, [3-48](#)  
 file description, [3-47](#)

## I

Institution Definition File (IDF)  
 configuring for SSB Enhanced ATM  
 Application, [3-51](#)  
 configuring for SSB Enhanced Check Processing  
 Application, [4-80](#)  
 example of IDF screen 37, [4-82](#)  
 fields on IDF screen 1, [4-80](#)  
 fields on IDF screen 5, [3-51](#), [4-81](#)  
 fields on IDF screen 37, [4-82](#)  
 file description, [3-51](#), [4-80](#)

InterBold i Series/MDS Display screen,  
 description, [2-27](#)

Interchange Configuration File (ICF)  
 configuring for SSB Enhanced ATM  
 Application, [3-50](#)  
 fields on ICF screen 7, [3-50](#)  
 file description, [3-50](#)

Interchange Log File (ILF)  
 SSB Device Handler Extension, [2-50](#)  
 SSB Enhanced ATM Application, [3-64](#)  
 SSB Enhanced Check Processing Application, [4-94](#)

Issuer Processing Code File (IPCF)  
 configuring for SSB Enhanced ATM  
 Application, [3-52](#)

## L

Least bills method of bill dispensing, [3-6](#)

Load group 12, [2-17](#)

Load group 52, [3-24](#)

Load group 54, [3-24](#)

Load group 56, [3-24](#)

Load group 58, [4-78](#)

Logical Network Configuration File (LCONF)  
 configuring for SSB Device Handler Extension, [2-31](#)  
 configuring for SSB Enhanced ATM  
 Application, [3-53](#)  
 configuring for SSB Enhanced Check Processing  
 Application, [4-85](#)  
 file description, [2-31](#), [3-53](#)  
 file refreshing, [5-8](#)

## M

MICR data  
 conversion, [4-19](#)  
 logging to the CPLF, [2-10](#)  
 manipulation, [4-20](#)  
 MICR data token, [2-50](#)

MICR data processing  
 feature overview, [2-7](#)  
 feature summary, [1-8](#)  
 tokens to configure in TKN, [2-50](#)  
*see also* Enhanced MICR data processing and  
 manipulation

## N

Negative Card File (NEG)  
 configuring for SSB Enhanced ATM  
 Application, [3-54](#)  
 configuring for SSB Enhanced Check Processing  
 Application, [4-86](#)  
 example of NEG screen 3, [3-55](#)  
 example of NEG screen 4, [4-87](#)  
 fields on NEG screen 1, [3-54](#), [4-86](#)  
 fields on NEG screen 3, [3-55](#)  
 fields on NEG screen 4, [4-88](#)  
 file description, [3-54](#), [4-86](#)

Notation conventions, [-xiii](#)

**P**

- Peak and non-peak processing periods, [3-2](#)
- Preapproved and predeclined check processing
  - assigns to configure in LCONF, [4-85](#)
  - feature overview, [4-25](#)
  - feature summary, [1-15](#)
  - fields to configure in ATD, [4-35](#)
  - fields to configure in CSF, [4-70](#)
  - fields to configure in IDF, [4-80](#)

## Printing

- check proof listing, [2-10](#), [2-46](#), [5-3](#)
- depository print, [3-13](#), [3-62](#)
- reports, [A-1](#)
- statement printing, [3-14](#)
- transaction receipts, [2-41](#), [3-61](#)

**R**

## Receipt File (RCPT)

- configuring for SSB Device Handler Extension, [2-37](#)
- configuring for SSB Enhanced ATM Application, [3-57](#)
- configuring for SSB Enhanced Check Processing Application, [4-89](#)
- field description, [2-37](#), [4-89](#)
- field type codes, [2-38](#), [3-57](#), [4-89](#)
- file description, [3-57](#)
- receipt templates and samples, [2-41](#), [3-61](#)

## Receipt type

- ADHO, [2-48](#)
- administrative subtotals, hopper counts, [2-48](#)
- administrative subtotals, hopper totals, [2-48](#)
- ADTO, [2-48](#)
- CACK, [2-41](#)
- cash check, [2-41](#)
- check proof list header, [2-46](#)
- check proof list information, [2-46](#)
- check proof list totals, [2-46](#)
- CPLC, [2-46](#)
- CPLH, [2-46](#)
- CPLT, [2-46](#)
- denied transactions, [2-45](#)
- DENY, [2-45](#)
- deposit with cash back, [2-42](#)
- DPCB, [2-42](#)
- DPPR, [3-62](#)
- envelope depository print, [3-62](#)
- partial cash check, [2-43](#)
- partial deposit with cash back, [2-44](#)
- PCKK, [2-43](#)
- PDPC, [2-44](#)
- SDP, [3-61](#)
- split deposit, [3-61](#)

## Registered check processing

- assigns to configure in LCONF, [4-85](#)
- feature overview, [4-23](#)
- feature summary, [1-14](#)
- fields to configure in ATD, [4-35](#)
- fields to configure in CSF, [4-70](#)
- fields to configure in IDF, [4-80](#)

## Reports, SSB

- Daily Institution Detail Transaction Log (STAT07-B24), [A-9](#)
- Daily Terminal Depository Report (STAT08-B24), [A-12](#)
- Daily Terminal Detail Transaction Log (STAT06-B24), [A-3](#)
- report data, [A-2](#)
- Transaction Detail Report (STAT09-XXXX), [A-16](#)

**S**

## Screen illustrations

- ATD Diebold screen 11, [3-34](#)
- ATD Diebold screen 12, [4-36](#)
- BSF screen 1, [4-40](#)
- CAF screen 14, [3-45](#)
- CAF screen 15, [4-59](#)
- CAF screen 16, [4-64](#)
- CCF screen 1, [4-75](#)
- CPF screen 14, [4-47](#)
- CSF screen 1, [4-70](#)
- Diebold Copy Buffer State, [2-26](#), [3-28](#)
- Diebold Deposit State, [2-19](#)
- Diebold Transaction Request State, [2-24](#), [3-27](#)
- HCF screen 20, [3-48](#)
- High-level Display, [2-28](#)
- IDF screen 37, [4-82](#)
- Interbold Low-level Display screen with ESC-M, [2-30](#)
- Interbold Low-level Display screen with ESC-Q, [2-29](#)
- UAF screen 10, [4-97](#)

## Servicing Diebold terminals

- check proof list via the DCT, [5-3](#)
- check proof list via the terminal, [5-3](#)
- overview, [5-2](#)

## Split deposit transaction

- feature overview, [3-5](#)
- feature summary, [1-10](#)
- fields to configure in ATD, [3-32](#)
- fields to configure in IDF, [3-51](#)
- receipts to configure in RCPT, [3-61](#)
- tokens to configure in TKN, [3-64](#)

## SSB Device Handler Extension

- configuration, [2-13](#)
- product overview, [2-1](#)
- summary, [1-6](#)

## SSB Enhanced ATM Application

- configuration, [3-20](#)
- product overview, [3-1](#)
- summary, [1-10](#)

## SSB Enhanced Check Processing Application

- configuration, [4-29](#)
- product overview, [4-1](#)
- summary, [1-13](#)

## Standard Internal Message (STM)

- see* BASE24-atm Standard Internal Message (STM)

Start and stop method of bill dispensing  
*see* Configurable dispense algorithm method of bill dispensing

State type =  
 SSB Device Handler Extension, [2-18](#)  
 SSB Enhanced ATM Application, [3-25](#)

State type C, [2-18](#)

State type G, [2-18](#)

State type I  
 SSB Device Handler Extension, [2-18](#)  
 SSB Enhanced ATM Application, [3-25](#)

State type K  
 SSB Enhanced ATM Application, [3-25](#)  
 SSB Enhanced Check Processing Application, [4-79](#)

Statement print host communications  
 feature overview, [3-14](#)  
 feature summary, [1-11](#)  
 fields to configure in ATD, [3-32](#)  
 fields to configure in HCF, [3-47](#)  
 fields to configure in IDF, [3-51](#)

Stop Payment File (SPF)  
 configuring for SSB Enhanced Check Processing Application, [4-91](#)  
 fields on SPF screen 1, [4-91](#)  
 file description, [4-91](#)

Stop payment verification  
 assigns to configure in LCONF, [4-85](#)  
 feature overview, [4-24](#)  
 feature summary, [1-15](#)  
 fields to configure in ATD, [4-35](#)  
 fields to configure in IDF, [4-80](#)  
 fields to configure in SPF, [4-91](#)

Super Teller  
 authorization impacts, [4-18](#)  
 feature overview, [3-15](#)  
 feature summary, [1-12](#)  
 fields to configure in ATD, [3-32](#)  
 fields to configure in CAF, [3-42](#)  
 fields to configure in CPF, [3-39](#)  
 fields to configure in IDF, [3-51](#)  
 fields to configure in NEG, [3-54](#)  
 state path, [3-19](#)  
 tokens to configure in TKN, [3-64](#)  
 transaction flow, [3-17](#)

## T

Terminal Receipt File (TRF)  
 configuring for SSB Device Handler Extension Configuration, [2-49](#)  
 Configuring for SSB Enhanced ATM Application Configuration, [3-63](#)  
 configuring for SSB Enhanced Check Processing Application Configuration, [4-93](#)

Thresholds method of bill dispensing, [3-7](#)

Token File (TKN)  
 configuring for SSB Device Handler Extension, [2-50](#)  
 configuring for SSB Enhanced ATM Application, [3-64](#)  
 configuring for SSB Enhanced Check Processing Application, [4-93](#)  
 file description, [3-64](#)

Transaction Log File (TLF)  
 file description, [5-6](#)  
 report dependencies, [A-2](#)  
 tokens logged to TLF, [2-50](#), [3-64](#), [4-94](#)

Transaction time windows  
 feature overview, [3-2](#)  
 feature summary, [1-10](#)  
 fields to configure in ATD, [3-32](#)  
 params to configure in LCONF, [3-53](#)

Transactions  
 cash check, [2-3](#)  
 check deposit, [2-4](#)  
 check deposit with cash back, [2-3](#)  
 envelope deposit with cash back, [2-2](#)  
 split deposit, [3-5](#)

## U

Usage Accumulation File (UAF)  
 example of UAF screen 10, [4-97](#)  
 fields on UAF screen 1, [4-95](#)  
 fields on UAF screen 10, [4-97](#)  
 fields on UAF screen 4, [4-96](#)  
 file description, [4-95](#)

*ACI Worldwide, Inc.*



# Index by Field Name

---

## A

ABOVE AMOUNT, [4-42](#)  
ACCOUNT LENGTH, [4-33](#)  
ACCOUNT NUMBER  
    CCF, [4-76](#)  
    CSF, [4-71](#)  
    SPF, [4-91](#)  
ACCOUNT NUMBER INSERT POSN, [4-34](#)  
ACCOUNT NUMBER INSERT VALUE, [4-34](#)  
ACCOUNT TYPE  
    ARF, [4-33](#)  
    SPF, [4-92](#)  
ACTIVITY LIMITS  
    CAF screen 1, [3-42](#), [4-56](#)  
    CAF screen 8, [3-44](#), [4-57](#)  
    CAF screen 15, [4-61](#)  
    CAF screen 16, [4-65](#)  
    CPF screen 1, [3-39](#), [4-44](#)  
    CPF screen 4, [3-41](#), [4-45](#)  
    CPF screen 14, [4-48](#)  
ACTIVITY THIS PERIOD  
    CAF screen 15, [4-63](#)  
    CAF screen 16, [4-67](#)  
    UAF screen 4, [4-96](#)  
    UAF screen 1, [4-95](#)  
    UAF screen 10, [4-97](#)  
AMOUNT  
    ATD, [4-38](#)  
    SPF, [4-92](#)  
ARF, [4-85](#)  
ATM-DH-CHK-BIN-THRHL, [2-31](#)  
ATM-DH-CHK-DISP-FAULT-ACT, [2-31](#)  
ATM-DH-MDS1000-CPLF, [2-31](#)  
ATM-DH-MDS1000-CPLF-REQ, [2-32](#)  
ATM-DH-PEAK-LEAD-TIME, [3-53](#)

## B

BEG CASH  
    ATD screen 4, [2-36](#)  
    ATD screen 5, [2-36](#)  
BILL MIX INFORMATION, [3-35](#)

BILL VAL  
    ATD Diebold screen 11, [3-35](#)  
    ATD screen 4, [2-35](#)  
    ATD screen 5, [2-35](#)  
BIN INFORMATION, [4-41](#)  
BRANCH  
    ATD Diebold screen 11, [3-34](#)  
    ATD Diebold screen 12, [4-36](#)

## C

Cancel Next State, [2-23](#)  
CARD TYPE  
    CAF, [3-42](#), [4-56](#)  
    CPF, [3-39](#), [4-43](#)  
    NEG, [3-54](#), [4-86](#)  
CARDHOLDER/CHECK STATUS  
    INFORMATION, [4-71](#)  
CASH CHECK DISPOSITION, [4-83](#)  
Check Accepted Screen Number, [2-22](#)  
CHECK AMOUNT, [4-41](#)  
CHECK DEPOSITORY BIN, [4-41](#)  
CHECK LIMIT, [4-73](#)  
CHECK NUMBER/HIGH CHECK NUMBER, [4-92](#)  
CHECK RETAIN FLAG, [4-72](#)  
CHECK STATUS  
    CSF, [4-72](#)  
    IDF, [4-83](#)  
CHECK SUPPORT, [4-37](#)  
CHECK USAGE CONTROL  
    CAF, [4-60](#)  
    UAF, [4-97](#)  
CHECK/CSF CHECK USAGE CONTROL, [4-48](#)  
CONTENTS  
    ATD screen 4, [2-35](#)  
    ATD screen 5, [2-35](#)  
CORPORATION CHECK, [4-83](#)  
CORPORATION NUMBER  
    CAF, [4-60](#)  
    CCF, [4-75](#)  
    NEG, [4-88](#)  
COUNT  
    ATD, [4-38](#)  
CSF CHECK USAGE CONTROL, [4-64](#)

## CSF CHECKS ACCEPTED THIS PERIOD

CAF, [4-68](#)

UAF, [4-99](#)

## CSF CHECKS ALLOWED PER PERIOD

CAF, [4-68](#)

CPF, [4-52](#)

## D

DATE, [4-92](#)

DEFAULT DEPOSITORY BIN, [4-38](#)

Deposit Bin ID, [2-21](#)

DEPOSITORY BIN NUMBER

ATD, [4-38](#)

DESCRIPTION

CCF, [4-76](#)

SPF, [4-93](#)

Destination Buffer ID, [2-27](#), [3-29](#)

DEVICE TYPE, [2-34](#), [3-32](#), [4-35](#)

DISPENSE ALGORITHM, [3-36](#)

DPC NUMBER, [3-48](#)

## E

END CASH

ATD screen 4, [2-36](#)

ATD screen 5, [2-36](#)

EXPIRATION DATE, [4-92](#)

Extension State, [2-22](#)

## F

Fault Next State, [2-20](#)

FIID

ATD Diebold screen 11, [3-34](#)

ATD Diebold screen 12, [4-36](#)

CAF screen 14, [3-46](#)

NEG screen 1, [3-55](#)

SPF screen 1, [4-91](#)

## G

Good Next State, [2-19](#)

## H

Handling Delay Screen, [2-22](#)

Handling Delay Time, [2-23](#)

Handling Error Next State, [2-23](#)

HISF NAME, [3-48](#)

## I

Image Capture, [2-22](#)

INST ID NUM, [4-76](#)

INST ID NUM (BASE24), [4-34](#)

INST ID NUM (CHECK), [4-34](#)

INSTITUTION ID NUMBER

BSF, [4-40](#)

CSF, [4-70](#)

## L

LN

ATD Diebold screen 11, [3-34](#)

ATD Diebold screen 12, [4-37](#)

LOW CHECK NUMBER, [4-92](#)

## M

MAX BILLS, [3-36](#)

MAXIMUM AMOUNT, [4-77](#)

Media Fault Next State, [2-23](#)

MEMBER

CAF, [3-45](#)

NEG, [3-55](#)

MICR Fault Next State, [2-23](#)

MINIMUM DISPENSE AMOUNT, [4-47](#)

MULTIPLE ACCT SELECT, [3-32](#)

## N

Next State, [2-26](#)

NUMBER OF ACCOUNTS, [4-76](#)

## O

OFFLINE AGGR

CAF screen 1, [3-43](#), [4-57](#)

CAF screen 8, [3-45](#), [4-58](#)

CAF screen 15, [4-62](#)

CAF screen 16, [4-67](#)

CPF screen 1, [3-40](#), [4-45](#)

CPF screen 4, [3-41](#), [4-46](#)

CPF screen 14, [4-51](#)

OFFLINE CASH ADV

CAF screen 1, [3-43](#), [4-57](#)

CAF screen 8, [3-44](#), [4-58](#)

CPF screen 1, [3-40](#), [4-44](#)

CPF screen 4, [3-41](#), [4-46](#)

OFFLINE CASH WDL

CAF screen 1, [3-43](#), [4-56](#)

CAF screen 8, [3-44](#), [4-58](#)

CPF screen 1, [3-40](#), [4-44](#)

CPF screen 4, [3-41](#), [4-45](#)

OFFLINE CHECK

CAF, [4-62](#), [4-63](#)

CPF, [4-49](#)

UAF, [4-98](#)

OFFLINE CSF CHECK

CAF, [4-66](#), [4-67](#)

CPF, [4-50](#)

UAF, [4-98](#)

Operation, [2-20](#)

Override MICR DIT Setting, [2-23](#)

## P

### PAN

CAF, [3-45](#)

NEG, [3-55](#)

PBF STOP PAY/WARNING STATUS, [4-93](#)

PEAK WINDOW LOAD GROUP, [3-38](#)

PROCESS CHECK TRANSACTIONS USING BASE LIMITS/USAGES

CAF, [4-60](#)

CPF, [4-51](#)

PROCESS CSF CHECK TRANSACTIONS USING BASE LIMITS/USAGES

CAF, [4-65](#)

CPF, [4-52](#)

## R

REASON ON FILE, [3-54](#), [4-87](#)

RECORD TYPE, [4-33](#)

### REGION

ATD Diebold screen 11, [3-34](#)

ATD Diebold screen 12, [4-36](#)

REGISTERED MEMBER NUMBER, [4-71](#)

REGISTERED PAN NUMBER, [4-71](#)

## S

Screen Number, [2-20](#)

Send Buffer B and/or C, [3-27](#)

Send Track 1, 3, and/or MICR, [2-25](#)

Source Buffer ID, [2-26](#), [3-28](#)

### SPF

IDF, [4-80](#)

LCONF, [4-85](#)

SSB BASE, [3-51](#)

SSB CHECK, [4-81](#)

SSB-BSF, [4-85](#)

SSB-CCF, [4-85](#)

SSB-CSF, [4-85](#)

STANDARD WINDOW LOAD GROUP, [3-38](#)

STATEMENT PRINT ALTERNATE ROUTE, [3-49](#)

STATION, [3-47](#)

STATUS, [4-77](#)

### STD BEG CASH

ATD screen 4, [2-36](#)

ATD screen 5, [2-36](#)

STOP PAY, [4-82](#)

SUPER TELLER TERMINAL ID

CAF, [3-46](#)

NEG, [3-56](#)

SYSTEM CALCULATE, [4-93](#)

## T

TERM BIN GROUP, [4-40](#)

### TERM ID

ATD Diebold screen 11, [3-34](#)

ATD Diebold screen 12, [4-36](#)

TERMINAL BIN GROUP, [4-37](#)

TERMINAL GROUP, [2-36](#), [3-32](#), [4-35](#)

THRESHOLD, [3-35](#)

### TIME

SPF, [4-92](#)

Timeout/Cancel Next State, [2-20](#)

TIMES USED THIS PERIOD, [4-96](#)

### TOTAL AGGR

CAF screen 1, [3-43](#), [4-57](#)

CAF screen 8, [3-45](#), [4-58](#)

CAF screen 15, [4-62](#)

CAF screen 16, [4-67](#)

CPF screen 1, [3-40](#), [4-44](#)

CPF screen 4, [3-41](#), [4-46](#)

CPF screen 14, [4-51](#)

### TOTAL CASH ADV

CAF screen 1, [3-43](#), [4-56](#)

CAF screen 8, [3-44](#), [4-58](#)

CPF screen 1, [3-40](#), [4-44](#)

CPF screen 4, [3-41](#), [4-46](#)

UAF screen 1, [4-95](#)

UAF screen 4, [4-96](#)

### TOTAL CASH WDL

CAF screen 1, [3-43](#), [4-56](#)

CAF screen 8, [3-44](#), [4-58](#)

CPF screen 1, [3-39](#), [4-44](#)

CPF screen 4, [3-41](#), [4-45](#)

UAF screen 1, [4-95](#)

UAF screen 4, [4-96](#)

### TOTAL CHECK

CAF, [4-61](#), [4-63](#)

CPF, [4-48](#)

UAF, [4-98](#)

### TOTAL CSF CHECK

CAF, [4-65](#), [4-67](#)

CPF, [4-49](#)

UAF, [4-98](#)

TRANSACTION TIME WINDOW INFORMATION, [3-36](#)

TYPE, [3-47](#)

Type, [2-19](#), [2-24](#), [2-26](#)

## U

UNDER AMOUNT, [4-41](#)

## W

WEEKEND/HOLIDAY PEAK TIME END, [3-38](#)

WEEKEND/HOLIDAY PEAK TIME START, [3-37](#)

WORKDAY PEAK TIME END, [3-37](#)

WORKDAY PEAK TIME START, [3-37](#)

# Index by Data Name

---

## A

ACCT-NUM  
    CCF, [4-76](#)  
    CSF, [4-71](#)  
ACCT-STAT, [4-77](#)  
AMT  
    BSF, [4-41](#)  
AUTH-AMT-1, [A-6](#), [A-9](#), [A-14](#), [A-18](#)  
AUTH-AMT-2, [A-6](#), [A-11](#), [A-14](#), [A-18](#)

## B

BASE.GRP-LMT.AGGR-LMT  
    CAF, [4-62](#), [4-67](#)  
    CPF, [4-51](#)  
BASE.GRP-LMT-OFFL-AGGR-LMT  
    CAF, [4-62](#), [4-67](#)  
    CPF, [4-51](#)  
BIN-GRP, [4-40](#)

## C

CHK-LMT  
    CCF, [4-77](#)  
    CSF, [4-73](#)  
CHK-STAT, [4-72](#)  
CORP-CNT, [4-76](#)  
CORP-DESCR, [4-76](#)  
CORP-NUM, [4-75](#)

## D

DIEBOLD.BILL-MIX.HOPR-THRSHLDS, [3-35](#)  
DIEBOLD.BILL-MIX.MAX-BILLS, [3-36](#)  
DIEBOLD.DISP-ALGO, [3-36](#)  
DIEBOLD.PEAK-WINDOW-LOAD-GRP, [3-38](#)  
DIEBOLD.STD-WINDOW-LOAD-GRP, [3-38](#)  
DIEBOLD.WKND-END-PEAK-LOAD-WINDOW, [3-38](#)  
DIEBOLD.WKND-STRT-PEAK-LOAD-WINDOW, [3-37](#)  
DIEBOLD.WRKDAY-END-PEAK-LOAD-WINDOW, [3-37](#)

DIEBOLD.WRKDAY-STRT-PEAK-LOAD-WINDOW, [3-37](#)

## I

INST-ID-NUM  
    BSF, [4-41](#)  
    CCF, [4-76](#)  
    CSF, [4-70](#)

## M

MICR-DATA-TKN.MICR-DATA, [A-7](#), [A-11](#), [A-15](#), [A-18](#)

## O

OVR-BIN-NUM, [4-42](#)

## R

RET-CHK-FLG, [4-72](#)  
RGSTR-MBR-NUM, [4-72](#)  
RGSTR-PAN, [4-71](#)

## S

SSBC.BIN-GRP, [4-37](#)  
SSBC.CCF-CHK, [4-83](#)  
SSBC.CHK-BASE-FLG  
    CAF, [4-61](#)  
    CPF, [4-51](#)  
SSBC.CHK-DISP, [4-84](#)  
SSBC.CHK-SUPPORT, [4-37](#)  
SSBC.CORP-NUM  
    CAF, [4-60](#)  
    NEG, [4-88](#)  
SSBC.CSF-CHK, [4-83](#)  
SSBC.CSF-CHK-BASE-FLG  
    CAF, [4-65](#)  
    CPF, [4-52](#)  
SSBC.CSF-CHK-USED-PRD  
    CAF, [4-68](#)  
    UAF, [4-99](#)  
SSBC.CSF-CHK-USE-LMT  
    CAF, [4-68](#)  
    CPF, [4-52](#)

SSBC.DEP-BINx.SSBC-AMT-CHK, [4-38](#)  
SSBC.DEP-BINx.SSBC-NUM-CHK, [4-38](#)  
SSBC.DFLT-BIN, [4-38](#)  
SSBC.GRP-LMT.OFFL-CHK-LMT  
    CAF, [4-62](#)  
    CPF, [4-49](#)  
SSBC.GRP-LMT.OFFL-CSF-CHK-LMT  
    CAF, [4-67](#)  
    CPF, [4-50](#)  
SSBC.GRP-LMT.TTL-CHK-LMT  
    CAF, [4-61](#)  
    CPF, [4-48](#)  
SSBC.GRP-LMT.TTL-CSF-CHK-LMT  
    CAF, [4-66](#)  
    CPF, [4-50](#)  
SSBC.GRP-PRD.OFFL-CHK-PRD  
    CAF, [4-63](#)  
    UAF, [4-98](#)  
SSBC.GRP-PRD.OFFL-CSF-CHK-PRD  
    CAF, [4-68](#)  
    UAF, [4-99](#)  
SSBC.GRP-PRD.TTL-CHK-PRD  
    CAF, [4-63](#)  
    UAF, [4-98](#)  
SSBC.GRP-PRD.TTL-CSF-CHK-PRD  
    CAF, [4-67](#)  
    UAF, [4-98](#)  
SSBC.MIN-AMT, [4-47](#)  
SSBC.SPF-CHK, [4-82](#)  
SSBCCPF.CHK-DEP-CR-PERCENT  
    CPF, [4-53](#)  
SSBCCPF.CR-PER-CHK-DEP-LMT  
    CPF, [4-53](#)  
SSBCCPF.CR-PER-CSF-CHK-LMT  
    CPF, [4-54](#)  
SSBCCPF.CSF-CHK-DEP-CR-PERCENT  
    CPF, [4-53](#)  
SSBC-TERM-SETL-TKN.DEP-BIN0.AMT-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN0.NUM-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN1.AMT-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN1.NUM-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN2.AMT-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN2.NUM-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN3.AMT-CHK, [A-8](#), [A-15](#)  
SSBC-TERM-SETL-TKN.DEP-BIN3.NUM-CHK, [A-8](#), [A-15](#)  
SSBC-TKN.BIN-SEQ-NUM, [A-7](#), [A-11](#), [A-14](#), [A-18](#)

SSBC-TKN.SUPER-TLR-IND, [A-6](#), [A-11](#), [A-14](#)  
STMT-PRNT-ALT-RTE, [3-49](#)  
SUPER-TLR-TERM-ID  
    CAF, [3-46](#)  
    NEG, [3-56](#)

## U

UNDR-BIN-NUM, [4-41](#)