

Settlement and Reporting Manual

BASE24-atm[®]



© 2007 by ACI Worldwide, Inc. All rights reserved.

All information contained in this documentation, as well as the software described in it, is confidential and proprietary to ACI Worldwide, Inc., or one of its subsidiaries, is subject to a license agreement, and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of ACI Worldwide, Inc., or one of its subsidiaries.

ACI, ACI Worldwide, and the ACI product names used in this documentation are trademarks or registered trademarks of ACI Worldwide, Inc., or one of its subsidiaries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

Contents

Preface	ix
Conventions Used in this Manual	xiii
1: Introduction	1-1
The BASE24-atm Role in Settlement	1-2
BASE24-atm Settlement	1-3
Defining the Network Participants	1-4
Cardholders	1-4
Card Issuers	1-4
Terminals	1-5
Terminal Owners	1-6
Interchanges	1-6
The BASE24-atm Business Day	1-8
Terminal Cutover	1-9
Institution Cutover	1-11
Logical Network Cutover	1-12
Interchange Cutover	1-12
The BASE24-atm Cutover and Reporting Database	1-13
Transaction Log File (TLF)	1-13
Reports File (RPT)	1-13
Interchange Log File (ILF)	1-14
Other Database Files	1-14
BASE24-atm Cutover and Reporting Processing	1-16
Financial Institution Cutover Timer	1-16
Force Cutover Timer	1-16
Logical Network Cutover Timer	1-16
Midnight Cutover Timer	1-16
Start Reports Timers	1-17
Terminal Timer	1-17

Introduction *continued*

BASE24-atm Report Overview	1-18
Data Masking	1-18
Daily Reports	1-19
Monthly Reports	1-20
Interchange Reports	1-21
2: Terminal Support	2-1
Terminal Totals	2-2
Transaction Totals	2-2
Balancing Totals	2-3
Administrative Transactions	2-5
Midpoint Cash Adjustment	2-5
Subtotaling Transaction	2-6
Balancing Transaction	2-6
Terminal Balancing	2-7
Balancing Terminals Once a Day	2-7
Balancing Terminals Multiple Times a Day	2-7
Terminal Cutover	2-8
Terminal Balancing and Cutover Window	2-8
Force Cutover	2-9
Forced Cutover Audit	2-9
Terminal Reconciliation	2-10
Sample Reconciliation Form	2-10
Form Description	2-13
3: Settlement Support	3-1
BASE24-atm Settlement	3-2
Institution Settlement	3-2
Logical Network Settlement	3-2
Institution Settlement	3-3
Vault Cash Account	3-5
ATM Cash Account	3-5
ATM Settlement Account	3-6
Individual Customer Accounts	3-6
Logical Network Account	3-7

Settlement Support *continued*

Logical Network Settlement	3-8
Logical Network Clearings Account	3-10
Individual Institution Account	3-10
Interchange Clearings Account.	3-11
Interchange Due To/From Account	3-11
4: BASE24-atm Settlement Reports.	4-1
Clearings Statement Report (SETL01-B24)	4-2
Clearings Statement Report for XXXX (SETL01-XXXX)	4-5
Daily Terminal Settlement Report (SETL02-B24)	4-14
Monthly Terminal Settlement Report (SETL03-B24)	4-27
Daily Institution Approved Transaction Volume Report (STAT04-B24)	4-29
Monthly Institution Approved Transaction Volume Report (STAT05-B24)	4-43
Daily Terminal Detail Transaction Log Report (STAT06-B24)	4-45
Format Description Page 1	4-49
Format Description Page 2	4-51
Daily Terminal Exception Detail Report	4-54
Daily Institution Detail Transaction Log Report (STAT07-B24)	4-56
Daily Institution Exception Detail Report	4-62
Daily Terminal Depository Report (STAT08-B24)	4-64
Transaction Detail Report For XXXX (STAT09-XXXX)	4-69
Format Description Page 1	4-73
Format Description Page 2	4-77
5: Configuring Cutover and Reporting	5-1
LCONF Assigns and Params	5-2
Configuring the Settlement Initiator Process	5-4
Configuring Cutover	5-5
Terminal Cutover	5-5
Institution Cutover	5-6
Logical Network Cutover	5-8
Interchange Cutover	5-9

Configuring Cutover and Reporting *continued*

Configuring Reports	5-10
BASE24-atm Report Sets	5-10
Logical Network Configuration File	5-11
Institution Definition File	5-16
Interchange Configuration Files	5-16
COBNAMES File	5-17
6: Cutover and Reporting Operations	6-1
Producing BASE24-atm Reports	6-2
Report Obey Files	6-2
Example Report Obey File	6-4
Manually Starting BASE24-atm Reports	6-4
Suppressing BASE24-atm Reports	6-5
Specifying Date Formats	6-5
Producing Interchange Reports	6-6
Manually Starting BASE24 Interchange Reports	6-7
Suppressing BASE24 Interchange Reports	6-7
Specifying Date Formats	6-7
Perusing Reports in the Reports File (RPT)	6-8
Deleting Report Files	6-10
Daily Reports	6-10
Monthly Reports	6-10
A: Processing Information	A-1
Process Configuration	A-2
Multiple Copies	A-2
Startup Logic	A-2
Event Messages and Product Module ID	A-2
Broadcast Notification	A-3
Initialization Processing	A-4
Warmboot Processing	A-6
Timer Processing	A-7
Financial Institution Cutover Timer	A-7
Force Cutover Timer	A-13

Timer Processing <i>continued</i>	
Logical Network Cutover Timer.....	A-14
Midnight Cutover Timer.....	A-18
Start Reports Timers.....	A-22
Terminal Timer.....	A-22
Text Commands	A-25
Index	Index-1

ACI Worldwide, Inc.

Preface

The BASE24-atm product provides settlement and reporting tools that enable institutions to settle more efficiently and accurately with each other. These settlement and reporting tools include settlement reports, statistical reports, and interchange reports. The BASE24-atm product also ensures that settlement entities are cut over to new business days at appropriately configured times.

This manual describes the settlement and reporting tools available with the BASE24-atm product. It also describes the functionality within the BASE24-atm product that guides and controls cutover and reporting actions.

Audience

This manual is intended for the BASE24 operational staff who monitor and control BASE24-atm cutover, settlement, and reporting. It also provides settlement initialization and cutover procedures for technical support personnel.

Additional Documentation

The BASE24 documentation set is arranged so that each BASE24 manual presents a topic or group of related topics in detail. When one BASE24 manual presents a topic that has already been covered in detail in another BASE24 manual, the topic is summarized and the reader is directed to the other manual for additional information. Information has been arranged in this manner to be more efficient for readers who do not need the additional detail and at the same time provide the source for readers who require the additional information.

This manual contains references to the following BASE24 publications:

- The ***BASE24 Base Files Maintenance Manual*** contains information about the Institution Definition File (IDF) and Interchange Configuration File (ICF).
- The ***BASE24 Logical Network Configuration File Manual*** contains information about accessing and configuring the Logical Network Configuration File (LCONF) and detailed descriptions of each assign and param.
- The ***BASE24 Event Message Reference Guide*** provides information about event messages.
- The ***BASE24 Text Command Reference Manual*** contains syntax and processing steps for text commands.
- The ***BASE24-atm Files Maintenance Manual*** contains information about the Reports File (RPT), BASE24-atm Terminal Data files, and Transaction Log File (TLF).
- The ***BASE24-atm Diebold 1000 SSB Manual*** and the ***BASE24-atm NCR 50XX/56XX SSB Manual*** contain information about report fields specific to the BASE24-atm self-service banking (SSB) product.

This manual also refers to the ***NET24-XPNET Network Control Operations Guide*** for information about service-based routing, including broadcast messages.

Software

This manual documents standard processing as of its publication date. Software that is not current and custom software modifications (CSMs) may result in processing that differs from the material presented in this manual. The customer is responsible for identifying and noting these changes.

Manual Summary

The following is a summary of the contents of this manual.

“Conventions Used in this Manual” follows this preface and describes notation and documentation conventions necessary to understand the information in the manual.

Section 1, “Introduction,” provides an overview of BASE24-atm settlement and reporting, defines the network participants, describes how transaction activity is reported, and introduces the BASE24-atm reports.

Section 2, “Terminal Support,” describes terminal totals and terminal balancing, cutover, and reconciliation support provided by the BASE24-atm product.

Section 3, “Settlement Support,” describes institution, logical network, and interchange settlement support provided by the BASE24-atm product.

Section 4, “BASE24-atm Settlement Reports,” describes the daily, monthly, and interchange reports produced by the BASE24-atm product.

Section 5, “Configuring Cutover and Reporting,” describes the configuration tasks that a user must perform to establish BASE24-atm cutover and reporting.

Section 6, “Cutover and Reporting Operations,” describes the operations a user must perform when managing BASE24-atm settlement and reporting on a daily basis.

Appendix A, “Processing Information,” contains supplementary information for process configuration, a description of process initialization and warmboot processing, descriptions of timer processing, and a list of text commands that the BASE24-atm Settlement Initiator process can receive.

Publication Identification

Three entries appearing at the bottom of each page uniquely identify this BASE24 publication. The publication number (for example, AT-AE000-06 for the ***BASE24-atm Settlement and Reporting Manual***) appears on every page to assist readers in identifying the manual from which a page of information was printed. The publication date (for example, Nov-2007 for November, 2007) indicates the issue of the manual. The software release information (for example, R6.0v8 for release 6.0, version 8) specifies the software that the manual describes. This information matches the document information on the copyright page of the manual.

ACI Worldwide, Inc.

Conventions Used in this Manual

This section explains how syntax is documented in this manual. It also explains BASE24-atm Terminal Data files terminology.

Syntax Notation

Syntax descriptions in this manual use several symbols and conventions to denote how commands must be entered. These conventions are described in the table below.

Notation	Meaning
UPPERCASE LETTERS	Indicate key words and literals that you must enter exactly as shown.
<i>lowercase italics</i>	Identify variables that you must provide.
Brackets []	Enclose optional syntax items that you can enter in the command.
Braces { }	Enclose a group of items from which you are required to choose one item. The items are separated within the braces by a vertical bar ().
Vertical bar	Separates alternatives in a list of items.
Ellipsis ...	Indicates the immediately preceding syntactical item can occur one or more times.
Punctuation	Must be entered as shown. This includes parentheses, commas, semicolons, and other symbols not previously described.

Notation	Meaning
Spaces	Are required as delimiters wherever it would be otherwise impossible to discriminate between adjacent words or symbols. You can insert additional spaces between any adjacent words or symbols, but not within a word or multiple character symbol.
Indented lines	Indicates a continuation of the preceding line of syntax. If the syntax of a command is too long to fit on a single line, each continuation line is indented.

BASE24-atm Terminal Data Files Acronyms

The BASE24-atm Terminal Data files can be abbreviated using a number of acronyms, depending on the Device Handler process used in the BASE24-atm system, whether you are accessing the file through the CRT Access system, or whether the data is static or dynamic. The table below summarizes BASE24-atm Terminal Data file acronyms by Device Handler process:

Device Handler Process	Terminal Data File Acronym			
	Screen	File	Static	Dynamic
Diebold 10XX/478X	ATD	ATD	ATDS1	ATDD x
NCR 5XXX	ATD	ATD	ATDS1	ATDD x
Other	ATD	TDF	Not applicable	Not applicable

In the above table, the acronym ATDD x , where x is the value 1 or 2, can describe the dynamic data stored in the BASE24-atm Terminal Data files. The data in the BASE24-atm Terminal Data Dynamic File—general data (ATDD1) is general dynamic data. The data in the BASE24-atm Terminal Data Dynamic File —scratch pad (ATDD2) is token data for the last transaction processed by the BASE24 system and acquired at this terminal. The acronym ATDS1 describes the BASE24-atm Terminal Data Static File—general data.

To eliminate confusion when referring to the file, the name *BASE24-atm Terminal Data files* is used instead of a file acronym.

1: Introduction

This section introduces the reader to BASE24-atm cutover, settlement, and reporting procedures. The topics discussed in this section include the role of the BASE24-atm product in cutover, settlement, and reporting; the financial entities (or network participants) involved in settlement; the BASE24-atm business day; how transaction activity is reported; and descriptions of the files used in processing settlement information.

The BASE24-atm Role in Settlement

The BASE24-atm role in settlement is one of transaction management and reporting. The BASE24-atm product defines the reporting day, logs and keeps track of each day's transaction activity, provides a daily file of transactions for back-end processing by a host, and reports the funds due from and owed to the various logical network participants.

Although BASE24-atm processing and reporting is designed specifically to enhance network participants' internal settlement and accounting, participating BASE24-atm institutions are themselves responsible for the tangible aspects of settlement. They must debit and credit their terminal and cardholder accounts, settle among themselves, and settle with interchanges associated with the network. The BASE24-atm product facilitates this settlement effort by providing a file of transactions it has processed during the business day, the Transaction Log File (TLF), along with a set of settlement and statistical reports that reflect cardholder and terminal activity on both a daily and monthly basis.

BASE24-atm Settlement

The BASE24-atm logical network is *cut over* and *settled* each day. Settlement, in this context, is actually a reconciliation effort whereby the current day's transaction activity is closed out and reported and the system is shown to be in balance.

BASE24-atm settlement differs from the settlement carried out by the various institutions in the logical network in that the BASE24-atm product does not move funds to physically *settle* accounts. However, the BASE24-atm product does provide the support for participants in the logical network to initiate this movement of funds.

Defining the Network Participants

The BASE24-atm product interacts with a number of financial entities. Each of these financial entities, or network participants, plays a unique role in the initiation and processing of BASE24-atm transactions and each has its own unique settlement requirements. The network participants that the BASE24-atm product supports are described below and on the following pages.

Cardholders

Cardholders are individuals who have been issued debit or credit cards that they can use to initiate electronic transactions.

The BASE24-atm product does not consider cardholders to be settlement entities. This means that the BASE24-atm product does not compute a daily settlement position for each cardholder as it does for the other network participants. The BASE24-atm product does, however, log all transactions initiated by cardholders in the daily Transaction Log File (TLF), allowing institutions to post these transactions to the appropriate cardholder accounts.

Card Issuers

Card issuers are financial organizations that issue debit and credit cards to their customers, or cardholders, for use at terminals. These cards access the individual checking and savings accounts established at the cardholder's institution.

The BASE24-atm product captures all transaction activity in a daily file, which card issuers can extract and use to post cardholder transactions to the appropriate accounts.

The BASE24-atm product also computes a daily settlement position for each institution in the network. For a card issuer, this settlement position includes the net amount the card issuer owes the network for its cardholders' transactions. For example, if an institution's cardholder makes a withdrawal for \$20.00 at a terminal belonging to another institution, The BASE24-atm product keeps track of this amount and, at the end of the day, informs the card-issuing institution that \$20.00 is due to the logical network for a transaction made at another terminal.

In addition, the BASE24-atm product provides an audit report containing cardholder activity for each card issuer. This report lists cardholder transactions in cardholder number order and provides institutions with the information necessary to trace specific transactions in cases of customer service problems or cardholder disputes.

The settlement and statistical reports the BASE24-atm product provides for use by card-issuing institutions are listed below. These reports are described in section 4.

- Clearings Statement Report (SETL01-B24)
- Daily Institution Approved Transaction Volume Report (STAT04-B24)
- Monthly Institution Approved Transaction Volume Report (STAT05-B24)
- Daily Institution Detail Transaction Log Report (STAT07-B24)
- Daily Institution Exception Detail Report

Terminals

Terminals are Automated Teller Machines (ATMs) where cardholders initiate transactions. The BASE24-atm product records transactions made at a terminal according to the current posting date for that terminal.

The BASE24-atm product accumulates transaction totals for each terminal throughout its business day. When a new business day begins, the BASE24-atm product uses these transaction totals to facilitate the institution's terminal reconciliation procedures and provide the institution with the comprehensive set of reports listed below. These reports are described in section 4.

- Daily Terminal Settlement Report (SETL02-B24)
- Daily Terminal Detail Transaction Log Report (STAT06-B24)
- Daily Terminal Exception Detail Report
- Daily Terminal Depository Report (STAT08-B24)

Terminal Owners

Terminal owners are financial organizations that own ATM terminals for use by their customers and by customers belonging to other card-issuing institutions.

The BASE24-atm product computes a daily settlement position for each institution in the logical network. For a terminal owner, this settlement position includes the net amount the network owes the terminal owner for those transactions made by customers belonging to other institutions. For example, if an institution's cardholder makes a withdrawal for \$20.00 at a terminal belonging to another institution, the BASE24-atm product keeps track of this amount and, at the end of the day, informs the terminal-owning institution that \$20.00 is due from the logical network for transactions made by other cardholders.

The BASE24-atm product maintains a transaction log that provides terminal-owning institutions with the information necessary to reconcile all transaction activity at each terminal.

The BASE24-atm settlement and statistical reports show all transactions made at an institution's terminals so that fees can be settled accurately. These reports are listed below and described in section 4.

- Clearings Statement Report (SETL01-B24)
- Daily Terminal Settlement Report (SETL02-B24)
- Monthly Terminal Settlement Report (SETL03-B24)
- Daily Terminal Detail Transaction Log Report (STAT06-B24)
- Daily Terminal Exception Detail Report
- Daily Terminal Depository Report (STAT08-B24)

Interchanges

Interchanges are national or regional networks that allow, for an established fee, authorization and completion of transactions between otherwise independent card-issuing and terminal-owning institutions.

Since each interchange conducts settlement according to its own business day, the BASE24-atm product provides transaction information reports according to both the BASE24-atm and the interchange business day. These reports allow the BASE24-atm system to settle with the interchange and to account for transactions the interchange does not recognize as being included in the day's business.

The transaction information for the interchange settlement reports is derived from the Interchange Log File (ILF)—the file to which all interchange transactions are logged. The BASE24-atm product manages this file according to the interchange business day. The interchange settlement reports are listed below and described in section 4.


- Clearings Statement Report for XXXX (SETL01-XXXX)
- Clearings Statement Report (SETL01-B24)
- Transaction Detail Report for XXXX (STAT09-XXXX)

The BASE24-atm Business Day

The BASE24-atm product manages transaction activity according to its business day. Transactions the BASE24-atm system processes during its defined business day are included in that day's Transaction Log File (TLF) and, consequently, on that day's reports.

The BASE24-atm business day is defined by a series of daily cutovers during which the BASE24-atm system stops posting transactions to the current posting day and begins posting transactions to the next business day. There are four daily cutovers: terminal, institution, logical network, and interchange. Terminal, institution, and logical network cutover occur in that order. Terminal cutover occurs at the terminal level; all terminals must be cut over before institution cutover; and all institutions must be cut over before logical network cutover. Ultimately, the logical network cutover defines the BASE24-atm business day, as logical network cutover is the time when all BASE24-atm institutions are cut over to the next day. The BASE24-atm settlement reports are produced after logical network cutover.

Interchange cutover varies from interchange to interchange. The following diagram shows the cutover hierarchy, illustrating how each cutover is related. Each cutover is described on the following pages.

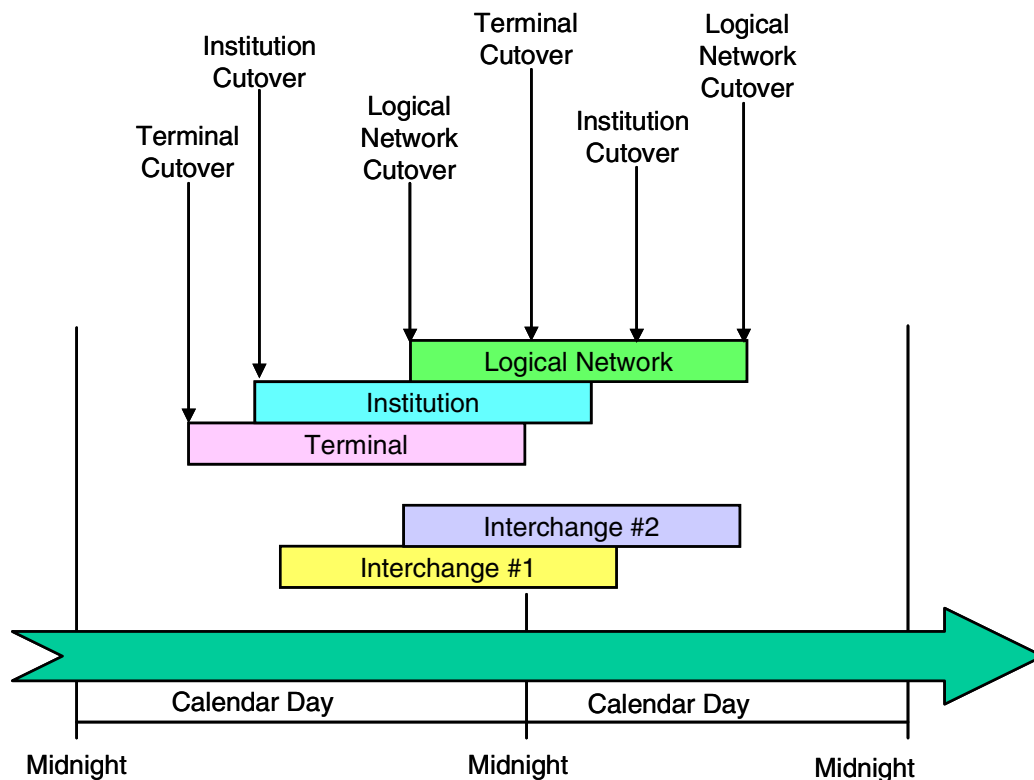

Terminal Cutover

Terminal cutover is the point at which the BASE24-atm business day begins for an institution's terminals. When a terminal is cut over, BASE24-atm Settlement Initiator process increases the posting date in the BASE24-atm Terminal Data files by one day. All incoming transactions to that terminal after that point are included in the next BASE24-atm business day.

The BASE24-atm product also provides terminal balancing support. Terminal balancing can be performed in conjunction with terminal cutover. When a terminal is balanced, the BASE24-atm product updates, settles, and clears terminal totals in addition to cutting the terminal over to a new posting day. For more information about terminal balancing, see section 2.

Terminals must be cut over each day during a *cutover* window. Each institution defines its own cutover window in the Institution Definition File (IDF). Terminals can be configured to cut over by the following methods:

- An operator uses a card at the terminal to balance and cut over the terminal during the cutover window.
- An operator uses a CRT at the institution to balance and cut over a terminal during the cutover window.
- The Settlement Initiator process forces the terminal to cut over at the end of the cutover window.

The method by which terminals are cut over depends on the needs of the institution and the requirements of the terminal at terminal cutover. Each method is described below.

Card Balance and Cutover

Service personnel can balance and cut over a terminal using a card transaction initiated at the terminal. The balance and cutover transaction must be initiated at the terminal within the cutover window defined in the Institution Definition File (IDF) for the terminal-owning institution. This balancing and cutover option is most often used when the terminal must be serviced at the time of cutover. For example, at terminal cutover the institution may send out service personnel to cut over and balance the terminal and add cash to the ATM at the same time.

CRT Balance and Cutover

An operator can balance and cut over a terminal using a CRT at the institution. To do this, the operator uses the Device Control Terminal (DCT) screens. The operator must initiate the balance and cutover command at the CRT within the cutover window defined in the IDF record of the terminal-owning institution. This balancing and cutover option is most often used when the terminal does not require servicing at terminal cutover.

Settlement Initiator Process Force Cutover

If a terminal has not been cut over to a new business day by the end of the terminal cutover window defined in the IDF for the terminal-owning institution, the Settlement Initiator process forces the terminal to cut over at the end of the

terminal cutover window. This ensures that every terminal operates on the correct business day and that transactions are logged to the appropriate Transaction Log File (TLF).

When a terminal is cut over by this method, the terminal is *not* balanced. The BASE24-atm product does not update, settle, or clear any of the terminal totals. The BASE24-atm product updates the posting date only.

Customers can purchase the Forced Cutover Audit add-on module. The Forced Cutover Audit module logs transaction and balancing totals to the journal printer at the ATM following a forced cutover. This module is used only with the Diebold 10XX/478X and NCR 5XXX Device Handler processes.

Institution Cutover

Institution cutover consists of a number of institution-level actions. BASE24-atm card issuers and terminal owners are defined at the institution level. Actions directly related to BASE24-atm settlement include increasing the processing dates for the institution in the IDF by one and verifying that all the institution's terminals have been cut over.

Each institution controls its cutover time in the IDF by defining a window during which it can cut over to a new business day. At the end of this window, the Settlement Initiator process increases the institution's posting dates to the date of the next processing day. If any of the institution's terminals have not been cut over by this time, the Settlement Initiator process performs force cutover actions to automatically cut the terminals over. In this way, institution cutover ensures that all terminals have been cut over to the new business day.

The BASE24-atm business day revolves around logical network and institution cutover. All institutions must be cut over before the logical network cuts over and all terminals must be cut over before the institution cuts over.

If the institution's cutover time is not set properly in the IDF, the Settlement Initiator process uses the value in the ATM-SETL-LN-CUTOVER-LEAD-TIME param in the Logical Network Configuration File (LCONF) to determine the minimum number of minutes before logical network cutover that all institutions must be cut over. If an IDF record contains an institution cutover time that is less than the minimum number of minutes specified by this param, the Settlement Initiator process automatically cuts the institution over the number of minutes before logical network cutover as specified in this param.

Logical Network Cutover

At logical network cutover the entire logical network moves to a new business day. The BASE24-atm system reinitializes using the new processing dates established at institution cutover. The BASE24-atm system closes the Transaction Log File (TLF) for the day just ended, making this file available for extracting and reporting. If configured to do so, the Settlement Initiator process creates the report obey files used to start the BASE24-atm report programs and starts the BASE24-atm reports. All reports can be produced immediately after logical network cutover; all reports can be produced at a later time; or some reports can be produced immediately after logical network cutover while others are produced later.

The logical network cutover time and the time at which reports must be run are defined in the Logical Network Configuration File (LCONF).

Interchange Cutover

If an interchange is associated with the logical network, interchange cutover is also a part of the overall BASE24-atm settlement and reporting picture. However, each participating interchange establishes its own cutover procedures. BASE24 Interchange Interface processes are responsible for the initiation and completion of BASE24 cutover procedures for their respective interchanges (this includes starting the appropriate report programs for the generation of reports). The Settlement Initiator process is not responsible for any interchange cutover activity or interchange report generation.

Interchange cutover is the time when an interchange ends the current business day and begins the next; that is, all incoming transactions to the interchange begin logging to the next day's Interchange Log File (ILF). At interchange cutover, the interchange updates its processing dates and allows the BASE24-atm interchange reports to be produced.

The interchange cutover time, determined by the interchange, need not correspond to the BASE24-atm business day. Therefore, the BASE24-atm product provides reports reflecting transaction activity for both the interchange and the BASE24-atm business day. Reports for both business days allow the BASE24-atm system to account for all interchange transactions according to the BASE24-atm business day and to reconcile according to the interchange business day.

The BASE24-atm Cutover and Reporting Database

The BASE24-atm product uses several files for cutover and reporting purposes. These files include the Transaction Log File (TLF), Reports Files (RPTs), Interchange Log File (ILF), and others. Each file is described below.

Transaction Log File (TLF)

The Transaction Log File (TLF) is the center of the BASE24-atm settlement and reporting effort. The BASE24-atm product logs daily transaction activity to the TLF, and this file forms the basis for BASE24-atm settlement and reporting. The TLF contains one record for each transaction, approved or denied, processed during a single BASE24-atm business day. If a given transaction has been reversed, the TLF may contain more than one record for the original transaction.

The Settlement Initiator process creates the TLF at logical network cutover for use by the BASE24-atm Authorization process. The Settlement Initiator process also purges old TLFs at logical network cutover based on the value of the ATM-SETL-TLF-FILE-RETENTION param in the LCONF. This param identifies the number of days of TLF records to be kept on the system.

The BASE24-atm product bases its business day on its various cutovers and each TLF is representative of those transactions the BASE24-atm system recognizes for the defined business day. By extracting the TLF, institutions can process the transactions against their terminal and cardholder accounts, affecting the day's settlement with these accounts.

Institutions can gain access to information in the TLF by perusing the file online, extracting the file for host reporting, or running reports on the BASE24 system. Operators with appropriate access can peruse the TLF at any time. Refer to the ***BASE24-atm Files Maintenance Manual*** for more information concerning TLF perusal. The TLF can be extracted while the file is open or closed; this allows institutions to perform partial file extracts in the middle of the day. However, to run reports, the TLF must be closed by a daily cutover.

Reports File (RPT)

The Reports File (RPT) contains information created by the BASE24-atm report programs and the appropriate Interchange Interface processes. This information is printed on the BASE24-atm reports or can be perused online using the Pathway

system. The Settlement Initiator process creates the RPT at logical network cutover. The Settlement Initiator process deletes old RPTs from the system according to the value in the ATM-SETL-RPT-FILE-RETENTION param.

Interchange Log File (ILF)

The Interchange Log File (ILF) contains a record of each transaction processed by an interchange. These records are used to produce the settlement reports for that interchange. A new ILF is created by the Interchange Interface process each business day when the interchange cuts over. The Interchange Interface process deletes old ILFs from the system according to the value of the SW-ILF-FILE-RETENTION param in the LCONF.

Interchange cutover is based on the requirements of the interchange. The business day reflected is that of the interchange, rather than the BASE24 system. The Interchange Interface process creates and writes a record for each transaction.

Other Database Files

The following database files are also used by the Settlement Initiator process when performing settlement, cutover, and reporting functions.

BASE24-atm Terminal Data Files	The Settlement Initiator process reads the BASE24-atm Terminal Data files at institution cutover to verify that each terminal has cut over. If a terminal has not cut over, the Settlement Initiator process updates the BASE24-atm Terminal Data files posting date and forces the terminal to cut over.
Institution Definition File (IDF)	The Settlement Initiator process reads the Institution Definition File (IDF) to determine the terminals' balancing window, during which the terminals owned by the institution and the institution itself are cut over. The Settlement Initiator process also updates the processing dates in the IDF. If the institution is processing transactions using the Negative Authorization with Usage Accumulation method, the Settlement Initiator process also retrieves the name of the Usage Accumulation File (UAF) from the IDF to clear usage accumulation totals.

Token File (TKN)	The Settlement Initiator process reads the Token File (TKN) to determine which tokens must be placed in TLF administrative records. The Settlement Initiator process creates administrative records whenever it forces a terminal to cut over.
Log Message Configuration File (LMCF)	The Log Message Configuration File (LMCF) contains event message information, such as text, routing code, and severity, that has been modified by the user. At initialization, the Settlement Initiator process builds a table in memory from the LMCF records. When an event message is generated, the Settlement Initiator process accesses the table to verify whether that event message has been modified. If the event message has been modified, the Settlement Initiator process logs the modified information instead of the standard event message.
Logical Network Configuration File (LCONF)	The Settlement Initiator process reads the Logical Network Configuration File (LCONF) at initialization to retrieve the assigns and params it needs for processing.
Usage Accumulation File (UAF)	If the Settlement Initiator process is set up to clear the usage accumulation for an institution, it purges data in the institution's Usage Accumulation File (UAF) at institution cutover or at midnight. The time that the Settlement Initiator process deletes the UAF data depends on a field in the IDF.

BASE24-atm Cutover and Reporting Processing

The cutover and reporting actions the Settlement Initiator process performs are controlled and triggered by timers. These timers are listed and briefly described below. For more detailed information on each of these timers, refer to appendix A.

Financial Institution Cutover Timer

The financial institution cutover timer indicates when a financial institution within the logical network must cut over. The BASE24-atm product maintains one financial institution cutover timer for each institution in the logical network. When the financial institution cutover timer for an institution expires, the Settlement Initiator process verifies that all terminals owned by that financial institution have been cut over. When all the terminals have been cut over, the Settlement Initiator process cuts over the financial institution.

Force Cutover Timer

The force cutover timer is a safeguard for terminal cutover. When the force cutover timer expires, the Settlement Initiator process verifies that all terminals in the logical network have been cut over to a new business day. If a terminal has not yet been cut over to a new business day by the time this timer expires, the Settlement Initiator process forces the terminal to cut over.

Logical Network Cutover Timer

The logical network cutover timer indicates when the logical network must cut over. When the logical network cutover timer expires, the Settlement Initiator process cuts over the entire logical network to a new business day.

Midnight Cutover Timer

The midnight cutover timer indicates that the data in the Usage Accumulation File (UAF) must be purged at midnight. When the midnight timer expires, the Settlement Initiator process clears the UAF totals and updates the business date in the Institution Definition File (IDF). The midnight timer is optional.

Start Reports Timers

The start reports timers initiate the production of BASE24-atm reports. There are two start reports timers. When the first start reports timer expires, the Settlement Initiator process starts the report programs that generate the first set of reports. When the second start reports timer expires, the Settlement Initiator process starts the second set of reports. The start reports timers are optional.

Terminal Timer

The terminal timer indicates when the Settlement Initiator process should check a terminal to see if it has cut over to a new business day. The BASE24-atm product maintains one terminal timer for each terminal in the logical network. When the terminal timer for a terminal expires, the Settlement Initiator process checks the terminal. If the terminal has been cut over, the Settlement Initiator process does not reset the timer. If the terminal has not been cut over and is not busy, the Settlement Initiator process forces the terminal to cut over. If the terminal has not been cut over and is busy, the Settlement Initiator process resets the terminal timer.

BASE24-atm Report Overview

The BASE24-atm product provides reports that include both settlement information and statistical information. The statistical reports are an accumulation of totals for approved and declined transactions categorized by type of transaction, terminal ID, institution, and logical network. The settlement reports show the net position of each institution to the logical network, thus enabling participating institutions to settle funds among themselves.

The BASE24-atm product generates reports using transactions accumulated during the business days for each terminal and institution. Thus, *daily* reports contain transactions accumulated during a single business day. They are based on the daily transaction activity of cardholders and terminals. *Monthly* reports are printed for the last full month and provide an overview of all daily cardholder and terminal transaction activity during that month.

The BASE24-atm product also provides *interchange* reports using transactions accumulated during each interchange's business day. These reports show each interchange's position to the logical network.

Data Masking

BASE24-atm provides the option of masking sensitive data in accordance with Payment Card Industry (PCI) standards for account data protection. PCI standards define sensitive data as the primary account number, cardholder name, service code, and expiration date. Sensitive data masking is optional, based on settings in the Institution Definition File (IDF), Interchange Configuration File (ICF), and Enhanced Interchange Configuration File (ICFE).

The primary account number is the only sensitive data field currently displayed on BASE24-atm reports that is partially masked. Any other sensitive data fields are masked completely if the primary account number is masked.

According to PCI standards, the first 6 digits and last 4 digits are the maximum number of primary account number digits that can be displayed. The user can define the actual masking format. This definition includes the maximum number of left-most characters to display unmasked, the specific number of right-most characters to display unmasked, and the minimum number of digits to display masked.

The PCI requirement for masking sensitive data does not apply to employees and other parties with a specific need to see the full primary account number. When sensitive data is masked on BASE24-atm reports, any personnel needing to see it must have the appropriate security level in their HP-NonStop logon to run the reports manually.

Daily Reports

The daily reports are listed and briefly described below. Refer to section 4 for details on each report.

Clearings Statement Report (SETL01-B24) — Reflects the debit, credit, and net position of each participating institution and interchange to the logical network.

Daily Terminal Settlement Report (SETL02-B24) — Reflects the count and amount of transaction activity initiated at each terminal owned by the institution. Transaction activity includes that of cardholders belonging to the institution, cardholders belonging to other institutions, and cardholders belonging to an interchange.

Daily Institution Approved Transaction Volume Report (STAT04-B24) — Provides a daily summary, by institution, of all transaction activity. Within each institution, transaction activity is broken out on the report by transaction type, cardholders and terminals belonging to the institution, and cardholders and terminals belonging to other institutions or interchanges.

Daily Terminal Detail Transaction Log Report (STAT06-B24) — Provides a detailed listing, by terminal, of all transaction activity that occurred at each terminal owned by this institution. The report is produced in two formats—one for cardholder activity and one for administrative activity. The report reflects all transactions logged to the TLF, in chronological order.

Daily Terminal Exception Detail Report — Provides a detailed listing, by card-issuing institution and terminal, of all TLF records that resulted in exception processing. The transactions included on this report have been approved and completed; however, for some reason a problem occurred and the BASE24-atm product may not have posted the transactions appropriately. As a result, the

institution must review these transactions to determine whether they need to be posted manually. This report is run as an optional part of the Daily Terminal Detail Transaction Log Report (STAT06-B24).

Daily Institution Detail Transaction Log Report (STAT07-B24) —

Provides a detailed listing of all cardholder activity by institution. Transactions are reported in chronological order.

Daily Institution Exception Detail Report — Provides a detailed listing, by card-issuing institution, of all TLF records that resulted in exception processing. The transactions included in this report have been approved and completed; however, for some reason a problem occurred and the BASE24-atm product may not have posted the transactions appropriately. As a result, the institution must review these transactions to determine whether they need to be posted manually. This report is run as an optional part of the Daily Institution Detail Transaction Log Report (STAT07-B24).

Daily Terminal Depository Report (STAT08-B24) — Provides a complete listing, by terminal, of every approved depository transaction, including the number of envelopes in the depository, the enclosed amount, and those deposits that were reversed.

Monthly Reports

The monthly reports are listed and briefly described below. Refer to section 4 for details on each report.

Monthly Terminal Settlement Report (SETL03-B24) — Provides a summary, by terminal, of all transaction activity for the month.

Monthly Institution Approved Transaction Volume Report (STAT05-B24) — Provides a summary, by institution, of all cardholder activity for the month.

Interchange Reports

The interchange reports are listed and briefly described below. Refer to section 4 for details on each report.

Clearings Statement Report for XXXX (SETL01-XXXX) — Reflects the debit, credit, and net position of the logical network to the interchange.

Transaction Detail Report for XXXX (STAT09-XXXX) — Provides a complete listing of all transaction activity for this interchange.

ACI Worldwide, Inc.

2: Terminal Support

The BASE24-atm product supports terminal balancing procedures by providing terminal-owning institutions with comprehensive transaction totals for each terminal and providing BASE24-atm institutions with balancing options. BASE24 institutions can balance their terminals once a day at a predetermined time, or balance their terminals any time and as many times throughout the business day as deemed necessary.

This section provides an overview of BASE24-atm terminal support. It provides a description of the terminal totals the BASE24-atm product maintains and the administrative transactions the BASE24-atm product supports. It also describes terminal balancing, cutover, and reconciliation and discusses how these functions are supported in the BASE24-atm system.

Terminal Totals

The BASE24-atm product maintains transaction totals and balancing totals for each terminal in the system. These totals reflect all transaction activity, approved and denied, occurring at each terminal during the BASE24-atm business day. Terminal owners can use these totals to verify actual cash amounts present in the terminal hoppers. These totals are described below.

Transaction Totals

The BASE24-atm product maintains a set of transaction totals in the BASE24-atm Terminal Data files for each terminal owned by a particular institution. These totals can be perused online and reflect the overall transaction activity occurring at each terminal throughout the BASE24-atm business day. The totals in the BASE24-atm Terminal Data files are written to the Transaction Log File (TLF) when the terminal is balanced or when the terminal-owning institution adjusts the cash amounts in the terminal.

These totals are used as input to the BASE24-atm settlement reports and provide terminal owners with comprehensive transaction information for each terminal. An institution can use this information to reconcile terminal activity with the institution's internal accounts.

The transaction totals maintained in the BASE24-atm Terminal Data files are described below.

Cards Retained — The number of cards the BASE24-atm system has retained for any of the following reasons:

- Card is reported lost.
- Card is reported stolen.
- Card is expired.
- The institution requests the card be retained.

Deposit Count and Amount — The total number of deposits made at the terminal and the total amount of these deposits.

Commercial Deposit Count and Amount — The total number of commercial deposits made at the terminal and the total amount of these deposits.

Payment Count and Amount — The total number of payments made at the terminal and the total amount of these payments.

Check Count and Amount — The total number of checks cashed and received and the total amount of these checks.

Message Count — The total number of messages cardholders sent to the institution by the terminal.

Log Only Count — The total number of log only transactions logged to the TLF. These transactions do not affect the cash amount in the terminal.

Terminal Debits — The total of all deposits to checking and savings accounts made at this terminal. This number also includes all transfers and payments to other accounts.

Terminal Credits — The total of all withdrawals from checking and savings accounts made at this terminal. This number also includes all transfers and payments to other accounts.

On-Us Debits — The total number of debits made at this terminal by customers belonging to this institution.

On-Us Credits — The total number of credits made at this terminal by customers belonging to this institution.

Balancing Totals

In addition to the transaction totals, the BASE24-atm product also maintains a set of balancing totals necessary for reconciling the terminal. Balancing totals reflect the total cash in the terminal at the beginning of the day, the total amount of cash dispensed, and any increases or decreases to cash amounts due to institution-initiated cash adjustments. The BASE24-atm product maintains these totals in the BASE24-atm Terminal Data files and writes them to the TLF when cash adjustments are made at the terminal and when the terminal is balanced.

The balancing totals maintained in the BASE24-atm Terminal Data files are described below.

Contents — The contents of each hopper in this terminal (i.e., bills or coins).

Bill Value — The bill denomination in each hopper.

Standard Beginning Cash — The standard number of bills used to replenish the ATM. This field applies only to terminals with cartridge cash dispensers.

Beginning Cash — The cash amount contained in the terminal at the beginning of the business day. This field applies only to terminals that allow cash to be manually added to each hopper. An operator must enter the correct beginning cash amount when the terminal is balanced. The beginning cash amount varies from business day to business day based on customer usage at this terminal.

Cash Increase — The amount of cash added to this terminal during the balancing period using cash adjustment transactions.

Cash Decrease — The amount of cash subtracted from this terminal during the balancing period using cash adjustment transactions.

Cash Out — The total amount of cash dispensed from this terminal during the balancing period. This number can be compared against the terminal's credits for verification.

End Cash — The total amount of cash in this terminal at the end of this business day.

Currency Code — The type of currency used in this terminal.

Administrative Transactions

The BASE24-atm product supports a number of administrative transactions that assist in terminal maintenance. These administrative transactions provide the institution with the total cash amounts in the terminal at the beginning of the day, all cash amounts added to or dispensed from the terminal throughout the day, and the total cash amounts currently in the terminal. However, the availability of these administrative transactions depends on the type of terminal. Refer to the appropriate ATM device support manual for specific transaction support information.

The BASE24-atm product supports the following administrative transactions:

- Midpoint cash adjustments
- Subtotaling transactions
- Balancing transactions

Midpoint Cash Adjustment

A midpoint cash adjustment is used when an increase or decrease is made to the amount of cash in the terminal. For example, if cash amounts in the terminal hoppers are too high or too low, or if the hoppers are empty, an operator uses a midpoint cash adjustment to manipulate the amounts.

An operator can initiate this transaction at the terminal or from the Device Control Terminal (DCT); however, institution personnel must also physically adjust the cash amounts in the terminal by adding or removing the appropriate amount of cash.

The BASE24-atm product updates terminal balancing totals in the BASE24-atm Terminal Data files to reflect the cash adjustment and show the new cash amounts in the terminal. The BASE24-atm product also writes the totals to the TLF when the transaction is completed. These totals are used as input to the Daily Terminal Detail Transaction Log Report (STAT06-B24) and the Monthly Terminal Settlement Report (SETL03-B24).

Subtotaling Transaction

The subtotaling transaction provides the current transaction totals for the terminal. If the subtotaling transaction is initiated at a terminal that generates receipts and the terminal-owning institution has selected the transaction receipt option, the totals are printed on a receipt. If a subtotaling transaction is initiated from the DCT, the totals are displayed on the DCT screen.

With a subtotaling transaction, the BASE24-atm product does not log totals to the TLF or reset the totals to zero. Instead, the totals continue to accumulate in the BASE24-atm Terminal Data files until a balancing transaction is performed.

Balancing Transaction

The balancing transaction enables the institution to update the cash amounts for the new business day and reset the accumulating transaction totals to zero.

An operator can initiate a balancing transaction from either the terminal or the DCT. The BASE24-atm product writes both the transaction totals and the balancing totals for that terminal to the TLF. The BASE24-atm product then adjusts the balancing totals in the BASE24-atm Terminal Data files to reflect the beginning cash amounts in the terminal for the new business day and resets the totals to zero.

If the balancing transaction is initiated at a terminal that generates receipts and the terminal-owning institution has selected the transaction receipt option, the balancing totals are printed on a receipt. If the balancing transaction is initiated from the DCT, the balancing totals are displayed on the DCT screen.

Regardless of where the balancing transaction is initiated, institution personnel must go to each terminal that has been issued a balancing transaction to retrieve the contents of the terminal depository and adjust the cash amounts in the terminal hoppers, if necessary.

The balancing transaction includes clearing the cash supplies counter, clearing captured cards, clearing the deposit counters, and adding cash to the ATM.

Note: Initiating a balancing transaction sets a balance timer. The timers are used to control the event messages associated with the balancing transaction. When you enter the supervisor mode, the Device Handler process sets a balance timer. This timer is deleted when you exit supervisor mode. All balancing transactions must be done during this period, or the Device Handler process will raise an EMS event.

Terminal Balancing

BASE24-atm terminal balancing involves initiating the balancing transaction and maintaining the physical cash amounts in each terminal owned by the institution.

The BASE24-atm product supports two methods in which the institution can issue the balancing transaction to each terminal. The first method allows the institution to balance each terminal once a day within the terminal balance and cutover window defined in the Institution Definition File (IDF). The second method allows the institution to balance its terminals at any time and as many times throughout the BASE24-atm business day as deemed necessary.

Balancing Terminals Once a Day

A terminal owner that balances its terminals once a day must do so within the institution's terminal balance and cutover window, a timeframe the terminal owner designates and defines in the IDF. Initiating the balancing transaction within this window cuts the terminal over to the next business day.

If a balancing transaction is not initiated within this window, the BASE24-atm product automatically forces the terminal to cut over at the end of the terminal balance and cutover window. The institution must then balance its terminals with a balancing transaction outside of the window. A balancing transaction initiated outside the terminal balancing and cutover window does not cut over the terminal to the next business day, preventing the terminal from cutting over twice on the same day.

Balancing Terminals Multiple Times a Day

A terminal owner that balances its terminals several times a day can issue a balancing transaction and adjust the cash amounts in the terminal hoppers at any time and as many times throughout the business day as deemed necessary.

The balancing transaction for these institutions does not cut the terminal over to the next business day. Instead, the BASE24-atm product routinely forces the terminals to cut over.

Terminal Cutover

The BASE24-atm product requires that all terminals belonging to an institution in the BASE24-atm system be cut over each day. At terminal cutover, the BASE24-atm product updates the posting date for the terminal. After a terminal is cut over, all incoming transactions to that terminal are logged to the next day's TLF.

The TLF posting date determines the day to which transactions belong and the reporting date on which they appear. Updating this posting date, or cutting over, is how the terminal closes the current day's business and begins the next day's business.

Terminal Balancing and Cutover Window

The terminal balancing and cutover window is the timeframe determined by the terminal owner during which the institution balances its terminals. The terminal balance and cutover window designates when the posting dates for the terminal are updated and when the terminal and balancing totals are written to the TLF.

Terminal Cutover for Terminals Balanced Once a Day

Institutions that balance their terminals once a day, cut over and balance their terminals at the same time. Cutover and balancing must occur within the terminal balancing and cutover window. Terminals that are not balanced within this window are forced to cut over to the next day by the BASE24-atm system and must be balanced outside the balancing and cutover window.

Terminal Cutover for Terminals Balanced Multiple Times a Day

Institutions that balance their terminals several times throughout the BASE24-atm business day allow the BASE24-atm system to routinely force the terminals to cut over at the end of the institution's terminal balancing and cutover window.

Force Cutover

Force cutover is the action the BASE24-atm Settlement Initiator process takes to automatically cut a terminal over to the next day's business. Terminals are forced to cut over and start logging transactions to the next business day's TLF when an institution is balancing its terminals multiple times a day, or when an institution balancing its terminals once a day neglects to do so within the terminal balancing and cutover window. Force cutover involves the following:

- The transaction and balancing totals in the BASE24-atm Terminal Data files record for that terminal are written to the TLF. However, the totals in the BASE24-atm Terminal Data files record are not reset to zero. These transaction totals continue to accumulate until the terminal is balanced with an administrative balancing transaction.
- The BALANCE FLAG field on screen 6 of the BASE24-atm Terminal Data files (ATD) is set to indicate that the terminal was forced to cut over. Terminals that were forced to cut over require an operator-initiated balancing transaction to be balanced.

Note: When forcing a terminal to cut over, the Settlement Initiator process first ensures that there are no transactions currently in progress. If a transaction is currently in progress, the Settlement Initiator process waits until the transaction has completed before forcing the terminal to cut over. This ensures that no transactions are lost during terminal cutover.

Forced Cutover Audit

The Forced Cutover Audit add-on module for Diebold 10XX/478X and NCR 5XXX Device Handler processes enables printing totals to the ATM journal printer. When the Forced Cutover Audit module is purchased and installed, and the ATM-FCA-CUTOVER-AUDIT LCONF param is set to a value of Y, transaction and balancing totals are printed on the ATM's journal printer following a forced cutover.

Terminal Reconciliation

Terminal reconciliation is the manual process of accounting for all cash added to and dispensed from the terminal throughout the previous BASE24-atm business day. The BASE24-atm product does not require specific terminal reconciliation procedures; rather, the institution must define and implement terminal reconciliation.

To facilitate terminal reconciliation, the BASE24-atm product provides transaction totals by terminal. These totals reflect all transaction activity incurred during the BASE24-atm business day. In addition, the BASE24-atm product produces balancing totals upon completion of administrative balancing transactions. Balancing totals provide a summary of all activity at the terminal.

Sample Reconciliation Form

An example approach to terminal reconciliation is shown on the following page. The example uses the transaction totals maintained by the BASE24-atm product and the results of the manual cash count at the terminal to arrive at a net cash position for the terminal.

ACI recommends that terminal owners establish their own terminal reconciliation procedures to account for the transaction activity at each terminal. The following form is an example that illustrates the type of form an institution might use in conducting terminal reconciliation.

This form can be used to record daily terminal information and to arrive at a net cash position for the terminal by referencing both the balancing totals the BASE24-atm product provides and the actual cash counts at the terminal. With this tool, the institution can track any imbalances in terminal cash totals.

TERMINAL IDENTIFICATION

Terminal Number	Terminal Location	Settlement Account No.	Time	Date
S1A91004	144th & Center	222-2-222	14:01	10/30/YY

ACTUAL CASH COUNT BY HOPPER

	Hopper 1	Hopper 2	Hopper 3	Hopper 4	Hopper 5
Divert Tray:	\$ 40.00	\$ 15.00	\$ 0.00	\$ 0.00	\$ 0.00
Misplaced Cash:	\$ 0.00	\$ 0.00	\$	\$	\$
Hopper Cash:	\$ 3600.00	\$ 2815.00	\$	\$	\$
Subtotal:	\$ 3640.00	\$ 2830.00	\$ 0.00	\$ 0.00	\$ 0.00

MANUAL CASH COUNT TOTAL: \$ **6470.00**

MANUAL ENVELOPE COUNT: **13**

MANUAL CARD RETAINED COUNT: **2**

NAME/CARD NUMBER: **Peter West** **1111 2222 3333333333**

Megan Carter **2222 3333 4444444444**

ADMINISTRATIVE BALANCING TOTALS

	Hopper 1	Hopper 2	Hopper 3	Hopper 4	Hopper 5
Starting Cash:	\$ 5000.00	\$ 3000.00	\$ 0.00	\$ 0.00	\$ 0.00
Cash Increase:	\$ 0.00	\$ 0.00	\$	\$	\$
Cash Decrease:	\$ 0.00	\$ 0.00	\$	\$	\$
Cash Out:	\$ 1360.00	\$ 170.00	\$	\$	\$
Ending Cash:	\$ 3640.00	\$ 2830.00	\$ 0.00	\$ 0.00	\$ 0.00

EXPECTED CASH TOTAL: \$ **6470.00**

NUMBER OF ENVELOPES: **13**

NUMBER OF CARDS RETAINED: **2**

TOMORROW'S BEGINNING

CASH BY

HOPPER	\$ 5000.00	\$ 3000.00	\$ 0.00	\$ 0.00	\$ 0.00
--------	-------------------	-------------------	----------------	----------------	----------------

Device-Dependent

Standard Replenishment = these beginning amounts are always the same.

Current Cash = these beginning amounts vary.

**This institution does not
include deposits in
settlement until after
they've been proofed**

TERMINAL DAILY SETTLEMENT TOTALS (SETL02-B24 REPORT)

WITHDRAWALS		DEPOSITS	
On-Us Debits:	\$ 670.00	On-Us Credits:	\$ 0.00
Not-On-Us Debits:	\$ 610.00	Not-On-Us Credits:	\$ 0.00
Interchange Debits:	\$ 250.00	Interchange Credits:	\$ 0.00
Total Debits:	\$ 1530.00	Total Credits:	\$ 0.00

DEPOSIT PROOF TOTALS

Deposit Items Cash:	\$ 50.00	
Deposit Items Checks:	+\$ 628.35	
Subtotal Deposit Items:	=\$ 678.35	
Minus (–) Total Credits:	–\$ 0.00	
Equal (=) Adjustment Amount:	=\$ 678.35	Deposits are adjusted here

CASH ACCOUNT ENTRIES

Total Withdrawals:	\$ 1530.00	Beginning Balance:	\$ 8000.00
Cash Sold (Decr):	+\$ 6470.00	Subtotal:	–\$ 0.00
Cash Short/Over:	±\$ 0.00	ENDING BALANCE:	=\$ 8000.00
Cash Bought (Incr.):	–\$ 8000.00	Tomorrow's beginning cash	
Subtotal:	=\$ 0.00		

SERVICED BY

Mary Smith

WITNESS

John Q. Public

Form Description

The major sections of the example terminal reconciliation form are described below.

Terminal Identification — This section enables the institution to identify the terminal number and location, as well as the settlement account number assigned to the terminal for internal posting of terminal debits and credits. It also provides space for recording the date and time this terminal was reconciled.

Actual Cash Count By Hopper — This section enables the institution to verify the actual cash amounts and depository items in the terminal. The entries to this section are based on the results of the physical cash count initiated at the terminal by institution personnel. This section also allows the institution to manually record the customer names and card numbers appearing on those cards the BASE24-atm system retained.

Administrative Balancing Totals — This section enables the institution to verify the balancing totals by comparing the balancing totals with the actual cash count at the terminal.

The administrative balancing totals refer to the balancing totals logged at the time of the administrative balancing transaction. These totals can be taken from the administrative balancing receipt if the terminal generates receipts. These totals can also be taken from the Daily Terminal Detail Transaction Log Report (STAT06-B24) or be perused online from the TLF.

The beginning cash amount for the terminal is device-dependent. For example, if the institution has terminals that always begin each day with the same amount, the beginning cash amount entries are always the same. If the institution has terminals that allow beginning cash amounts to vary, the beginning cash amount entries depend on transaction traffic at this terminal, as well as other institution-defined parameters.

Terminal Daily Settlement Totals — This section provides the institution with total debits and credits for this business day. The entries for this section can be taken from the Daily Terminal Settlement Report (SETL02-B24). This report separates all withdrawals and deposits made at this terminal into those made by customers whose accounts belong to this institution (on-us), and those made by customers whose accounts belong to other institutions (not-on-us). If the institution does not electronically credit customer accounts for deposits made at terminals, the “Total Credits” reported by the BASE24-atm system is zero.

Deposit Proof Totals — Entries for this section are based on the proofed deposits of those items found in this terminal's depository.

This section enables the institution to adjust the total credit amount if the institution does not automatically credit customer accounts for deposits. The amount of proofed deposits becomes the adjustment amount. If the institution electronically credits customer accounts for deposits, this section enables the institution to verify the total credit amount reported by the BASE24-atm system and listed in the above section. The total credit amount is subtracted, indicating that no adjustment amount is necessary.

Cash Account Entries — This section ties together all of the above totals that have been verified by both the BASE24-atm system and physical cash counts to arrive at a net cash position for the terminal. The institution can account for any cash shortages or overages in this section.

3: Settlement Support

BASE24-atm settlement is conducted in two stages: institution settlement and logical network settlement.

The BASE24-atm system does not physically move funds for actual settlement procedures, nor does ACI require specific internal settlement procedures. However, ACI does recommend that institutions establish certain accounts within the settlement framework in order to conduct both institution and logical network settlement.

This section reviews the two settlement stages and defines the accounts ACI recommends an institution maintain to support the physical transfer of funds.

BASE24-atm Settlement

The BASE24-atm product provides the tools necessary for internal settlement procedures with the Transaction Log File (TLF) and settlement and statistical reports. The TLF contains all transactions, approved and denied, that the BASE24-atm system processed during that business day. An institution can extract the TLF and use it to post debits and credits to cardholder accounts.

BASE24-atm settlement and statistical reports are a means for terminal-owning institutions to settle their terminals and those debits and credits incurred from other institutions. These reports detail transaction activity by terminal and institution, as well as provide the information necessary for the institution to arrive at a net settlement position.

Although the BASE24-atm product provides these tools to facilitate settlement, the BASE24-atm product does not physically move funds for actual settlement procedures. The actual movement of funds is the responsibility of each institution in the logical network.

BASE24-atm settlement is conducted in two stages: institution settlement and logical network settlement.

Institution Settlement


During institution settlement, the institution balances and settles its own terminals and settles with other participating institutions and interchanges by settling with the logical network. To assist in this physical settlement of funds, ACI recommends that institutions establish accounts to track all debits and credits.

Logical Network Settlement

During logical network settlement, the central institution that runs the logical network settles with all participating institutions and interchanges. This allows the participating institutions and interchanges to indirectly settle among themselves. To assist in this physical settlement of funds, ACI recommends that the central institution establish accounts to track all debits and credits.

Institution Settlement

Institution settlement within the BASE24-atm system involves each individual institution that is participating in the logical network. Each institution must settle its cardholders' debits and credits and settle the transaction activity that has occurred at its terminals. Each institution can extract its Transaction Log File (TLF) and use the TLF to automatically post debits and credits to the appropriate cardholder accounts. Institutions can use the BASE24-atm institution settlement reports to manually post debits and credits to terminal accounts. The following graphic illustrates the flow of information from the ATMs to the appropriate cardholder and terminal accounts used by the institution.

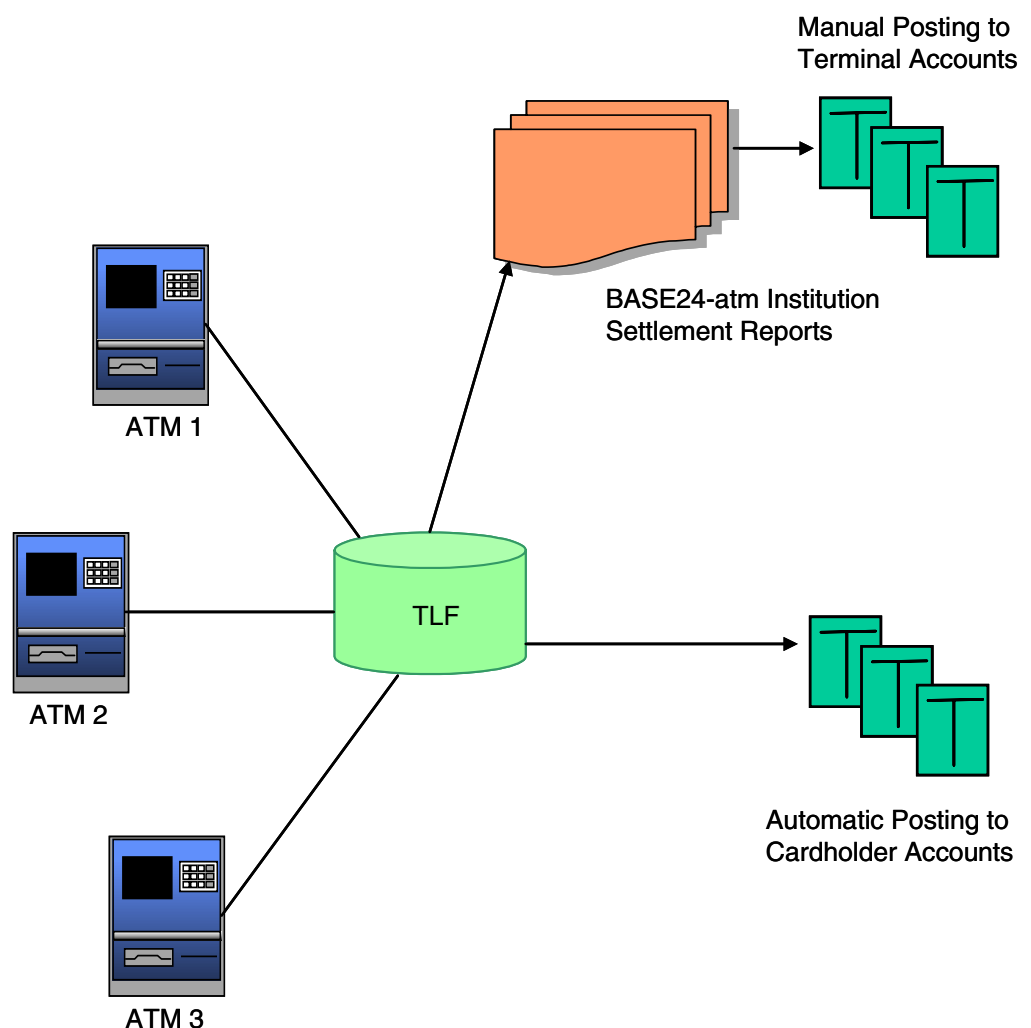

An institution settles terminal activity by debiting and crediting accounts it has established to aid in settlement and the physical transfer of funds. These accounts represent cardholders from other institutions and each of its terminals.

The institution must settle with other institutions in the network because its cardholders may have initiated transactions at other institutions' terminals, while the cardholders from other institutions may have initiated transactions at its terminals. The institution settles with other institutions by way of the central institution running the logical network; the BASE24-atm system views the logical network as a separate settlement entity. The individual institution posts the debits and credits created by both its own cardholders and other institutions' cardholders that used its terminals with the central institution. Then, the central institution, aware of all debits and credits due to and from various institutions, notifies the appropriate institutions of the amount they owe the logical network or the amount that is due to them. Thus, individual institutions are indirectly settling among themselves by settling with the logical network.

ACI does not dictate internal accounting procedures for individual institutions; however, ACI does recommend the accounts listed below as tools to account for and offset all debits and credits incurred throughout the business day.

- Vault cash account
- ATM cash account
- ATM settlement account
- Individual customer accounts
- Logical network account

These accounts are described in more detail below. In the account descriptions, the term *our* refers to cardholders and terminals belonging to the institution conducting the settlement procedure. The term *other* refers to cardholders and terminals belonging to other institutions or participating interchanges in the logical network.

Vault Cash Account

The vault cash account is also called the master teller account. Each institution should have its own vault cash account. This account reflects all cash purchased from the vault for all terminals and all cash returned to the vault from all terminals. The institution is responsible for entering data into this account.

Debits	Credits
Cash returned to the vault from all terminals.	Cash purchased from the vault for all terminals.
Offset: Credit to the ATM cash accounts.	Offset: Debit to the ATM cash accounts.

ATM Cash Account

The ATM cash account reflects the total physical cash amounts added to and dispensed from the terminal. Each terminal the institution owns should have its own ATM cash account. The institution is responsible for entering data into this account. Customer withdrawal data is provided on the Daily Terminal Settlement Report (SETL02-B24). See section 4 for an example of this report.

Debits	Credits
Cash purchased from the vault for the terminal.	Cash returned to the vault, such as misfed or misfit cash.
Offset: Credit to the vault cash account.	Offset: Debit to the vault cash account.

	All customer withdrawals.
	Offset: Debit to the ATM settlement account.

ATM Settlement Account

The ATM settlement account reflects all transactions made at each terminal. The ATM settlement account is designed to be a *zero-balance* account; that is, all debits and credits are to be offset elsewhere, leaving a daily ending balance in this account of zero. Each terminal the institution owns should have its own ATM settlement account.

The institution is responsible for entering data into this account. The total deposits and total credits determined in terminal reconciliation provide the data for these accounts. To maintain a *zero-balance* for this account, offset entries of the deposit and withdrawal amounts must be made to this account.

Debits	Credits
Our cardholders making deposits.	Our cardholders making withdrawals.
Offset: Credit to the ATM cash account and the individual customer accounts.	Offset: Debit to the individual customer accounts.
-----	-----
Other cardholders making deposits.	Other cardholders making withdrawals.
Offset: Credit to the logical network account.	Offset: Debit to the logical network account.

Individual Customer Accounts

The individual customer accounts are debited and credited according to withdrawals and deposits made at other terminals. One individual customer account should exist for each customer who has a card from the institution.

Institutions can automatically debit and credit individual customer accounts by extracting the TLF and posting it to the accounts. Offset entries can be made manually to the ATM settlement account.

Debits	Credits
Our cardholders making withdrawals at other terminals.	Our cardholders making deposits at other terminals.
Offset: Credit to the ATM settlement account.	Offset: Debit to the ATM settlement account.

Logical Network Account

The logical network account reflects debits and credits incurred by other cardholders, or cardholders belonging to other institutions and interchanges. The net amount of this account indicates the amount the institution must pay or be paid from the logical network. Each institution should have its own logical network account.

The Clearings Statement Report (SETL01-B24) for the logical network provides data for this account. Offset entries can be made manually to the ATM settlement account.


Institutions post the debits and credits of other cardholders to this account. Each institution must pay the logical network the deposit amount received from other cardholders. The logical network must then reimburse each institution for the activity of other cardholders. In this way, institutions indirectly settle their cardholder activity at each other's terminals by way of the logical network.

Debits	Credits
Other cardholders making withdrawals at our terminals. The logical network must reimburse the institution.	Other cardholders making deposits at our terminals. The institution must reimburse the logical network.
Offset: Credit to the ATM settlement account.	Offset: Debit to the ATM settlement account.

Logical Network Settlement

A central institution must be responsible for logical network settlement. In terms of BASE24-atm settlement, this central institution represents the logical network as a separate settlement entity.

Institutions settle with each other by way of the logical network. The central institution that represents the logical network acts on behalf of all other participating institutions in clearing debits and credits incurred throughout the business day. Thus, institutions are paid for all outside cardholder activity at their terminals, and institutions pay for the activity initiated by their cardholders at terminals belonging to other institutions. The following graphic illustrates the flow of information from the participating institutions to the logical network accounts.

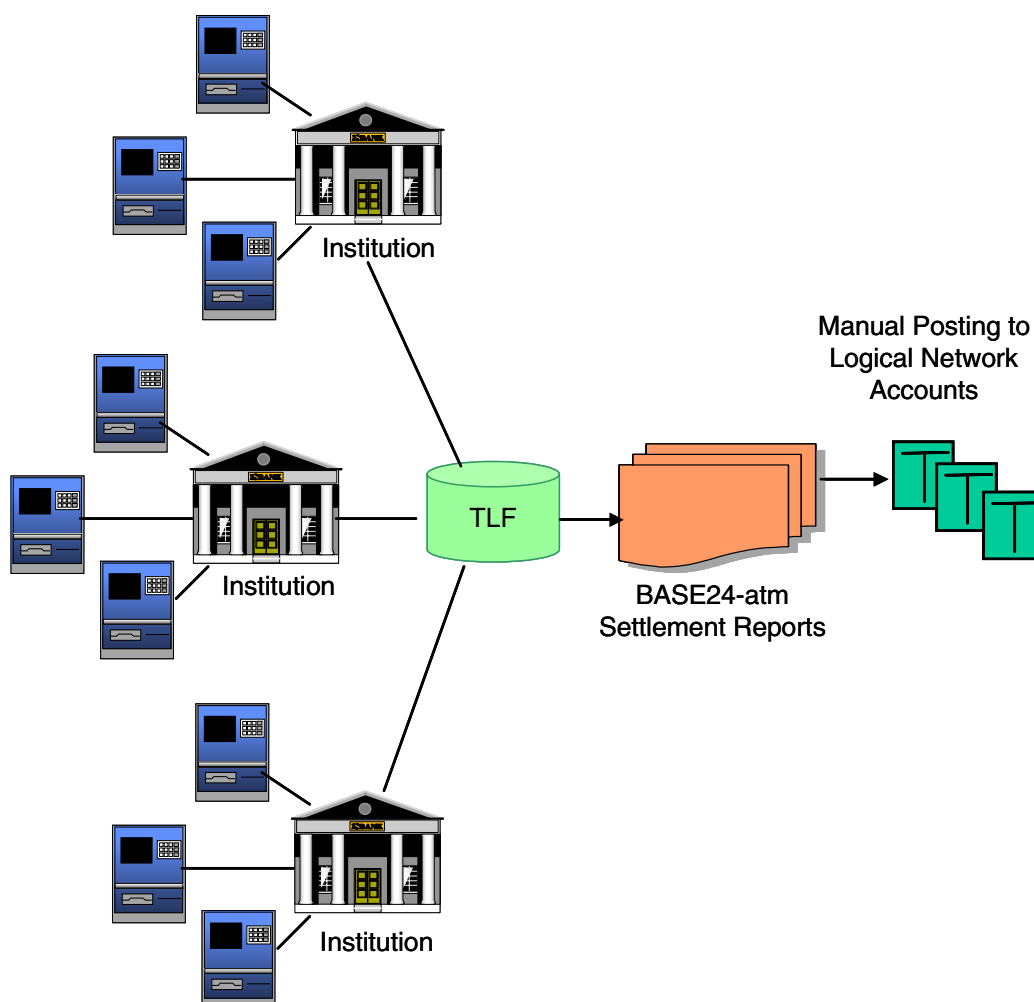

Institutions also settle with participating interchanges by way of the logical network, which again acts on their behalf. Interchange settlement occurs according to each interchange's individual business day.

The BASE24 product supports logical network settlement with interchanges by providing the Clearings Statement Report (SETL01-B24) for the logical network, the Clearings Statement Report for XXXX (SETL01-XXXX) where XXXX indicates the interchange, and the Daily Transaction Detail Report for XXXX (STAT09-XXXX) where XXXX indicates the interchange.

The Clearings Statement Report for the logical network provides the net position of the logical network to the interchange, according to the BASE24-atm business day.

The Clearings Statement Report for XXXX for the interchange provides the net position of the logical network to the interchange, according to the interchange's business day.

The Daily Transaction Detail Report for XXXX for the interchange provides a detailed listing of all transactions processed by the interchange involving cardholders belonging to this logical network.

ACI does not dictate internal accounting procedures for the central institution that manages the logical network. However, ACI does recommend that the institution establish the following accounts to account for and offset all debits and credits incurred throughout the BASE24-atm business day.

- Logical network clearings account
- Individual institution account
- Interchange clearings account
- Interchange due to/from account

Logical Network Clearings Account

The logical network clearings account offsets the amounts owed by or due to other institutions or interchanges in the logical network. One logical network clearings account exists for the logical network. This account should net to zero, showing that all deposits and withdrawals have been credited or debited to the appropriate cardholder accounts. Entries to this account are taken from the Clearings Statement Report (SETL01-B24) for the logical network.

Debits	Credits
Withdrawals by other cardholders at a specific institution's terminals. The logical network owes this amount to the institution.	Deposits by other cardholders at a specific institution's terminals. The institution owes this amount to the logical network.
Offset: Credit to the individual institution account.	Offset: Debit to the individual institution account.

Individual Institution Account

The individual institution accounts are the accounts from which the logical network settles with each institution. One individual institution account exists for each institution in the logical network. This account represents the institution's net position to the logical network, from the logical network's point of view. The logical network receives data for entry to this account from the Clearings Statement Report (SETL01-B24), which provides a daily net position for every institution in the logical network. This net position determines how much each individual institution in the logical network owes, or is due from, other institutions in the logical network.

Debits	Credits
Deposits by other cardholders at this institution's terminals. The institution owes this amount to the logical network.	Withdrawals by other cardholders at this institution's terminals. The logical network owes this amount to the institution.
Offset: Credit to the logical network clearings account.	Offset: Debit to the logical network clearings account.

Interchange Clearings Account

The interchange clearings account reflects the net position of the logical network to the interchange from the logical network's point of view. Since the interchange usually operates on a different business day than the logical network, the net result of this account differs from the interchange's point of view. The net debit or credit is carried over to the interchange's next business day for settlement.

One interchange clearings account exists for each interchange in the logical network. The data for entry into this account is taken from the Clearings Statement Report (SETL01-B24) for the logical network.

Debits	Credits
Logical network cardholders making withdrawals at interchange terminals and interchange cardholders making deposits at logical network terminals. The logical network owes this amount to the interchange.	Interchange cardholders making withdrawals at logical network terminals and logical network cardholders making deposits at interchange terminals. The interchange owes this amount to the logical network.
Offset: Credit to the interchange due to/from account.	Offset: Debit to the interchange clearings account.

Interchange Due To/From Account

The interchange due to/from account reflects the net position of the logical network to the interchange from the interchange's point of view. The logical network pays, or is paid by, the interchange according to this account. Actual interchange settlement occurs as a result of the amounts posted to this account.

This account reflects the same kind of information as the interchange clearings account, except this information is presented from the interchange's point of view. The difference between this account and the interchange clearings account is carried over to the interchange's next business day for settlement.

One interchange due to/from account exists for each interchange in the logical network. The data for entry into this account is provided by the Clearings Statement Report for XXXX (SETL01-XXXX) for the interchange. This report is generated when interchange cutover is completed.

Debits	Credits
Interchange cardholders making withdrawals at logical network terminals and logical network cardholders making deposits at interchange terminals. The interchange owes this amount to the logical network. Offset: Credit to the interchange clearings account.	Interchange cardholders making deposits at logical network terminals and logical network cardholders making withdrawals at interchange terminals. The logical network owes this amount to the interchange. Offset: Debit to the interchange clearings account.

4: BASE24-atm Settlement Reports

This section describes the reports the BASE24-atm product provides to meet the reporting needs of its institutions. The information contained in these reports enables institutions to settle their terminals, settle with the network, settle with interchanges, and track cardholder and terminal transaction activity.

The following BASE24-atm reports are discussed in this section:

- Clearings Statement Report (SETL01-B24)
- Clearings Statement Report for XXXX (SETL01-XXXX)
- Daily Terminal Settlement Report (SETL02-B24)
- Monthly Terminal Settlement Report (SETL03-B24)
- Daily Institution Approved Transaction Volume Report (STAT04-B24)
- Monthly Institution Approved Transaction Volume Report (STAT05-B24)
- Daily Terminal Detail Transaction Log Report (STAT06-B24)
- Daily Terminal Exception Detail Report
- Daily Institution Detail Transaction Log Report (STAT07-B24)
- Daily Institution Exception Detail Report
- Daily Terminal Depository Report (STAT08-B24)
- Transaction Detail Report for XXXX (STAT09-XXXX)

The BASE24-atm settlement reports identify the logical network or the interchange for which the reports apply on the top of the page as part of the report title. In this section, the interchange indicator is XXXX. Sample reports are shown with sample codes for these indicators.

Clearings Statement Report (SETL01-B24)

The Clearings Statement Report (SETL01-B24) reflects the daily debit and credit totals and net position of each participating institution and interchange in relation to the logical network. The report shows each institution's and interchange's point of view. Therefore, debits indicate the amount each institution and interchange owes the logical network; credits indicate the amount the logical network owes each institution and interchange; and net positions indicate the difference between debits and credits.

Each participating institution and interchange receives a copy of the Clearings Statement Report that indicates its particular net debit or credit position in relation to the logical network. Each institution and interchange can then use this report to settle with the logical network.

The BASE24-atm Settlement Initiator process generates the Clearings Statement Report each day using information in the Transaction Log File (TLF). To generate this report, the Settlement Initiator process creates the obey file specified in the ATM-SETL-RPT0-OBEY-FILE assign in the Logical Network Configuration File (LCONF). This obey file, when run, starts the report program specified in the ATM-SETL-RPT0-PROG-1-NAME assign. This report program creates the Clearings Statement Report.

The Clearings Statement Report is printed to a spooler location of \$\$.#ATSL01. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Clearings Statement Report online from the RPT.

A sample Clearings Statement Report is shown on the next page, followed by descriptions of its fields.

PRO1 CLEARINGS STATEMENT REPORT						DATE YY/MM/DD	PAGE 01

INSTITUTION ID NUMBER	INSTITUTION NAME		DEBIT -----	CREDIT -----	NET -----		

BNKA	BANK A		.00	306.96	306.96		
	SURCHARGES:		.00	33.04	33.04		
BNKB	BANK B		292.90	9,140.59	8,847.69		
	SURCHARGES:		2.90	47.41	44.51		
BNKC	BANK C		.00	17.87	17.87		
	SURCHARGES:		.00	2.13	2.13		
BNKD	BANK D		4,793.85	292.90	4,500.95-		
	SURCHARGES:		71.15	2.90	68.25-		
BICI	BIC Interchange		4,671.57	.00	4,671.57-		
	SURCHARGES:		11.43	.00	11.43-		
SETTLEMENT TOTAL			9,758.32	9,758.32	.00		
			85.48	85.48	.00		
*** END OF REPORT ***							

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply.

INSTITUTION ID NUMBER — The FIID of the institution or the interchange ID of the interchange.

INSTITUTION NAME — The name of the institution or interchange.

DEBIT — The total amount the institution or interchange owes the logical network. Logical network debits include the following transactions:

- Withdrawals and cash advances made by cardholders belonging to this institution at terminals belonging to other institutions.
- Deposits made by cardholders belonging to other institutions at terminals belonging to this institution.

CREDIT — The total amount the logical network owes this institution or interchange. Logical network credits include the following transactions:

- Deposits made by cardholders belonging to this institution at terminals belonging to other institutions.
- Withdrawals and cash advances made by cardholders belonging to other institutions at terminals belonging to this institution.

NET — The net position of this institution or interchange to the logical network, (credits minus debits). A minus sign (–) indicates a debit position, or the amount owed to the logical network.

SURCHARGES — The total surcharge amount assessed for all transactions. This field appears on the report only when the institution has purchased the Surcharge option.

SETTLEMENT TOTAL — The debit, credit, and net totals of all institutions and interchanges listed. Total debits must always equal total credits, with a net amount equal to zero.

Clearings Statement Report for XXXX (SETL01-XXXX)

The Clearings Statement Report for XXXX (SETL01-XXXX) reflects the debit, credit, and net position of the interchange in relation to the logical network. The report shows the interchange's point of view. Therefore, credits indicate the amount the interchange owes the logical network; debits indicate the amount the logical network owes the interchange; and net positions indicate the difference between debits and credits.

The last page of this report reflects the net position of this logical network to other logical networks in the BASE24 system. The central institution running the logical network uses this report to settle with participating interchanges.

The Interchange Interface process for the particular interchange generates the Clearings Statement Report for XXXX each day using information in the Interchange Log File (ILF) for that interchange. The report includes all transactions logged to the ILF since the interchange cut over on the previous day. To generate this report, the Interchange Interface process creates an obey file that, when run, starts the report program specified in the SW-RPT01-PROG-NAME assign in the LCONF. The report program specified in this assign should be RP01xxx, where xxx is the three-character identifier used to identify the interchange (for example, CIR for CIRRUS). This report program creates the Clearings Statement Report for XXXX.

The Clearings Statement Report for XXXX is printed to a spooler location of \$\$S.#RP01xxx. The Interchange Interface process also writes the report to the Reports File (RPT), although operators cannot view interchange reports using the BASE24 CRT access system.

A sample Clearings Statement Report for XXXX is shown on the following pages, followed by descriptions of its fields. This report may have slightly different formats depending on which interchange it represents. However, the type of information contained on the reports for each interchange is the same.

Nov-2007 R6.0v8 AT-AE000-06
ACI Worldwide, Inc.

SETL01-PLUS		CLEARINGS STATEMENT REPORT FOR PLUS			DATE YY/MM/02		PAGE 02	
		TRAN DATE	DEBIT	CREDIT	NET			
		----	----	-----	---			
***** SPAN TODAY *****								
YY/MM/02		YY/MM/02	0.00	0.00	0.00			
** MINUS INTERCHANGE NOT-TODAY **								
INTERCHANGE		YY/MM/03	0.00	0.00	0.00			
SETTLEMENT SUBTOTAL			0.00	0.00	0.00			
***** ADD INTERCHANGE TODAY *****								
SETTLEMENT SUBTOTAL		YY/MM/02	0.00	0.00	0.00			

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply. The sample report has a date of YY/MM/02 to illustrate the difference between the BASE24-atm and interchange business days.

TRAN DATE

The Interchange Log File (ILF) date (YY/MM/DD) to which these transactions belong. The sample report uses transaction dates of YY/MM/02 and YY/MM/03 to illustrate the difference between the BASE24-atm and interchange business days.

***** PRO1 TODAY *****

The following field represents the day this report is produced.

<YY/MM/02> — The transaction date for today's interchange activity.

***** MINUS INTERCHANGE NOT-TODAY *****

The following field represents the date on which amounts not considered in today's totals will be considered current.

INTERCHANGE — The date (YY/MM/DD) on which the corresponding debit, credit, and net amounts will be counted in interchange activity.

***** ADD INTERCHANGE TODAY *****

The following field represents the date of the settlement and surcharge subtotals. These settlement and surcharge subtotals are added to today's debit, credit and net amounts.

SETTLEMENT SUBTOTAL — The date of the settlement subtotal and surcharge subtotal amounts.

DEBIT

The amount the logical network owes the interchange according to the interchange. Interchange debits include the following transactions:

- Deposits by interchange cardholders at terminals owned by a BASE24 institution.
- Withdrawals and cash advances by cardholders belonging to a BASE24 institution at interchange terminals.

***** PRO1 TODAY *****

The following field represents the debit amount reported for today.

<YY/MM/02> — The debit amount for the interchange reported for today's business date.

***** MINUS INTERCHANGE NOT-TODAY *****

The following debit amounts are not considered part of the interchange reporting day. The BASE24-atm product does consider these debit amounts as part of its reporting day.

INTERCHANGE — The debit amount not considered part of the interchange reporting day.

SETTLEMENT SUBTOTAL — The debit figures not considered part of the interchange reporting day are subtracted from today's business. The result is a settlement subtotal for debit activity considered as today's business by the interchange.

SURCHARGE SUBTOTAL — The debit surcharge amounts not considered part of the interchange reporting day are subtracted from today's business. The result is a surcharge subtotal for all activity considered as today's business by the interchange. This field appears on the report only when the institution has purchased the surcharge option.

******* ADD INTERCHANGE TODAY *******

The following debit amounts are considered as part of the interchange reporting day. The BASE24-atm product does not consider these amounts as part of its reporting day.

SETTLEMENT SUBTOTAL — The debit figures considered part of the interchange reporting day are added to today's business. The result is a settlement subtotal for all debit activity considered as today's business by the interchange.

SURCHARGE SUBTOTAL — The debit surcharge amounts considered part of the interchange reporting day are added to today's business. The result is a surcharge subtotal for all activity considered as today's business by the interchange. This field appears on the report only when the institution has purchased the Surcharge option.

CREDIT

The amount the interchange owes the logical network according to the interchange. Interchange credits include the following transactions:

- Withdrawals and cash advances by interchange cardholders at terminals owned by a BASE24 institution.
- Deposits by cardholders belonging to a BASE24 institution at interchange terminals.

******* PRO1 TODAY *******

The following field represents the credit amount reported for today.

<YY/MM/02> — The credit amount for the interchange reported for today's business date.

******* MINUS INTERCHANGE NOT-TODAY *******

The following credit amounts are not considered part of the interchange reporting day. The BASE24-atm product does consider these credit amounts as part of its reporting day.

INTERCHANGE — The credit amount not considered part of the interchange reporting day.

SETTLEMENT SUBTOTAL — The credit figures not considered part of the interchange reporting day are subtracted from today's business. The result is a settlement subtotal for credit activity considered as today's business by the interchange.

SURCHARGE SUBTOTAL — The credit surcharge amounts not considered part of the interchange reporting day are subtracted from today's business. The result is a surcharge subtotal for all activity considered as today's business by the interchange. This field appears on the report only when the institution has purchased the Surcharge option.

******* ADD INTERCHANGE TODAY *******

The following credit amounts are considered as part of the interchange reporting day. The BASE24-atm product does not consider these amounts as part of its reporting day.

SETTLEMENT SUBTOTAL — The credit figures considered part of the interchange reporting day are added to today's business. The result is a settlement subtotal for all credit activity considered as today's business by the interchange.

SURCHARGE SUBTOTAL — The credit surcharge amounts considered part of the interchange reporting day are added to today's business. The result is a surcharge subtotal for all activity considered as today's business by the interchange. This field appears on the report only when the institution has purchased the Surcharge option.

NET

The net position of the logical network to the interchange according to the interchange, (credits minus debits). A minus sign (–) indicates a debit position, or the amount owed to the interchange.

******* PRO1 TODAY *******

The following field represents the net amount reported for today.

<YY/MM/02> — The net amount for the interchange reported for today's business date.

******* MINUS INTERCHANGE NOT-TODAY *******

The following net amounts are not considered part of the interchange reporting day. The BASE24-atm product does consider these net amounts as part of its reporting day.

INTERCHANGE — The net amount not considered part of the interchange reporting day.

SETTLEMENT SUBTOTAL — The net figures not considered part of the interchange reporting day are subtracted from today's business. The result is a settlement subtotal for net activity considered as today's business by the interchange.

SURCHARGE SUBTOTAL — The net surcharge amounts not considered part of the interchange reporting day are subtracted from today's business. The result is a surcharge subtotal for all activity considered as today's business by the interchange. This field appears on the report only when the institution has purchased the Surcharge option.

******* ADD INTERCHANGE TODAY *******

The following net amounts are considered as part of the interchange reporting day. The BASE24-atm product does not consider these amounts as part of its reporting day.

SETTLEMENT SUBTOTAL — The net figures considered part of the interchange reporting day are added to today's business. The result is a settlement subtotal for all net activity considered as today's business by the interchange.

SURCHARGE SUBTOTAL — The net surcharge amounts considered part of the interchange reporting day are added to today's business. The result is a surcharge subtotal for all activity considered as today's business by the interchange. This field appears on the report only when the institution has purchased the Surcharge option.

*******SPAN TODAY*******

This section summarizes net position of the logical network to the interchange. However, if there are multiple logical networks present in the BASE24-atm system, this section summarizes the net position of each logical network to the interchange.

Daily Terminal Settlement Report (SETL02-B24)

The Daily Terminal Settlement Report (SETL02-B24) lists the day's transaction activity for each terminal owned by an institution in the logical network. Each terminal owner in the logical network receives a copy of this report showing counts and amounts for each transaction type that occurred at each of its terminals.

Each individual terminal report lists the count and amount of transaction activity from cardholders belonging to this institution (on-us transactions), transaction activity from cardholders belonging to other institutions (not-on-us transactions), and transaction activity from cardholders belonging to an interchange (interchange transactions). In the field descriptions, the term *our* refers to cardholders and terminals belonging to the terminal-owning institution. The term *other* refers to cardholders and terminals belonging to other institutions or participating interchanges in the logical network. A category summarizing all transaction activity that occurred at this terminal is also included.

Each participating institution that owns terminals receives a copy of the Daily Terminal Settlement Report that lists the transaction activity of its own terminals. Each institution can then use this report to settle and reconcile its terminals.

Note: Not all transaction types included on this report affect settlement. The transaction types that do not affect settlement are marked with an asterisk on the report. Deposits affect settlement according to the value of the DEPOSIT SETTLEMENT IMPACT field on Institution Definition File (IDF) screen 13.

The BASE24-atm Settlement Initiator process generates the Daily Terminal Settlement Report each day using information in the Transaction Log File (TLF). To generate this report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times. Refer to section 5 for more information.

The obey file, when run, starts the report program specified in either the ATM-SETL-RPT0-PROG-2-NAME or the ATM-SETL-RPT1-PROG-2-NAME assign in the LCONF, depending again on whether the reports are run all at once or in two sets at different times. The report program creates the Daily Terminal Settlement Report. The Daily Terminal Settlement Report can be run in the first set of reports or in both sets of reports. However, it cannot be run in only the second set of reports.

The Daily Terminal Settlement Report is printed to a spooler location of \$S.#ATSL02. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Daily Terminal Settlement Report online from the RPT.

A sample Daily Terminal Settlement Report is shown on the following pages, followed by descriptions of its fields.

Note: If the error message “THE MAXIMUM SIZE FOR THE RECAP TABLE HAS BEEN REACHED” is printed on the last line of the report, the operator must increase the value in the WS-NUM-ATM-TERMINALS field in the COBNAMES table, recompile the report program, and rerun the report. The error message indicates that the number of ATMs defined for an institution exceeds the number indicated in the WS-NUM-ATM-TERMINALS field in the COBNAMES table and the report data may be in error.

SETL02-B24				PRO1 DAILY TERMINAL SETTLEMENT RPT				DATE YY/MM/DD				PAGE 01	
INSTITUTION		NAME		BANK A		S1AC10023							
ID NUMBER													
BNKA		BANK A											
TERMINAL ID NUMBER		S1AC10023											
TRANSACTION TYPE		COUNT		ON-US AMOUNT		COUNT		NOT-ON-US AMOUNT		COUNT		INTERCHANGE AMOUNT	

SETL02-B24									
PRO1 DAILY TERMINAL SETTLEMENT RPT									
INSTITUTION		DATE YY/MM/DD							
ID NUMBER	NAME	PAGE 02							
BNKA BANK A									
TERMINAL ID NUMBER		S1AC10023							
TRANSACTION TYPE	COUNT	ON-US AMOUNT	COUNT	NOT-ON-US AMOUNT	COUNT	INTERCHANGE AMOUNT	COUNT	ALL ACTIVITY AMOUNT	
*DEP SAV/CB 0	0	.00	0	.00	0	.00	0	.00	.00
*DEP SAV/CB 1	0	.00	0	.00	0	.00	0	.00	.00
*DEP SAV/CB 3	0	.00	0	.00	0	.00	0	.00	.00
*INQ TO CHK	0	.00	0	.00	0	.00	0	.00	.00
*INQ TO SAV	0	.00	1	.00	0	.00	0	.00	.00
*INQ TO CC	0	.00	0	.00	0	.00	0	.00	.00
*GENERIC INQ	0	.00	0	.00	0	.00	0	.00	.00
*XFER CHK-CHK	0	.00	0	.00	0	.00	0	.00	.00
*XFER CHK-SAV	0	.00	1	205.60	0	.00	0	.00	205.60
*XFER SAV-CHK	0	.00	0	.00	0	.00	0	.00	.00
*XFER SAV-SAV	0	.00	0	.00	0	.00	0	.00	.00
*XFER CC-CHK	0	.00	0	.00	0	.00	0	.00	.00
*PYMT SAV-CC	0	.00	0	.00	0	.00	0	.00	.00
*PYMT CHK-CC	0	.00	1	308.50	0	.00	0	.00	308.50
*PYMT ENCLSD	0	.00	1	320.58	0	.00	0	.00	320.58
*MSG TO FI	0	.00	1	.00	0	.00	0	.00	.00
*LOG ONLY 1	0	.00	1	.00	0	.00	0	.00	.00
*LOG ONLY 2	0	.00	0	.00	0	.00	0	.00	.00
*LOG ONLY 3	0	.00	0	.00	0	.00	0	.00	.00
*LOG ONLY 4	0	.00	0	.00	0	.00	0	.00	.00
*CARD REVIEW	0	.00	0	.00	0	.00	0	.00	.00
*STMT PRT CHK	0	.00	0	.00	0	.00	0	.00	.00
*STMT PRT SAV	0	.00	0	.00	0	.00	0	.00	.00
*STMT PRT CC	0	.00	0	.00	0	.00	0	.00	.00
*PIN CHANGE	0	.00	0	.00	0	.00	0	.00	.00
SETTLEMENT									
SUBTOTAL	0	.00	14	2,694.23	0	.00	0	.00	2,694.23
TOTAL APPROVED	0	.00	14	2,694.23	0	.00	0	.00	2,694.23
SURCHARGES:	0	.00	6	6.37	0	.00	0	.00	6.37
DISAPPROVED	0		2		0		2		
* INDICATES TOTALS ARE NOT INCLUDED IN SETTLEMENT									

SETL02-B24		PRO1 DAILY TERMINAL SETTLEMENT RPT				DATE YY/MM/DD	
INSTITUTION		ID NUMBER		NAME		PAGE	
BNKA		BANK A				03	
TERMINAL ID NUMBER		S1AC10023					
TRANSACTION TYPE	COUNT	ON-US AMOUNT	NOT-ON-US COUNT	INTERCHANGE COUNT	INTERCHANGE AMOUNT	ALL ACTIVITY COUNT	ALL ACTIVITY AMOUNT
SETTLEMENT TOTALS							
ON-US DB		.00					
ON-US CR		.00					
NOT-ON-US DB			309.37				
NOT-ON-US CR			1,550.18				
INTERCHANGE DB					.00		
INTERCHANGE CR					.00		
SURCHARGE TOTALS							
ON-US DB		.00					
ON-US CR		.00					
NOT-ON-US DB			6.37				
NOT-ON-US CR			.00				
INTERCHANGE DB					.00		
INTERCHANGE CR					.00		
* INDICATES TOTALS ARE NOT INCLUDED IN SETTLEMENT							

SETL02-B24													
PRO1 DAILY TERMINAL SETTLEMENT RPT													
INSTITUTION		DATE YY/MM/DD											
ID NUMBER	NAME	PAGE 04											
BNKA	BANK A												

ALL TERMINALS													
TRANSACTION	TYPE	COUNT	ON-US	AMOUNT	COUNT	NOT-ON-US	AMOUNT	COUNT	INTERCHANGE	AMOUNT	COUNT	ALL ACTIVITY	AMOUNT

*CHECK GUAR		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*CHECK VERIFY		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
W/D GENERIC		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
W/D FROM CHK		0	.00	30.60	2	30.60	.00	0	.00	.00	2	30.60	30.60
W/D FROM CHK		0	.00	30.60	2	30.60	.00	0	.00	.00	2	30.60	30.60
Non-Currency Dispense		0	.00	.60	2	.60	.00	0	.00	.00	2	.60	.60
SURCHARGES:		0	.00	247.15	3	247.15	.00	0	.00	.00	3	247.15	247.15
W/D FROM SAV		0	.00	247.15	3	247.15	.00	0	.00	.00	3	247.15	247.15
W/D FROM SAV		0	.00	247.15	3	247.15	.00	0	.00	.00	3	247.15	247.15
Non-Currency Dispense		0	.00	4.15	3	4.15	.00	0	.00	.00	3	4.15	4.15
SURCHARGES:		0	.00	31.62	1	31.62	.00	0	.00	.00	1	31.62	31.62
W/D FROM CC		0	.00	31.62	1	31.62	.00	0	.00	.00	1	31.62	31.62
W/D FROM CC		0	.00	31.62	1	31.62	.00	0	.00	.00	1	31.62	31.62
Non-Currency Dispense		0	.00	.62	1	.62	.00	0	.00	.00	1	.62	.62
SURCHARGES:		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
CASH CHECK 0		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
CASH CHECK 3		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO CHK 0		0	.00	1,230.08	1	1,230.08	.00	0	.00	.00	1	1,230.08	1,230.08
*DEP TO CHK 1		0	.00	15.00	0	15.00	.00	0	.00	.00	0	15.00	15.00
SURCHARGES:		0	.00	.75	1	.75	.00	0	.00	.00	1	.75	.75
*DEP TO CHK 3		0	.00	20.00	0	20.00	.00	0	.00	.00	0	20.00	20.00
SURCHARGES:		0	.00	.25	1	.25	.00	0	.00	.00	1	.25	.25
*DEP TO SAV 0		0	.00	320.10	1	320.10	.00	0	.00	.00	1	320.10	320.10
*DEP TO SAV 1		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO SAV 3		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO C/C 0		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO C/C 1		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO C/C 3		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO C/S 0		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO C/S 1		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO C/S 3		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO S/S 0		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO S/S 1		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP TO S/S 3		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP CHK/CB 0		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP CHK/CB 1		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00
*DEP CHK/CB 3		0	.00	.00	0	.00	.00	0	.00	.00	0	.00	.00

* INDICATES TOTALS ARE NOT INCLUDED IN SETTLEMENT													

SETL02-B24									
PRO1 DAILY TERMINAL SETTLEMENT RPT									
INSTITUTION		DATE YY/MM/DD							
ID NUMBER	NAME	PAGE 05							
BNKA		BANK A							

ALL TERMINALS									
TRANSACTION TYPE	COUNT	ON-US AMOUNT	COUNT	NOT-ON-US AMOUNT	COUNT	INTERCHANGE AMOUNT	COUNT	ALL ACTIVITY COUNT	ALL ACTIVITY AMOUNT

*DEP SAV/CB 0	0	.00	0	.00	0	.00	0	0	.00
*DEP SAV/CB 1	0	.00	0	.00	0	.00	0	0	.00
*DEP SAV/CB 3	0	.00	0	.00	0	.00	0	0	.00
*INQ TO CHK	0	.00	0	.00	0	.00	0	0	.00
*INQ TO SAV	0	.00	1	.00	0	.00	0	1	.00
*INQ TO CC	0	.00	0	.00	0	.00	0	0	.00
*GENERIC INQ	0	.00	0	.00	0	.00	0	0	.00
*XFER CHK-CHK	0	.00	0	.00	0	.00	0	0	.00
*XFER CHK-SAV	0	.00	1	205.60	0	.00	0	1	205.60
*XFER SAV-CHK	0	.00	0	.00	0	.00	0	0	.00
*XFER SAV-SAV	0	.00	0	.00	0	.00	0	0	.00
*XFER CC-CHK	0	.00	0	.00	0	.00	0	0	.00
*PYMT SAV-CC	0	.00	0	.00	0	.00	0	0	.00
*PYMT CHK-CC	0	.00	1	308.50	0	.00	0	1	308.50
*PYMT ENCLSD	0	.00	1	320.58	0	.00	0	1	320.58
*MSG TO FI	0	.00	1	.00	0	.00	0	1	.00
*LOG ONLY 1	0	.00	1	.00	0	.00	0	1	.00
*LOG ONLY 2	0	.00	0	.00	0	.00	0	0	.00
*LOG ONLY 3	0	.00	0	.00	0	.00	0	0	.00
*LOG ONLY 4	0	.00	0	.00	0	.00	0	0	.00
*CARD REVIEW	0	.00	0	.00	0	.00	0	0	.00
*STMT PRT CHK	0	.00	0	.00	0	.00	0	0	.00
*STMT PRT SAV	0	.00	0	.00	0	.00	0	0	.00
*STMT PRT CC	0	.00	0	.00	0	.00	0	0	.00
*PIN CHANGE	0	.00	0	.00	0	.00	0	0	.00
SETTLEMENT									
SUBTOTAL	0	.00	14	2,694.23	0	.00	0	14	2,694.23
TOTAL APPROVED	0	.00	14	2,694.23	0	.00	0	14	2,694.23
SURCHARGES:									
DISAPPROVED	0	.00	6	6.37	0	.00	0	6	6.37
DISAPPROVED 2									
* INDICATES TOTALS ARE NOT INCLUDED IN SETTLEMENT									

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply.

INSTITUTION

The following two fields define the terminal-owning institution for which this report is produced.

ID NUMBER — The identification number for the terminal-owning institution for which this report is produced.

NAME — The name of the terminal-owning institution.

TERMINAL ID NUMBER — The ID number assigned to this particular terminal. After the totals for all of the terminals have been reported, the field label ALL TERMINALS is used to indicate that the totals that follow are for all terminals owned by the institution.

TRANSACTION TYPE — An abbreviation describing the type of transaction. All transaction types supported are listed on the sample report. Those transactions preceded by an * are not calculated in the settlement totals, nor are they used in calculating the settlement position for this financial institution. Also included in this column are the Non-Currency Dispense field label for those transactions that dispensed a noncurrency item and the SURCHARGES field label for those transactions for which surcharges are assessed. The Non-Currency Dispense field label appears on the report only when the institution has purchased the BASE24-atm Non-Currency Dispense add-on product. The SURCHARGES field label appears on the report only when the institution has purchased the Surcharge option. Note that values in the SURCHARGES field can be negative or positive. A positive value indicates a transaction surcharge. A negative value indicates an issuer incentive or rebate.

ON-US

The following two fields describe transactions made by cardholders belonging to this institution.

COUNT — The total number of transactions made by cardholders belonging to this institution for this type of transaction.

AMOUNT — The total amount of transactions made by cardholders belonging to this institution for this type of transaction.

NOT-ON-US

The following two fields describe transactions made by cardholders belonging to other institutions.

COUNT — The total number of transactions made by cardholders belonging to other institutions for this type of transaction.

AMOUNT — The total amount of transactions made by cardholders belonging to other institutions for this type of transaction.

INTERCHANGE

The following two fields describe transactions made by cardholders belonging to an interchange.

COUNT — The total number of transactions made by cardholders belonging to an interchange for this type of transaction.

AMOUNT — The total amount of transactions made by cardholders belonging to an interchange for this type of transaction.

ALL ACTIVITY

The following two fields describe on-us, not-on-us, and interchange transactions.

COUNT — The total number of on-us, not-on-us, and interchange transactions by cardholders who performed this type of transaction.

AMOUNT — The total amount of on-us, not-on-us, and interchange transactions by cardholders who performed this type of transaction.

SETTLEMENT SUBTOTAL — The total amount of those transactions to be included in settlement calculations.

TOTAL APPROVED — The total of all approved transactions listed above.

SURCHARGES — The total amount of surcharges for the approved transactions listed above. This field appears on the report only when the institution has purchased the Surcharge option. Note that surcharges can be a positive or negative amount.

DISAPPROVED — The total of all denied transactions listed above.

SETTLEMENT TOTALS

The following six fields describe total cardholder activity at on-us, not-on-us, and interchange terminals.

ON-US DB — On-us debits include our cardholders making withdrawals or requesting cash advances at our terminals.

ON-US CR — On-us credits include our cardholders making deposits at our terminals.

NOT-ON-US DB — Not-on-us debits include other cardholders making deposits or requesting cash advances at our terminals.

NOT-ON-US CR — Not-on-us credits include other cardholders making withdrawals at our terminals.

INTERCHANGE DB — Interchange debits include interchange cardholders making deposits or requesting cash advances at our terminals.

INTERCHANGE CR — Interchange credits include interchange cardholders making withdrawals at our terminals.

SURCHARGE TOTALS

The following six fields describe total surcharges at on-us, not-on-us, and interchange terminals. This group of fields appears on the report only when the institution has purchased the Surcharge option.

ON-US DB — On-us debit surcharges include fees assessed for our cardholders making withdrawals or requesting cash advances at our terminals.

ON-US CR — On-us credit surcharges include fees assessed for our cardholders making deposits at our terminals.

NOT-ON-US DB — Not-on-us debit surcharges include fees assessed for other cardholders making deposits or requesting cash advances at our terminals.

NOT-ON-US CR — Not-on-us credit surcharges include fees assessed for other cardholders making withdrawals at our terminals.

INTERCHANGE DB — Interchange debit surcharges include fees assessed for interchange cardholders making deposits or requesting cash advances at our terminals.

INTERCHANGE CR — Interchange credit surcharges include fees assessed for interchange cardholders making withdrawals at our terminals.

TERMINAL

The following fields describe totals for the named terminal.

DEBITS — Terminal debits are broken down into all debits incurred at our terminals, those debits incurred by our cardholders at our terminals, and those incurred by interchange cardholders at our terminals.

CREDITS — Terminal credits are broken down into all credits incurred at our terminals, those credits incurred by our cardholders at our terminals, and those incurred by interchange cardholders at our terminals.

SURCHARGES

The following two fields describe surcharge totals for the named terminal.

DEBITS — All surcharges debited at this terminal.

CREDITS — All surcharges credited at this terminal.

TERMINALS - ALL

The following fields describe all debits and credits at our terminals.

DEBITS — Terminal debits are broken down into all debits incurred at our terminals, those debits incurred by our cardholders at our terminals, and those incurred by interchange cardholders at our terminals.

CREDITS — Terminal credits are broken down into all credits incurred at our terminals, those credits incurred by our cardholders at our terminals, and those incurred by interchange cardholders at our terminals.

Surcharges

The following two fields describe surcharge totals for all terminals.

DEBITS — TAll surcharges debited at all terminals.

CREDITS — All surcharges credited at all terminals.

Monthly Terminal Settlement Report (SETL03-B24)

The Monthly Terminal Settlement Report (SETL03-B24) summarizes the past full month's transaction activity for each terminal owned by an institution in the logical network. Each terminal owner in the logical network receives a copy of this report showing counts and amounts for each transaction type that occurred at each of its terminals.

Each individual terminal report lists the count and amount of transaction activity from cardholders belonging to the terminal-owning institution (on-us transactions), transaction activity from cardholders belonging to other institutions (not-on-us transactions), and transaction activity from cardholders belonging to interchanges (interchange transactions). A category summarizing all transaction activity that occurred throughout the past full month is also included.

An institution can use this report to track and analyze its monthly terminal activity.

Note: Not all transaction types included on this report affect settlement. The transaction types that do not affect settlement are marked with an asterisk on the report.

The BASE24-atm Settlement Initiator process generates the Monthly Terminal Settlement Report after the last calendar day of the month using the MON3-MSTR and MON3-TOTL files specified in the ATM-SETL-RPT3M and ATM-SETL-RPT3T assigns, respectively, in the LCONF. These files are accumulator files to which the SETL02 report program writes the daily terminal totals each time the Daily Terminal Settlement Report is produced during the month.

To generate the Monthly Terminal Settlement Report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times. Refer to section 5 for more information. The obey file, when run, starts the report program specified in the ATM-SETL-MON-RPT-PROG-3-NAME assign in the LCONF. This report program creates the Monthly Terminal Settlement Report.

The Monthly Terminal Settlement Report is printed to a spooler location of \$\$.#ATSL03. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Monthly Terminal Settlement Report online from the RPT.

The format of the Monthly Terminal Settlement Report is identical to that of the Daily Terminal Settlement Report. Refer to the sample Daily Terminal Settlement Report for format information and field descriptions.

Note: If the error message “THE MAXIMUM SIZE FOR THE RECAP TABLE HAS BEEN REACHED” is printed on the last line of the report, the operator must increase the value in the WS-NUM-ATM-TERMINALS field in the COBNAMES table, recompile the report program, and rerun the report. The error message indicates that the number of ATMs defined for an institution exceeds the number indicated in the WS-NUM-ATM-TERMINALS field in the COBNAMES table and the report data may be in error.

Daily Institution Approved Transaction Volume Report (STAT04-B24)

The Daily Institution Approved Transaction Volume Report (STAT04-B24) summarizes all the approved transaction activity that occurred at the institution that day. Transaction activity includes both cardholder activity and terminal activity. Cardholder activity is broken down by cardholders belonging to this institution (our cardholders) and cardholders belonging to another institution or an interchange (other cardholders). Terminal activity is broken down by terminals belonging to this institution (on-us terminals), terminals belonging to other institutions (not-on-us terminals), and terminals belonging to interchanges (interchange terminals).

Each institution in the logical network receives a copy of the Daily Institution Approved Transaction Volume Report showing its cardholder and terminal activity for the day. The institution can use this report to track and analyze its ATM business.

The BASE24-atm Settlement Initiator process generates the Daily Institution Approved Transaction Volume Report each day using information in the Transaction Log File (TLF). To generate this report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times. Refer to section 5 for more information.

The obey file, when run, starts the report program specified in either the ATM-SETL-RPT0-PROG-4-NAME or the ATM-SETL-RPT1-PROG-4-NAME assign in the LCONF, depending again on whether reports are run all at once or in two sets at different times. The report program actually creates the Daily Institution Approved Transaction Volume Report.

The Daily Institution Approved Transaction Volume Report is printed to a spooler location of \$\$.#ATST04. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Daily Institution Approved Transaction Volume Report online from the RPT.

A sample Daily Institution Approved Transaction Volume Report is shown on the following pages, followed by descriptions of its fields.

PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
STAT04-B24		INSTITUTION		DATE YY/MM/DD					
ID NUMBER		NAME		PAGE 01					
BNKA		BANK A							

TRANSACTION TYPE				ON-US TERMINALS		NOT-ON-US TERMINALS		INTERCHANGE TERMINALS	
CARDHOLDERS				COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT

CHECK GUAR									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
CHECK VERIFY									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
W/D GENERIC									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
W/D FROM CHK									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				2	30.60			2	30.60
TOTAL				2	30.60	0	.00	2	30.60
W/D FROM CHK (NON-CURR DISP)									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				2	10.20			2	10.20
TOTAL				2	10.20	0	.00	2	10.20
W/D FROM CHK (SURCHARGES)									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				2	.60			2	.60
TOTAL				2	.60	0	.00	2	.60
W/D FROM SAV									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				3	247.15			3	247.15
TOTAL				3	247.15	0	.00	3	247.15
W/D FROM SAV (NON-CURR DISP)									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				3	5.10			1	5.10
TOTAL				3	5.10	0	.00	1	5.10

PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
STAT04-B24		INSTITUTION		DATE YY/MM/DD		PAGE		02	
ID NUMBER		NAME							
BNKA		BANK A							

TRANSACTION TYPE									
CARDHOLDERS									
		ON-US		NOT-ON-US		INTERCHANGE		ALL	
		COUNT		COUNT		COUNT		COUNT	
		AMOUNT		AMOUNT		AMOUNT		AMOUNT	

W/D FROM SAV (SURCHARGES)									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		3	4.15	0	.00	0	.00	3	4.15
TOTAL		3	4.15	0	.00	0	.00	3	4.15
W/D FROM CC									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		1	31.62	0	.00	0	.00	1	31.62
TOTAL		1	31.62	0	.00	0	.00	1	31.62
W/D FROM CC (NON-CURR DISP)									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		1	.00	0	.00	0	.00	0	.00
TOTAL		1	.00	0	.00	0	.00	0	.00
W/D FROM CC (SURCHARGES)									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		1	.62	0	.00	0	.00	1	.62
TOTAL		1	.62	0	.00	0	.00	1	.62
CASH CHECK 0									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
CASH CHECK 3									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP TO CHK 0									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		1	1,230.08	0	.00	0	.00	1	1,230.08
TOTAL		1	1,230.08	0	.00	0	.00	1	1,230.08
DEP TO CHK 0 (SURCHARGES)									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		1	.50	0	.00	0	.00	1	.50
TOTAL		1	.50	0	.00	0	.00	1	.50

STAT04-B24 PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
INSTITUTION		NAME		DATE YY/MM/DD		PAGE		03	
ID NUMBER	BNKA	BANK A							

TRANSACTION TYPE									
CARDHOLDERS									
	ON-US	TERMINALS	NOT-ON-US	INTERCHANGE	TERMINALS	ALL			
	COUNT	AMOUNT	COUNT	COUNT	AMOUNT	TERMINALS	COUNT	AMOUNT	

DEP TO CHK 1									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00
DEP TO CHK 3									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00
DEP TO SAV 0									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	1	320.10	0	0	.00	1	1	320.10	320.10
TOTAL	1	320.10	0	0	.00	1	1	320.10	320.10
DEP TO SAV 1									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00
DEP TO SAV 3									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00
DEP TO C/C 0									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00
DEP TO C/C 1									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00
DEP TO C/C 3									
OUR CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
OTHER CARDHOLDERS	0	.00	0	0	.00	0	0	.00	.00
TOTAL	0	.00	0	0	.00	0	0	.00	.00

PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
STAT04-B24		INSTITUTION		DATE YY/MM/DD		PAGE		04	
ID NUMBER		NAME							
BNKA		BANK A							

TRANSACTION TYPE									
CARDHOLDERS									
		ON-US TERMINALS		NOT-ON-US TERMINALS		INTERCHANGE TERMINALS		ALL TERMINALS	
		COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT

DEP TO C/S 0									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP TO C/S 1									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP TO C/S 3									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP TO S/S 0									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP TO S/S 1									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP TO S/S 3									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP CHK/CB 0									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00
DEP CHK/CB 1									
OUR CARDHOLDERS		0	.00	0	.00	0	.00	0	.00
OTHER CARDHOLDERS		0	.00					0	.00
TOTAL		0	.00	0	.00	0	.00	0	.00

STAT04-B24										PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
INSTITUTION				ID NUMBER				NAME				DATE YY/MM/DD							
BNKA				BANK A								PAGE 05							
TRANSACTION TYPE																			
CARDHOLDERS																			
				ON-US		TERMINALS		NOT-ON-US		TERMINALS		INTERCHANGE		TERMINALS		ALL			
				COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT		

PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
STAT04-B24		INSTITUTION		DATE YY/MM/DD					
ID NUMBER		NAME		PAGE 06					
BNKA		BANK A							

TRANSACTION TYPE				ON-US TERMINALS		NOT-ON-US TERMINALS		INTERCHANGE TERMINALS	
CARDHOLDERS				COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT

XFER CHK-CHK				0	.00	0	.00	0	.00
OUR CARDHOLDERS				0	.00			0	.00
OTHER CARDHOLDERS				0	.00	0	.00	0	.00
TOTAL				0	.00	0	.00	0	.00
XFER CHK-SAV				0	.00	0	.00	0	.00
OUR CARDHOLDERS				1	205.60			1	205.60
OTHER CARDHOLDERS				1	205.60	0	.00	1	205.60
TOTAL				1	205.60	0	.00	1	205.60
XFER SAV-CHK				0	.00	0	.00	0	.00
OUR CARDHOLDERS				0	.00			0	.00
OTHER CARDHOLDERS				0	.00	0	.00	0	.00
TOTAL				0	.00	0	.00	0	.00
XFER SAV-SAV				0	.00	0	.00	0	.00
OUR CARDHOLDERS				0	.00			0	.00
OTHER CARDHOLDERS				0	.00	0	.00	0	.00
TOTAL				0	.00	0	.00	0	.00
XFER CC-CHK				0	.00	0	.00	0	.00
OUR CARDHOLDERS				0	.00			0	.00
OTHER CARDHOLDERS				0	.00	0	.00	0	.00
TOTAL				0	.00	0	.00	0	.00
PYMT SAV-CC				0	.00	0	.00	0	.00
OUR CARDHOLDERS				0	.00			0	.00
OTHER CARDHOLDERS				0	.00	0	.00	0	.00
TOTAL				0	.00	0	.00	0	.00
PYMT CHK-CC				0	.00	0	.00	0	.00
OUR CARDHOLDERS				1	308.50			1	308.50
OTHER CARDHOLDERS				1	308.50	0	.00	1	308.50
TOTAL				1	308.50	0	.00	1	308.50
PYMT ENCLSD				0	.00	0	.00	0	.00
OUR CARDHOLDERS				1	320.58			1	320.58
OTHER CARDHOLDERS				1	320.58	0	.00	1	320.58
TOTAL				1	320.58	0	.00	1	320.58

PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
STAT04-B24		INSTITUTION		DATE YY/MM/DD					
		ID NUMBER		NAME		PAGE 07			
BNKA		BANK A							

TRANSACTION TYPE									
CARDHOLDERS									
				ON-US TERMINALS		NOT-ON-US TERMINALS		INTERCHANGE TERMINALS	
				COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT

MSG TO FI									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				1	.00			1	.00
TOTAL				1	.00	0	.00	1	.00
LOG ONLY 1									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				1	.00			1	.00
TOTAL				1	.00	0	.00	1	.00
LOG ONLY 2									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
LOG ONLY 3									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
LOG ONLY 4									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
CARD REVIEW									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
STMNT PRT CHK									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00
STMNT PRT SAV									
OUR CARDHOLDERS				0	.00	0	.00	0	.00
OTHER CARDHOLDERS				0	.00			0	.00
TOTAL				0	.00	0	.00	0	.00

PRO1 DAILY INSTITUTION APPROVED TRANSACTION VOLUME REPORT									
INSTITUTION		DATE YY/MM/DD							
ID NUMBER	NAME	PAGE 08							
BNKA BANK A									

TRANSACTION TYPE CARDHOLDERS	ON-US TERMINALS		NOT-ON-US TERMINALS		INTERCHANGE TERMINALS		ALL TERMINALS		
	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	COUNT	AMOUNT	

STMT PRT CC									
OUR CARDHOLDERS	0	.00	0	.00	0	.00	0	.00	
OTHER CARDHOLDERS	0	.00					0	.00	
TOTAL	0	.00	0	.00	0	.00	0	.00	
PIN CHANGE									
OUR CARDHOLDERS	0	.00	0	.00	0	.00	0	.00	
OTHER CARDHOLDERS	0	.00					0	.00	
TOTAL	0	.00	0	.00	0	.00	0	.00	
ALL TRANSACTIONS									
OUR CARDHOLDERS	0	.00	0	.00	0	.00	0	.00	
OTHER CARDHOLDERS	14	2,694.23					14	2,694.23	
TOTAL	14	2,694.23	0	.00	0	.00	14	2,694.23	
ALL TRANSACTIONS (SURCHARGES)									
OUR CARDHOLDERS	0	.00	0	.00	0	.00	0	.00	
OTHER CARDHOLDERS	6	6.37					6	6.37	
TOTAL	6	6.37	0	.00	0	.00	6	6.37	
SETTLEMENT APPLICATIONS TOTALS									
DDA DEBITS	5	544.70	0	.00	0	.00	5	544.70	
DDA CREDITS	1	1,230.08	0	.00	0	.00	1	1,230.08	
SAV DEBITS	3	247.15	0	.00	0	.00	3	247.15	
SAV CREDITS	2	525.70	0	.00	0	.00	2	525.70	
CCD DEBITS	1	31.62	0	.00	0	.00	1	31.62	
CCD CREDITS	1	308.50	0	.00	0	.00	1	308.50	
SETTLEMENT APPLICATIONS TOTALS (SURCHARGES)									
DDA DEBITS	2	.60	0	.00	0	.00	2	.60	
DDA CREDITS	0	.00	0	.00	0	.00	0	.00	
SAV DEBITS	3	4.15	0	.00	0	.00	3	4.15	
SAV CREDITS	0	.00	0	.00	0	.00	0	.00	
CCD DEBITS	1	.62	0	.00	0	.00	1	.62	
CCD CREDITS	0	.00	0	.00	0	.00	0	.00	
***** END OF REPORT *****									

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply.

INSTITUTION

The following two fields describe the institution for which this report is produced.

ID NUMBER — The FIID of this institution.

INSTITUTION NAME — The name of this institution.

TRANSACTION TYPE — A term describing this type of transaction. All transaction types supported and processed by the BASE24-atm system are included here; however, only those transactions that were approved are calculated in the settlement totals. After the totals for each type of transaction has been reported, the field label ALL TRANSACTIONS is used to indicate that the totals that follow are for all transactions of our cardholders and other cardholders at our terminals, terminals belonging to other institutions, and interchange terminals.

CARDHOLDERS — Cardholder activity is broken down into our cardholders and other cardholders. The total is the sum of the two categories for that particular transaction. Under each individual transaction type field label and the ALL TRANSACTIONS field label, cardholder activity is broken down into the total number and amount of our cardholders' transactions at our terminals, terminals belonging to other institutions, and interchange terminals; the total number and amount of other cardholders' transactions at our terminals; and the total number and amount of the two categories.

ON-US-TERMINALS

The following two fields contain figures for transactions made at terminals belonging to this institution.

COUNT — The total number of transactions made at terminals belonging to this institution for this type of transaction.

AMOUNT — The total amount of transactions made at terminals belonging to this institution for this type of transaction.

NOT-ON-US TERMINALS

The following two fields contain figures for transactions made by customers belonging to this institution at terminals belonging to other institutions.

COUNT — The total number of transactions made by customers belonging to this institution at terminals belonging to other institutions for this type of transaction.

AMOUNT — The total amount of transactions made by customers belonging to this institution at terminals belonging to other institutions for this type of transaction.

INTERCHANGE TERMINALS

The following two fields contain figures for transactions made by customers belonging to this institution at interchange terminals.

COUNT — The total number of transactions made by customers belonging to this institution at interchange terminals for this type of transaction.

AMOUNT — The total amount of transactions made by customers belonging to this institution at interchange terminals for this type of transaction.

ALL TERMINALS

The following two fields contain figures for transactions occurring at our terminals, terminals belonging to other institutions, and interchange terminals.

COUNT — The total number of transactions occurring at our terminals, terminals belonging to other institutions, and interchange terminals for this type of transaction.

AMOUNT — The total amount of transactions occurring at our terminals, terminals belonging to other institutions, and interchange terminals for this type of transaction.

ALL TRANSACTIONS (SURCHARGES)

The following two fields contain figures for all transaction surcharges assessed at our terminals, terminals belonging to other institution, and interchange terminals. These fields appear on the report only when the institution has purchased the Surcharge option.

COUNT — The total number of all transaction surcharges incurred at our terminals, terminals belonging to other institutions, and interchange terminals.

AMOUNT — The total amount of all transaction surcharges incurred at our terminals, terminals belonging to other institutions, and interchange terminals.

SETTLEMENT APPLICATIONS TOTALS

The following six fields describe totals for our cardholders.

DDA DEBITS — The total number of debits to Demand Deposit Accounts (DDAs) for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. DDA debits include withdrawals from checking, the *from* amount of transfers from checking, and the *from* amount of payments from checking.

DDA CREDITS — The total number of credits to DDAs for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. DDA credits include deposits to checking, and the *to* amount of transfers to checking.

SAV DEBITS — The total number of debits to savings accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. Savings debits include withdrawals from savings, the *from* amount of transfers from savings, and the *from* amount of payments from savings.

SAV CREDITS — The total number of credits to savings accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. Savings credits include deposits to savings and the *to* amount of transfers to savings.

CCD DEBITS — The total number of debits to credit card (CCD) accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. CCD debits include withdrawals and cash advances from credit cards, and the *from* amount of transfers from a credit card.

CCD CREDITS — The total number of credits to CCD accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. CCD credits include the *to* amount of payments to the credit card account.

SETTLEMENT APPLICATIONS TOTALS (SURCHARGES)

The following six fields describe surcharge totals for our cardholders. This group of fields appears on the report only when the institution has purchased the Surcharge option.

DDA DEBITS — The total number of debits of surcharges to Demand Deposit Accounts (DDAs) for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. DDA debits include withdrawals from checking, the *from* amount of transfers from checking, and the *from* amount of payments from checking.

DDA CREDITS — The total number of credits of surcharges to DDAs for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. DDA credits include deposits to checking, deposits to checking with cash back, split deposits to checking, and the *to* amount of transfers to checking.

SAV DEBITS — The total number of debits of surcharges to savings accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. Savings debits include withdrawals from savings, the *from* amount of transfers from savings, and the *from* amount of payments from savings.

SAV CREDITS — The total number of credits of surcharges to savings accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. Savings credits include deposits to savings, deposits to savings with cash back, split deposits to savings, and the *to* amount of transfers to savings.

CCD DEBITS — The total number of debits of surcharges to credit card (CCD) accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. CCD debits include withdrawals and cash advances from credit cards, and the *from* amount of transfers from a credit card.

CCD CREDITS — The total number of credits of surcharges to CCD accounts for our cardholders at our terminals, terminals belonging to other institutions, and interchange terminals, and for other cardholders at our terminals. CCD credits include the *to* amount of payments to the credit card account.

Monthly Institution Approved Transaction Volume Report (STAT05-B24)

The Monthly Institution Approved Transaction Volume Report (STAT05-B24) summarizes all the approved transaction activity that occurred at the institution in the past calendar month. Transaction activity includes both cardholder activity and terminal activity. Cardholder activity is broken down by cardholders belonging to this institution (our cardholders) and cardholders belonging to another institution or an interchange (other cardholders). Terminal activity is broken down by terminals belonging to this institution (on-us terminals), terminals belonging to other institutions (not-on-us terminals), and terminals belonging to an interchange (interchange terminals).

Each institution in the logical network receives a copy of the STAT05-B24 report showing its cardholder and terminal activity for the past calendar month. The institution can use this report to track and analyze its ATM business.

The BASE24-atm Settlement Initiator process generates the Monthly Institution Approved Transaction Volume Report after the last calendar day of the month using the MON3-MSTR and MON5-MSTR files specified in the ATM-SETL-RPT5M assign, and the MON5-TOTL file specified in the ATM-SETL-RPT3T assign in the LCONF. These files are accumulator files to which the STAT04 report program writes the daily approved transaction summaries each time the Daily Institution Approved Transaction Volume Report is produced during the month.

To generate the Monthly Institution Approved Transaction Volume Report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times. Refer to section 5 for more information about these assigns. The obey file, when run, starts the report program specified in the ATM-SETL-MON-RPT-PROG-5-NAME assign in the LCONF. This report program creates the Monthly Institution Approved Transaction Volume Report.

The Monthly Institution Approved Transaction Volume Report is printed to a spooler location of \$\$.#ATST05. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Monthly Institution Approved Transaction Volume Report online from the RPT.

The format of the Monthly Institution Approved Transaction Volume Report is identical to that of the Daily Institution Approved Transaction Volume Report. Refer to the sample Daily Institution Approved Transaction Volume Report for format information and field descriptions.

Daily Terminal Detail Transaction Log Report (STAT06-B24)

The Daily Terminal Detail Transaction Log Report (STAT06-B24) details all cardholder activity occurring at each terminal owned by this institution. This report lists all transactions for each of the terminal owner's terminals that occurred during the terminal's business day. The transactions appear on the report in chronological order.

The Daily Terminal Detail Transaction Log Report is produced in two different formats. The first format reflects cardholder transactions initiated at the terminal. The second format reflects administrative transactions initiated at the terminal. Both formats are described in this section.

This report also includes transactions that were started but were reversed before the transaction completed. Reversed transactions are reported with the requested amount, the dispensed amount (if any), and the difference between the amount requested and the amount dispensed.

Transactions are *fully* reversed in the following circumstances:

- The cardholder makes a deposit but does not insert the deposit envelope.
- The terminal cannot dispense cash due to a hopper jam.
- The hopper contains an insufficient amount of cash.

Transactions are *partially* reversed if the terminal fails to dispense cash from both hoppers due to a hopper jam or because one of the hoppers contains an insufficient amount of cash.

Each terminal owner in the logical network receives a copy of the Daily Terminal Detail Transaction Log Report listing each transaction that occurred at each of its terminals during the business day. The institution can use this report to analyze and research transactions that may be in question.

The masking of cardholder primary account numbers (PANs) and administrative PANs on this report depends on the values of the four REPORT DATA MASKING PARAMETER fields on Institution Definition File (IDF) screen 4.

The BASE24-atm Settlement Initiator process generates the Daily Terminal Detail Transaction Log Report each day using information in the Transaction Log File (TLF). To generate this report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or the ATM-SETL-

RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times.

The obey file, when run, starts the report program specified in either the ATM-SETL-RPT0-PROG-6-NAME or the ATM-SETL-RPT1-PROG-6-NAME assign in the LCONF, depending again on whether reports are run all at once or in two sets at different times. The report program creates the STAT06-B24 report.

The STAT06-B24 report is printed to a spooler location of \$\$.#ATST06. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Daily Terminal Detail Transaction Log Report online from the RPT.

This report contains additional information when the institution has purchased the BASE24-atm self service banking (SSB) application. Refer to the device-specific SSB manual for more information about how SSB report formats and field definitions differ from the standard report.

A sample of the Daily Terminal Detail Transaction Log Report is shown on the following pages, followed by descriptions of its fields. Page one of this sample report illustrates the cardholder transaction detail format. Page two of this sample report illustrates the administrative transaction detail format.

STAT06-B24													
PRO1 DAILY TERMINAL DETAIL TRANSACTION LOG													
INSTITUTION		NAME		DATE YY/MM/DD		PAGE		01					
ID NUMBER		BNKA		BANK A		TERMINAL ID NUMBER		S1AC10023					
PAN	FROM ACCT	MBR	TO ACCT	DESCRIP <d>	RESP RC	SEQ	SUBTYPE	DATE	TIME	OFST	CARD LN	AMT	SURCHARGE
SPLIT DEP AMT 1	SPLIT DEP AMT 2	<st>	BIN	SEQ	NUM	MICR							
*****0000	000	W/D FROM CHK	3	000	1301			03/12	10:13	+0000	PRO1	20.40	
01371101	00000000000000000000											0.40	
*****0000	000	W/D FROM SAV	3	060	1302			03/12	10:14	+0000	PRO1	302.00	
11371101	00000000000000000000											2.00	
*****0000	000	W/D FROM CC	3	060	1303			03/12	10:15	+0000	PRO1	30.60	
31371101	00000000000000000000											0.60	
*****0000	000	W/D FROM CHK	3	000	1304			03/12	10:21	+0000	PRO1	10.00	
3001101	00000000000000000000											0.00	
Non-Currency Dispense: TYPE STMP, QUANTITY 02													
*****0000	000	W/D FROM SAV	3	000	1305			03/12	10:21	+0000	PRO1	11.55	
11371101	00000000000000000000											0.55	
*****0000	000	W/D FROM CC	3	000	1306			03/12	10:22	+0000	PRO1	31.62	
31371101	00000000000000000000											0.62	
*****0000	000	W/D FROM SAV	3	000	1307			03/12	10:23	+0000	PRO1	202.00	
11371101	00000000000000000000											2.00	
*****0000	000	DEP TO CHK	0	3	000	1308		03/12	10:24	+0000	PRO1	1230.08	
00000000000000000000	01371101											0.00	
*****0000	000	XFER CHK-SAV	3	001	1309			03/12	10:25	+0000	PRO1	205.60	
01371101	11371101											0.00	
*****0000	000	DEP TO SAV	0	3	000	1310		03/12	10:25	+0000	PRO1	320.10	
00000000000000000000	11371101											0.00	
*****0000	000	DEP SAV/CB	0	3	001	1311		03/12	10:39	+0000	PRO1	100.58	
00000000000000000000	3311101											0.00	
0.00	0.00												
* INDICATES AMOUNT REVERSED, F INDICATES FORCE POST													
T987654321T00000111100000*													

TERMINAL ID NUMBER S1AC10023

PRO1 DAILY TERMINAL DETAIL TRANSACTION LOG

PAGE 02

* INDICATES AMOUNT REVERSED, F INDICATES FORCE POST

END OF REPORT

Format Description Page 1

The information on this page of the report consists of detailed transaction information.

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply.

INSTITUTION

The following two fields describe the institution for which this report is produced.

ID NUMBER — The FIID for this institution.

NAME — The name of this institution.

TERMINAL ID NUMBER — The ID number identifying the terminal to which the following transaction activity pertains.

PAN — The primary account number (PAN) assigned to the card. Values of the four REPORT DATA MASKING PARAMETER fields on Institution Definition File (IDF) screen 4 control masking of values in this field.

MBR — The member number identifying the cardholder, if more than one person has a card to access this account.

DESCRIP — A brief description of the transaction. Noncurrency dispense transactions are noted with the label “Non-Currency Dispense: TYPE xxxx, QUANTITY *n*” where *xxxx* is an abbreviation for the type of item dispensed and *n* is the number of items dispensed.

<d> — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. This field appears on the report only when the institution has purchased the Self Service Banking option.

RESP — An identifier indicating the authorizing entity.

RC — A response code indicating the authorization action taken in response to this transaction request.

SEQ — The sequence number the terminal assigned to the transaction.

DATE — The date (MM/DD) of this transaction.

TIME — The time (hh:mm) of this transaction.

OFST — The time difference in minutes (+\-mmmm) between this terminal and the HP Non-Stop processor if they are located in different time zones.

CARD LN — The logical network to which this cardholder belongs.

AMT — The amount of this transaction.

FROM ACCT — The account number from which funds are requested.

TO ACCT — The account number to which the deposit, payment, or transfer is made.

SUBTYPE — The subtype for the transaction. This value is present only when the subtype token is required for the transaction and is logged to the transaction log file.

SURCHARGE — The surcharge assessed for this transaction. This field appears on the report only when the institution has purchased the Surcharge option.

SPLIT DEP AMT 1 — The Account 1 amount involved in a split deposit transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

SPLIT DEP AMT 2 — The Account 2 amount involved in a split deposit transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

<st> — An unlabeled field identifying transactions performed with a Super Teller card. This field is used only when the institution has purchased the Self Service Banking option.

BIN SEQ NUM — The depository bin sequence number in the terminal as assigned by the Device Handler process. This field appears on the report only when the institution has purchased the Self Service Banking option.

MICR — The magnetic ink character recognition (MICR) data from a check-related transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

Format Description Page 2

The information on this page of the report consists of administrative transaction information. The format of this portion of the report depends on the administrative transaction reported. The example report format presented in this manual illustrates the format for administrative transactions that initiate terminal cutover.

<LNET> — The logical network to which this terminal belongs.

<MM/DD> — The date on which this terminal was cut over.

<HH:MM> — The time at which this terminal was cut over.

<OFFST> — The time difference in minutes (+\-mmmm) between this terminal and the HP Non-Stop processor if they are located in different time zones

<CUTOVER METHOD> — A description of how this terminal was cut over. If the Settlement Initiator process forced the terminal to cut over (administrative code = 9), the description “FORCED CUTOVER” appears in this field. If an operator cut the terminal over by using an administrative card at the terminal (administrative code = 5), the description “ATM TERMINAL BALANCE” appears in this field. If an operator cut the terminal over by using a command at the Device Control Terminal (administrative code = 6), the description “CRT TERMINAL BALANCE” appears in this field.

BEGINNING CASH HOPPER # — The total cash amount in the hopper at the start of the reporting day.

CASH INCREASE HOPPER # — The total cash added to the hopper by midpoint cash adjustment transactions.

CASH DECREASE HOPPER # — The total cash subtracted from the hopper by midpoint cash adjustment transactions.

CASH OUT HOPPER # — The total cash amount dispensed from the hopper by cardholder withdrawals.

ENDING CASH HOPPER # — The total cash amount currently in the hopper.

CONTENTS HOPPER # — The currency code identifying the type of currency contained in the hopper.

NUMBER/AMOUNT DEPOSITS — The total number and amount of all deposits made at this terminal.

DEPOSITORY 0 — The total number and amount of deposits in the depository.

DEPOSITORY 1 — The total number and amount of deposits in the commercial depository if the terminal has one. If the terminal does not have a commercial depository, these fields contain zeros.

DEPOSITORY 3 — The number and amount of check-related transactions in the depository. This field is calculated by adding the four bin count fields.

BIN 0 — The number and amount of check-related transactions for bin 0 (envelope and reject bin).

BIN 1 — The number and amount of check-related transactions for bin 1 (pocket A).

BIN 2 — The number and amount of check-related transactions for bin 2 (pocket B).

BIN 3 — The number and amount of check-related transactions for bin 3 (pocket C).

NUMBER/AMOUNT PAY ENCL — The number and amount of payments enclosed.

NUMBER MESSAGES TO FI — The total number of messages to the institution.

NUMBER/AMT DEPOSITORY — The total number and amount of all deposits and payments in the depository.

CARDS RETAINED — The total number of cards retained by the BASE24 system. Cards are retained by the BASE24 system if the card is reported as stolen or lost and the institution requests that the card be retained.

Daily Terminal Exception Detail Report

The Daily Terminal Exception Detail Report contains a listing and summary of all cardholder activity occurring at each terminal owned by the institution that resulted in exception processing that day. The report includes all transactions that have a record type of 20 (exception posted) or 21 (exception not posted).

The BASE24-atm product performs exception processing when an authorizer other than the BASE24-atm Authorization process has approved the transaction and the transaction contains data or is missing data that prevents the BASE24-atm product from posting the transaction correctly to BASE24 files. Transactions that may result in exception processing include force posts, reversals, and requests. This report does not include administrative or settlement records.

Institutions can use the Daily Terminal Exception Detail Report to research exception transactions and ensure that they have been appropriately posted to BASE24 files. If the BASE24-atm system was unable to post an exception transaction appropriately, the institution must update the appropriate files manually to keep the BASE24 database accurate.

This report is produced in the same format as the Daily Terminal Detail Transaction Log Report and is optional. It is produced based on the value of the ATM-SETL-EXPT-RPT-FLG param in the LCONF. See section 5 or the ***BASE24 Logical Network Configuration File Manual*** for more information about this param.

If exception reporting is indicated, the BASE24-atm Settlement Initiator process generates a copy of the Daily Terminal Exception Detail Report for each terminal owner in the logical network. It is produced at the same time and by the same report program as the Daily Terminal Detail Transaction Log Report. The Settlement Initiator process obtains the information for this report from the Transaction Log File (TLF). If no exception records exist in the TLF for a specific institution, the report contains the following comment:

*** NO EXCEPTION RECORDS EXIST FOR THIS INSTITUTION ***

The report is printed to a spooler location of \$\$S.#ATST6R. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing this report online from the RPT.

Because this report is identical in format to the Daily Terminal Detail Transaction Log Report, a sample report is not provided in this manual. Refer to the sample of the Daily Terminal Detail Transaction Log Report for a description of the Daily Terminal Exception Detail Report.

Daily Institution Detail Transaction Log Report (STAT07-B24)

The Daily Institution Detail Transaction Log Report (STAT07-B24) lists all cardholder activity that occurred at this institution's terminals during the institution's business day. The transactions are listed in chronological order according to the time each was initiated at a terminal.

Also included in this report are those transactions that were started but were reversed before the transaction completed. Reversed transactions are reported with the requested amount, the dispensed amount (if any), and the difference between the amount requested and the amount dispensed.

Transactions are *fully* reversed in the following circumstances:

- The cardholder makes a deposit but does not insert the deposit envelope.
- The terminal cannot dispense cash due to a hopper jam.
- The hopper contains an insufficient amount of cash.

Transactions are *partially* reversed if the terminal fails to dispense cash from both hoppers due to a hopper jam or because one of the hoppers contains an insufficient amount of cash.

Each institution in the logical network receives a copy of the Daily Institution Detail Transaction Log Report listing each transaction that occurred at this institution's terminals during the institution's business day. The institution can use this report to analyze and research transactions that may be in question.

The masking of cardholder primary account numbers (PANs) on this report depends on the values of the four REPORT DATA MASKING PARAMETER fields on Institution Definition File (IDF) screen 4.

The BASE24-atm Settlement Initiator process generates the Daily Institution Detail Transaction Log Report each day using information in the Transaction Log File (TLF). To generate this report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times. Refer to section 5 for more information.

The obey file, when run, starts the report program specified in either the ATM-SETL-RPT0-PROG-7-NAME or the ATM-SETL-RPT1-PROG-7-NAME assign in the LCONF, depending again on whether reports are run all at once or in two sets at different times. The report program creates the Daily Institution Detail Transaction Log Report.

The Daily Institution Detail Transaction Log Report is printed to a spooler location of \$\$.#ATST07. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing the Daily Institution Detail Transaction Log Report online from the RPT.

This report contains additional information when the institution has purchased the BASE24-atm self-service banking (SSB) application. Refer to the device-specific SSB manual for more information about how SSB report formats and field definitions differ from the standard report.

A sample of the Daily Institution Detail Transaction Log Report is shown on the next page, followed by descriptions of its fields.

PRO1 DAILY INSTITUTION DETAIL TRANSACTION LOG													
STAT07-B24		INSTITUTION		DATE YY/MM/DD		PAGE		01					
ID NUMBER		NAME											
BNKA		BANK A											
PAN	MBR	DESCRIPT <d>	RESP RC	SEQ	DATE	TIME	OFST	TERM	LN	AMT			
FROM ACCT	TO ACCT			TERM		SUBTYPE							
SPLIT DEP AMT 1	SPLIT DEP AMT 2 <st>	BIN	SEQ	MICR									
*****0000	000	W/D FROM CHK	3	000	1301	03/12	10:13	+0000	PRO1	20.40			
01371101					SIAC10023					0.40			
*****0000	000	W/D FROM SAV	3	060	1302	03/12	10:14	+0000	PRO1	302.00			
11371101					SIAC10023					2.00			
*****0000	000	W/D FROM CC	3	060	1303	03/12	10:15	+0000	PRO1	30.60			
31371101					SIAC10023					0.60			
*****0000	000	W/D FROM CHK	3	000	1304	03/12	10:21	+0000	PRO1	10.20			
01371101					SIAC10023					0.00			
Non-Currency Dispense: TYPE STMP, QUANTITY 02													
*****0000	000	W/D FROM SAV	3	000	1305	03/12	10:21	+0000	PRO1	11.55			
11371101					SIAC10023					0.55			
*****0000	000	W/D FROM CC	3	000	1306	03/12	10:22	+0000	PRO1	31.62			
31371101					SIAC10023					0.62			
*****0000	000	W/D FROM SAV	3	000	1307	03/12	10:23	+0000	PRO1	202.00			
11371101					SIAC10023					2.00			
*****0000	000	DEP TO CHK	0	3	1308	03/12	10:24	+0000	PRO1	1230.08			
	01371101				SIAC10023					0.00			
*****0000	000	XFER CHK-SAV	3	001	1309	03/12	10:25	+0000	PRO1	205.60			
01371101	11371101				SIAC10023					0.00			
*****0000	000	DEP SAV/CB	0	3	1310	03/12	10:26	+0000	PRO1	100.58			
0000000000000000	3311101				T000002								
0.00		0.00	10001		T987654321T0000011100000*								
*****0000	000	PYMT CHK-CC	3	001	1311	03/12	10:26	+0000	PRO1	308.50			
01371101	31371101				SIAC10023					0.00			
* INDICATES AMOUNT REVERSED, F INDICATES FORCE POST *** END OF REPORT ***													

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply.

INSTITUTION

The following two fields describe the institution for which this report is produced.

ID NUMBER — The FIID of this institution.

NAME — The name of this institution.

PAN — The primary account number (PAN) assigned to this card. Values of the four REPORT DATA MASKING PARAMETER fields on IDF screen 4 control masking of values in this field.

MBR — The member number identifying the cardholder if more than one person is authorized to access this account.

DESCRIP — A brief description of this transaction. Noncurrency dispense transactions are noted with the label “Non-Currency Dispense: TYPE *xxxx*, QUANTITY *n*” where *xxxx* is an abbreviation for the type of item dispensed and *n* is the number of items dispensed.

<d> — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. This field appears on the report only when the institution has purchased the Self Service Banking option.

RESP — An identifier indicating the authorizing entity.

RC — A response code indicating the authorization action taken in response to this transaction request.

SEQ — The sequence number the terminal assigned to the transaction.

DATE — The date (MM/DD) of this transaction.

TIME — The time (hh:mm) of this transaction.

OFST — The time difference in minutes (+/-mmmm) between this terminal and the HP Non-Stop processor if they are located in different time zones.

TERM LN — The logical network to which this terminal belongs.

AMT — The amount of this transaction.

FROM ACCT — The account number from which funds are requested.

TO ACCT — The account number to which the deposit, payment, or transfer is made.

TERM — The identification number of the terminal at which the transaction was initiated.

SUBTYPE — The subtype for the transaction. This value is present only when the subtype token is required for the transaction and is logged to the transaction log file.

SURCHARGE — The amount of the surcharge assessed for the transaction. This field appears on the report only when the institution has purchased the Surcharge option.

SPLIT DEP AMT 1 — The Account 1 amount involved in a split deposit transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

SPLIT DEP AMT 2 — The Account 2 amount involved in a split deposit transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

<st> — An unlabeled field identifying transactions performed with a Super Teller card. This field is used only when the institution has purchased the Self Service Banking option.

BIN SEQ NUM — The depository bin sequence number in the terminal as assigned by the Device Handler process. This field appears on the report only when the institution has purchased the Self Service Banking option.

MICR — The magnetic ink character recognition (MICR) data from a check-related transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

Daily Institution Exception Detail Report

The Daily Institution Exception Detail Report lists all cardholder activity that occurred at this institution's terminals during the institution's business day and resulted in exception processing. The report includes all transactions that have record types of 20 (exception posted) or 21 (exception not posted).

The BASE24-atm system performs exception processing when an authorizer other than the BASE24-atm Authorization process has approved the transaction and the transaction contains data or is missing data that prevents the BASE24-atm system from posting the transaction correctly to BASE24 files. Transactions that may result in exception processing include force posts, reversals, and requests. This report does not include administrative or settlement records.

Institutions can use the Daily Institution Exception Detail Report to research exception transactions and ensure that they have been appropriately posted to the BASE24 files. If the BASE24-atm system was unable to post a transaction appropriately, the institution must update the appropriate files manually to keep the BASE24 database accurate.

This report is produced in the same format as the Daily Institution Detail Transaction Log Report and is optional. It is produced based on the value of the ATM-SETL-EXPT-RPT-FLG param in the LCONF. See section 5 or the ***BASE24 Logical Network Configuration File Manual*** for more information about this param.

The BASE24-atm Settlement Initiator process generates a copy of the Daily Institution Exception Detail Report for each institution in the logical network. It is produced at the same time and by the same report program as the Daily Institution Detail Transaction Log Report. The Settlement Initiator process obtains the information for this report from the Transaction Log File (TLF). If no exception records exist in the TLF for the institution, the report contains the following comment:

*** NO EXCEPTION RECORDS EXIST FOR THIS INSTITUTION ***

The report is printed to a spooler location of \$\$S.#ATST7R. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system. Refer to section 6 for information about accessing this report online from the RPT.

Because this report is identical in format to the Daily Institution Detail Transaction Log Report, a sample report is not provided in this manual. Refer to the sample of the Daily Institution Detail Transaction Log Report for a description of the Daily Institution Exception Detail Report.

Daily Terminal Depository Report (STAT08-B24)

The Daily Terminal Depository Report (STAT08-B24) provides a complete listing, by terminal, of every approved depository transaction made that day. The listing includes the number of envelopes in the depository, the enclosed amount, and the number of deposits that were reversed.

Each terminal owner in the logical network receives a copy of the Daily Terminal Depository Report listing all approved depository transactions made that day at its individual terminals. The institution can use this report when reconciling the depository transactions for each terminal.

The masking of cardholder primary account numbers (PANs) on this report depends on the values of the four REPORT DATA MASKING PARAMETER fields on Institution Definition File (IDF) screen 4.

The BASE24-atm Settlement Initiator process generates the Daily Terminal Depository Report each day using information in the Transaction Log File (TLF). To generate this report, the Settlement Initiator process creates the obey file specified in either the ATM-SETL-RPT0-OBEY-FILE or the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. The assign the Settlement Initiator process uses depends on whether reports are run all at once or in two sets at different times. Refer to section 5 for more information.

The obey file, when run, starts the report program specified in either the ATM-SETL-RPT0-PROG-8-NAME or the ATM-SETL-RPT1-PROG-8-NAME assign in the LCONF, depending again on whether reports are run all at once or in two sets at different times. The report program produces the Daily Terminal Depository Report.

The STAT08-B24 report is printed to a spooler location of \$\$.#ATST08. The Settlement Initiator process also writes the report to the Reports File (RPT). Operators can peruse this report online from the RPT using the BASE24 CRT access system.

This report contains additional information when the institution has purchased the BASE24-atm self-service banking (SSB) application. Refer to the device-specific SSB manual for more information about how SSB report formats and field definition differ from the standard report.

A sample of the Daily Terminal Depository Report is shown on the following page, followed by descriptions of its fields.

STAT08-B24																						
PRO1 DAILY TERMINAL DEPOSITORY REPORT																						
INSTITUTION				DATE YY/MM/DD																		
ID NUMBER NAME				PAGE 01																		
BNK2 CAF ONLY BANK																						
TERMINAL ID NUMBER S1AC10023																						

PAN	MBR	DESCRIP <d>	RESP RC	SEQ	DATE	TIME	OFST	CARD LN	AMT													
FROM ACCT	TO ACCT	SUBTYPE																				
SPLIT DEP AMT 1	SPLIT DEP AMT 2 <st>	BIN SEQ NUM	MICR																			
37110000000000000000	000	DEP TO CHK 0	3	000	1308	03/12	10:24	+0000	R511	1230.08												
00000000000000000000	01371101																					
37110000000000000000	000	DEP TO SAV 0	3	000	1310	03/12	10:25	+0000	R511	320.10												
00000000000000000000	11371101																					
37110000000000000000	000	PYMT ENCLSD	3	001	1312	03/12	10:27	+0000	R511	320.58												
00000000000000000000	00000000000000000000																					
37110000000000000000	000	MSG TO FI	3	001	1313	03/12	10:27	+0000	R511	0.00												
00000000000000000000	00000000000000000000																					
33010000000000000000	000	DEP CHK/CB 3	3	001	1314	03/12	10:29	+0000	R511	80.58												
00000000000000000000	3301101																					
0.00	0.00	20001	T012345678T1122233344455*																			
TOTAL DEPOSITS	2	1,550.18																				
DEPOSITORY 0	2	1,550.18																				
DEPOSITORY 1	0	0.00																				
DEPOSITORY 3	0	.00																				
BIN 0	0	.00																				
BIN 1	0	.00																				
BIN 2	0	.00																				
BIN 3	0	.00																				
TOTAL PAY ENCL	1	320.58																				
SUB-TOTAL	3	1,870.76																				
TOTAL MESSAGES	1																					
TOTAL DEPOSITORY	4																					
*** END OF REPORT ***																						

DATE — The reporting date (YY/MM/DD) to which these settlement figures apply.

INSTITUTION

The following two fields describe the institution for which this report is produced.

ID NUMBER — The FIID of this institution.

NAME — The name of this institution.

TERMINAL ID NUMBER — The number identifying the terminal at which these depository transactions took place.

PAN — The primary account number (PAN) assigned to this card. Values of the four REPORT DATA MASKING PARAMETER fields on IDF screen 4 control masking of entries in this field.

MBR — The member number identifying this customer. This field is used only if more than one person is authorized to access this account.

DESCRIP — A brief description of this depository transaction.

<d> — An unlabeled code appended to the description above, indicating the deposit method. This code is based on the transaction code. This field appears on the report only when the institution has purchased the Self Service Banking option.

RESP — An identifier indicating the authorizing entity.

RC — A response code indicating the authorization action taken in response to this transaction request.

SEQ — The sequence number the terminal assigned to the transaction.

DATE — The date (MM/DD) of this transaction.

TIME — The time (hh:mm) of this transaction.

OFST — The time difference in minutes (+/-mmmm) between this terminal and the HP Non-Stop processor if they are located in different time zones.

CARD LN — The logical network to which this cardholder belongs.

AMT — The amount of this transaction.

FROM ACCT — The account number from which funds are requested. This field is applicable only if this transaction is a transfer or a payment made from another account.

TO ACCT — The account number to which funds are deposited. This field is applicable only if this transaction is a payment or transfer.

SUBTYPE — The subtype for the transaction. This value is present only when the subtype token is required for the transaction and is logged to the transaction log file.

SURCHARGE — The amount of the surcharge assessed for the transaction. This field appears on the report only when the institution has purchased the Surcharge option.

SPLIT DEP AMT 1 — The Account 1 amount involved in a split deposit transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

SPLIT DEP AMT 2 — The Account 2 amount involved in a split deposit transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

<st> — An unlabeled field identifying transactions performed with a Super Teller card. This field is used only when the institution has purchased the Self Service Banking option.

BIN SEQ NUM — The depository bin sequence number in the terminal as assigned by the Device Handler process. This field appears on the report only when the institution has purchased the Self Service Banking option.

MICR — The magnetic ink character recognition (MICR) data from a check-related transaction. This field appears on the report only when the institution has purchased the Self Service Banking option.

TOTAL DEPOSITS — The total number and amount of all monetary deposits at this terminal.

DEPOSITORY 0 — The total number and amount of deposits found in the depository.

DEPOSITORY 1 — The total number and amount of deposits found in the commercial depository. This field is blank if the terminal does not have a commercial depository.

DEPOSITORY 3 — The number and amount of check-related transactions in the depository. This field is calculated by adding the four bin count fields.

BIN 0 — The number and amount of check-related transactions for bin 0.

BIN 1 — The number and amount of check-related transactions for bin 1.

BIN 2 — The number and amount of check-related transactions for bin 2.

BIN 3 — The number and amount of check-related transactions for bin 3.

TOTAL PAY ENCL — The total number and amount of payments in the depository.

SUB-TOTAL — The total number and amount of all monetary deposits in the depository.

TOTAL MESSAGES — The total number of messages to the institution.

TOTAL DEPOSITORY — The total number of cash deposits and messages in the depository.

Transaction Detail Report For XXXX (STAT09-XXXX)

The Transaction Detail Report for XXXX (STAT09-XXXX) provides a complete listing of all interchange activity that occurred during the interchange business day.

The Interchange Interface process for the particular interchange generates the Transaction Detail Report for XXXX each day after the interchange has cut over to a new business day. The report contains all transactions logged to the Interchange Log File (ILF) for that interchange since the interchange cut over on the previous day.

The masking of cardholder primary account numbers (PANs) on this report for interchanges depends on the values of four REPORT DATA MASKING PARAMETER fields on Interchange Configuration File (ICF) or Enhanced Interchange Configuration File (ICFE) screen 2. For interchanges with expiration date information on this report, the expiration dates are masked completely if cardholder PANs are masked.

To generate this report, the Interchange Interface process creates an obey file that, when run, starts the report program specified in the SW-RPT09-PROG-NAME assign in the LCONF. The report program specified in the assign should be RP09xxx, where xxx is the 3-character identifier used to identify the interchange (e.g., CIR for CIRRUS). This report program creates the STAT09-XXXX report.

Some interchanges do not perform settlement reporting on weekends and holidays. Under these circumstances, the reports for those days simply state that no transactions occurred on those dates. The detailed report generated after a weekend or holiday contains all the transaction activity that occurred over the weekend or holiday on one report.

The Transaction Detail Report for XXXX is printed to a spooler location of \$S.#RP09xxx. The Interchange Interface process also writes the report to the Reports File (RPT), although operators cannot view interchange reports using the BASE24 CRT access system.

This report contains additional information when the institution has purchased the BASE24-atm self-service banking (SSB) application. Refer to the device-specific SSB manual for more information about how SSB report formats and field definitions differ from the standard report.

A sample Transaction Detail Report for XXXX is shown on the following pages, followed by descriptions of its fields. This report may have slightly different formats depending on which interchange it is representing. However, the type of information contained on the reports for each interchange is the same.

Note: This report contains fields that refer to BASE24-pos transactions. These fields are applicable only if the institution currently has the BASE24-pos product. The report also contains three fields (SPLIT DEP ATMT1, SPLIT DEP AMT2, and MICR) that refer to BASE24-atm self-service banking (SSB) transactions. Refer to the device-specific SSB manuals for more information about these fields.

[illegible]

STAT09-BAB		TRANSACTION DETAIL REPORT FOR BICISO			DATE YY/MM/DD
ATM TRANSACTION SUMMARY					PAGE 02
-----		APPROVALS	DENIALS		
CHECK GUAR	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
CHECK VERIFY	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
WITHDRAWALS	1	50.00	0	.00	
SETL CONV	1	50.00	0	.00	
POS DIRECT DB	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
POS PURCH RTN	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
POS VERIFY	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
DEPOSITS	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
BALANCE INQ	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
TRANSFERS	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
PAYMENTS	0	.00	0	.00	
SETL CONV	0	.00	0	.00	
TOTALS	1	50.00	0	.00	
SETL TOTALS	1	50.00	0	.00	
SURCHARGES:	0	.00	0	.00	

Format Description Page 1

The information on this page of the report consists of detailed transaction information for the interchange.

DATE — The reporting date (YYMMDD) to which these settlement figures apply.

CARDHOLDER NUMBER — The number identifying the cardholder who initiated this transaction. Values of the four REPORT DATA MASKING PARAMETER fields on screen 2 of the Interchange Configuration File (ICF) and Enhanced Interchange Configuration File (ICFE) control masking of entries in this field.

TRAN DESC — A brief description of the transaction.

PST DAT — The Interchange Log File (ILF) date assigned to this transaction according to the interchange reporting day.

B24 DAT-TIM — The date (MMDD) and time (hhmmss) this transaction occurred according to the BASE24 reporting day. This date determines whether or not the BASE24 product considers this transaction to be part of today's business.

B24 RESP — The first digit indicates the entity responsible for authorizing this transaction. The next three digits indicate the response action taken for this transaction.

CARD LN — The logical network to which this cardholder belongs.

ATM FROM ACCT #/POS ACCT # — The account accessed in this transaction. This field applies to both BASE24-atm and BASE24-pos transactions.

TRAN/BAL/ORIG AMOUNT — The transaction amount if this is a BASE24-atm transaction. If the transaction is a balance inquiry, this field contains the balance amount. If this is a BASE24-pos transaction, this field contains the original amount.

TRM LN — The logical network to which this terminal belongs.

TRM ID — The identification number of this terminal.

SEQUENCE # — The sequence number the terminal assigned to this transaction.

TRACE # — An additional identification number the interchange assigned to the transaction.

SWI DAT-TIM — The date (MMDD) and time (hhmmss) of this transaction according to the interchange reporting day.

SWI RESP — A response code indicating the action taken for this transaction, assigned by the interchange.

RV CDE — An identifier indicating the reversal code if this transaction was reversed. If this transaction was not reversed, this field is blank.

ATM TO ACCT #/POS APPR CODE — The account to which this transaction was made if this is a BASE24-atm transaction. If this is a BASE24-pos transaction, this field contains the approval code.

COMPLETED AMOUNT — The total amount of the completed transaction.

ATM TRM OWNER/POS RETLR — The terminal-owning institution if this is a BASE24-atm transaction. If this a BASE24-pos transaction, this field contains the name of the retailer who owns this terminal.

TRM NAME-LOCATION — The terminal name as assigned by the terminal-owning institution and its location.

TRM CITY — The city in which this terminal is located.

TRM ST — The state in which this terminal is located.

PRD — The product identifier indicating what type of product initiated this transaction (e.g., BASE24-atm, BASE24-pos, or BASE24-teller).

B24 TYP — The message type BASE24 assigned to this transaction.

SWI TYP — The message type the interchange assigned to this transaction.

CURRENCY — The code for the currency used in the transaction.

SETL AMT — The amount to be settled.

SURCHARGE — The amount of the surcharge assessed for the transaction. This field appears on the report only if the customer has purchased the Surcharge option.

CO-NETWORK ACQUIRER TOTALS FOR MM/DD

The following nine fields describe totals for interchange transaction acquirers.

DB CNT — The number of debit transactions for co-network acquirers.

DB AMT — The amount of debit transactions for co-network acquirers.

CR CNT — The number of the number of credit transactions for co-network acquirers.

CR AMT — The amount of credit transactions for co-network acquirers.

REV DB CNT — The number of reversed debit transactions for co-network acquirers.

REV DB AMT — The amount of reversed debit transactions for co-network acquirers.

REV CR CNT — The number of reversed credit transactions for co-network acquirers.

REV CR AMT — The amount of reversed credit transactions for co-network acquirers.

NET SETL AMT — The net total amount to be settled for co-network acquirers.

CO-NETWORK ISSUER TOTALS FOR MM/DD

The following nine fields describe totals for interchange transaction issuers.

DB CNT — The number of debit transactions for co-network issuers.

DB AMT — The amount of debit transactions for co-network issuers.

CR CNT — The number of credit transactions for co-network issuers.

CR AMT — The amount of credit transactions for co-network issuers.

REV DB CNT — The number of reversed debit transactions for co-network issuers.

REV DB AMT — The amount of reversed debit transactions for co-network issuers.

REV CR CNT — The number of reversed credit transactions for co-network issuers.

REV CR AMT — The amount of reversed credit transactions for co-network issuers.

NET SETL AMT — The net total amount to be settled for co-network issuers.

Format Description Page 2

The information on this page of the report consists of transaction summary information.

ATM TRANSACTION SUMMARY

The following two fields describe ATM transactions.

APPROVALS — The total count and amount of approved transactions, by transaction type. It also lists the converted settlement currency count and amount for each transaction type.

DENIALS — The total count and amount of denied transactions, by transaction type. It also lists the converted settlement currency count and amount for each transaction type.

TOTALS — The total counts and amounts for approved transactions and denied transactions.

SETL TOTALS — The total count and amount to be settled for approved transactions and denied transactions.

SURCHARGES — The total count and amount of surcharges for approved and denied transactions.

ACI Worldwide, Inc.

5: Configuring Cutover and Reporting

This section provides an overview of the configuration tasks that a user must perform to establish BASE24-atm cutover and reporting. These tasks involve setting assigns and params in the Logical Network Configuration File (LCONF) and setting fields in BASE24-atm, base, and interchange files.

Refer to the *BASE24 Logical Network Configuration File Manual* for information on accessing and configuring the LCONF and for detailed descriptions and valid values for each assign and param.

Refer to the *BASE24-atm Files Maintenance Manual* for more information on BASE24-atm Terminal Data files (ATD) fields and field settings. Refer to the *BASE24 Base Files Maintenance Manual* for more information on the Institution Definition File (IDF), Interchange Configuration File (ICF), and Enhanced Interchange Configuration File (ICFE) fields and field settings. Refer to informal interchange-specific documentation for interchange-specific field settings.

LCONF Assigns and Params

The assigns and params listed below are used by the Settlement Initiator process. The Settlement Initiator process reads these assigns and params into memory at initialization. (Refer to appendix A for initialization procedures.) If any of the required assigns and params are not configured correctly in the LCONF, the Settlement Initiator process abends during initialization. Required assigns and params are identified in the listings.

The roles of each of these assigns and params in cutover and reporting are explained further in this section. Refer to the ***BASE24 Logical Network Configuration File Manual*** for more information on LCONF assigns and params.

Note: LCONF assigns and params involved in interchange cutover and reporting are read by the Interchange Interface processes during initialization. These assigns and params are discussed in this section but are not listed below.

Assigns	
ATM-ATD-DYN-GNRL (required)*	ATM-SETL-RPT0-PROG-6-NAME
ATM-SETL-ATD-EXTMEM-SWAPVOL	ATM-SETL-RPT1-PROG-6-NAME
ATM-SETL-MON-RPT-PROG-3-NAME	ATM-SETL-RPT0-PROG-7-NAME
ATM-SETL-MON-RPT-PROG-5-NAME	ATM-SETL-RPT1-PROG-7-NAME
ATM-SETL-RPT0-OBEY-FILE	ATM-SETL-RPT0-PROG-8-NAME
ATM-SETL-RPT1-OBEY-FILE	ATM-SETL-RPT1-PROG-8-NAME
ATM-SETL-RPT0-PROG-1-NAME	ATM-SETL-RPT3M
ATM-SETL-RPT1-PROG-1-NAME	ATM-SETL-RPT3T
ATM-SETL-RPT0-PROG-2-NAME	ATM-SETL-RPT5M
ATM-SETL-RPT1-PROG-2-NAME	ATM-SETL-RPT5T
ATM-SETL-RPT0-PROG-4-NAME	IDF (required)
ATM-SETL-RPT1-PROG-4-NAME	LMCF

Assigns	
RPT	TDF (required)*
RPT-ERROR-FILE	TLF (required)

* The ATM-ATD-DYN-GNRL assign is used by the Diebold 10XX/478X Device Handler process and the NCR 5XXX Device Handler process only. All other BASE24-atm Device Handler processes use the TDF assign. One of these assigns must be present.

Params	
ATM-FCA-CUTOVER-AUDIT	ATM-SETL-MIDNIGHT-NOTIFY
ATM-LN-CUTOVER (required)	ATM-SETL-NOTIFY
ATM-NOTIFY-INTERVAL	ATM-SETL-RPT-FILE-RETENTION
ATM-NOTIFY-PERCENTAGE	ATM-SETL-RPT0-STARTUP (required)
ACCT-NUM-TYP	ATM-SETL-RPT1-STARTUP
ATM-RPT-CPU	ATM-SETL-TLF-EXTENTS-TO-ALLOCATE
ATM-RPT-PRI	ATM-SETL-TLF-FILE-RETENTION
ATM-SETL-ATD-LOCKED-RECS-SKIP	CURRENCY-CODE
ATM-SETL-EXPT-RPT-FLG	DATE-DISPLAY-TYPE
ATM-SETL-LN-CUTOVER-LEAD-TIME	HSF
ATM-SETL-HDWRSTAT-NOTIFY	LOGICAL-NET (required)
ATM-SETL-MASTER (required)	TKN

Configuring the Settlement Initiator Process

The cutover and reporting procedures of the BASE24-atm product are controlled and executed by the Settlement Initiator process. Each logical network must have one Settlement Initiator process. This process is configured by setting several params in the Logical Network Configuration File (LCONF). These params are listed and briefly described below.

ATM-FCA-CUTOVER-AUDIT — A flag indicating whether the forced cutover audit function is in effect for the logical network.

ATM-NOTIFY-INTERVAL — The number of times the BASE24-atm product can write to the TLF between calculating the percentage of file full.

ATM-NOTIFY-PERCENTAGE — The percentage of file full at which the Settlement Initiator process logs a message indicating the TLF is becoming full.

ATM-SETL-ATD-LOCKED-RECS-SKIP — A flag indicating whether the Settlement Initiator process keeps trying to read a locked ATD or TDF record before continuing with the next record, or just skips the locked record, raises an event to indicate the locked record occurred during terminal cutover, and continues with the next record.

ATM-SETL-MASTER — The symbolic name of the Settlement Initiator process used for BASE24-atm settlement. The Settlement Initiator process checks this param at initialization. If its own name is not specified in this param, the process abends.

ATM-SETL-RPT-FILE-RETENTION — The number of days worth of inactive Reports Files (RPTs) the Settlement Initiator process allows to remain on the system. The Settlement Initiator process deletes any RPTs that have remained on the system longer than the number of days specified in this param.

ATM-SETL-TLF-EXTENTS-TO-ALLOCATE — The number of extents the Settlement Initiator process must reserve, or allocate, when creating new Transaction Log Files (TLFs).

ATM-SETL-TLF-FILE-RETENTION — The number of days worth of inactive TLFs the BASE24-atm product maintains on the system.

Configuring Cutover

The BASE24-atm product supports terminal, institution, and logical network cutover. These cutovers are configured using assigns and params in the Logical Network Configuration File (LCONF) and fields in the Institution Definition File (IDF) and the BASE24-atm Terminal Data files. The IDF and the BASE24-atm Terminal Data files must be identified by setting the IDF and ATM-ATD-DYN-GNRL or TDF assigns in the LCONF.

Interchange cutovers are controlled by the cutover procedures dictated by each individual interchange. The Settlement Initiator process does not affect or control interchange cutover. However, the cutover information provided by the interchange must be configured within the BASE24 system. Interchange cutover information is configured within the BASE24 system in the Interchange Configuration File (ICF) or Enhanced Interchange Configuration File (ICFE).

Terminal Cutover

The BASE24-atm product supports several methods for cutting over a terminal. An operator can use a card at the terminal to balance and cut over the terminal during the cutover window; an operator can use a CRT at the institution to balance and cut over a terminal during the cutover window; or the Settlement Initiator process can force the terminal to cut over at the end of the cutover window. The method by which terminals are cut over depends on the needs of the institution and the requirements of the terminal at terminal cutover. No matter how a terminal is cut over, each terminal must be cut over during a time frame, the *cutover window*, defined by the institution.

Logical Network Configuration File (LCONF)

The Settlement Initiator process uses the Institution Definition File (IDF), BASE24-atm Terminal Data files, and the Transaction Log File (TLF) in its processing. To access these files, the IDF, the TDF or ATM-ATD-DYN-GNRL and ATM-SETL-ATD-EXTMEM-SWAPVOL, and the TLF assigns must be configured in the Logical Network Configuration File (LCONF). The ATM-ATD-DYN-GNRL and ATM-SETL-ATD-EXTMEM-SWAPVOL assigns are used with the Diebold 10XX/478X and the NCR 5XXX Device Handler processes. All other Device Handler processes use the TDF assign.

Institution Definition File (IDF)

The terminal cutover window is configured in the ATM BALANCE AND CUTOVER TIME WINDOW field on screen 10 of the Institution Definition File (IDF). Terminals must be cut over to a new day within this time frame. If a terminal has not cut over by the end time of the window, the Settlement Initiator process forces the terminal to cut over.

BASE24-atm Terminal Data Files

At terminal cutover, the Settlement Initiator process increases the date in the POSTING DATE field on screen 1 of the BASE24-atm Terminal Data files (ATD). All transactions initiated at this terminal are logged to the Transaction Log File (TLF) with the date in the POSTING DATE field. The date in this field must be set when settlement processing is first being configured and again if the BASE24 system has been down. Otherwise, the Settlement Initiator process automatically increases the date in this field as necessary.

Institution Cutover

The Settlement Initiator process automatically cuts over each institution at the end of each institution's business day. All institutions must have cut over before logical network cutover. The Settlement Initiator process cuts over each institution according to a param in the Logical Network Configuration File (LCONF) and fields in the Institution Definition File (IDF). The IDF must be identified by setting the IDF assign in the LCONF.

Logical Network Configuration File (LCONF)

The Settlement Initiator process uses the Institution Definition File (IDF), Log Message Configuration File (LMCF), BASE24-atm Terminal Data files, and Transaction Log File (TLF) in its processing. To access these files, the corresponding assigns must be configured in the Logical Network Configuration File (LCONF). These assigns are the IDF, LMCF, ATM-ATD-DYN-GNRL or TDF, and TLF, respectively.

The Settlement Initiator process uses the value in the ATM-SETL-LN-CUTOVER-LEAD-TIME param in the LCONF to determine the minimum number of minutes before logical network cutover that all institutions must be cut over. If an institution is not configured to cut over this many minutes before the logical

network cuts over, the Settlement Initiator process automatically cuts over the institution this number of minutes before logical network cutover, regardless of the institution's configured cutover time.

Institution Definition File (IDF)

Institutions control their cutover times individually using the ATM BALANCE AND CUTOVER TIME WINDOW on screen 10 of the Institution Definition File (IDF). At institution cutover, if any of the institution's terminals have not been cut over, the Settlement Initiator process forces the terminals to cut over. In this way, institution cutover ensures that all terminals have been cut over to the new business day.

If the institution's cutover time is not set properly in the ATM BALANCE AND CUTOVER TIME WINDOW field, the Settlement Initiator process uses the value in the ATM-SETL-LN-CUTOVER-LEAD-TIME param in the LCONF to automatically cut over the institution this number of minutes prior to logical network cutover.

At the end time specified in the ATM BALANCE AND CUTOVER TIME WINDOW, the Settlement Initiator process increases the dates in the following fields that also appear on screen 10 of the IDF: CURRENT BUSINESS DATE, CUSTOMER PROCESSING DATE, NEXT BUSINESS DATE, and REPORT DATE. The dates in these fields must be set when settlement processing is first being configured and again if the BASE24 system has been down. Otherwise, the Settlement Initiator process automatically increases the dates in these fields as necessary.

Institutions must also control the time of day at which the system purges the Usage Accumulation File (UAF) and the data in the usage accumulation fields of the Cardholder Authorization File (CAF). The BASE24 system performs these functions as indicated in the FIELD CUTOVER field on screen 3 of the IDF.

On screen 4 of the IDF, each institution establishes usage accumulation period parameters for the institution's processing dates and the holidays on which the institution does not process. The BEGINNING DATE field indicates the starting date (YYMMDD) of the current usage accumulation period for all of the institution's cardholders. The NEXT BEGINNING DATE field indicates the starting date of the institution's next usage accumulation period. Once these fields are set at initialization or startup, the Settlement Initiator process increases the dates automatically.

Also on screen 4, the PERIOD LENGTH field and the WORK DAY CODE field indicate the length of the institution's usage accumulation period. The BASE24 system uses only one of these fields; the field used depends on the settings in each field. The HOLIDAYS fields contain the dates (YYMMDD) on which the institution does not process. The BASE24 system uses the HOLIDAYS fields based on the settings in the PERIOD LENGTH and WORK DAY CODE fields. The Settlement Initiator process also uses these fields to determine the dates for the BEGINNING DATE and NEXT BEGINNING DATE fields. Refer to the ***BASE24 Base Files Maintenance Manual*** for more information on how these fields interact.

Logical Network Cutover

The Settlement Initiator process automatically cuts over the logical network according to several assigns and params in the Logical Network Configuration File (LCONF). These assigns and params are listed and briefly described below.

ATM-LN-CUTOVER param — The time of day the Settlement Initiator process is to cut over the logical network. All institutions in the logical network must be cut over by the time specified in this param.

ATM-SETL-LN-CUTOVER-LEAD-TIME param — The minimum number of minutes before logical network cutover that all financial institutions should be cut over.

ATM-SETL-NOTIFY param — The names of the BASE24-atm Authorization processes the Settlement Initiator process must notify at logical network cutover. When setting this param, all applicable BASE24-atm Authorization processes must be included in this list. The BASE24 system does not verify that all applicable processes are included in this param.

ATM-SETL-MIDNIGHT-NOTIFY param — The names of the BASE24-atm Authorization processes the Settlement Initiator process must notify at midnight cutover. When setting this param, all applicable BASE24-atm Authorization processes must be included in this list. The BASE24 system does not verify that all applicable processes are included in this param.

Note: For BASE24 networks using both the BASE24-atm and BASE24-pos products and the Usage Accumulation File (UAF), this param should include all BASE24-atm Authorization processes and all BASE24-pos Device Handler/Router/Authorization processes. This ensures correct purge processing of the UAF

during midnight cutover. The UAF is used by the BASE24-atm and BASE24-pos products with the Negative Authorization with Usage Accumulation method. The first settlement process to cut over after midnight performs the UAF purge processing. This process then needs to notify all processes that use the UAF.

TLF assign — The naming convention of the Transaction Log File (TLF) and the location of the TLF template file. The Settlement Initiator process uses the TLF template file to create the TLF at initialization and logical network cutover.

Interchange Cutover

The BASE24-atm product does not control interchange cutover. Interchange cutover is dictated by each individual interchange. The BASE24-atm product does, however, enable institutions and retailers to reconcile their business days in relation to the interchange's business day.

Each interchange associated with the BASE24-atm network provides cutover information that the BASE24-atm system uses to aid its institutions in reconciling its interchange transaction activity. This cutover information must be configured on screen 2 of the Interchange Configuration File (ICF) or Enhanced Interchange Configuration File (ICFE). Because not all the fields on screen 2 of the ICF and ICFE function for all interchanges, refer to the ***BASE24 Base Files Maintenance Manual*** and the interchange documentation specific to the particular interchange when configuring this information.

The SETTLEMENT HOUR and SETTLEMENT MINUTE fields contain the hour and minute at which the interchange performs cutover and settlement. The SETTLEMENT DAYS field indicates whether the interchange processes on a 5- or 7-day schedule. This field may not function for all interchanges.

The SWITCH POSTING DATE field contains the posting date (YYMMDD) of the interchange. Once this field is set during initial configuration, the Interchange Interface process automatically increases the date in this field at interchange cutover.

The HOLIDAY DATES field contains the holiday dates (YYMMDD) on which the interchange does not process. This field may not function for all interchanges.

Configuring Reports

The BASE24-atm daily and monthly reporting functions are configured using information in the Logical Network Configuration File (LCONF) and the Institution Definition File (IDF). The BASE24 interchange reporting functions are configured using information in the Interchange Configuration File (ICF) or Enhanced Interchange Configuration File (ICFE).

The Settlement Initiator process produces the BASE24-atm reports automatically when configured to do so by creating obey files at logical network cutover. These obey files contain the commands necessary for starting the report programs. The Settlement Initiator process then sets timers and, when these timers expire, the Settlement Initiator process runs the obey files to start the report programs.

The interchange reports, however, are produced by the respective Interchange Interface process for each interchange. Refer to the appropriate interchange documentation for more information about Interchange Interface processes.

BASE24-atm Report Sets

The Settlement Initiator process produces the BASE24-atm reports in one or two sets, depending on the reporting requirements of the logical network. For example, the logical network may want to produce summary reports first, with the more detailed reports run at a later time when the system is less busy. Or, the logical network may want to have two complete sets of reports run at separate times. The second set may be a duplicate of the first, or some reports may be included in the first set but not the second or vice versa.

The Settlement Initiator process produces monthly reports on the last day of the month. If one set of reports is run, the monthly reports are included with that set. If two sets of reports are run, the monthly reports are included in the second set.

Reports are divided into sets by assigns in the Logical Network Configuration File (LCONF). The report programs used to generate the reports in the first set must be named in the ATM-SETL-RPT0-PROG-*x*-NAME assigns. The report programs used to generate the reports in the second set must be named in the ATM-SETL-RPT1-PROG-*x*-NAME assigns. These assigns are explained later in this section. When the Settlement Initiator process creates the obey files, it includes run commands for the first set of report programs in the obey file defined by the ATM-SETL-RPT0-OBEY-FILE assign in the LCONF and run commands for the second set of report programs in the obey file defined by the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF.

Logical Network Configuration File

The BASE24-atm product uses a number of LCONF assigns and params when running reports. These assigns and params must be configured before the BASE24-atm system can produce reports.

Assigns

Each assign the BASE24-atm product uses for reporting is identified and briefly defined below. Refer to the ***BASE24 Logical Network Configuration File Manual*** for more information on each assign.

ATM-SETL-MON-RPT-PROG-3-NAME — The fully qualified file name of the BASE24-atm report program that generates the Monthly Terminal Settlement Report (SETL03-B24).

ATM-SETL-MON-RPT-PROG-5-NAME — The fully qualified file name of the BASE24-atm report program that generates the Monthly Institution Approved Transaction Volume Report (STAT05-B24).

ATM-SETL-RPT0-OBEY-FILE — The naming convention for the first obey file the Settlement Initiator process creates at logical network cutover. This assign is required only if the Settlement Initiator process is to start the first set of reports.

ATM-SETL-RPT1-OBEY-FILE — The naming convention for the second obey file the Settlement Initiator process creates at logical network cutover. This assign is required only if the Settlement Initiator process is to start a second set of reports.

ATM-SETL-RPT0-PROG-1-NAME

ATM-SETL-RPT1-PROG-1-NAME — The fully qualified file name of the BASE24-atm report program that generates the Clearings Statement Report (SETL01-B24). The Settlement Initiator process uses the ATM-SETL-RPT0-PROG-1-NAME assign when generating the first set of reports. It uses the ATM-SETL-RPT1-PROG-1-NAME assign when generating the second set of reports. If one or both of these assigns is not configured, the Settlement Initiator process does not produce the SETL01-B24 report.

ATM-SETL-RPT0-PROG-2-NAME

ATM-SETL-RPT1-PROG-2-NAME — The fully qualified file name of the BASE24-atm report program that generates the Daily Terminal Settlement Report (SETL02-B24). The Settlement Initiator process uses the ATM-SETL-RPT0-PROG-2-NAME assign when generating the first set of reports. It uses the ATM-SETL-RPT1-PROG-2-NAME assign when generating the second set of reports. If one or both of these assigns is not configured, the Settlement Initiator process does not produce the SETL02-B24 report.

ATM-SETL-RPT0-PROG-4-NAME

ATM-SETL-RPT1-PROG-4-NAME — The fully qualified file name of the BASE24-atm report program that generates the Daily Institution Approved Transaction Volume Report (STAT04-B24). The Settlement Initiator process uses the ATM-SETL-RPT0-PROG-4-NAME assign when generating the first set of reports. It uses the ATM-SETL-RPT1-PROG-4-NAME assign when generating the second set of reports. If one or both of these assigns is not configured, the Settlement Initiator process does not produce the STAT04-B24 report.

ATM-SETL-RPT0-PROG-6-NAME

ATM-SETL-RPT1-PROG-6-NAME — The fully qualified file name of the BASE24-atm report program that generates the Daily Terminal Detail Transaction Log Report (STAT06-B24) and the Daily Terminal Exception Detail Report. The Settlement Initiator process uses the ATM-SETL-RPT0-PROG-6-NAME assign when generating the first set of reports. It uses the ATM-SETL-RPT1-PROG-6-NAME assign when generating the second set of reports. If one or both of these assigns is not configured, the Settlement Initiator process does not produce these reports.

ATM-SETL-RPT0-PROG-7-NAME

ATM-SETL-RPT1-PROG-7-NAME — The fully qualified file name of the BASE24-atm report program that generates the Daily Institution Detail Transaction Log Report (STAT07-B24) and the Daily Institution Exception Detail Report. The Settlement Initiator process uses the ATM-SETL-RPT0-PROG-7-NAME assign when generating the first set of reports. It uses the ATM-SETL-RPT1-PROG-7-NAME assign when generating the second set of reports. If one or both of these assigns is not configured, the Settlement Initiator process does not produce these reports.

ATM-SETL-RPT0-PROG-8-NAME

ATM-SETL-RPT1-PROG-8-NAME — The fully qualified file name of the BASE24-atm report program that generates the Daily Terminal Depository Report (STAT08-B24). The Settlement Initiator process uses the ATM-SETL-RPT0-

PROG-8-NAME assign when generating the first set of reports. It uses the ATM-SETL-RPT1-PROG-8-NAME assign when generating the second set of reports. If one or both of these assigns is not configured, the Settlement Initiator process does not produce the STAT08-B24 report.

ATM-SETL-RPT3M — The fully qualified file name template of the master file that contains information on terminal settlement for the current month (e.g., \B24.\$DATA.PRO1DATA.RPT3MSTR). This file is an accumulator file where daily data is stored when the Settlement Initiator process produces daily reports. The Settlement Initiator process uses the file specified in this assign to produce the Monthly Terminal Settlement Report (SETL03-B24).

The Settlement Initiator process uses the first six characters of the file name specified in this assign to create the actual file name. It then appends two characters to the first six characters. These two characters identify the month for which the report is produced. For example, if RPT3MSTR is specified in this assign, the report file created would be RPT3MS05 for the month of May.

ATM-SETL-RPT3T — The fully qualified file name template of the totals file that contains totals information on terminal settlement for the current month (e.g., \B24.\$DATA.PRO1DATA.RPT3TOTL). This file is an accumulator file where daily data is stored when the Settlement Initiator process produces daily reports. The Settlement Initiator process uses the file specified in this assign to produce the Monthly Terminal Settlement Report (SETL03-B24).

The Settlement Initiator process uses the first six characters of the file name specified in this assign to create the actual file name. It then appends two characters to the first six characters. These two characters identify the month for which the report is produced. For example, if RPT3TOTL is specified in this assign, the report file created would be RPT3TO05 for the month of May.

ATM-SETL-RPT5M — The fully qualified file name template of the master file that contains information on terminal settlement for the current month (e.g., \B24.\$DATA.PRO1DATA.RPT5MSTR). This file is an accumulator file where daily data is stored when the Settlement Initiator process produces daily reports. The Settlement Initiator process uses the file specified in this assign to produce the Monthly Institution Approved Transaction Volume Report (SETL05-B24).

The Settlement Initiator process uses the first six characters of the file name specified in this assign to create the actual file name. It then appends two characters to the first six characters. These two characters identify the month for which the report is produced. For example, if RPT5MSTR is specified in this assign, the report file created would be RPT5MS05 for the month of May.

ATM-SETL-RPT5T — The fully qualified file name template for the totals file that contains totals information on terminal settlement for the current month (e.g., \B24.\$DATA.PRO1DATA.RPT5TOTL). This file is an accumulator file where daily data is stored when the Settlement Initiator process produces daily reports. The Settlement Initiator process uses this assign to produce the Monthly Institution Approved Transaction Volume Report (SETL05-B24).

The Settlement Initiator process uses the first six characters of the file name specified in this assign to create the actual file name. It then appends two characters to the first six characters. These two characters identify the month for which the report is produced. For example, if RPT5TOTL is specified in this assign, the report file created would be RPT5TO05 for the month of May.

RPT — The fully qualified file name of the BASE24-atm Reports File (RPT). This file contains BASE24-atm daily and monthly reports and BASE24-atm interchange reports. This assign is required if the Settlement Initiator process is to produce reports.

RPT-ERROR-FILE — The spooler location (e.g., \B24.\$S.#ATMERR) or network logging location (e.g., \$SUDO, \$0) to which the Settlement Initiator process logs error messages that were generated by the BASE24-atm report programs.

SW-RPT-OBEY-FILE — The fully qualified file name of the report obey file for the Interchange Interface process. This report obey file generates the BASE24 interchange reports.

SW-RPT01-PROG-NAME — The fully qualified file name of the BASE24 interchange report program that generates the Clearings Statement Report (SETL01).

SW-RPT09-PROG-NAME — The fully qualified file name of the BASE24 interchange report program that generates the Transaction Detail Report (STAT09).

Params

Each param the BASE24-atm product uses for reporting is identified and briefly defined below. Refer to the *BASE24 Logical Network Configuration File Manual* for more information on each param.

ATM-RPT-CPU — The central processing unit (CPU) in which the Settlement Initiator process executes the BASE24-atm report programs. If this param is not configured or is invalid, the Settlement Initiator process executes the BASE24-atm report programs in CPU 0.

ATM-RPT-PRI — The priority at which the Settlement Initiator process executes the BASE24-atm report programs. If this param is not configured or is invalid, the Settlement Initiator process executes the BASE24-atm report programs at a priority of 100.

ATM-SETL-EXPT-RPT-FLG — A code indicating whether the Settlement Initiator process generates the Daily Terminal Exception Detail Report and the Daily Institution Exception Detail Report. The Daily Terminal Exception Detail Report is produced only if the Daily Terminal Detail Transaction Log Report (STAT06-B24) is configured to be produced and this param is set accordingly in the LCONF. The Daily Institution Exception Detail Report is produced only if the Daily Institution Detail Transaction Log Report (STAT07-B24) is configured to be produced and this param is set accordingly in the LCONF.

ATM-SETL-RPT0-STARTUP — The time of day the Settlement Initiator process starts the first set of BASE24-atm reports. The first set of BASE24-atm reports are specified in the ATM-SETL-RPT0-PROG-<x>-NAME assigns. If this param contains alphabetic characters, the first set of reports is not run. If this param is not configured or contains an invalid time, the Settlement Initiator process abends during initialization.

ATM-SETL-RPT1-STARTUP — The time of day the Settlement Initiator process starts the second set of BASE24-atm reports. The second set of BASE24-atm reports are specified in the ATM-SETL-RPT1-PROG-<x>-NAME assigns. If this param contains alphabetic characters or is not configured, the second set of reports is not run. If this param contains an invalid time, the Settlement Initiator process starts the second set of reports at the same time as it starts the first set of reports.

ATM-SETL-RPT-FILE-RETENTION — The number of days worth of inactive daily report files the Settlement Initiator process maintains on the system.

ILF-LOGGING-ENABLED — A code indicating whether an Interchange Interface process logs transactions to the ILF. If the Interchange Interface process does not log transactions to the ILF, transactions cannot be reported on interchange reports.

SW-RPT-STARTUP — The time of day the Interchange Interface process starts the BASE24 interchange reports. If this param is not configured or is invalid, the Interchange Interface process does not produce BASE24 interchange reports.

Institution Definition File

The Institution Definition File (IDF) contains one record for each institution in the logical network. Each institution's record contains parameters that indicate how the institution processes, settles, and reports transactions.

Screen 4 of the IDF contains 4 fields that control how sensitive data is displayed on BASE24-atm reports. The DATA MASK FLAG field controls whether sensitive data is masked, the MAX LEFT UNMASKED DIGITS field indicates the maximum number of left-most characters to display unmasked, the RIGHT UNMASKED DIGITS field indicates the specific number of right-most characters to display unmasked, and the MIN MASKED DIGITS field indicates the minimum number of digits to display masked.

The DEPOSIT SETTLEMENT IMPACT field on screen 13 of the IDF impacts transaction reporting. This field indicates whether the institution requires deposits made at BASE24 CRT access terminals to be included in the settlement report totals.

Interchange Configuration Files

The Interchange Configuration File (ICF) or Enhanced Interchange Configuration File (ICFE) contains one record for each interchange communicating with the BASE24 logical network. The settings in the ICF or ICFE records indicate how the BASE24 product processes and reports transactions from each respective interchange.

The fields on screen 2 of the ICF and ICFE impact transaction reporting. The REPORT PRIORITY field indicates the priority at which the Interchange Interface process produces the BASE24 interchange reports. The REPORT CPU field indicates the central processing unit (CPU) in which the Interchange Interface process produces the interchange reports.

Four additional fields on screen 2 of the ICF and ICFE control how sensitive data is displayed on BASE24 interchange reports. The DATA MASK FLAG field controls whether sensitive data is masked, the MAX LEFT UNMASKED DIGITS field indicates the maximum number of left-most characters to display unmasked,

the RIGHT UNMASKED DIGITS field indicates the specific number of right-most characters to display unmasked, and the MIN MASKED DIGITS field indicates the minimum number of digits to display masked.

COBNAMES File

Some information that appears on BASE24-atm reports can be customized for a particular logical network. For example, ACI assigns descriptions to response codes that appear on BASE24-atm reports where applicable. These descriptions can be changed to better fit the needs of the logical network. Such changes are made in the COBNAMES file.

The COBNAMES file contains tables of information and is used by all BASE24 products during processing. Each product accesses particular tables in the COBNAMES file to complete certain processing. The information tables that the BASE24-atm product uses in settlement and reporting contain device types and response code descriptions.

After making changes to the COBNAMES file, the requesters that access the COBNAMES file must be recompiled and the object code must be placed on the appropriate volume and subvolume.

ACI Worldwide, Inc.

6: Cutover and Reporting Operations

This section describes the tasks that an operator must perform to manage cutover and reporting from day to day. These tasks include generating BASE24-atm daily and monthly reports and BASE24 interchange reports.

Producing BASE24-atm Reports

The Settlement Initiator process automatically produces the BASE24-atm daily reports after logical network cutover and the BASE24-atm monthly reports on the last day of the calendar month if configured to do so. Once the system is correctly configured for reporting, an operator does not need to perform any tasks to produce the BASE24-atm daily and monthly reports.

At logical network cutover, if configured to do so, the Settlement Initiator process creates an obey file for each set of reports that is to be run. If only one set of reports is to be run, the Settlement Initiator process creates only one obey file. Refer to section 5 for an explanation of the BASE24-atm report sets and how they are configured. Each obey file contains commands necessary to run the appropriate report programs. On the last day of each calendar month, if configured to do so, the Settlement Initiator process also includes the commands necessary to generate the monthly reports.

To start the report programs, the Settlement Initiator process starts a TACL program and sends it the appropriate obey file, depending on whether the Settlement Initiator process is generating the first or second set of reports. The Settlement Initiator process then waits 60 seconds. After 60 seconds, the Settlement Initiator process verifies that the report programs are running. If the report programs are not running, the Settlement Initiator process generates an event message notifying operators of the situation.

Report Obey Files

The report obey files have the naming convention *xyymmdd*, where *xx* is the first two characters of the assign file name value and *ymmdd* is the report date. The Settlement Initiator process creates the obey files in the volume and subvolume where the institution's data files are located if the assigns are not fully qualified. The ATM-SETL-RPT0-OBEY-FILE and ATM-SETL-RPT1-OBEY-FILE assigns in the LCONF specify the fully qualified file names of each obey file.

The Settlement Initiator process retrieves the names of the report programs that generate the reports from the LCONF and places the report program names in the appropriate obey file. Each report and the corresponding report program name that appears in the report program assign is listed on the following page.

Report Program Name	Report Name
RP01B24	Clearings Statement Report (SETL01-B24)
RP02B24	Daily Terminal Settlement Report (SETL02-B24)
RP03B24	Monthly Terminal Settlement Report (SETL03-B24)
RP04B24	Daily Institution Approved Transaction Volume Report (STAT04-B24)
RP05B24	Monthly Institution Approved Transaction Volume Report (STAT05-B24)
RP06B24	Daily Terminal Detail Transaction Log Report (STAT06-B24) and exception report
RP07B24	Daily Institution Detail Transaction Log Report (STAT07-B24) and exception report
RP08B24	Daily Terminal Depository Report (STAT08-B24)

Unless otherwise noted, each report can be configured to be generated in either the first or second set of reports.

The Settlement Initiator process runs the obey file for the first set of report programs at the time specified in the ATM-SETL-RPT0-STARTUP param in the LCONF. The Settlement Initiator process runs the obey file for the second set of report programs at the time specified in the ATM-SETL-RPT1-STARTUP param in the LCONF.

If the first param contains alphabetic characters, the Settlement Initiator process does not run reports. If a value is not present in the first param or the time in the first param is invalid, the Settlement Initiator process abends during initialization. If the second param contains alphabetic characters, the Settlement Initiator process generates only the reports in the first set. If a value is not present in the second param or the time in the second param is invalid, the Settlement Initiator process generates all the reports in the first set only.

Example Report Obey File

An example of a report obey file used to generate BASE24-atm reports is shown below.

```
assign inst-data, \B24.$DATA.PRO1DATA.IDF
assign mon3-mstr, \B24.$DATA.PRO1DATA.RPT3MS01, ext ( 4 , 32 )
assign mon3-totl, \B24.$DATA.PRO1DATA.RPT3TO01, ext ( 4 , 32 )
assign mon5-mstr, \B24.$DATA.PRO1DATA.RPT5MS01, ext ( 4 , 32 )
assign mon5-totl, \B24.$DATA.PRO1DATA.RPT5TO01, ext ( 4 , 32 )
run \B24.$DATA.AT50OBJ.RP01B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1
run \B24.$DATA.AT50OBJ.RP02B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D
run \B24.$DATA.AT50OBJ.RP03B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D
run \B24.$DATA.AT50OBJ.RP04B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D
run \B24.$DATA.AT50OBJ.RP05B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D
run \B24.$DATA.AT50OBJ.RP06B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D Y
run \B24.$DATA.AT50OBJ.RP07B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D Y
run \B24.$DATA.AT50OBJ.RP08B24 &
/in \B24.$DATA.PRO1ATLF.TL970114, &
out \B24.$DATA.PRO1DATA.RP970114, cpu 3 , pri 101/ATM1 2 D
clear all
```

Manually Starting BASE24-atm Reports

Under normal circumstances, the Settlement Initiator process starts report programs automatically. However, if the Settlement Initiator process encounters a problem while producing the reports or if the reports must be rerun, an operator can start the report programs by running the obey file for the day required from a TACL prompt. An operator can also produce additional sets of reports by manually rerunning the obey file.

Suppressing BASE24-atm Reports

To prevent the Settlement Initiator process from producing BASE24-atm reports, the operator must enter the literal “NA” in the ATM-SETL-RPT0-STARTUP param in the LCONF. When this param is configured with the literal “NA”, the system produces an event message at system startup indicating that no report start time is specified and the Settlement Initiator process cannot produce reports. No other messages indicate that the Settlement Initiator process cannot produce reports. The ATM-SETL-RPT0-STARTUP param *must* contain a valid time or the literal “NA”. If not, the Settlement Initiator process abends at initialization.

An operator can suppress a specific report by removing the appropriate report program name from the LCONF. For example, the STAT04-B24 report in the first set could be suppressed by removing the ATM-SETL-RPT0-PROG-4-NAME assign from the LCONF. Monthly reports can be suppressed by removing the corresponding monthly program name assign from the LCONF. For example, the Monthly Terminal Settlement Report in the second set could be suppressed by removing the ATM-SETL-MON-RPT-PROG-3-NAME assign from the LCONF. Suppressing individual reports in this manner causes the Settlement Initiator process to generate event messages indicating that the corresponding assigns are missing from the LCONF.

An alternative to removing the report program assigns is to specify a dummy report program name in the LCONF. Then, when the Settlement Initiator process attempts to start the report program, it is unable to find a report program that corresponds to the dummy report program name.

An operator can suppress the second set of reports by setting the ATM-SETL-RPT1-STARTUP param to a value of NA or by omitting that param from the LCONF.

Specifying Date Formats

Six-digit dates are always printed on the BASE24-atm reports in year, month, and day (YYMMDD) format. The format for printing four-digit dates, however, is controlled by a param in the LCONF.

Four-digit dates can be printed in month and day (MMDD) or day and month (DDMM) format. This is controlled by the DATE-DISPLAY-TYPE param in the LCONF, which the Settlement Initiator process reads and passes to the report programs in the obey file that starts them.

Producing Interchange Reports

The Interchange Interface process automatically produces BASE24 interchange reports for its respective interchange each day. If interchange reporting is configured correctly in the BASE24 system, the operator does not need to perform any tasks to generate the BASE24 interchange reports. The Settlement Initiator process, which is responsible for producing BASE24-atm daily and monthly reports, is not involved in producing BASE24 interchange reports.

Each BASE24 interchange report is produced by a report program. These report programs are started automatically by the Interchange Interface process for each interchange. The RP01-*xxx* Interchange Clearings Statement report program produces the Clearings Statement Report (SETL01-XXXX). The RP09-*xxx* Interchange Transaction Detail report program produces the Interchange Transaction Detail Report (STAT09-XXXX). The *xxx* suffix in the report program names differentiates the report programs for the different interchanges. For example, the report programs for the CIRRUS interchange are RP01-CIR and RP09-CIR.

The report programs are configured in the BASE24 system using assigns in the LCONF. The LCONF assigns for the interchange report programs, if only one interchange is configured in the system, are the SW-RPT01-PROG-NAME and the SW-RPT09-PROG-NAME for the SETL01-XXXX and STAT09-XXXX reports, respectively. If more than one interchange is configured in the system, each Interchange Interface process must have a process-specific assign for its particular interchange report programs.

The Interchange Interface process starts the report programs for an interchange at the time configured in the SW-RPT-STARTUP param in the Logical Network Configuration File (LCONF). One SW-RPT-STARTUP param exists in the LCONF for each interchange. At that time, the Interchange Interface process creates and runs an obey file to start the report programs for the specific interchange.

Manually Starting BASE24 Interchange Reports

Under normal circumstances, the Interchange Interface process starts report programs automatically. However, if the Interchange Interface process encounters a problem while producing the reports or if the reports must be rerun, an operator can start the report programs by running the obey file for the day required from a TACL prompt. The reports then overwrite anything previously written to the spooler location. An operator can also produce additional sets of reports by manually rerunning the obey file.

Suppressing BASE24 Interchange Reports

To prevent the Interchange Interface process from producing interchange reports, the operator can remove the SW-RPT-STARTUP param from the LCONF or enter an invalid value (such as NA). The operator also can replace the report program name in the LCONF with a dummy name. When the Interchange Interface process attempts to start the report program, the Interchange Interface process is unable to find the corresponding report program and, therefore, is unable to produce the report. Replacing the report program name with a dummy name causes the BASE24 system to generate event messages; these event messages are informational only and processing is not impacted.

An operator can suppress a specific interchange report by removing the appropriate report program name from the LCONF. For example, the Clearings Statement Report (SETL01-B24) in the first set could be suppressed by removing the ATM-SETL-RPT0-PROG-1-NAME assign from the LCONF.

Specifying Date Formats

Six-digit dates are always printed on the interchange reports in year, month, and day (YYMMDD) format. However, four-digit dates can be printed in month and day (MMDD) or day and month (DDMM) format. This is controlled by the DATE-DISPLAY-TYPE param set in the LCONF. This parameter is read by the Interchange Interface processes and passed to the report programs in the obey files that start them.

Perusing Reports in the Reports File (RPT)

Several reports can be perused online by accessing the Reports File (RPT) using the BASE24 CRT access system. By perusing the RPT, operators can obtain the same information that appears on the printed form of each report. The only difference between the online information and the information that appears on hard copy reports is the format. Refer to the *BASE24-atm Files Maintenance Manual* for more information about the RPT.

To peruse the RPT, perform the following procedure:

1. Access the RPT screen using the BASE24 CRT access system.
2. Enter the appropriate report code and ID in the REPORT field. The report codes and IDs for each report that can be perused online are listed in the tables below.

Settlement Reports		Report Code	ID
SETL01-B24	Clearings Statement Report	01	B24
SETL02-B24	Daily Terminal Settlement Report	02	B24
SETL03-B24	Monthly Terminal Settlement Report	03	B24

Statistical Reports		Report Code	ID
STAT04-B24	Daily Institution Approved Transaction Volume Report	04	B24
STAT05-B24	Monthly Institution Approved Transaction Volume Report	05	B24
STAT06-B24	Daily Terminal Detail Transaction Log Report	06	B24
	Daily Terminal Exception Detail Report	6R	B24

Statistical Reports		Report Code	ID
STAT07-B24	Daily Institution Detail Transaction Log Report	07	B24
	Daily Institution Exception Detail Report	7R	B24
STAT08-B24	Daily Terminal Depository	08	B24

3. Enter the FIID of the institution whose reports are to be perused.
4. Enter the date (YYMMDD) of the report to be perused.
5. Press the **F1** key to access the first page of the requested report.

Deleting Report Files

Reports must be deleted from the system periodically. How these reports are deleted depends on whether they are daily reports or monthly reports. The BASE24-atm Settlement Initiator process automatically deletes daily reports. Operators, however, must manually delete monthly reports from the system.

Daily Reports

Daily reports are deleted from the system automatically according to the ATM-SETL-RPT-FILE-RETENTION param in the Logical Network Configuration File (LCONF). Refer to section 5 or to the ***BASE24 Logical Network Configuration File Manual*** for more information about this param.

Monthly Reports

Monthly reports must be manually deleted from the system. The BASE24-atm Settlement Initiator does not delete monthly reports automatically. To delete monthly reports from the system, enter the following command from the TACL prompt (where *volume.subvolume.filename* is the fully qualified name of the master or totals file to be deleted):

```
FUP PURGE volume.subvolume.filename
```

A: Processing Information

This appendix includes the following processing information as it pertains to the BASE24-atm Settlement Initiator process:

- Supplementary information for process configuration
- A description of initialization processing
- A description of warmboot processing
- Descriptions of the processing that occurs when the timers used in cutover and settlement expire
- A list and brief descriptions of text commands that the Settlement Initiator process can receive

Process Configuration

The following issues relate to the configuration of the BASE24-atm Settlement Initiator process.

Multiple Copies

Each BASE24-atm logical network requires its own Settlement Initiator process. In situations where multiple BASE24-atm XPNET nodes exist, each XPNET node can also have its own Settlement Initiator process. In that case, one process acts as the master process and actually handles the cutover and reporting procedures for the logical network. The other process or processes act as subordinates to the main process. The main process is designated in the Logical Network Configuration File (LCONF) by the SETL-MASTER param in the LCONF.

During initialization, each BASE24-atm Settlement Initiator process checks the SETL-MASTER param in the LCONF. If its process name is not in the param, that Settlement Initiator process stops.

The BASE24-atm Settlement Initiator process is a required process in the system; BASE24-atm cannot process transactions without it.

Startup Logic

The Settlement Initiator process is designed to run continuously and should be assigned a startup logic of AUTOMATIC in the XPNET system. A startup logic of AUTOMATIC means that the process starts automatically when the XPNET process is initiated and restarts automatically should it ever fail.

Event Messages and Product Module ID

The Settlement Initiator process generates event messages using a standard routing code of 1. Refer to the *BASE24 Event Message Reference Guide* for more information about event messages.

The settlement processes have a product module ID of ATSET.

Broadcast Notification

Broadcast notification enables BASE24 users to effectively minimize Settlement Initiator process notify lists in the LCONF, replacing multiple params with a single service name. Without broadcast notification, BASE24 users must configure a separate param for each process to be notified.

Services can be configured in the following LCONF params used by the Settlement Initiator process for the BASE24-atm product: ATM-SETL-HDWRSTAT-NOTIFY, ATM-SETL-MIDNIGHT-NOTIFY, and ATM-SETL-NOTIFY.

To use broadcast notification, the BROADCAST-NOTIFY param in the LCONF must be set to a value of 2 and all processes requiring a settlement notify message must have a service configured that matches the entry in the appropriate settlement notification param. A second LCONF param associated with broadcast notification, BROADCAST-DELAY, is optional.

When broadcast notification is not used (i.e., the BROADCAST-NOTIFY param is missing or contains an invalid value), the Settlement Initiator process for the BASE24-atm product treats information defined in the ATM-SETL-HDWRSTAT-NOTIFY, ATM-SETL-MIDNIGHT-NOTIFY, and ATM-SETL-NOTIFY params as individual process names instead of service names.

For more information about service-based routing, including broadcast messages, see the *NET24-XPNET Network Control Operations Guide*.

Initialization Processing

The BASE24-atm Settlement Initiator process initializes when the XPNET process is started. When an operator enters the START NODE command from the network control facility at system start up, the XPNET process sends a start up message containing the name of the Logical Network Configuration File (LCONF) to the Settlement Initiator process. The Settlement Initiator process then performs the following initialization steps:

1. Reads the name of the LCONF into memory.

The startup message from the XPNET process contains the name of the LCONF, which the Settlement Initiator process reads into memory. This name enables the Settlement Initiator process to access the LCONF for the assigns and params it uses in processing.

2. Retrieves the assigns and params it requires from the LCONF.

The required assigns and params are listed in section 5. Refer to the ***BASE24 Logical Network Configuration File Manual*** for a complete list of assigns and params, descriptions of each assign and param, and possible valid values for each assign and param.

3. Opens the Token File (TKN) and builds the TKN extended memory table. The Settlement Initiator process uses this extended memory table when writing records to the BASE24-atm Transaction Log File (TLF).
4. Opens the Institution Definition File (IDF) with read and write access. If the Settlement Initiator process is unable to open the IDF, the process abends.
5. Opens the BASE24-atm Terminal Data files with read and write access. If the Settlement Initiator process is unable to open the BASE24-atm Terminal Data files, the process abends.
6. Retrieves today's date and computes tomorrow's date. This information is obtained from the HP Non-Stop processor.
7. Builds the UAF cleanup table.
8. Determines whether there are existing Reports Files (RPTs) and Transaction Log Files (TLFs) for today and tomorrow. If a RPT and TLF do not exist for today and tomorrow, the Settlement Initiator process creates them.

If the current time is greater than or equal to the logical network cutover time, the Settlement Initiator process also determines whether there is an existing RPT and TLF for the day after tomorrow. If these files do not exist for the day after tomorrow, the Settlement Initiator process creates them and sets a flag indicating that cutover must be performed in step 10.

9. Opens the current day's TLF.
10. Determines whether it is past logical network cutover for the current day. To do this, the Settlement Initiator process checks the current time against the time in the ATM-LN-CUTOVER param in the LCONF and performs as follows:
 - If it is not past the logical network cutover time, the Settlement Initiator process checks the FIELD CUTOVER field on screen 3 of the IDF and the CUSTOMER PROCESSING DATE field on screen 10 of the IDF. If the value in the FIELD CUTOVER field is 2 or 5 (clear the Cardholder Authorization File (CAF) usage and/or purge the Usage Accumulation File (UAF) data at midnight) and the date in the CUSTOMER PROCESSING DATE field is less than or equal to the date in the CURRENT BUSINESS DATE field on screen 10 of the IDF, the Settlement Initiator process takes the same action for the IDF record as it would upon expiration of the midnight cutover timer.
 - If it is past the logical network cutover time, the Settlement Initiator process increases its own dates for today and tomorrow by one day and verifies that all IDF records are operating on these new dates. If an institution is not operating on these new dates, the Settlement Initiator process cuts over the IDF record for the institution.
11. Initializes its timer tables in extended memory. This is the memory area in which the Settlement Initiator process places its timers.
12. Sets its timers for processing. The timers the Settlement Initiator process sets are the financial institution cutover timers, the midnight cutover timer, the force cutover timer, the logical network cutover timer, and the start reports timers. Each of these timers is explained in detail later in the section.
13. Initializes the network logging facility for writing event messages.
14. Reads the Log Message Configuration File (LMCF) for its modified event messages.

The LMCF contains a record for each modified event message in the system. The Settlement Initiator process opens the LMCF, retrieves its own modified event messages, and closes the LMCF. Whenever the Settlement Initiator process generates an event message, it checks these LMCF records in memory to determine whether the message needs to be modified.

Warmboot Processing

The BASE24-atm Settlement Initiator process can be warmbooted by issuing a warmboot command from a network control facility or the Device Control Terminal (DCT). An operator must initiate a warmboot command when configuration changes have been made to the BASE24-atm system.

The Settlement Initiator process can be warmbooted using the Device Control Terminal (DCT) screen individually or as a part of the DCT's warmboot list in the LCONF. When the Settlement Initiator process is warmbooted, it performs exactly as described for initialization except for the following differences:

- Does not retrieve a new LCONF name
- Does not clear totals in the CAF
- Does not purge the data in the UAF
- Deallocates the existing extended memory segment for the TKN
- Closes and reopens any files it opens during initialization

For more information about the warmboot command, including a detailed description and the command syntax, refer to the ***BASE24 Text Command Reference Manual***.

Timer Processing

The BASE24-atm Settlement Initiator process is controlled by timers. These timers are listed below, and the actions they trigger are described below and on the following pages.

- Financial institution cutover timer
- Force cutover timer
- Logical network cutover timer
- Midnight cutover timer
- Start reports timers
- Terminal timer

Financial Institution Cutover Timer

When the financial institution cutover timer expires, the Settlement Initiator process begins institution cutover. The Settlement Initiator process maintains a separate timer for each institution in the logical network.

An institution's cutover time is based on the institution's balancing window, specified in the BALANCE AND CUTOVER TIME WINDOW fields on screen 10 of the IDF. The financial institution cutover timer expires at the end of the cutover window.

All institution cutovers must precede logical network cutover by at least the number of minutes specified in the ATM-SETL-LN-CUTOVER-LEAD-TIME param in the LCONF. If the cutover time in the IDF does not allow for the time indicated in the ATM-SETL-LN-CUTOVER-LEAD-TIME param, the Settlement Initiator process sets the financial institution cutover timer so that it meets the requirements.

When the financial institution cutover timer expires, the Settlement Initiator process performs the following steps:

1. Cuts over the institution's terminals if they have not been cut over.

The Settlement Initiator process uses the FIID of the institution being cut over to read the BASE24-atm Terminal Data files, using the OWNER NAME field on BASE24-atm Terminal Data files (ATD) screen 1 as the alternate key. If it encounters a locked record, the Settlement Initiator process delays and retries reading the record until the record is unlocked and the Settlement Initiator process can access it unless the value of the optional ATM-SETL-ATD-LOCKED-RECS-SKIP param in the LCONF is set to a value of Y.

For each BASE24-atm Terminal Data files record belonging to the institution, the Settlement Initiator process checks the POSTING DATE field on screen 1 of the ATD. If the terminal has been cut over to the new day, the Settlement Initiator process accesses the next BASE24-atm Terminal Data files record. If the terminal has not been cut over to the new day, the Settlement Initiator process checks to see if the device has a transaction in progress.

- a. If a transaction is in progress, the Settlement Initiator process cannot cut over the terminal. Instead, the Settlement Initiator process performs as follows:
 - 1) Sets the new posting date in memory to the next calendar day.
 - 2) Sets a flag indicating that terminal cutover needs to be performed and is pending.
 - 3) Sets a terminal timer for 30 seconds.
- b. If a transaction is not in progress, the Settlement Initiator process forces the terminal to cut over by performing as follows:
 - 1) Sets the BALANCE FLAG field on screen 6 of the ATD to a value of 9 (force cutover).
 - 2) Sets the POSTING DATE field on screen 1 of the ATD to the next calendar date.

- 3) Creates two terminal balancing records and writes them to the current day's TLF.

These records are each given a record type of 4 (administrative transaction) and together contain the current transaction totals from the BASE24-atm Terminal Data files. The first record uses the TLF.TERM-SETL (terminal settlement) definition and is given an administrative code of 09. The second record uses the TLF.SETL-TTL (settlement totals) definition and is given an administrative code of 22.

For a description of these TLF records and the values they contain, refer to the BASE24-atm Data Definition Language (DDL) record structures.

2. Reads the IDF record for the institution being cut over and determines if the BASE24-atm product is supported by locating the BASE24-atm segment of the IDF. If the BASE24-atm product is not supported, no further processing occurs for this institution. If the BASE24-atm product is supported, processing continues with step 3.
3. Computes a new customer business date and places it in memory.

To compute a new customer business date, the Settlement Initiator process checks the WORK DAY CODE field on screen 4 of the IDF and performs as follows:

- a. If the value in the WORK DAY CODE field is 0, the Settlement Initiator process increases the current customer business day by one day. This calculated date should be equal to the date in the CURRENT BUSINESS DATE field on IDF screen 10 plus one calendar day.
- b. If the value in the WORK DAY CODE field is not 0, the Settlement Initiator process calculates the date for the CUSTOMER PROCESSING DATE field on screen 10 of the IDF based on the value in the WORK DAY CODE field and the holidays listed in the HOLIDAYS fields on screen 4 of the IDF. For example, if the institution is not set up to process on weekends or holidays, the customer business date is set to the next non-weekend, non-holiday date.

Note: The customer processing date is only computed at this time. It is not actually placed in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF.

4. Purges data in the Usage Accumulation File (UAF), if required. To do this, the Settlement Initiator process performs as follows:
 - a. Determines whether a UAF exists by checking the UAF field on screen 1 of the IDF.

If the UAF field contains a file name, the institution is using the Negative Authorization with Usage Accumulation method of authorization and a UAF exists. If this field does not contain a file name, a UAF does not exist and the Settlement Initiator process continues processing with step 5.

- b. Checks the value of the FIELD CUTOVER field on IDF screen 3.
 - If the value of the FIELD CUTOVER field is 1, processing continues with step c.
 - If the value of the FIELD CUTOVER field is 2, the Settlement Initiator process compares timestamps to determine whether it is midnight cutover time. If it is before midnight cutover time, processing continues with step 5. If it is midnight cutover time or later, processing continues with step d.
 - If the value of the FIELD CUTOVER field is 0, 4, or 5, processing continues with step d.
- c. Determines whether the institution's business day conforms to the BASE24-atm processing day and, therefore, whether usage accumulation needs to be purged.

To do this, the Settlement Initiator process compares the newly computed customer business date in memory to the date in the NEXT BEGINNING DATE field on screen 4 of the IDF. If the customer business date in memory is less than the date in the NEXT BEGINNING DATE field, the Settlement Initiator process continues processing with step 5. If the customer business date in memory is equal to or greater than the date in this field, processing continues with step d.

- d. Determines the type of clearance action the institution uses and takes that action. The Settlement Initiator process checks the PERSISTENT UAF field on IDF screen 3.
 - If the value is 0, the UAF is used without Persistent UAF functionality. The Settlement Initiator process does not set a flag in the UAF cleanup table or purge the UAF. Processing continues with step 5.
 - If the value is 1, the UAF is used with Persistent UAF functionality. The Settlement Initiator process sets a flag in the UAF cleanup table without purging the UAF. The Settlement Initiator process can initiate UAF cleanup during logical network cutover and midnight cutover. Processing continues with step 5.

- If the value is 2, the UAF is used with Persistent UAF functionality. However, the Settlement Initiator process does not set a flag in the UAF cleanup table or purge the UAF because the Settlement Initiator process does not initiate UAF cleanup. Processing continues with step 5.
- e. Opens the UAF and purges the data in the file.
5. Advances the date in the REPORT DATE field on screen 10 of the IDF to match the date in the CURRENT BUSINESS DATE field on screen 10 of the IDF.
 6. Advances the date in the CURRENT BUSINESS DATE field on screen 10 of the IDF to match the date in the NEXT BUSINESS DATE field on screen 10 of the IDF.
 7. Increases the date in the NEXT BUSINESS DATE field by one calendar day.
 8. Updates the date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF, if required. The Settlement Initiator process checks the FIELD CUTOVER field on screen 3 of the IDF to determine if this step is required.
 - a. If the FIELD CUTOVER field is set to 2 or 5 (midnight cutover), the Settlement Initiator process continues processing with step 10.
 - b. If the FIELD CUTOVER field is not set to 2 or 5 (midnight cutover), the Settlement Initiator process performs as follows:
 - 1) Sets the date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF to the newly computed customer business date the Settlement Initiator is holding in memory.
 - 2) Compares the new date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF to the date in the NEXT BEGINNING DATE field on screen 4 of the IDF. If the date in the CUSTOMER PROCESSING DATE field is less than the date in the NEXT BEGINNING DATE field, the Settlement Initiator process continues processing with step 10.

If the date in the CUSTOMER PROCESSING DATE field is greater than or equal to the date in the NEXT BEGINNING DATE field, the institution has reached the end of its current usage accumulation period. In this case, the Settlement Initiator process must compute a new withdrawal period. To do this, the Settlement Initiator process continues processing with step 9.

9. Establishes a new withdrawal period and resets the dates in the BEGINNING DATE and NEXT BEGINNING DATE fields on screen 4 of the IDF, if necessary. To do this, the Settlement Initiator process performs as follows:
 - a. If the value in the WORK DAY CODE field on screen 4 of the IDF is 0, the Settlement Initiator process performs as follows:
 - 1) Computes a new next beginning date for the NEXT BEGINNING DATE field based on the length of the institution's withdrawal period set in the PERIOD LENGTH field on screen 4 of the IDF. The Settlement Initiator process stores this new date in memory. The date is not placed in the NEXT BEGINNING DATE field at this time.
 - 2) Compares the new next beginning date in memory with the date in the NEXT BEGINNING DATE field. If these dates are the same, the Settlement Initiator process continues processing with step 10.
 - 3) Moves the date in the NEXT BEGINNING DATE field to the BEGINNING DATE field.
 - 4) Places the new next beginning date from memory into the NEXT BEGINNING DATE field.
 - b. If the value in the WORK DAY CODE field on screen 4 of the IDF is not 0, the Settlement Initiator process performs as follows:
 - 1) Moves the date in the NEXT BEGINNING DATE field to the BEGINNING DATE field.
 - 2) Computes a new next beginning date for the NEXT BEGINNING DATE field using the value in the WORK DAY CODE field, the date in the BEGINNING DATE field, and the institution's specified holidays from the HOLIDAYS field on screen 4 of the IDF.
 - 3) Sets the date in the NEXT BEGINNING DATE field to the new next beginning date the Settlement Initiator has stored in memory.
10. Writes the IDF record back to the file.

Note: While the date fields may have been changed, the dates are not automatically reread by any of the BASE24-atm processes and, consequently, do not take effect until logical network cutover.

Force Cutover Timer

The force cutover timer acts as a safeguard for terminal cutover. When the force cutover timer expires, the Settlement Initiator process verifies that all the terminals in the logical network have cut over. For those that have not been cut over, the Settlement Initiator process cuts them over.

The force cutover timer is set to expire 15 minutes prior to logical network cutover. The Settlement Initiator process sets this timer at initialization and at logical network cutover.

When the force cutover timer expires, the Settlement Initiator process retrieves each terminal timer that is still running. These terminal timers represent terminals that need to be cut over to the new processing day. For each terminal whose terminal timer is still running when the force cutover timer expires, the Settlement Initiator process performs the following actions:

1. Reads the BASE24-atm Terminal Data files record for the terminal. The Settlement Initiator process obtains the terminal's symbolic name from the terminal timer. If it encounters a locked record, the Settlement Initiator process delays and retries reading the record until the record is unlocked and the Settlement Initiator process can access it unless the value of the optional ATM-SETL-ATD-LOCKED-RECS-SKIP param in the LCONF is set to a value of Y.
2. Sets the BALANCE FLAG field on screen 6 of the ATD to a value of 9 (force cutover).
3. Changes the date in the POSTING DATE field on screen 1 of the ATD to the next calendar date.
4. Creates two terminal balancing records and writes them to the current day's TLF. These records are each given a record type of 04 (administrative transaction) and together contain the current transaction totals from the BASE24-atm Terminal Data files.

The first record uses the TLF.TERM-SETL (terminal settlement) definition and is given an administrative code of 09. The second record uses the TLF.SETL-TTL (settlement totals) definition and is given an administrative code of 22.

For a description of these TLF records and the values they contain, refer to the BASE24-atm DDL record structures.

5. Writes the BASE24-atm Terminal Data files record back to its file.

Note: The Settlement Initiator process should rarely need to take the above actions. All BASE24-atm Terminal Data files records should be cut over to a new day prior to the time the force cutover timer expires. However, if the Settlement Initiator process is required to force balance a BASE24-atm Terminal Data files record at this point, some problems may arise. The first sign that a problem has occurred after logical network cutover, is when the BASE24-atm Authorization process begins rejecting transactions for invalid dates.

Logical Network Cutover Timer

When the logical network cutover timer expires, the Settlement Initiator process begins logical network cutover.

The Settlement Initiator process sets its logical network cutover timer so that it expires at the time specified in the ATM-LN-CUTOVER param in the LCONF. The Settlement Initiator process sets this timer at initialization and at logical network cutover.

When the logical network cutover timer expires, the Settlement Initiator process performs as follows:

1. Closes the current day's TLF.
2. Increases the date in the NEXT BUSINESS DATE field on screen 10 of the IDF by one and places this new date in memory.
3. Creates the next day's Hardware Status File (HSF), if necessary.

If the Settlement Initiator process locates the HSF assign in the LCONF, the Settlement Initiator process creates the next day's HSF using the template file specified in the HSF assign.

Note: The Hardware Status File (HSF) is used only with IBM 3624 ATMs.

4. Broadcasts a cutover (9502) message to those processes specified in the ATM-SETL-NOTIFY params of the LCONF.

The Settlement Initiator process reads the LCONF at initialization and maintains the broadcast list in memory.

The cutover message contains the current date (the day just ending). The Settlement Initiator process uses the message to notify each process to perform its cutover procedures (for example, close files, open files, and reinitialize internal memory for the new day).

5. Reads the UAF cleanup table to determine whether the Settlement Initiator process has to initiate Usage Accumulation File (UAF) cleanup.
 - If the UAF cleanup table contains flags set by the Settlement Initiator process, the Settlement Initiator process initiates UAF cleanup, then continues processing with step 6.
 - If the UAF cleanup table does not contain flags, processing continues with step 6 without initiating UAF cleanup.

The UAF Cleanup process is actually part of the BASE24 Extract process. The Settlement Initiator process only initiates the UAF Cleanup process.

6. If the Settlement Initiator process found the HSF assign in the LCONF, the Settlement Initiator process broadcasts a cutover (9502) message to processes specified in the ATM-SETL-HDWRSTAT-NOTIFY params. The 3624 Device Handler processes close the old HSF file and open the new one.
7. Checks the ATM-SETL-RPT0-STARTUP and ATM-SETL-RPT1-STARTUP params in the LCONF to determine whether reports must be started. If reports must be started, the Settlement Initiator process creates one or two TACL obey files for running the BASE24-atm report programs.

The naming convention for the first obey file is R0yymmdd, taken from the ATM-SETL-RPT0-OBEY-FILE assign in the LCONF. The naming convention for the second obey file is R1yymmdd, taken from the ATM-SETL-RPT1-OBEY-FILE assign in the LCONF. In these cases, yymmdd is equal to the current date the Settlement Initiator process is using. If the second assign is not present or is invalid, the second obey file is not produced.

- a. The first obey file contains the necessary commands to run the report programs named in the following assigns:

ATM-SETL-RPT0-PROG-1-NAME
 ATM-SETL-RPT0-PROG-2-NAME
 ATM-SETL-RPT0-PROG-4-NAME
 ATM-SETL-RPT0-PROG-6-NAME
 ATM-SETL-RPT0-PROG-7-NAME
 ATM-SETL-RPT0-PROG-8-NAME

- b. The second obey file contains the necessary commands to run the report programs named in the following assigns:

ATM-SETL-RPT1-PROG-1-NAME
 ATM-SETL-RPT1-PROG-2-NAME
 ATM-SETL-RPT1-PROG-4-NAME
 ATM-SETL-RPT1-PROG-6-NAME
 ATM-SETL-RPT1-PROG-7-NAME
 ATM-SETL-RPT1-PROG-8-NAME

- c. On the last day of each month, the Settlement Initiator process includes commands to generate the BASE24-atm monthly reports. It retrieves the names of the report programs used to produce these reports from the following assigns in the LCONF:

ATM-SETL-MON-RPT-PROG-3-NAME
ATM-SETL-MON-RPT-PROG-5-NAME

- 8. Purges old RPTs in the system, based on the value of the ATM-SETL-RPT-FILE-RETENTION param in the LCONF. The Settlement Initiator process also goes back five days from that date to purge any other old RPTs that may have been missed previously.

The Settlement Initiator process performs this step only if reports must be produced. Otherwise, there are no RPTs on the system.

- 9. Checks the ATM-SETL-RPT0-STARTUP and ATM-SETL-RPT1-STARTUP params in the LCONF to determine whether reports are to be started. If reports are to be run, the Settlement Initiator process creates the day after next's Reports File (RPT). The Settlement Initiator process creates both a primary key file and an alternate key file for the day after next.

The naming convention for the primary key RPT is RPyymmdd, taken from the RPT assign in the LCONF. The extent size used in creating the file is taken from the RPT template file.

The naming convention for the alternate key RPT is RXyymmdd, taken from the RPT template file specified in the LCONF. The extent size used in creating the file is also taken from this template file.

The date yymmdd used for creating these files is one day beyond the date in the NEXT BUSINESS DATE field on screen 10 of the IDF.

- 10. Purges old TLFs in the system, based on the value of the ATM-SETL-TLF-FILE-RETENTION param in the LCONF. The Settlement Initiator process also goes back five days from that date to purge any other old TLFs that may have been missed previously.
- 11. Purges old HSF files in the system, if they exist, based on the ATM-SETL-TLF-FILE-RETENTION param in the LCONF. The Settlement Initiator process also goes back five days from that date to purge any other old HSF files that may have been missed previously.
- 12. Purges the old TACL obey files in the system that the Settlement Initiator process used for running the BASE24-atm report programs. The Settlement Initiator process does this based on the same retention period used for the TLFs (i.e., the value of the ATM-SETL-TLF-FILE-RETENTION param in the LCONF).

13. Creates the day after next's TLFs.

The Settlement Initiator process creates both a primary key file and an alternate key file for the day after next. The naming convention for the primary key TLF is *TLyymmdd*, taken from the TLF assign in the LCONF. The extent size used in creating the file is taken from the TLF template file.

The naming convention for the alternate key TLF is *T0yymmdd*, taken from the TLF template file in the LCONF. The extent size used in creating the file is also taken from this template file.

The date *yymmdd* used for creating these files is one day greater than the date in the NEXT BUSINESS DATE field on screen 10 of the IDF. The number of extents to use in creating the TLF is specified in the ATM-SETL-TLF-EXTENTS-TO-ALLOCATE param in the LCONF, which the Settlement Initiator process retrieves at initialization.

14. Deallocates the unused file extents for the TLF just cut over.

15. Generates the event message "Cutover completed for YYMMDD."

16. Performs processing as if the midnight timer expired, if the current system business date does not equal the current business date and a midnight timer is found.

17. Increases the dates in the Settlement Initiator process' internal memory fields for the current day and next day.

18. Opens the new current day's TLF. If the Settlement Initiator process is unable to open the TLF, the Settlement Initiator process abends.

19. Resets the following timers:

Logical network cutover timer
Financial institution cutover timer
Force cutover timer
Midnight cutover timer

Note: The midnight cutover timer is reset only if the flag in the FIELD CUTOVER field on screen 3 of the IDF record equals a value of 2 or 5 and the CUSTOMER PROCESSING DATE field on screen 10 of that IDF record is less than or equal to the current calendar date (from the HP Non-Stop processor).

Midnight Cutover Timer

When the midnight cutover timer expires, the Settlement Initiator process purges the data in the Usage Accumulation File (UAF), if required, and updates the date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF. Only one midnight cutover timer exists for the entire logical network. If one or more institutions are set up to clear their usage accumulation at midnight instead of at logical network cutover, the Settlement Initiator process sets the midnight cutover timer.

The Settlement Initiator process sets the midnight cutover timer at initialization or logical network cutover if both of the following conditions exist:

- The value in the FIELD CUTOVER field on screen 3 of the IDF record equals 2 (purge UAF at midnight; begin clearing CAF usage accumulation fields at midnight) or 5 (do not purge the UAF; begin clearing the CAF usage accumulation fields at midnight).
- The date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF record is less than or equal to the current calendar date.

When the midnight cutover timer expires, the Settlement Initiator process reads the first record in the IDF and performs the following steps:

1. Determines whether midnight processing is necessary. To do this, the Settlement Initiator process performs the following steps:
 - a. Determines if the BASE24-atm product is supported.
 - b. Verifies that the UAF name is present in the IDF. If so, the Settlement Initiator process assumes the institution uses the Negative Authorization with Usage Accumulation method.
 - c. Checks the FIELD CUTOVER field on screen 3 of the IDF. If that field contains a value of 2 or 5 and the date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF is earlier than or equal to the date in the CURRENT BUSINESS DATE field on screen 10 of the IDF, the Settlement Initiator process continues with step 2. Otherwise, the Settlement Initiator process continues with step 4.

2. Updates the CUSTOMER PROCESSING DATE field in the IDF. To do this, the Settlement Initiator process performs the following steps:
 - a. Computes a new customer business date by checking the value of the WORK DAY CODE field on screen 4 of the IDF for the following situations:
 - If the value in the WORK DAY CODE field is 0, the Settlement Initiator process increases the date in the CUSTOMER PROCESSING DATE field in the IDF by one day.
 - If the value in the WORK DAY CODE field is not 0, the Settlement Initiator process calculates the customer processing date based on the value in the WORK DAY CODE field and the holidays listed in the HOLIDAYS fields on screen 4 of the IDF. For example, if the institution is not set up to process on weekends or holidays, the customer processing date is set to the next non-weekend, non-holiday date.
 - b. Moves the newly computed customer processing date to the CUSTOMER PROCESSING DATE field on screen 10 of the IDF.
3. Establishes a new withdrawal period if necessary.

If the date in the CUSTOMER PROCESSING DATE field on screen 10 of the IDF is greater than or equal to the date in the NEXT BEGINNING DATE field on screen 4 of the IDF, the institution has reached the end of its current usage accumulation period. In this case the Settlement Initiator process must compute a new withdrawal period based on the value of the WORK DAY CODE field on screen 4 of the IDF.

- a. If the value in the WORK DAY CODE field is 0, the Settlement Initiator process performs the following steps:
 - 1) Computes a new next beginning date for the NEXT BEGINNING DATE field based on the length of the institution's withdrawal period set in the PERIOD LENGTH field on screen 4 of the IDF. The Settlement Initiator process stores this new date in memory. The date is not placed in the NEXT BEGINNING DATE field at this time.
 - 2) Compares the new next beginning date in memory with the date in the NEXT BEGINNING DATE field. If these dates are the same, the Settlement Initiator process continues processing with step 4.

- 3) Moves the date in the NEXT BEGINNING DATE field to the BEGINNING DATE field on screen 4 of the IDF.
 - 4) Sets the date in the NEXT BEGINNING DATE field to the new next beginning date the Settlement Initiator process calculated earlier.
 - b. If the value in the WORK DAY CODE field is not 0, the Settlement Initiator process performs the following steps:
 - 1) Moves the date in the NEXT BEGINNING DATE field to the BEGINNING DATE field on screen 4 of the IDF.
 - 2) Computes a new next beginning date using the value in the WORK DAY CODE field, the date in the BEGINNING DATE field, and the holidays the institution established in the HOLIDAYS fields on screen 4 of the IDF.
 - 3) Sets the date in the NEXT BEGINNING DATE field to the new next beginning date the Settlement Initiator process calculated earlier.
4. Determines whether the data in the UAF and the usage accumulation fields in the CAF must be purged for the institution. If the value in the FIELD CUTOVER field is 5, the Settlement Initiator process continues processing with step 6. If the value in the FIELD CUTOVER field is 2, the Settlement Initiator process performs the following steps.

To purge data in the UAF, the Settlement Initiator process performs as follows:

- a. Checks the UAF FILE NAME field on screen 1 of the IDF to determine whether the institution is using the Negative Authorization with Usage Accumulation method. If the name of a UAF does not appear in this field, the institution is not using the Negative Authorization with Usage Accumulation method and there is no UAF. In that case the Settlement Initiator process continues processing with step 5.
- b. Retrieves the file name of the UAF from the UAF FILE NAME field on screen 1 of the IDF, if one exists.
- c. Determines the type of clearance action the institution uses and takes that action.

The Settlement Initiator process checks the PERSISTENT UAF field on IDF screen 3.

- If the value is 0, the UAF is used without Persistent UAF functionality. The Settlement Initiator process does not set a flag in the UAF cleanup table or purge the UAF. Processing continues with step 5.
- If the value is 1, the UAF is used with Persistent UAF functionality. The Settlement Initiator process sets a flag in the UAF cleanup table without purging the UAF. The Settlement Initiator process can initiate UAF cleanup during logical network cutover and midnight cutover. Processing continues with step 5.
- If the value is 2, the UAF is used with Persistent UAF functionality. However, the Settlement Initiator process does not set a flag in the UAF cleanup table or purge the UAF because the Settlement Initiator process does not initiate UAF cleanup. Processing continues with step 5.

d. Opens the UAF and purges the data in the file.

5. Broadcasts a cutover (9502) message to those processes specified in the ATM-SETL-MIDNIGHT-NOTIFY params in the LCONF.

The Settlement Initiator process reads the LCONF at initialization and maintains the midnight broadcast list in memory.

The cutover message contains a date of zeros. The Settlement Initiator process uses this message to notify each authorization process to reinitialize internal memory (that is, set new IDF dates).

6. Reads the UAF cleanup table to determine whether the Settlement Initiator process has to initiate Usage Accumulation File (UAF) cleanup.
 - If the UAF cleanup table contains flags set by the Settlement Initiator process, the Settlement Initiator process initiates UAF cleanup, then continues processing with step 7.
 - If the UAF cleanup table does not contain flags, processing continues with step 7 without initiating UAF cleanup.

The UAF Cleanup process is actually part of the BASE24 Extract process. The Settlement Initiator process only initiates the UAF Cleanup process.

7. Writes the IDF record back to the file.

Note: If an institution runs both the BASE24-atm and BASE24-pos products and uses the same UAF for both products, the ATM-SETL-MIDNIGHT-NOTIFY list should include all BASE24-atm Authorization processes as well as all

BASE24-pos Router/Authorization/Device Handler processes. The POS-SETL-MIDNIGHT-NOTIFY list should be blank (i.e., contain no entries). This enables the proper cutover of the UAF and the notification of processes that use the UAF.

Start Reports Timers

The BASE24-atm system maintains two start reports timers—the RPT0 start reports timer and the RPT1 start reports timer. The RPT0 start reports timer is used to start the report programs that generate the first set of reports. The RPT1 start reports timer is used to start the report programs that generate the second set of reports.

When a start reports timer expires, the Settlement Initiator process begins producing reports. The Settlement Initiator process sets each start reports timer at logical network cutover. The timers are set to expire at the times specified in the ATM-SETL-RPT0-STARTUP and ATM-SETL-RPT1-STARTUP params in the LCONF.

When a start reports timer expires, the Settlement Initiator process performs as follows:

1. Creates a TACL process.
2. Retrieves the name of the obey file from the timer (the name is stored with the timer).
3. Runs the obey file.

This obey file starts the BASE24-atm report programs that create the BASE24-atm reports. These formatted reports are placed in the Reports File (RPT) for the reporting day and are also sent to a spooler location. (The Settlement Initiator process created the RPT at logical network cutover on a previous day.)

4. Delays 30 seconds and verifies that the report programs are running. If the report programs are not running, the Settlement Initiator process generates an event message with this information.

Terminal Timer

Terminal timers enable the Settlement Initiator process to continually check terminals that have not been cut over to a new posting day when institution cutover occurs. The Settlement Initiator process checks the BASE24-atm Terminal Data files record every 30 seconds to determine whether the terminal has been cut over.

If a terminal has been cut over, the Settlement Initiator process does not reset the terminal timer for that terminal. If a terminal has not been cut over and is not busy, the Settlement Initiator process forces the terminal to cut over. If the terminal is busy, the Settlement Initiator process resets the terminal timer for another 30 seconds and the cycle begins again.

Each terminal in the logical network has its own terminal timer. If an institution cutover occurs and a terminal is already cut over, a terminal timer is not set for that terminal. A terminal timer always expires 30 seconds from the time it is set.

When a terminal timer expires, the Settlement Initiator process performs as follows:

1. Reads the BASE24-atm Terminal Data files record for the terminal (the timer carries the terminal's symbolic name). If it encounters a locked record, the Settlement Initiator process delays and retries reading the record until the record is unlocked and the Settlement Initiator process can access it unless the value of the optional ATM-SETL-ATD-LOCKED-RECS-SKIP param in the LCONF is set to a value of Y.
2. Checks to see if a transaction is in progress at the terminal. If a transaction is in progress, the Settlement Initiator process resets the terminal timer for another 30 seconds and continues with step 1 again. If a transaction is not in progress, the Settlement Initiator process continues with the next step.
3. Checks the POSTING DATE field on screen 1 of the ATD record and performs as follows:
 - a. If the date in the POSTING DATE field indicates the terminal has been cut over to the new day, the Settlement Initiator process takes no further action.
 - b. If the date in the POSTING DATE field indicates the terminal has not been cut over to the new day, the Settlement Initiator process cuts over the terminal as follows:
 - 1) Increases the date in the POSTING DATE field on screen 1 of the BASE24-atm Terminal Data files record by one calendar day.
 - 2) Sets the BALANCE FLAG field on screen 6 of the ATD record to a value of 9 (force cutover).
 - 3) Sets the CUTOVER-PEND field in the BASE24-atm Terminal Data files record to indicate that no cutover is pending.
 - 4) Places blanks in the NEW-POST-DATE field in the BASE24-atm Terminal Data files record.

- 5) Creates two terminal balancing records and writes them to the current day's TLF.

These records are each given a record type of 04 (administrative transaction) and together contain the current transaction totals from the BASE24-atm Terminal Data files. The first record uses the TLF.TERM-SETL definition and is given an administrative code value of 09. The second record uses the TLF.SETL-TTL definition and is given an administrative code value of 22.

For a description of these fields that appear in the TLF records and the values they contain, refer to the documentation for the TLF DDL record structures.

Text Commands

The Settlement Initiator process can receive and process several text commands from a network control facility. You can issue text commands to the Settlement Initiator process to perform the functions listed below. For more information about each command, including command variations, descriptions, and command syntax, refer to the ***BASE24 Text Command Reference Manual***.

- Warmboot. The 9501 command causes the Settlement Initiator process to reinitialize.
- Reset Dates. The RESETATDDATES command resets the dates in the BASE24-atm Terminal Data files. The RESETIDFDATES command resets the dates in the Institution Definition File (IDF). The RESETALLDATES command resets dates in both the BASE24-atm Terminal Data files and the IDF.
- Simulate Midnight Cutover. The MIDNIGHT command causes the Settlement Initiator process to perform midnight processing as if the midnight cutover timer had expired.

ACI Worldwide, Inc.

Index

A

Administrative transactions
balancing transaction, [2-6](#)
midpoint cash adjustment, [2-5](#)
subtotaling transaction, [2-6](#)

ATD

see BASE24-atm Terminal Data files

ATM cash account, institution settlement, [3-5](#)

ATM settlement account, institution settlement, [3-6](#)

ATMs, [1-5](#)

B

Balancing totals, [2-3](#), [2-6](#)

BASE24-atm report generation

by Settlement Initiator process, [6-2](#)

manually by operator, [6-4](#)

specifying date formats, [6-5](#)

suppressing, [6-5](#)

BASE24-atm Terminal Data files

in initialization processing, [A-4](#)

in terminal cutover, [1-9](#), [5-6](#)

locked record processing, [A-8](#), [A-13](#), [A-23](#)

role in settlement, [1-14](#)

Broadcast notification, [A-3](#)

Business day

institution cutover, [1-8](#), [1-11](#)

interchange cutover, [1-12](#)

logical network cutover, [1-12](#)

terminal balancing, [1-9](#)

terminal cutover, [1-9](#)

C

Card balancing and cutover method, [1-10](#)

Card issuers, [1-4](#)

Cardholder Authorization File (CAF), in warmboot processing, [A-6](#)

Cardholders, [1-4](#)

Clearings Statement Report (SETL01-B24)

description, [4-2](#)

field descriptions, [4-4](#)

obey file, [4-2](#)

perusal, [4-2](#)

sample, [4-2](#)

spooler location, [4-2](#)

use in accounting, [3-7](#), [3-10](#), [3-11](#)

use in logical network settlement, [3-9](#)

Clearings Statement Report for XXXX (SETL01-XXXX)

definition, [1-21](#)

description, [4-5](#)

field descriptions, [4-8](#)

obey file, [4-5](#)

sample, [4-5](#)

spooler location, [4-5](#)

use in accounting, [3-12](#)

use in logical network settlement, [3-9](#)

COBNAMEs table, report configuration, [5-17](#)

Configuration

assigns and params, [5-2](#)

institution cutover, [5-6](#)

interchange cutover, [5-9](#)

logical network cutover, [5-8](#)

report sets, [5-10](#)

reports, [5-10](#)

Settlement Initiator process, [5-4](#), [A-2](#)

terminal cutover, [5-5](#)

CRT balance and cutover method, [1-10](#)

Cutover

assigns and params, [5-2](#)

configuration, [5-5](#)

force cutover, [A-13](#)

hierarchy diagram, [1-8](#)

institution cutover, [5-6](#), [A-7](#)

logical network cutover, [A-14](#), [A-18](#), [A-22](#)

terminal cutover, [2-7](#), [2-8](#), [5-5](#), [A-13](#), [A-23](#)

timer processing, [A-7](#)

see also Terminal cutover; Institution cutover; Logical network cutover; Interchange cutover

Cutover and reporting database

Interchange Log File (ILF), [1-14](#)

Reports File (RPT), [1-13](#)

Transaction Log File (TLF), [1-13](#)

Cutover timers

financial institution cutover timer, [A-7](#)

force cutover timer, [A-13](#)

logical network cutover timer, [A-14](#)

midnight cutover timer, [A-18](#)

terminal timer, [A-23](#)

D

Daily Institution Approved Transaction Volume Report (STAT04-B24)

- definition, [1-19](#)
- description, [4-29](#)
- field descriptions, [4-38](#)
- obey file, [4-29](#)
- perusal, [4-29](#)
- sample, [4-29](#)
- spooler location, [4-29](#)

Daily Institution Detail Transaction Log Report (STAT07-B24)

- definition, [1-20](#)
- description, [4-56](#)
- field descriptions, [4-59](#)
- obey file, [4-56](#)
- perusal, [4-57](#)
- sample, [4-57](#)
- spooler location, [4-57](#)

Daily Institution Exception Detail Report

- definition, [1-20](#)
- description, [4-62](#)
- field descriptions, [4-63](#)
- perusal, [4-62](#)
- sample, [4-63](#)
- spooler location, [4-62](#)

Daily reports

- Clearings Statement Report (SETL01-B24), [1-19](#), [4-2](#)
- Daily Institution Approved Transaction Volume Report (STAT04-B24), [1-19](#), [4-29](#)
- Daily Institution Detail Transaction Log Report (STAT07-B24), [1-20](#), [4-56](#)
- Daily Institution Exception Detail Report, [1-20](#), [4-62](#)
- Daily Terminal Depository Report (STAT08-B24), [1-20](#), [4-64](#)
- Daily Terminal Detail Transaction Log Report (STAT06-B24), [1-19](#), [4-45](#)
- Daily Terminal Exception Detail Report, [1-20](#), [4-54](#)
- Daily Terminal Settlement Report (SETL02-B24), [1-19](#), [4-14](#)

Daily Terminal Depository Report (STAT08-B24)

- definition, [1-20](#)
- description, [4-64](#)
- field descriptions, [4-66](#)
- obey file, [4-64](#)
- perusal, [4-64](#)
- sample, [4-64](#)
- spooler location, [4-64](#)

Daily Terminal Detail Transaction Log Report (STAT06-B24)

- definition, [1-19](#)
- description, [4-45](#)
- field descriptions, [4-49](#)
- obey file, [4-45](#)
- sample, [4-46](#)
- spooler location, [4-46](#)

Daily Terminal Exception Detail Report

- definition, [1-20](#)
- description, [4-54](#)
- field descriptions, [4-55](#)
- perusal, [4-54](#)
- sample, [4-55](#)
- spooler location, [4-54](#)

Daily Terminal Settlement Report (SETL02-B24)

- definition, [1-19](#)
- description, [4-14](#)
- field descriptions, [4-22](#)
- sample, [4-15](#)
- use in accounting, [3-5](#)

Device Control Terminal (DCT)

- balancing transaction, [2-6](#)
- CRT balance and cutover, [1-10](#)
- midpoint cash adjustment, [2-5](#)
- subtotaling transaction, [2-6](#)

EEvent messages, routing code, [A-2](#)

Exception processing

- Daily Institution Exception Detail Report, [1-5](#), [1-20](#), [4-62](#)
- Daily Terminal Exception Detail Report, [1-5](#), [1-20](#), [4-54](#)
- transactions resulting in, [4-54](#), [4-62](#)

FFinancial institution cutover timer, [1-16](#), [A-7](#)

Force cutover

- methods, [1-10](#)
- processing, [2-9](#)

Force cutover timer, [1-16](#), [A-13](#)**I**Individual customer accounts, institution settlement, [3-6](#)Individual institution account, logical network settlement, [3-10](#)

Institution cutover

- configuration, [5-6](#)
- cutover order, [1-8](#)
- definition, [1-11](#)
- financial institution cutover timer, [1-16](#), [A-7](#)
- Institution Definition File (IDF), [5-7](#)
- Logical Network Configuration File (LCONF), [5-6](#)

Institution Definition File (IDF)

- cutover time, [1-11](#)
- cutover window, [1-10](#), [5-6](#)
- in initialization processing, [A-4](#), [A-5](#)
- role in settlement, [1-14](#)

Institution settlement, [3-2](#), [3-3](#)Interchange clearings account, logical network settlement, [3-11](#)

Interchange cutover
 configuration, [5-9](#)
 cutover time, defining, [1-12](#)
 Enhanced Interchange Configuration File (ICFE), [5-9](#)
 Interchange Configuration File (ICF), [5-9](#)
 Interchange due to/from account, logical network settlement, [3-11](#)
 Interchange Interface process
 interchange cutover, [1-12](#)
 reports, generating, [1-12](#)
 Interchange Log File (ILF)
 contents, [1-14](#)
 creation, [1-14](#)
 deletion, [1-14](#)
 role in settlement, [1-14](#)
 use in reporting, [4-5](#), [4-69](#)
 Interchange report generation
 by Interchange Interface process, [6-6](#)
 manually by operator, [6-7](#)
 specifying date formats, [6-7](#)
 suppressing, [6-7](#)
 Interchange reports
 Clearings Statement Report for XXXX (SETL01-XXXX), [1-21](#), [4-5](#)
 generation of, [6-6](#)
 Transaction Detail Report for XXXX (STAT09-XXXX), [1-21](#), [4-69](#)
 Interchanges, [1-6](#)

L

Log Message Configuration File (LMCF), role in settlement, [1-15](#)
 Logical network account, institution settlement, [3-7](#)
 Logical network clearings account, logical network settlement, [3-10](#)
 Logical Network Configuration File (LCONF) assigns
 ATM-SETL-MON-RPT-PROG-3-NAME, [5-11](#)
 ATM-SETL-MON-RPT-PROG-5-NAME, [5-11](#)
 ATM-SETL-RPT0-OBEY-FILE, [5-11](#)
 ATM-SETL-RPT0-PROG-1-NAME, [5-11](#)
 ATM-SETL-RPT0-PROG-2-NAME, [5-12](#)
 ATM-SETL-RPT0-PROG-4-NAME, [5-12](#)
 ATM-SETL-RPT0-PROG-6-NAME, [5-12](#)
 ATM-SETL-RPT0-PROG-7-NAME, [5-12](#)
 ATM-SETL-RPT0-PROG-8-NAME, [5-12](#)
 ATM-SETL-RPT1-OBEY-FILE, [5-11](#)
 ATM-SETL-RPT1-PROG-1-NAME, [5-11](#)
 ATM-SETL-RPT1-PROG-2-NAME, [5-12](#)
 ATM-SETL-RPT1-PROG-4-NAME, [5-12](#)
 ATM-SETL-RPT1-PROG-6-NAME, [5-12](#)
 ATM-SETL-RPT1-PROG-7-NAME, [5-12](#)
 ATM-SETL-RPT1-PROG-8-NAME, [5-12](#)
 ATM-SETL-RPT3M, [5-13](#)
 ATM-SETL-RPT3T, [5-13](#)
 ATM-SETL-RPT5M, [5-13](#)

ATM-SETL-RPT5T, [5-14](#)
 RPT, [5-14](#)
 RPT-ERROR-FILE, [5-14](#)
 SW-RPT01-PROG-NAME, [5-14](#)
 SW-RPT09-PROG-NAME, [5-14](#)
 SW-RPT-OBEY-FILE, [5-14](#)
 TLF, [5-9](#)
 Logical Network Configuration File (LCONF) params
 ATM-FCA-CUTOVER-AUDIT, [5-4](#)
 ATM-LN-CUTOVER, [5-8](#)
 ATM-NOTIFY-INTERVAL, [5-4](#)
 ATM-NOTIFY-PERCENTAGE, [5-4](#)
 ATM-RPT-CPU, [5-15](#)
 ATM-RPT-PRI, [5-15](#)
 ATM-SETL-ATD-LOCKED-RECS-SKIP, [5-4](#), [A-8](#), [A-13](#), [A-23](#)
 ATM-SETL-EXPT-RPT-FLG, [5-15](#)
 ATM-SETL-HDWRSTAT-NOTIFY, [A-3](#)
 ATM-SETL-LN-CUTOVER-LEAD-TIME, [1-11](#), [5-8](#)
 ATM-SETL-MASTER, [5-4](#)
 ATM-SETL-MIDNIGHT-NOTIFY, [5-8](#), [A-3](#)
 ATM-SETL-NOTIFY, [5-8](#), [A-3](#)
 ATM-SETL-RPT0-STARTUP, [5-15](#)
 ATM-SETL-RPT1-STARTUP, [5-15](#)
 ATM-SETL-RPT-FILE-RETENTION, [5-4](#), [5-15](#)
 ATM-SETL-TLF-EXTENTS-TO-ALLOCATE, [5-4](#)
 ATM-SETL-TLF-FILE-RETENTION, [5-4](#)
 BROADCAST-DELAY, [A-3](#)
 BROADCAST-NOTIFY, [A-3](#)
 ILF-LOGGING-ENABLED, [5-15](#)
 SETL-MASTER, [A-2](#)
 SW-RPT-STARTUP, [5-16](#)
 Logical Network Configuration File (LCONF), role in settlement, [1-15](#)
 Logical network cutover
 broadcast notification, [A-3](#)
 configuration, [5-8](#)
 cutover order, [1-8](#)
 cutover time, defining, [1-12](#)
 definition, [1-12](#)
 Logical Network Configuration File (LCONF), [5-8](#)
 logical network cutover timer, [1-16](#), [A-14](#)
 midnight cutover timer, [A-18](#)
 reports, generating, [1-12](#)
 start reports timers, [A-22](#)
 Logical network cutover timer, [1-16](#), [A-14](#)
 Logical network settlement, [3-2](#), [3-8](#)

M

Masking of sensitive data
 configuration, [5-16](#)
 overview, [1-18](#)
 Master teller account
see Vault cash account, institution settlement
 Midnight cutover timer, [A-18](#)
 Midnight timer, [1-16](#)

Monthly Institution Approved Transaction Volume Report (STAT05-B24)

definition, [1-20](#)
description, [4-43](#)
field descriptions, [4-44](#)
obey file, [4-43](#)
perusal, [4-43](#)
sample, [4-44](#)
spooler location, [4-43](#)

Monthly reports

Monthly Institution Approved Transaction Volume Report (STAT05-B24), [1-20](#), [4-43](#)
Monthly Terminal Settlement Report (SETL03-B24), [1-20](#), [4-27](#)

Monthly Terminal Settlement Report (SETL03-B24)

definition, [1-20](#)
description, [4-27](#)
field descriptions, [4-28](#)
obey file, [4-27](#)
perusal, [4-27](#)
sample, [4-28](#)
spooler location, [4-27](#)

Movement of funds, [1-3](#), [3-2](#)

N**Network participants**

ATMs, [1-5](#)
card issuers, [1-4](#)
cardholders, [1-4](#)
defining, [1-4](#)
interchanges, [1-6](#)
terminal owners, [1-6](#), [2-2](#)
terminals, [1-5](#)

O

Obey file, example, [6-4](#)

Operations

automatic BASE24-atm report generation, [6-2](#)
automatic interchange report generation, [6-6](#)
deleting report files, [6-10](#)
manual BASE24-atm report generation, [6-4](#)
manual interchange report generation, [6-7](#)
report perusal, [6-8](#)
specifying date formats, [6-5](#), [6-7](#)
suppressing BASE24-atm reports, [6-5](#)
suppressing interchange reports, [6-7](#)

R**Recommended accounts**

ATM cash account, [3-5](#)
ATM settlement account, [3-6](#)
individual customer accounts, [3-6](#)
individual institution account, [3-10](#)
interchange clearings account, [3-11](#)
interchange due to/from account, [3-11](#)
logical network account, [3-7](#)
logical network clearings account, [3-10](#)

master teller account, [3-5](#)

vault cash account, [3-5](#)

Report configuration

COBNAMEs table, [5-17](#)
Enhanced Interchange Configuration File (ICFE), [4-69](#), [5-16](#)
Institution Definition File (IDF), [5-16](#)
Interchange Configuration File (ICF), [5-16](#)
Logical Network Configuration File (LCONF), [5-11](#)

Report obey files

creation of, [6-2](#)
example of, [6-4](#)
naming convention, [6-2](#)

Report processing, start reports timers, [1-17](#)

Report programs, names of, [6-2](#), [6-6](#)

Report types

daily reports, [1-18](#), [1-19](#)
interchange reports, [1-18](#), [1-21](#)
monthly reports, [1-18](#), [1-20](#)
settlement reports, [1-18](#)
statistical reports, [1-18](#)

Reporting operations

automatic BASE24-atm report generation, [6-2](#)
automatic interchange report generation, [6-6](#)
deleting report files, [6-10](#)
manual BASE24-atm report generation, [6-4](#)
manual interchange report generation, [6-7](#)
report perusal, [6-8](#)
specifying date formats, [6-5](#), [6-7](#)
suppressing BASE24-atm reports, [6-5](#)
suppressing interchange reports, [6-7](#)

Reporting, assigns and params, [5-2](#)

Reports

Clearings Statement Report (SETL01-B24), [1-19](#), [3-7](#), [3-10](#), [3-11](#), [4-2](#)
Clearings Statement Report for XXXX (SETL01-XXXX), [1-21](#), [3-12](#), [4-5](#)
configuration of, [5-10](#)
Daily Institution Approved Transaction Volume Report (STAT04-B24), [4-29](#)
Daily Institution Detail Transaction Log Report (STAT07-B24), [1-20](#), [4-56](#)
Daily Institution Exception Detail Report, [1-20](#), [4-62](#)
Daily Institution Transaction Volume Report (STAT04-B24), [1-19](#)
Daily Terminal Depository Report (STAT08-B24), [1-20](#), [4-64](#)
Daily Terminal Detail Transaction Log Report (STAT06-B24), [1-19](#), [4-45](#)
Daily Terminal Exception Detail Report, [1-20](#), [4-54](#)
Daily Terminal Settlement Report (SETL02-B24), [1-19](#), [3-5](#), [4-14](#)
deleting report files, [6-10](#)
interchange reports, [6-6](#)
Monthly Institution Approved Transaction Volume Report (STAT05-B24), [1-20](#), [4-43](#)
Monthly Terminal Settlement Report (SETL03-B24), [1-20](#), [4-27](#)
perusal, [6-8](#)
report obey files, [6-2](#), [6-4](#)

Reports continued

- report programs, 6-2, 6-6
- report set configuration, 5-10
- Reports File (RPT) perusal, 6-8
- start reports timers, A-22
- timer processing, A-7
- Transaction Detail Report for XXXX (STAT09-XXXX), 1-21, 4-69

Reports File (RPT)

- contents, 1-14
- creation, 1-14
- deletion, 1-14
- perusal, 1-14
- report perusal, 6-8
- role in settlement, 1-13

Reports timers

- RPT0 start reports timer, A-22
- RPT1 start reports timer, A-22

Reversal transactions

- full reversals, 4-45, 4-56
- partial reversals, 4-45, 4-56

S

Sensitive data masking

- configuration, 5-16
- overview, 1-18

SETL01-B24

- see* Clearings Statement Report

SETL01-XXXX

- see* Clearings Statement Report for XXXX

SETL02-B24

- see* Daily Terminal Settlement Report

SETL03-B24

- see* Monthly Terminal Settlement Report

Settlement

- definition, 1-3
- movement of funds, 1-3, 3-2
- recommended accounts, 3-2, 3-4, 3-9
- role of BASE24-atm, 1-2

Settlement database, 1-13

Settlement Initiator process

- broadcast notification, A-3
- event messages, A-2
- initialization, A-4
- locked record processing, A-8, A-13, A-23
- Logical Network Configuration File (LCONF), A-2
- multiple copies, A-2
- params, 5-4
- product module ID, A-2
- startup logic, A-2
- text commands, A-25
- warmboot processing, A-6

Settlement operations, 6-1

Settlement reports

- Clearings Statement Report (SETL01-B24), 1-5, 1-6, 1-7, 1-19, 3-7, 3-10, 3-11, 4-2
- Clearings Statement Report for XXXX (SETL01-XXXX), 1-7, 1-21, 3-12, 4-5
- Daily Terminal Settlement Report (SETL02-B24), 1-5, 1-6, 1-19, 3-5, 4-14
- Monthly Terminal Settlement Report (SETL03-B24), 1-6, 1-20, 4-27
- Transaction Detail Report for XXXX (STAT09-XXXX), 1-21

Settlement stages

- institution settlement, 3-2, 3-3
- logical network settlement, 3-2, 3-8

Settlement tools

- settlement reports, 3-2
- statistical reports, 3-2
- Transaction Log File (TLF), 3-2

Settlement, BASE24-atm, 1-3

Start reports timers, 1-17, A-22

STAT04-B24

- see* Daily Institution Approved Transaction Volume Report

STAT05-B24

- see* Monthly Institution Approved Transaction Volume Report

STAT06-B24

- see* Daily Terminal Detail Transaction Log Report

STAT07-B24

- see* Daily Institution Detail Transaction Log Report

STAT08-B24

- see* Daily Terminal Depository Report

STAT09-XXXX

- see* Transaction Detail Report For XXXX

Statistical reports

- Daily Institution Approved Transaction Volume Report (STAT04-B24), 1-5, 1-19, 4-29
- Daily Institution Detail Transaction Log Report (STAT07-B24), 1-5, 1-20, 4-56
- Daily Institution Exception Detail Report, 1-5, 1-20, 4-62
- Daily Terminal Depository Report (STAT08-B24), 1-5, 1-6, 1-20, 4-64
- Daily Terminal Detail Transaction Log Report (STAT06-B24), 1-5, 1-6, 1-19, 4-45
- Daily Terminal Exception Detail Report, 1-5, 1-6, 1-20, 4-54
- Monthly Institution Approved Transaction Volume Report (STAT05-B24), 1-5, 1-20, 4-43
- Transaction Detail Report for XXXX (STAT09-XXXX), 1-7, 4-69

T

TDF

- see* BASE24-atm Terminal Data files

- Terminal balancing
 - administrative transactions, [2-5](#)
 - balancing totals, [2-3](#), [2-6](#)
 - definition, [1-9](#)
 - methods, [2-7](#)
 - transaction totals, [2-2](#)
 - Terminal cutover
 - configuration, [5-5](#)
 - cutover methods, [1-10](#)
 - cutover order, [1-8](#)
 - cutover window, [1-10](#), [2-7](#), [2-8](#), [5-5](#)
 - definition, [1-9](#)
 - force cutover, [2-9](#)
 - force cutover timer, [1-16](#), [A-13](#)
 - Forced Cutover Audit, [2-9](#)
 - Institution Definition File (IDF), [5-5](#)
 - Logical Network Configuration File (LCONF), [5-5](#)
 - methods, [2-8](#)
 - terminal timer, [1-17](#), [A-23](#)
 - Terminal Data File
 - see* BASE24-atm Terminal Data files
 - Terminal force cutover, definition, [2-9](#)
 - Terminal owners, [1-6](#), [2-2](#)
 - Terminal reconciliation
 - BASE24-atm's role, [2-10](#)
 - definition, [2-10](#)
 - example approach, [2-10](#)
 - institution's role, [2-10](#)
 - sample reconciliation form, [2-10](#)
 - Terminal timer, [1-17](#), [A-22](#)
 - Terminal totals
 - balancing totals, [2-3](#)
 - transaction totals, [2-2](#)
 - Terminals, [1-5](#)
 - Text commands, [A-25](#)
 - Timers
 - financial institution cutover timer, [1-16](#), [A-7](#)
 - force cutover timer, [1-16](#), [A-13](#)
 - logical network cutover timer, [1-16](#), [A-14](#)
 - midnight cutover timer, [1-16](#), [A-18](#)
 - start reports timers, [1-17](#), [A-22](#)
 - terminal timer, [1-17](#), [A-23](#)
 - Token File (TKN), role in settlement, [1-15](#)
 - Transaction Detail Report for XXXX (STAT09-XXXX)
 - definition, [1-21](#)
 - description, [4-69](#)
 - field descriptions, [4-73](#)
 - obey file, [4-69](#)
 - sample, [4-70](#)
 - spooler location, [4-69](#)
 - use in logical network settlement, [3-9](#)
 - Transaction Log File (TLF)
 - contents, [1-13](#), [2-2](#), [2-3](#), [2-5](#), [2-6](#), [2-8](#)
 - creation, [1-13](#)
 - definition, [1-2](#)
 - deletion, [1-13](#)
 - extraction, [1-13](#), [3-3](#), [3-7](#)
 - in financial institution cutover timer processing, [A-9](#)
 - in force cutover timer processing, [A-13](#)
 - perusal, [1-13](#)
 - role in settlement, [1-13](#)
 - transactions, posting, [3-3](#), [3-7](#)
 - use in reporting, [4-14](#), [4-29](#), [4-45](#), [4-54](#), [4-56](#), [4-62](#), [4-64](#)
 - Transaction totals, [2-2](#)
- ## U
- Usage Accumulation File (UAF)
 - in warmboot processing, [A-6](#)
 - role in settlement, [1-15](#)
- ## V
- Vault cash account, institution settlement, [3-5](#)