

CRT Authorization and CRT Administration Manual

BASE24-pos[®]



© 2008 by ACI Worldwide, Inc. All rights reserved.

All information contained in this documentation, as well as the software described in it, is confidential and proprietary to ACI Worldwide, Inc., or one of its subsidiaries, is subject to a license agreement, and may be used or copied only in accordance with the terms of such license. Except as permitted by such license, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of ACI Worldwide, Inc., or one of its subsidiaries.

ACI, ACI Worldwide, and the ACI product names used in this documentation are trademarks or registered trademarks of ACI Worldwide, Inc., or one of its subsidiaries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

Contents

Preface	vii
Conventions Used in This Manual	xi
1: CRT Authorization and CRT Administration	1-1
CRT Authorization Overview	1-2
CRT Authorization Device Handler	1-2
CRT Authorization Options	1-4
Debit and Credit Card Support	1-7
Draft Capture Support	1-8
Selecting Draft Capture Options	1-9
Manual Card Verification	1-10
CRT Authorization Transaction Processing	1-11
CRT Authorization from Telephone Request	1-12
CRT Authorization from Telephone Request for Merchandise Returns	1-14
CRT Authorization for Referral Override Transactions	1-16
CRT Authorization for Force Posting Transactions	1-19
CRT Administration Overview	1-21
CRT Administration Device Handler Module	1-21
CRT Administration Options	1-22
CRT Administration Transaction Processing	1-23
CRT Administration for Sales Drafts	1-23
CRT Administration for Chargebacks and Representments	1-25
CRT Terminals	1-27
Connecting To BASE24-pos	1-28
Integration with BASE24-pos Transaction Processing	1-29
CRT Authorization and Administration Reporting	1-31

2: Accessing CRT Authorization and CRT Administration Functions	2-1
CRT Authorization Screens	2-2
CRT Administration Screens	2-3
CRT Authorization Files Maintenance	2-4
Menu Selection	2-5
Security Requirements	2-9
BASE24 Security File (SEC)	2-9
CRT Authorization Security File (CSEC)	2-11
3: Online Transaction Screen	3-1
Using the Online Transaction Screen	3-2
Online Entry of Transactions	3-2
Draft Capture Options	3-3
Working Pending Transactions	3-3
Merchandise Returns	3-5
Force Post Transactions	3-6
Adjusting Transactions from the Online Transaction Screen	3-8
Accessing the PRF Screen	3-9
Online Transaction Screen Function Keys	3-10
Online Transaction Screen Description	3-12
4: Multiple Referrals Screen	4-1
Using the Multiple Referrals Screen	4-2
Reading the Referral Queue	4-2
Accessing the PRF	4-2
Multiple Referrals Screen Function Keys	4-4
Multiple Referrals Screen Description	4-5
5: POS Referral File (PRF) Screen	5-1
Using the PRF Screen	5-2
Approving and Declining Transactions	5-2
Accessing the Credibility History Screen	5-2
PRF Screen Function Keys	5-3
PRF Screen Description	5-4

6: Credibility History Screen	6-1
Using the Credibility History Screen	6-2
Inquiries from the Credit or Debit History Screens	6-2
Credit History, Debit History, and the PRF	6-3
Credibility History Screen Function Keys	6-4
Credit History Screen Description	6-5
Debit History Screen Description	6-15
7: CRT Administration Maintenance Screens	7-1
Using the CRT Administration Maintenance Screens	7-2
Entering Sales Drafts	7-2
Reversing Sales Drafts	7-2
Entering Chargebacks and Representments	7-3
CRT Administration Maintenance Function Keys	7-4
CRT Administration Maintenance Screen 1 Description	7-5
CRT Administration Maintenance Screen 2 Description	7-9
8: CRT Authorization Files Maintenance	8-1
Card History File (CHF)	8-2
Card History File (CHF) Screen 1	8-3
Card History File (CHF) Screen 2	8-12
CRT Authorization Retailer Usage File (CRUF)	8-21
CRUF Requirements	8-21
CRUF Activity Limits	8-21
Usage Accumulation	8-22
CRUF Screen Description	8-23
CRT Authorization Security (CSEC) Screen	8-26
CSEC Screen Description	8-27
Index	Index-1
Index by Field Name	Index-3
Index by Data Name	Index-7

ACI Worldwide, Inc.

Preface

This manual describes the screens and functions used with the BASE24-pos CRT Authorization and CRT Administration products. This manual is designed to assist operators working with BASE24-pos CRT Authorization and CRT Administration in performing the functions associated with these two products.

This manual also provides readers with an overview of CRT Authorization and CRT Administration. Although these two modules are separate products, both modules are used in conjunction with BASE24-pos. Since these two products must be purchased separately, they are treated individually in this manual.

Audience

This publication has been prepared for those persons in an institution who use the CRT Authorization and CRT Administration products for transaction processing. It also provides both executives and technical personnel with an overview of the two products.

Prerequisites

Readers should be familiar with the *BASE24 User Security Manual* before reading this manual. The *BASE24 User Security Manual* provides readers with information about logging on to BASE24, accessing appropriate screens, and using function keys.

Since the two products are used with BASE24-pos, readers of this manual should be familiar with the BASE24-pos product.

Additional Documentation

The BASE24 documentation set is arranged so that each BASE24 manual presents a topic or group of related topics in detail. When one BASE24 manual presents a topic that has already been covered in detail in another BASE24 manual, the topic is summarized and the reader is directed to the other manual for additional

information. Information has been arranged in this manner to be more efficient for readers who do not need the additional detail and at the same time provide the source for readers who require the additional information. This manual contains references to the following BASE24 publications:

- The ***BASE24 User Security Manual*** describes the BASE24 menu structure and standard function keys. It also describes BASE24 security.
- The ***BASE24 Base Files Maintenance Manual*** contains additional information about BASE24 files maintenance.
- The ***BASE24-pos Transaction Processing Manual*** contains a complete list of response codes, transaction codes and transaction identifiers.
- The ***BASE24-pos Files Maintenance Manual*** contains information about the POS Retailer Definition File (PRDF).
- The ***BASE24-pos Settlement and Reporting Manual*** describes in detail the BASE24-pos reports.

This manual also contains references to the ISO 4217 standard, ***Codes for the Representation of Currencies and Funds***.

Software

This manual documents standard processing as of its publication date. Software that is not current and custom software modifications (CSMs) may result in processing that differs from the material presented in this manual. The customer is responsible for identifying and noting these changes.

Manual Summary

The following is a summary of the contents of this manual.

“Conventions Used in this Manual” follows this preface and describes notation and documentation conventions necessary to understand the information in the manual.

Section 1, “CRT Authorization and CRT Administration,” provides separate broad overviews of each product. It discusses the Device Handler modules used with each product, the processing options available, the files used during transaction processing, the types of terminals that can be used with the products, the relationship between these two products and BASE24-pos, and the reports used to monitor each product. Section 1 also includes scenarios describing transaction processing using CRT Authorization and CRT Administration.

Section 2, “Accessing CRT Authorization and CRT Administration

Functions,” contains information about accessing the screens associated with the CRT Authorization and CRT Administration products. This section provides brief introductions to the BASE24 screens used to perform CRT Authorization or CRT Administration functions, along with instructions on how the CRT operator can access the CRT Authorization or CRT Administration screens using the BASE24 virtual and product menus.

Section 3, “Online Transaction Screen,” provides information about using the Online Transaction screen, including a sample screen, function key descriptions, and a description of the screen’s functionality.

Section 4, “Multiple Referrals Screen,” provides information about using the Multiple Referrals screen. This includes a sample screen, function key descriptions, and a description of the screen’s functionality and its relationship to other screens.

Section 5, “POS Referral File (PRF) Screen,” provides information about using the PRF screen. This includes a sample screen, function key descriptions, and a description of the screen’s functionality and its relationship to other screens.

Section 6, “Credibility History Screen,” provides information about using the credibility screen for credit and debit transactions. This includes a sample screen, function key descriptions, and a description of the screen’s functionality and its relationship to other screens.

Section 7, “CRT Administration Maintenance Screens,” provides documentation on the individual screens used to perform CRT Administration functions. This section describes the functionality of the screens, their relationships to other screens, and the function keys and their usage on the specific screens. This section also includes a sample of each screen, along with its field descriptions.

Section 8, “CRT Authorization Files Maintenance,” describes file maintenance functions for the files used exclusively for BASE24-pos CRT Authorization. The file maintenance functions described in this section are designed to allow a person familiar with BASE24 CRT access and files maintenance to set up the necessary records in the CRT Authorization files and also to update these records. The functions described in this section should only be performed by authorized personnel.

Readers can use the index by field name to locate information about a particular screen field and the index by data name to locate information about a particular field from a file or record structure.

Publication Identification

Three entries appearing at the bottom of each page uniquely identify this BASE24 publication. The publication number (for example, PS-DP130-01 for the *BASE24-pos CRT Authorization and CRT Administration Manual*) appears on every page to assist readers in identifying the manual from which a page of information was printed. The publication date (for example, Dec-2008 for December, 2008) indicates the issue of the manual. The software release information (for example, R6.0v9 for release 6.0, version 9) specifies the software that the manual describes. This information matches the document information on the copyright page of the manual.

Conventions Used in This Manual

This section explains how field descriptions and unlabeled fields on screens are documented in this manual.

Field Descriptions

Each field appearing on a files maintenance screen is listed by name and then described. Field descriptions briefly summarize the contents, purpose, and permissible values, as shown in the following example taken from the Online Transaction screen.

Example

TRAN CODE — A code identifying the type of transaction being attempted. Valid values are as follows:

CA = Cash advance
CV = Card verification
MO - Mail or telephone order
MR = Merchandise return
NP = Normal purchase
PC = Purchase with cash back

Field Length: 2 alphabetic characters
Required Field: Yes
Default Value: NP (Normal purchase)
Data Name: PTLF.AUTH.TRAN-CDE.TC

Explanation

Each field description is completed by one or more of the following items of information:

Item	Description
Example	Illustrates a possible entry for the field to further clarify the value or values that can be entered.
Field Length	Specifies the size of the field and the type of characters that can be entered. This length refers to the field and valid values for the file maintenance screen, not the field in the DDLs. Possible values are alphabetic, alphanumeric, hexadecimal, and numeric. The term <i>alphanumeric</i> includes all alphabetic, numeric, and special characters that can be entered from a keyboard without using a control sequence. The term <i>hexadecimal</i> includes all numbers and the letters A through F. When a field value cannot be modified by the operator, the field length is System protected.
Occurs	Indicates the number of times the field can be displayed on the screen. This information is provided only when the field can be displayed multiple times.
Required Field	Specifies whether a value has to be entered in the field. Possible values are Yes and No. Some fields are required only under certain conditions. In this case, the entry is Yes, followed by the conditions that determine when the field is required.
Default Value	Specifies the value that is automatically placed in the field when the screen is first displayed or when the F8 key is pressed to clear the screen.
Data Name	Provides the DDL name associated with the field appearing on the screen. Data names are included in the documentation to assist in communicating screen and field issues to your technical staff. Note that screen data is not always stored in the BASE24 database as it appears on the screen or as it is described in the field description. If you need information on how screen data is actually stored, consult the DDLs.

Unlabeled Fields on Screens

Angle brackets (< >) indicate an unlabeled field on a screen. An unlabeled field is a field that is present on a screen but is not preceded by an identifying literal label. For the purposes of documenting the field, a label has been assigned and appears inside the angle brackets. A multiple line unlabeled field is displayed as a shaded area and also has a label in angle brackets.

In the field descriptions for the screen, the unlabeled field appears according to its place on the screen and is identified by the same label.

Unlabeled fields are not included in the index by field name; they appear by subject in the main index.

ACI Worldwide, Inc.

1: CRT Authorization and CRT Administration

CRT Authorization and CRT Administration are two products that can be used as add-ons to BASE24-pos to allow CRT operators to authorize and process certain types of transactions.

This section provides an overview of each product. The following pages describe the functions of the BASE24-pos CRT Authorization and BASE24-pos CRT Administration add-on products, the relationship each product has to BASE24-pos transaction processing, and how each product is connected to a BASE24-pos system. Also provided is a list of the BASE24-pos reports that include CRT Authorization and CRT Administration activity, a description of the processing options available with each product, and an overview of the terminals that can be used with the products.

CRT Authorization Overview

The BASE24-pos CRT Authorization add-on product enables financial institutions to design their own in-house system to authorize transactions and referrals, examine transactions and referrals, and monitor cardholder credit and debit account history. With the CRT Authorization add-on product, financial institutions can tailor their systems to meet their own needs and the needs of their specific cardholders without having to depend on outside authorization centers. Additional benefits and features provided by CRT Authorization include the following:

- The ability to accommodate large quantities of transactions having different processing needs quickly and with relative ease.
- High authorization availability in the event of terminal failure at a customer site.
- An interface to the merchant who does not have a POS terminal.
- Support of debit and credit cards.
- Support of draft capture options to either authorize transactions only or to authorize transactions and electronically capture them for settlement purposes.
- Support of force post options.
- Easy access to cardholder debit and credit account history, balance, and funds or credit availability.
- The ability to process merchandise return transactions.
- The ability to process multiple outstanding transaction requests at a single CRT terminal.

CRT Authorization Device Handler

The BASE24-pos CRT Authorization add-on product is controlled by a special Device Handler module which is bound with a standard BASE24-pos Router/Authorization process. This Device Handler enables transactions to be entered at remote terminals for authorization. These transactions are entered by operators from incoming telephone calls on formatted BASE24 screens.


Operators also can use CRT Authorization to process referral transactions. The Router/Authorization process can refer transactions that cannot be authorized based on cardholder information contained in the BASE24-pos database. Once a

transaction has been referred, the Router/Authorization process logs the transaction to the POS Transaction Log File (PTLF) and writes it to the POS Referral File (PRF).

Then, when a call is received from a merchant, an operator can retrieve the referred transaction from the PRF using formatted BASE24 screens. These screens provide easy access to cardholder history for both debit and credit cards, account balances, and funds or credit availability information. Based on this information, which is taken from the Cardholder Authorization File (CAF), the Card History File (CHF), and the Positive Balance File (PBF), the operator can either approve or decline the transaction by pressing the appropriate function key. This action is then recorded in the PTLF, and the PRF record is deleted.

Transactions being displayed on the Online Transaction screen are contained in the Terminal Queue File (TQF). The TQF contains one record for every terminal that is used to perform CRT Authorization. Each record contains information about the particular terminal, including the current transactions that are displayed on it. Transactions processed during online entry (from the Online Transaction screen) are automatically written to the TQF. Operators cannot alter the TQF using the CRT Authorization screens; it is updated automatically each time a transaction is performed from the Online Transaction screen. The lower portion of the Online Transaction screen displays a disk image of the online transaction queue. This queue holds up to seven transactions at a time. As transactions are processed, the oldest transaction with an authorization response is dropped from the queue and new transactions are added to the top of the queue.

The diagram below shows the BASE24-pos elements involved with CRT Authorization.

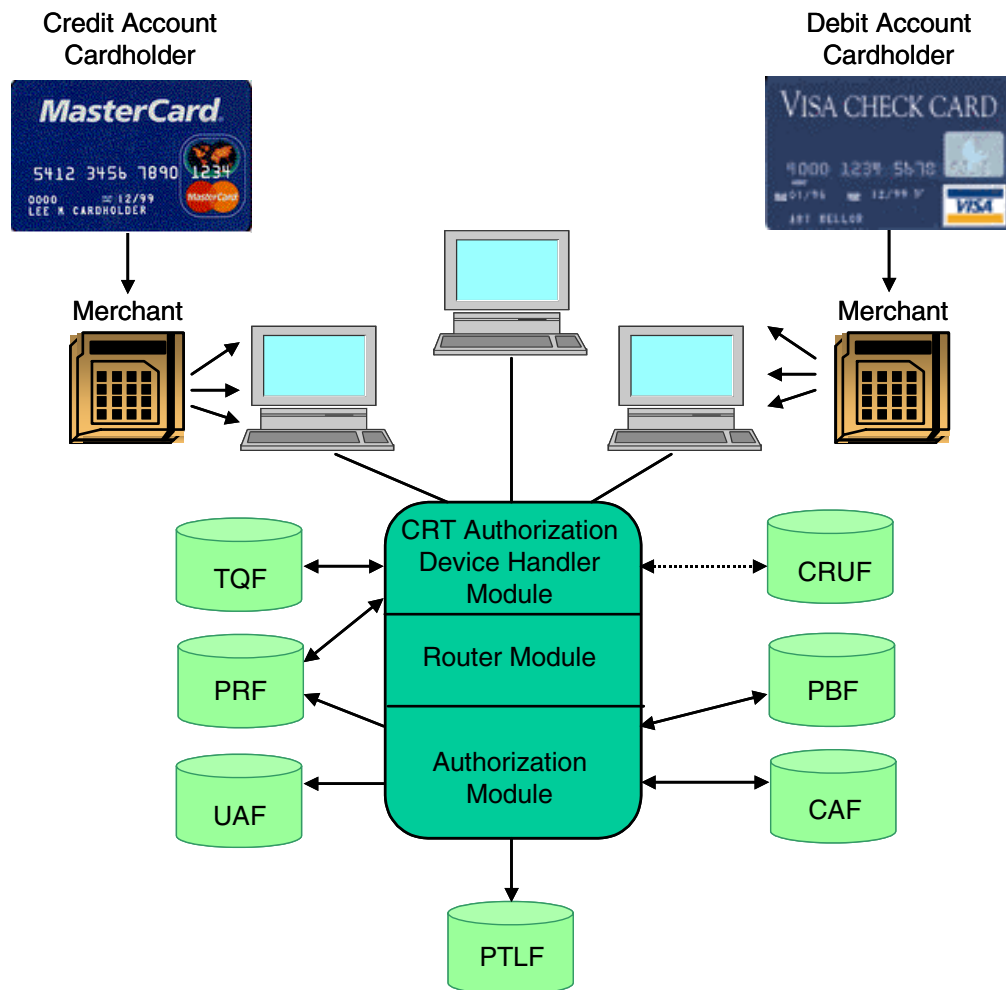

CRT Authorization Options

CRT Authorization allows operators to perform several authorization functions through the use of BASE24 menus, screens, and function keys. Operators can enter transactions for authorization resulting from telephone requests, perform adjustments and reversals, cancel pending transactions, perform force posts on transactions, process referral requests, and review cardholder balance and history records. The screens used to perform these functions are described later in this manual.

Depending on the function being performed, operators can either enter information on a formatted screen accessed through a series of menus or they can select it from data being displayed on the screen. In either case, the information is routed through normal BASE24-pos authorization channels. Authorization responses are returned to the BASE24 screen for the operator to relay to the merchant. Normal purchase transactions, purchase with cash back transactions, merchandise return transactions, mail or telephone order transactions, cash advance transactions, adjustments, or card verification transactions can be entered from the CRT Authorization Online Transaction screen.

Transaction authorizers use response codes to indicate the outcome of a transaction. These codes indicate whether a transaction authorizer approved, declined, or referred the transaction and, if declined, the reason it was declined. When a transaction is authorized, the authorizer returns the response code to inform the party requesting the authorization of the outcome of the transaction and any actions to be taken, if necessary. These response codes that are displayed on the CRT Authorization terminal allow CRT operators to relay the correct response to the merchant. For a complete listing of response codes, refer to the *BASE24-pos Transaction Processing Manual*.

The following paragraphs describe the options that can be used with CRT Authorization.

Authorizations from Telephone Requests

Authorization resulting from a telephone request occurs when a cardholder wishes to make a normal purchase, a mail or telephone order purchase, a cash advance, a card verification, or a merchandise return. The merchant calls the authorization center for authorization, and the CRT operator enters the transaction on the Online Transaction screen. The CRT operator then receives an authorization through BASE24-pos (locally or routed through an interchange or host), and returns a response to the merchant indicating whether the transaction was approved, declined, or referred.

Adjustments and Reversals

Operators can perform adjustments (either full or partial) and reversals from the Online Transaction screen. Adjustments can be performed on pending transactions (transactions that have not yet been purged from the TQF) or they can be entered directly on the Online Transaction screen at a later time. If the operators have

appropriate security clearance, they can perform adjustments on transactions that have been force posted. Operators also can perform reversals on transactions that have been previously authorized.

Canceling Transactions

Operators can cancel transactions from the Online Transaction screen display queue. Only open transactions (transactions that have not received responses from an authorizing entity) can be canceled from the Online Transaction screen.

Force Posting Transactions

If operators have the appropriate security clearance, they can force post transactions from the Online Transaction screen. Force posting is the manual posting of a transaction to an account. For example, if a POS device becomes inoperable but a merchant wants a transaction to be posted for settlement purposes, an operator can perform this function by entering the transaction on the Online Transaction screen and pressing the appropriate function key. Force post transactions also can be adjusted by entering the transaction directly on the Online Transaction screen.

Note: The introduction of force post capabilities to CRT Authorization provides users with added flexibility in authorizing transactions under a merchant floor limit. This capability, if used in conjunction with a point-of-sale terminal, may result in duplicate transaction posting under the following condition.

If a merchant is authorizing transactions using a POS terminal that uses merchant and terminal floor limits in a draft capture environment, transactions are typically stored in terminal memory and later sent to BASE24 as force post draft capture transactions. In the event that the terminal becomes inoperable before these transactions are sent to BASE24, merchants may want to enter these transactions into BASE24 using CRT Authorization in order to receive immediate draft capture credit for the transactions. These transactions can be duplicate posted by BASE24 if the POS terminal resends the transactions to BASE24 when the terminal becomes operable.

Referral Processing

Referral processing is the manual approval or decline of a transaction that has been referred to the operator because the merchant cannot complete the authorization. Operators can override the transaction and either approve or decline the referral, based on additional information from BASE24 screens. Referral processing is used when human intervention is required in order to complete a transaction. Through use of a referral number, operators can access the customer account and transaction balance and history. This information can then be used to determine if a transaction should be approved or declined. Three CRT Authorization screens can be accessed to perform referral functions. The Multiple Referrals screen is used to examine referrals for a specific retailer and date. The POS Referral File (PRF) screen is used to approve or decline the referral. The Credibility History screen is used to obtain additional cardholder credit or debit account information, based on the credit or debit account history of the cardholder.

Referrals that have entered the CRT Authorization queue prior to cutover can be addressed after cutover has been completed.

Debit and Credit Card Support

BASE24-pos CRT Authorization enables CRT operators to accept requests for transactions being performed with credit or debit cards accessing credit or noncredit accounts. Credit accounts are defined in the BASE24 system as accounts that involve funds advanced to an accountholder, by a financial institution or retailer, based on a credit agreement with the accountholder. Credit cards are the tools used to access credit accounts. Noncredit accounts are defined in the BASE24 system as accounts that involve accountholder funds on deposit with a financial institution. Noncredit accounts are savings and checking accounts. Debit cards are the tools used to access noncredit accounts. Debit cards can be used to access both credit and noncredit accounts.

The support of debit cards for voice authorization implies that a financial institution is willing to accept debit cards without the entry of a personal identification number (PIN). This may not be acceptable to all financial institutions. Therefore, the support of debit cards through BASE24-pos CRT Authorization is optional. Each financial institution has the flexibility of deciding, on a retailer basis, whether transactions requests using debit cards can be accepted using the CRT Authorization product. A flag can be set by the financial institution in the POS Retailer Definition File (PRDF), using files maintenance functions, to indicate whether debit card transactions are supported through CRT Authorization for a particular retailer. If the financial institution allows the support of debit cards through CRT Authorization, the debit cards that can be accepted must be defined

by the financial institution in the PRDF. When operators receive calls from merchants who are requesting authorization of transactions being attempted using debit cards, they can enter the transactions online (using the Online Transaction screen) and perform normal processing.

Draft Capture Support

BASE24-pos CRT Authorization supports both credit and noncredit accounts in processing retailer transactions as draft capture or non-draft capture. Non-draft capture transactions are transactions for which the paper receipt represents the actual settlement instrument. These items must be physically presented for deposit in order to be settled. Draft capture transactions are electronically captured at the time of the transaction and are sufficient in themselves to enact a funds transfer for the transaction amount. Draft capture is a settlement tool only. It has no impact on the authorization of transactions.

The draft capture method selected indicates whether the transaction amount is to affect balances immediately. Two environments can exist using BASE24-pos CRT Authorization; authorization only and authorization and draft capture.

Authorization Only

The purpose of an authorization only environment using CRT Authorization is to obtain an authorization for the amount of the transaction requested. The paper receipt arrives sometime after the transaction has been authorized to settle this transaction. The card issuer requires paper follow-up before posting the transaction and settling with the retailer. If a card type is set up with this option, none of the transactions for this card type from the specified terminal can be draft capture. Therefore, this is a non-draft capture environment. In this environment, transactions are logged to the POS Transaction Log File (PTLF), indicating the transaction is an authorization only transaction.

Authorization and Draft Capture

The purpose of an authorization and draft capture environment using CRT Authorization is to perform an authorization on the transaction and at the same time automatically capture the draft electronically. By using electronic draft capture, no paper follow-up is required by the card issuer to post the transaction and settle with the retailer.

Selecting Draft Capture Options

BASE24-pos CRT Authorization allows CRT operators to accept and process transaction requests as authorization only or authorization and draft capture. The draft capture method used can be determined in two ways. Operators can enter a value using the Online Transaction screen to select the draft capture method that is used for a specific transaction. If the value on the Online Transaction screen is blank, BASE24 uses the draft capture value set by the financial institution in the POS Retailer Definition File (PRDF).

Draft Capture Entry

If operators have security access to the Online Transaction screen, they can accept transaction requests as draft capture items by entering a value in the DRAFT CAPTURE field. The following values can be entered in the DRAFT CAPTURE field:

0 = Authorization only
1 = Authorization and draft capture
blank = Use PRDF value

A value of 0 entered in this field allows the transaction to be authorized only. This is a non-draft capture option. A value of 1 in this field allows authorization of the transaction and immediate draft capture. If this field is blank, the draft capture value set in the PRDF is used. A value of 0 or 1 entered in the DRAFT CAPTURE field on the Online Transaction screen overrides the draft capture option defined in the PRDF.

Note: The DRAFT CAPTURE field on the Online Transaction screen is set up at installation (through COBNAMES) to default to blank (use PRDF value). This default may be altered at the financial institution's discretion by changing the draft capture value in COBNAMES to either 0 (authorization only) or 1 (authorization and draft capture). COBNAMES should only be modified by authorized personnel and requires that the affected modules be recompiled.

PRDF Draft Capture

Financial institutions can set up draft capture options for CRT Authorization using files maintenance in the PRDF. The draft capture value in the PRDF is designed to be a default value used exclusively for BASE24-pos CRT Authorization and can be overridden by entering a value in the DRAFT CAPTURE field on the Online Transaction screen. The PRDF draft capture value is considered a default value. If

a value is entered in the DRAFT CAPTURE field on the Online Transaction screen, that draft capture value is used by BASE24 during transaction processing. However, if the DRAFT CAPTURE field is left blank on the Online Transaction screen, the draft capture value set by the financial institution in the PRDF is used.

The draft capture value in the PRDF is set by the financial institution for each card type at the retailer level. The draft capture value in the PRDF is used exclusively for CRT Authorization transactions to indicate whether draft capture is supported or if transactions are only to be authorized. Refer to the ***BASE24-pos Files Maintenance Manual*** for more information about the PRDF.

Manual Card Verification

The CRT Authorization add-on product supports manual card verification in which the merchant manually enters the card verification digits (CVD) printed on the back of the credit or debit card. This value is entered on a CRT Authorization screen along with an indicator that the manual card verification value is present. Once the transaction is completed, the BASE24 manual CVD result is displayed on the Online Transaction screen.


CRT Authorization Transaction Processing

Transactions entered using the CRT Authorization screens appear in the system as normal point-of-sale (POS) transactions. This includes normal purchases, purchases with cash back, merchandise returns, mail or telephone order purchases, card verification, and cash advances. The transaction scenarios contained on the following pages illustrate the steps that are typically taken through the major processes during CRT Authorization for the following:

- An authorization request by telephone
- An authorization request by telephone for a merchandise return
- A referral override
- A force post transaction

CRT Authorization from Telephone Request

The following scenario illustrates the steps typically taken during CRT Authorization of transactions initiated from telephone requests. The scenario is shown below, followed by an explanation of its steps.

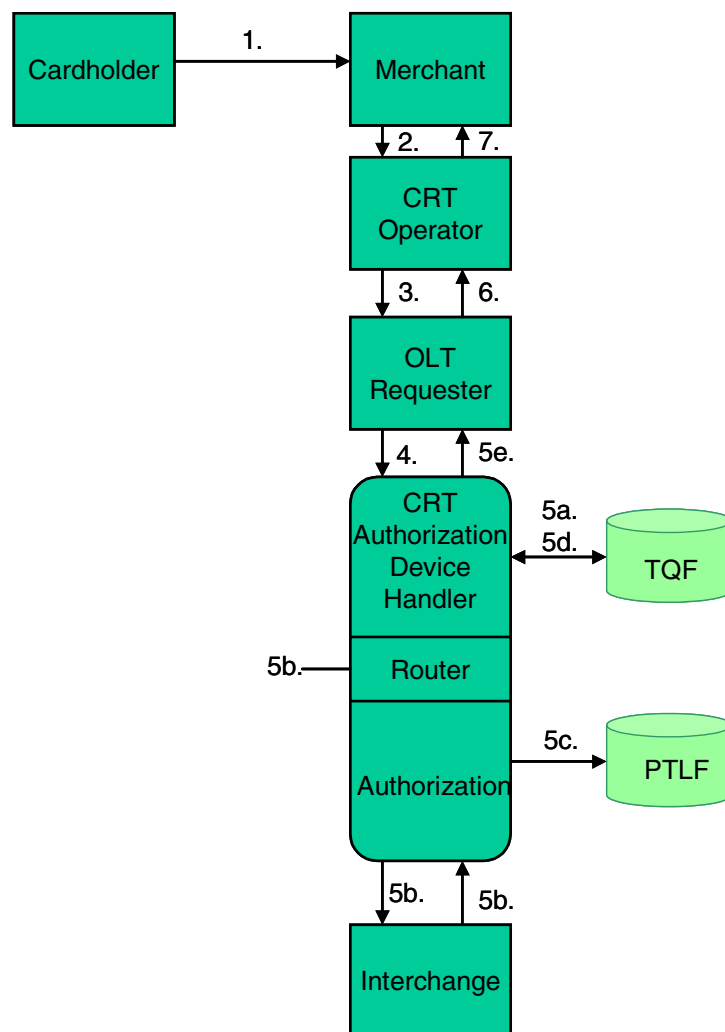


1. The cardholder attempts a normal purchase, a mail or telephone order purchase, or a cash advance.
2. The merchant calls in a transaction request to the authorization center. The merchant might also call in a card verification for the transaction.
3. The authorization center operator enters the transaction online from the Online Transaction screen and presses **F1** to send the transaction for authorization.

4. The OLT requester, controlling the Online Transaction screen, checks the transaction for security access then formats a CRT Device Handler message and sends it to the CRT Authorization Device Handler/Router/Authorization process.
5. The CRT Authorization Device Handler/Router/Authorization process performs as follows:
 - a. Writes the transaction to the TQF. The TQF tracks the seven most recent transactions processed at the terminal.
 - b. Handles the processing either sending the transaction to an interchange or host or authorizing it locally.
 - c. Logs the transaction to the POS Transaction Log File (PTLF).
 - d. Updates the Terminal Queue File (TQF) to indicate the transaction has been authorized.
 - e. Formats an authorization response message and sends it to the OLT requester.
6. The OLT requester returns the response to the BASE24 screen.
7. The operator relays the authorization response to the merchant.

CRT Authorization from Telephone Request for Merchandise Returns

The following scenario illustrates the steps typically taken during CRT Authorization of transactions initiated from a telephone request involving a merchandise return transaction. The scenario is shown below, followed by an explanation of its steps.

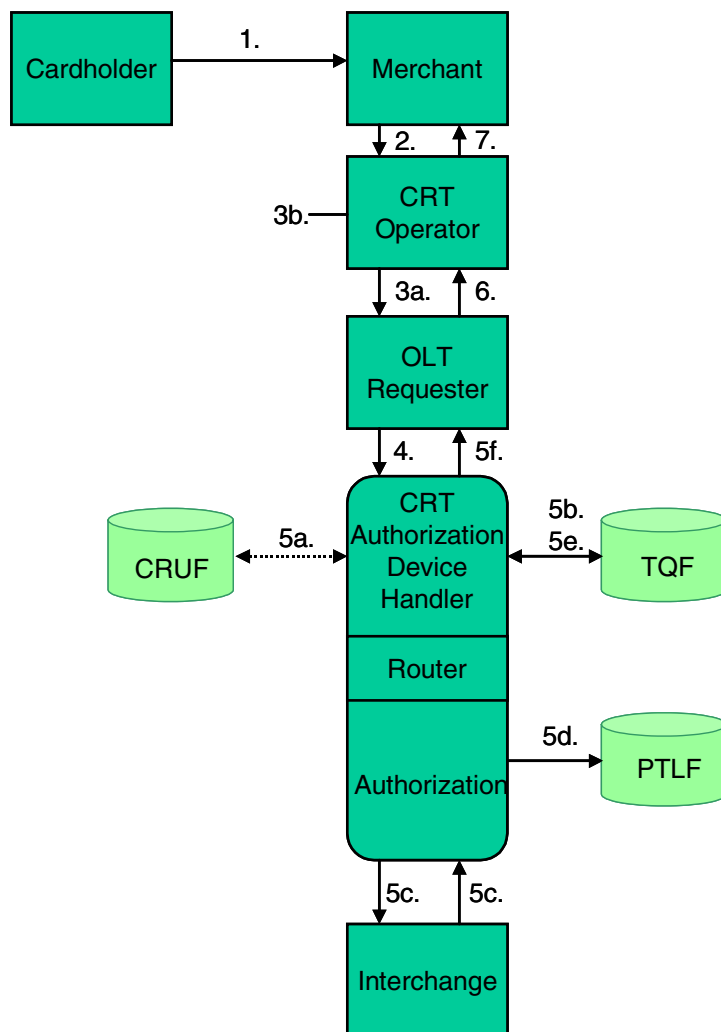


1. The cardholder attempts to return merchandise.
2. The merchant calls in a merchandise return transaction request to the authorization center.

3. The authorization center operator performs the following:
 - a. Enters the transaction online from the upper portion Online Transaction screen or selects the transaction from the lower portion of the screen by positioning the cursor next to the transaction and pressing the **F2** key.
 - b. Once the transaction is displayed in the upper portion of the OLT, the operator can perform a merchandise return by entering MR in the TRAN CODE field.
4. The OLT requester, controlling the Online Transaction screen, checks the transaction for security access then formats a CRT Device Handler message and sends it to the CRT Authorization Device Handler/Router/Authorization process. If the transaction is new, an authorization request transaction (0200) is generated.
5. The CRT Authorization Device Handler/Router/Authorization process performs as follows:
 - a. Updates the accumulation fields in the CRT Authorization Retailer Usage File (CRUF), if a CRUF is being used for this merchant. The accumulated amount of merchandise return transaction activity for a single usage accumulation period is compared to the activity limits set by the financial institution for this specific retailer. If the accumulated amount or count, including the transaction being performed, exceeds the activity limits for an 0200 (authorization request transaction), the transaction is declined with a response code of 253 (Declined—CRT Auth Merchandise Return Limits Exceeded). If the transaction is a 0220 (force post or referral override), the transaction is not declined, but rather sent to Router/Authorization for processing.
 - b. Writes the transaction to the TQF. The TQF tracks the seven most recent transactions processed at the terminal.
 - c. Handles the processing either sending the transaction to an interchange or host or authorizing it locally.
 - d. Logs the transaction to the POS Transaction Log File (PTLF).
 - e. Updates the Terminal Queue File (TQF) to indicate the transaction has been authorized.
 - f. Formats an authorization response message and sends it to the OLT requester.
6. The OLT requester returns the response to the BASE24 screen.
7. The operator relays the authorization response to the merchant.

CRT Authorization for Referral Override Transactions

Referral processing is the manual approval or decline of a transaction that has been referred to an authorization center because the authorizer does not have enough information to complete the authorization. Authorization has already been completed on referral transactions, but the authorization response received by the merchant from the authorizing entity indicates to call the authorization center in order to have the transaction approved or declined.

The following scenario illustrates the steps typically taken during CRT Authorization of referral transactions. The scenario is shown below, with its steps described on the following page.

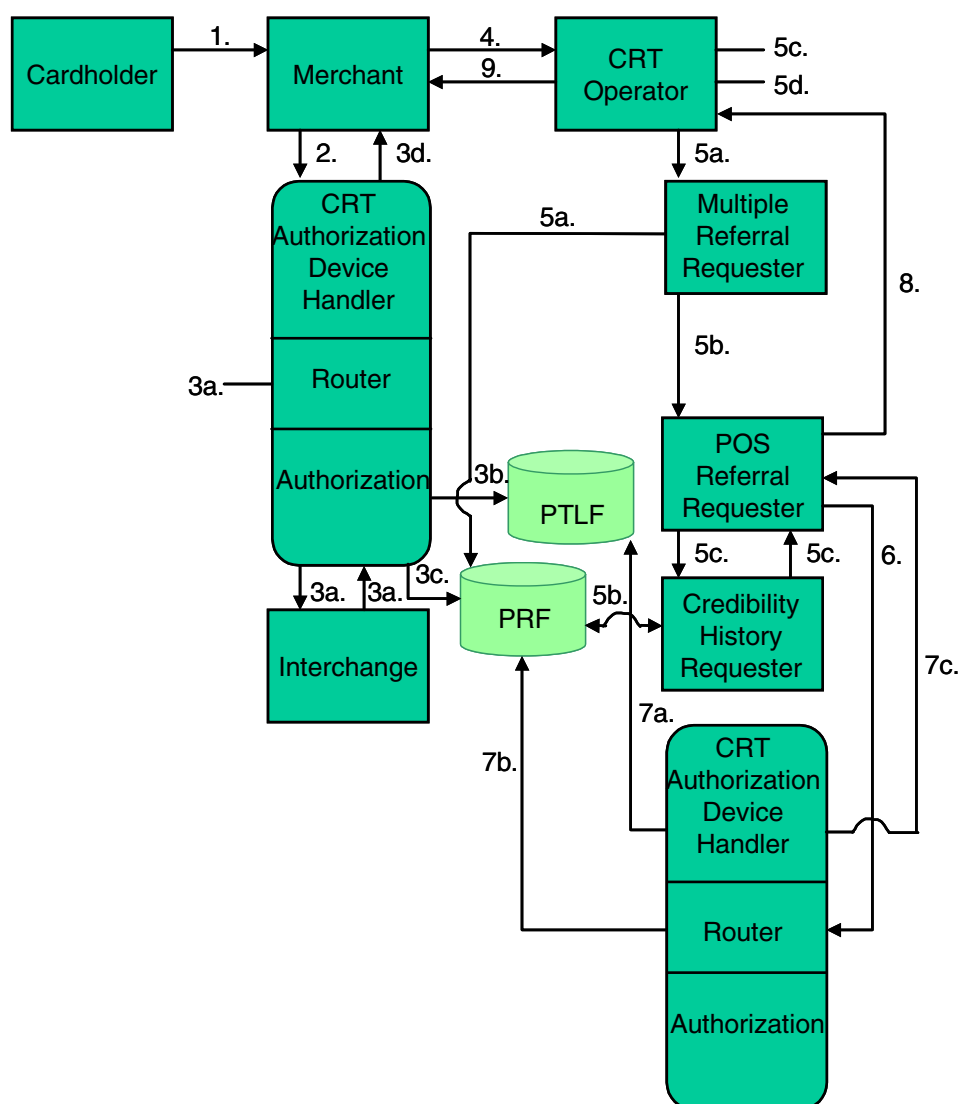


1. The cardholder attempts a POS transaction.
2. The merchant swipes the card through the POS device, which sends the transaction to a BASE24-pos Device Handler/Router/Authorization process for automated authorization.
3. BASE24-pos Device Handler/Router/Authorization process performs as follows:
 - a. Handles the processing either sending the transaction to an interchange or host or authorizing it locally. In this case, the authorizing entity (BASE24, interchange, or host) determines that it cannot authorize the transaction because it does not have enough information about the cardholder or the transaction, and gives the transaction a referral response code.
 - b. Logs the transaction to the POS Transaction Log File (PTLF)
 - c. Writes the transaction to the POS Referral File (PRF). When a referral is generated, it is written to the PRF by the BASE24-pos Device Handler/Router/Authorization process.
 - d. Sends an authorization response to the merchant's POS device, indicating to the merchant to call the authorization center in order to obtain an approval or denial of the transaction.
4. The merchant calls in the referral to the authorization center.
5. The authorization center operator performs the following:
 - a. Accesses the Multiple Referrals screen, enters the retailer ID, and presses the **F2** key. This displays all the referrals currently in the PRF for the retailer ID entered.
 - b. Selects the referral from the list displayed on the screen and presses the **F1** key. This retrieves the appropriate referral from the PRF and displays it on the PRF screen.
 - c. Determines from information contained on the PRF screen if the transaction should be approved or declined. (If additional information is needed in order to make a determination, the operator can press the **F14** key to access the Credibility History screen.
 - d. Presses the **F4** key to approve the transaction or the **F7** key to decline the transaction.
6. The PRF requester checks the transaction for security access then formats a CRT Device Handler Message and sends it to the CRT Authorization Device Handler/Router/Authorization process.

7. The CRT Authorization Device Handler/Router/Authorization process performs as follows:
 - a. Retrieves the referred transaction from the PRF (note that the referral may be retrieved from the previous day's PRF if the referred transaction took place before cutover).
 - b. Creates a force post transaction and logs it to the PTLF (the CRT Device Handler Message received from the PRF requester indicates to the CRT Authorization Device Handler that this is a force post transaction originating from the PRF).
 - c. Deletes the transaction from the PRF.
 - d. Formats a message to reply to the PRF requester.
8. The PRF requester updates the CRT screen with authorization information for this referral.
9. The operator relays the authorization response to the merchant.

CRT Authorization for Force Posting Transactions

The following scenario illustrates the steps typically taken during CRT Authorization when force posting a transaction. The scenario is shown below, followed by an explanation of its steps.

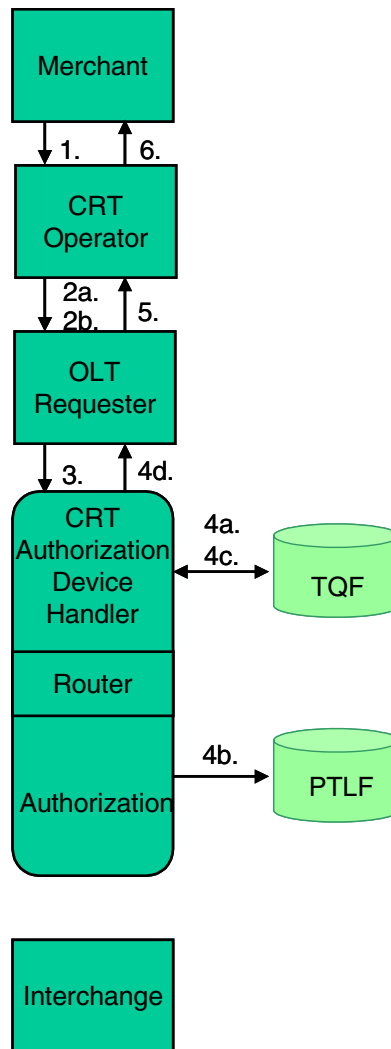

1. The merchant calls in a transaction request to the authorization center, indicating to the operator that this transaction must be force posted because the transaction has already taken place.

2. The authorization center operator performs the following:
 - a. Enters the transaction online from the Online Transaction screen.
 - b. Makes changes as necessary. At least one item of data must be changed before the transaction can be sent for force posting.
 - c. Presses the **Shift-F1** key to send the transaction for force posting.
3. The OLT requester, controlling the Online Transaction screen, checks the transaction for security access then formats a CRT Device Handler message and sends it to the CRT Authorization Device Handler/Router/Authorization process.
4. The CRT Authorization Device Handler/Router/Authorization process performs as follows:
 - a. Writes the transaction to the Terminal Queue File (TQF), if it is not already residing there. The TQF tracks the seven most recent transactions processed at the terminal.
 - b. Creates a force post transaction and sends the transaction to Router/Authorization which logs it to the POS Transaction Log File (PTLF).
 - c. Updates the TQF.
 - d. The CRT Authorization Device Handler process formats an authorization response message and sends it to the OLT requester.
5. The OLT requester updates the BASE24 operations screen with authorization information for this transaction.
6. The operator relays the authorization response to the merchant.

CRT Administration Overview

BASE24-pos CRT Administration provides financial institutions with the ability to handle three additional types of transactions: sales drafts, chargebacks, and representments. Sales draft transactions represent transactions occurring without the cardholder being present. Sales draft transactions are processed like normal BASE24-pos transactions. Chargebacks and representments are transactions that are directly related to the initiation and rebuttal of disputes regarding previous transactions. Chargebacks are transactions that have been disputed by the cardholder and are being charged back to the acquiring institution. Representments are transactions that have been disputed by the cardholder, but the acquiring institution has determined that the transaction is accurate as it stands and is representing the transaction for settlement. These transactions are entered using BASE24 screens for processing by an authorized CRT operator.

CRT Administration Device Handler Module

CRT Administration is controlled by a special Device Handler module, which is bound with a standard BASE24-pos Router/Authorization process. This Device Handler module enables the entry of sales drafts, chargebacks, and representments on formatted BASE24 screens by operators. Once a transaction has been identified as a sales draft, chargeback, or representment, the operator enters the transaction online on the appropriate CRT Administration Maintenance screens. The Device Handler/Router/Authorization process also is responsible for logging transactions to the POS Transaction Log File (PTLF) and the Administrative Queue File (AQF). The AQF keeps a mirror image of the most recent transaction being processed by the CRT Administration system. In this way, the most recent transaction can be retrieved from the AQF if it needs to be processed further or an entry error occurred.


The last transaction entered on the CRT Administration Maintenance screen is automatically written to the Administrative Queue File (AQF). The Administrative Queue File (AQF) contains one record for each CRT terminal used to perform CRT Administration functions. Each record contains information about the particular CRT terminal and the transaction that was last entered on it. When a new transaction is logged to the AQF, the transaction existing on the AQF is overwritten with the new transaction. The AQF queues only one transaction at a time. The AQF cannot be altered by the operator and is updated with each transaction entered on the CRT Administrative Maintenance screens. The AQF is a disk image of the last transaction entered on the CRT Administrative

Maintenance screen. The last transaction entered on the screen can be retrieved from the AQF by pressing the **F4** key from the CRT Administrative Maintenance screen. In this way, the last transaction entered can be reversed, if necessary.

CRT Administration Options

CRT Administration enables operators to perform several authorization functions through the use of BASE24 menus, screens, and function keys. They can enter sales drafts, representments, or chargebacks. They also can perform reversals on sales drafts. The screens used to perform these functions are described later in this manual.

The following diagram shows the BASE24-pos elements involved with CRT Administration.

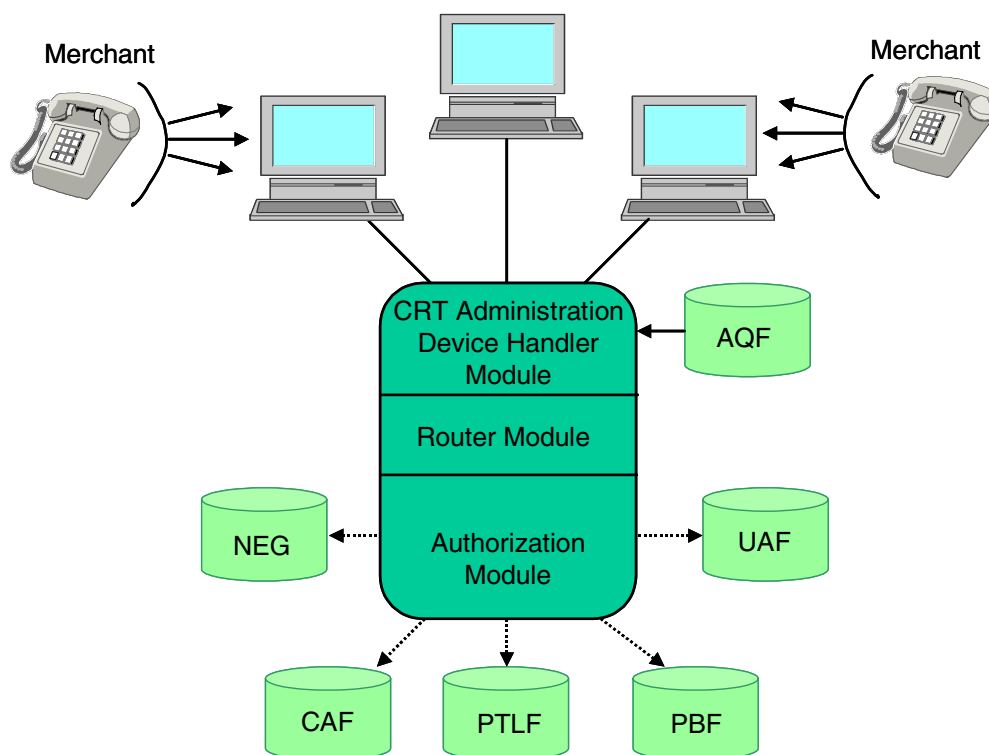


CRT Administration Transaction Processing

Transactions entered using the CRT Administration Maintenance screens appear in the system as normal transactions. The transaction scenarios contained on the following pages illustrate the steps typically taken through the major processes during CRT Administration for sales drafts, chargebacks, and representments.

CRT Administration for Sales Drafts

The following scenario illustrates the steps typically taken during CRT Administration processing of a sales draft transaction. The scenario is shown below, followed by an explanation of its steps.

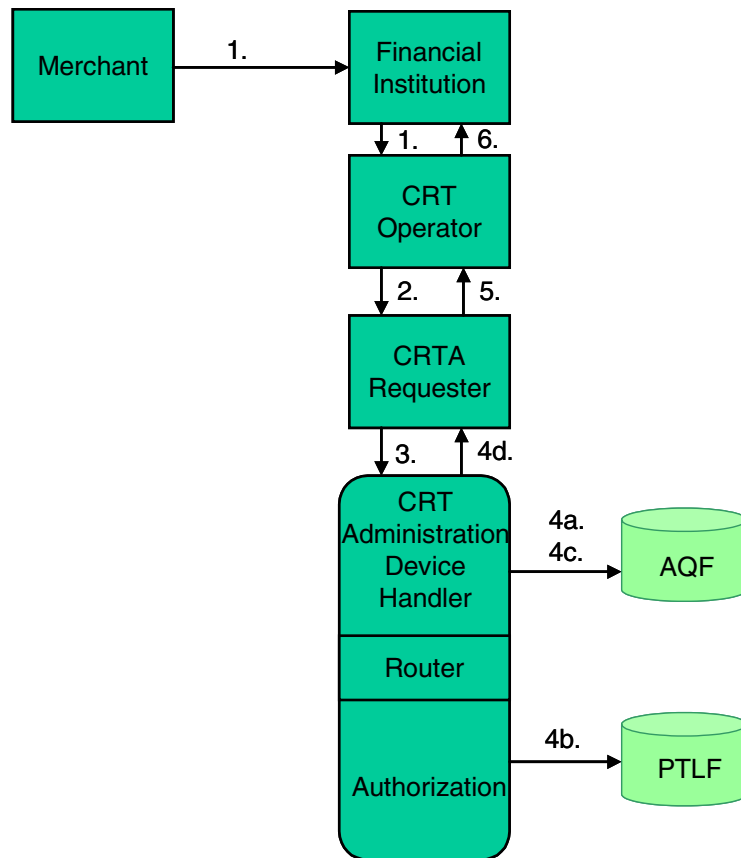


1. The merchant sends a sales draft to the financial institution. The financial institution sends the sales draft to an operator for entry.

2. The operator at the financial institution enters the sales draft online from screen 1 of the CRT Administration Maintenance screen and presses the **F1** key.
3. The CRTA requester formats a CRT Device Handler message and sends it to the CRT Administration Device Handler/Router/Authorization process.
4. The CRT Administration Device Handler/Router/Authorization process performs as follows:
 - a. Writes the transaction to the AQF. The AQF tracks the last transaction processed at the terminal, in case it needs to be reversed.
 - b. Logs the transaction to the POS Transaction Log File (PTLF).
 - c. Updates the AQF to indicate the sales draft has been authorized.
 - d. The CRT Administration Device Handler process formats a response message and sends it to the CRTA requester.
5. The CRTA requester updates the CRT Administrative Maintenance screen with information about the sales draft.
6. The operator examines the response to determine the outcome of the transaction.

CRT Administration for Chargebacks and Representments

The following scenario illustrates the steps typically taken during CRT Administration processing of a chargeback or representment. The scenario is shown below, followed by an explanation of its steps.

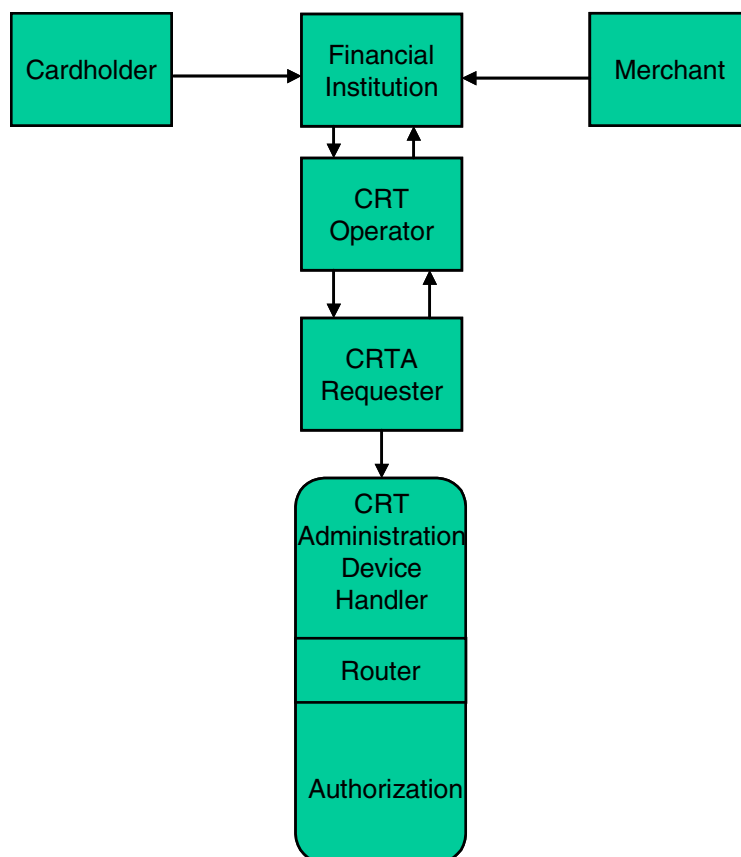

1. The cardholder calls the financial institution with a dispute. The financial institution generates a chargeback and the disputed transaction is sent to an operator for further processing. If the merchant calls the financial institution, the transaction is a representment.
2. The operator at the financial institution enters the chargeback or representment online on screen 2 of the CRT Administrative Maintenance screens and presses the appropriate function key to send the chargeback or representment to the system.
3. The CRTA requester formats a CRT Device Handler message and sends it to the CRT Administration Device Handler/Router/Authorization process.

4. The CRT Administration Device Handler/Router/Authorization process performs as follows:
 - a. Writes the transaction to the AQF. The AQF tracks the last transaction processed at the terminal.
 - b. Creates a chargeback transaction or a representment transaction and logs the transaction to the POS Transaction Log File (PTLF). The CRT Device Handler Message indicates to the CRT Administration Device Handler that this is a chargeback or representment originating from the CRTA.


Note: If BASE24 is both the acquirer and issuer of the transaction, the Device Handler/Router/Authorization process logs two transactions to the PTLF. One record is on behalf of the acquirer, and the other is on behalf of the issuer.
 - c. Updates the AQF to indicate the chargeback or representment has been processed.
 - d. The CRT Administration Device Handler module formats a response to send to the CRTA requester.
5. The CRTA requester updates the CRT Administrative Maintenance screen with a response concerning the action taken on the chargeback or representment.
6. The operator examines the response to determine the outcome of the transaction.

CRT Terminals

Both the CRT Authorization and CRT Administration products use the standard terminals allowed by BASE24 for CRT access to perform their functions. While some differences exist between the terminals that can be used with these two products, all of the terminals allow all of the necessary functions to be performed. The terminals that can be used with BASE24 CRT access are documented in detail in the ***BASE24 User Security Manual***.

Connecting To BASE24-pos

Various BASE24 products can coexist in a single network and access a common database. BASE24 allows service providers the ability to manage a geographically dispersed network of point-of-sale (POS) devices, automated teller machines (ATMs), and manned teller terminals as a single system. This network can also exchange transactions with any number of regional and national interchange networks. The BASE24-pos CRT Authorization and BASE24-pos CRT Administration products can be added to BASE24 systems which already support the BASE24-pos product. The diagram below shows a combined product BASE24 system.

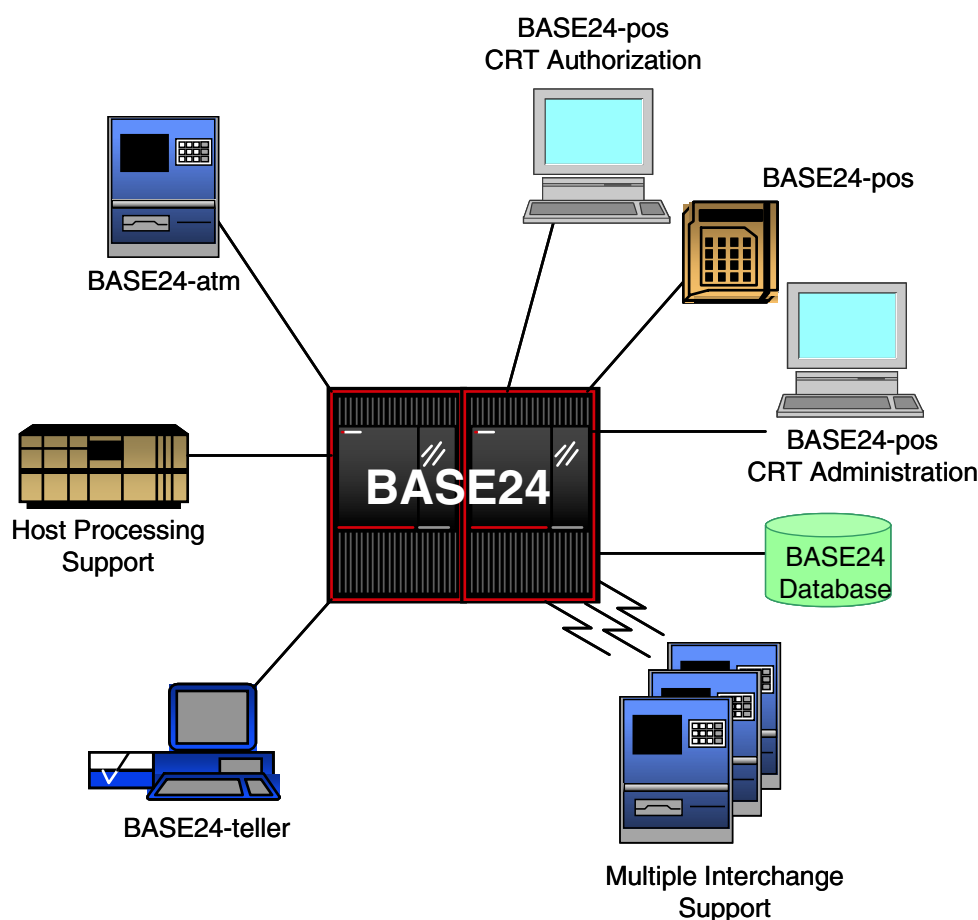

Integration with BASE24-pos Transaction Processing

Transactions entered using BASE24-pos CRT Authorization and CRT Administration systems are processed as normal BASE24-pos transactions. The CRT Authorization product does, however, have its own CRT Authorization Device Handler module. This is a separate module used to process CRT Authorization transactions and referrals exclusively. The CRT Administration product also has its own CRT Administration Device Handler module. This is a separate module used to process sales drafts, chargebacks, and representments.

It should be noted that if a financial institution has purchased both the CRT Authorization and the CRT Administration products, the products can be combined to use the same Device Handler/Router/Authorization module during processing. In this case, the Device Handler module determines which product handles the transaction, based on information contained in the message received from the BASE24 operations screen when the transaction is sent.

The message types used for transactions entered from the CRT Authorization and CRT Administration products are the same as those used by the BASE24-pos product for transactions originating from any other source. These message types are listed in the tables below.

CRT Authorization		
Transaction	Message Type	Description
Normal purchase	0200	Authorization request
	0210	Authorization response
Purchase with cash back	0200	Authorization request
	0210	Authorization response
Cash advance	0200	Authorization request
	0210	Authorization response
Mail/telephone order	0200	Authorization request
	0210	Authorization response
Merchandise return	0200	Authorization request
	0210	Authorization response
Card verification	0200	Authorization request
	0210	Authorization response

CRT Authorization		
Transaction	Message Type	Description
Approved referral	0220	Force post transaction
Reversal	0420	Reversal transaction
Force post	0220	Force post transaction
Adjustment	0200 0210	Authorization request Authorization response
Force post adjustment	0220	Force post transaction

CRT Administration		
Transaction	Message Type	Description
Chargeback	0402 0412	Chargeback request Chargeback response
Representment	0200	Representment transaction request
Sales Draft (SD)	0200	Sales draft transaction request
SD Reversal	0420	Sales draft reversal transaction

CRT Authorization and Administration Reporting

Although the CRT Authorization and CRT Administration products do not generate their own reports, financial institutions can track cardholder and retailer activity through a number of standard BASE24-pos reports. These reports, which include transactions entered using the CRT Authorization and CRT Administration products, assist in helping the financial institution to review and analyze their transaction and referral activity for fine-tuning their authorization efforts. The reports produced by BASE24-pos are as follows:

- B24POS02, Cardholder Activity Report
- B24POS05, Daily Disputed Transactions Report
- B24POS12, Retailer Activity Report
- B24POS21, Periodic Institution Summary Report
- B24POS22, Periodic Retailer Summary Report
- B24POS30, Network Referral Statistical Report
- B24POS35, Retailer Reconciliation Report

The BASE24-pos report used most extensively for CRT Authorization is the B24POS30, Network Referral Statistical Report. This report provides a listing and summary of records in the POS Referral File (PRF). The B24POS05, Daily Disputed Transactions Report, is used most extensively for the CRT Administration product. This report monitors the chargebacks and representments entered into the system during the current business day. BASE24-pos reports are described in detail in the ***BASE24-pos Settlement and Reporting Manual***.

ACI Worldwide, Inc.

2: Accessing CRT Authorization and CRT Administration Functions

CRT Authorization and CRT Administration functions are performed from standard terminals acceptable to the BASE24 CRT access system. Through the use of BASE24 menus, screens, and function keys, you can perform all necessary functions for the CRT Authorization and the CRT Administration products.

This section provides information about the screens that can be accessed for each product, how you can use the BASE24 menus to access the appropriate screens, and the security requirements governing access to the CRT Authorization and CRT Administration functions.

CRT Authorization Screens

BASE24-pos CRT Authorization allows you to select several authorization and referral options using formatted screens that are accessible through BASE24's CRT access system. The screens that can be accessed are listed below.

- Online Transaction screen
- POS Referral File (PRF) screen
- Multiple Referrals screen
- Credibility History screen

Sections 3, 4, 5, and 6 in this manual contain the documentation about the Online Transaction screen, the Multiple Referrals screen, the PRF screen, and Credibility History screen, respectively.

CRT Administration Screens

BASE24-pos CRT Administration allows you to enter sales drafts, chargebacks, and representments using a formatted screen. There are two CRT Administration Maintenance screens. The first is for entering sales drafts and the second is for entering chargebacks and representments. The CRT Administrative Maintenance screens are described in section 7. A sample of each screen and its field descriptions are also included in that section.

CRT Authorization Files Maintenance


The BASE24-pos product includes files used exclusively by the CRT Authorization add-on product: the Card History File (CHF) and the CRT Authorization Retailer Usage File (CRUF). The CRT Authorization Files Maintenance screens are documented in section 8.

Menu Selection

BASE24 allows you to access menus that list the files, functions, and utilities to which you have access. You can move to screens that access these menu items by selecting an item and pressing a function key.

In BASE24, two menu levels exist. The highest level is the Virtual Menu. The Virtual Menu lists all the products and CRT functions that you can access. The items listed on the Virtual Menu are general categories of files or functions.

To retrieve the CRT Authorization, the CRT Administration, or the CRT Authorization files maintenance screens, you can position the cursor next to the POS selection from the Virtual Menu and press the **F1** key. This takes you to the second menu level. The second menu level is the Product Menu. One product menu exists for each item listed on the Virtual Menu and contains the files or functions to which you have access. From the POS Product Menu, you can access screens associated with CRT Authorization, CRT Administration, or CRT Authorization Files Maintenance. The graphic shown on the next page illustrates the BASE24 menu structure.

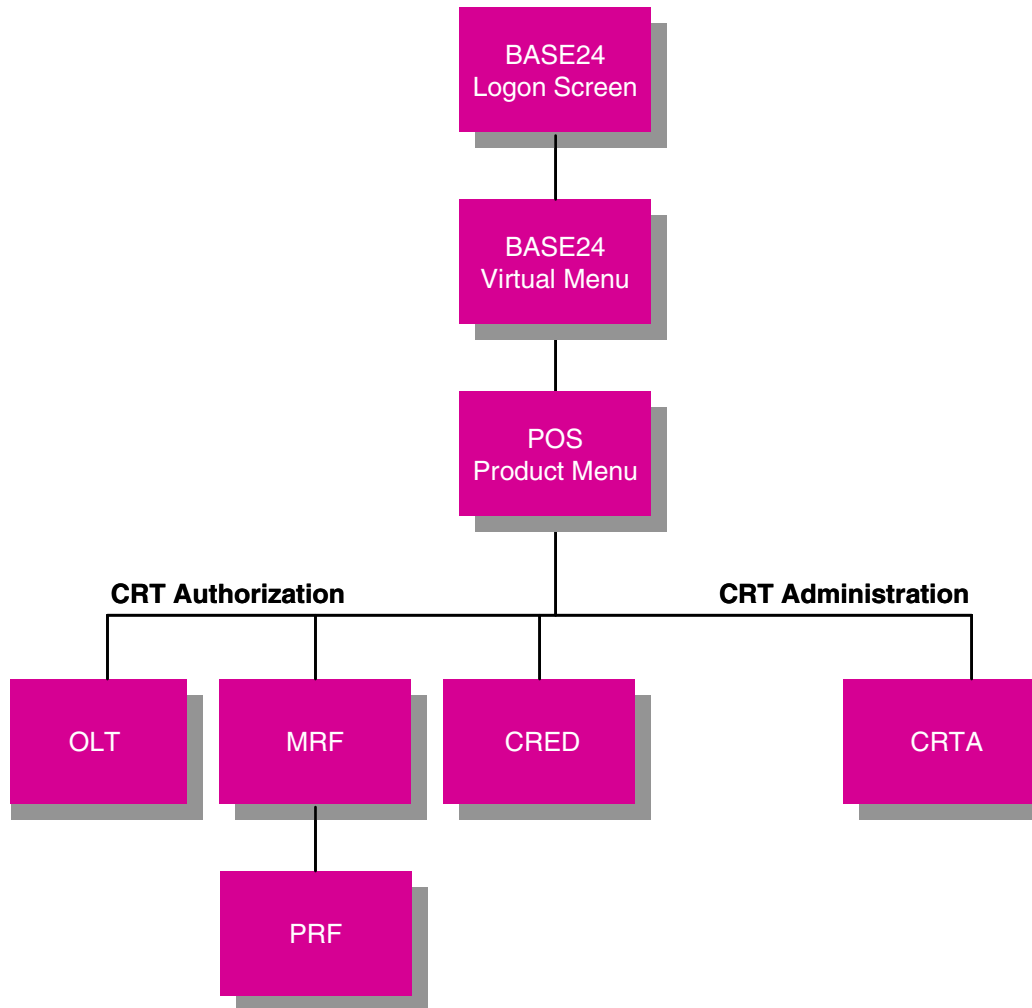

The POS Product Menu is shown below. The highlighted fields pertain to CRT Authorization and CRT Administration.

```

BASE24-ADMN  MENU                                LLLL      YY/MM/DD  HH:MM  01 OF 01
          P O S      P R O D U C T  M E N U

          ACNF          ADMN          ARSP          AST
          CAPF          CART          CHF          CRED
          CRTA          CRUF          CSEC          HPCF
          HPTC          MCNF          MHCf          MREG
          MRF          MRSP          MTCF          NNF
          OLT          PAF          PRDF          PRF
          PRG          PTD          PTLF          RTBL
          VVT

***** BASE24 *****
          FILE DESTINATION:
F1-ENTER DATA  F9-NEXT PAGE      F11-PREVIOUS PAGE  F10-PRINT  F12-HELP

```

The files and functions corresponding to the highlighted acronyms on the POS Product Menu are as follows

Acronym	File or Function
CHF	Card History File
CRED	Credibility History screen
CRTA	CRT Administration Maintenance screen
CRUF	CRT Authorization Retailer Usage File
CSEC	CRT Authorization Security File
MRF	Multiple Referrals screen
OLT	Online Transaction screen
PRF	POS Referral File

Refer to the ***BASE24 User Security Manual*** for more information about the POS Product Menu.

Screens can be accessed from the POS Product Menu by placing the cursor next to the desired file or function acronym on the menu and pressing the **F1** key. As an alternative, you can enter the file or function acronym in the FILE DESTINATION field at the bottom of the screen to access the selected screen. Refer to the ***BASE24 User Security Manual*** for more information on the BASE24 Menu structure.

Security Requirements

CRT security is designed to protect system functions from unauthorized usage. Institutions are allowed to restrict operators from accessing certain parts of the system by setting up security parameters. The CRT Authorization security parameters are specified in two files; the Security File (SEC) and the CRT Authorization Security File (CSEC). These files are explained below. For additional information on setting up security, refer to the ***BASE24 User Security Manual***.

BASE24 Security File (SEC)

The Security File (SEC) contains one record for every operator in the BASE24 system whether related to CRT Authorization/Administration or not. This file allows institutions to restrict access to certain data base files, CRT terminals, and terminal functions through a series of SEC screens.

The SEC screens can also be used to restrict access to logical networks, institutions, regions, branches, and specific times of day. As it applies to CRT Authorization and CRT Administration, CRT security can be implemented to permit or deny access to the following functions.

OLT Security	Allows access to the Online Transaction screen.
MRF Security	Allows access to the Multiple Referrals screen and POS Referral File (PRF) screen.
PRF Security	Allows access to the PRF screen.
CRED Security	Allows access to the Credibility History screen.
CRTA Security	Allows access to the CRT Administrative Maintenance screen. Separate security parameters must be set up for each page of the CRT Administrative Maintenance screen.

Depending on the duties of the operator, each one of these functions can have read, add, delete, and update capability as determined by the institution. For additional information on setting up security, refer to the ***BASE24 User Security Manual***.

Institution-Level Security

The Institution-Level Security feature allows financial institutions to restrict operator access to the Online Transaction screen, Multiple Referrals screen, and POS Referral File (PRF) screen based on the allowed FIIDs specified in the operator's Security File (SEC) record.

This feature is configured in the COBOL Names (COBNAMES) file using the INST-SECURITY-CHECK-FLG flag. The default value for this flag is 1, which indicates that the institution-level security processing is performed.

The following describes the processing that occurs when the INST-SECURITY-CHECK-FLG flag is configured to perform the institution-level security processing:

- **Online Transaction screen.** When an operator enters a transaction on the Online Transaction screen, the OLT requestor sends a message to the PRDF server to retrieve the merchant's FIID. If a PRDF record cannot be found, an error is displayed on the screen, and the operator is not allowed to complete the transaction. If a PRDF record is found, the FIID is returned to the OLT requester. Then the OLT requester sends a message to the SEC server to determine whether the operator is allowed to access that FIID. If the operator is not allowed to access the FIID, an error message is displayed, and the operator is not allowed to complete the transaction. If the operator is allowed to access that FIID, the operator is allowed to complete the transaction.
- **Multiple Referrals screen.** When an operator requests a list of referrals for a specified merchant on the Multiple Referrals screen, the MRF requestor sends a message to the PRDF server to retrieve the merchant's FIID. If the PRDF record for the specified merchant cannot be found, the list of referrals for the specified merchant is displayed, and no additional checks are performed. If the PRDF record is found, the FIID is returned to the MRF requester. Then the MRF requester sends a message to the SEC server to determine whether the operator is allowed to access that FIID. If the operator is not allowed to access the FIID, an error message is displayed, and the list of referrals for the specified merchant is not displayed. If the operator is allowed to access that FIID, the list of referrals for the specified merchant is displayed.
- **POS Referral File (PRF) screen.** When an operator attempts to read a referral on the POS Referral File (PRF) screen, the PRF requestor sends a message to the PRDF server to retrieve the merchant's FIID. If the PRDF record for the specified merchant cannot be found, the operator is allowed to read the referral, and no additional checks are performed. If the PRDF record is found, the FIID is returned to the PRF requester. Then the PRF requester sends a message to the SEC server to determine whether the operator is

allowed to access that FIID. If the operator is not allowed to access the FIID, an error message is displayed, and the operator is not allowed to read the requested referral. If the operator is allowed to access that FIID, the operator is allowed to read the referral.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMEs file is set to a value other than 1, no message is sent to the PRDF server to retrieve the merchant's FIID, and, therefore, no message is sent to the SEC server to determine whether the operator is allowed access to the merchant's FIID.

CRT Authorization Security File (CSEC)

The CRT Authorization Security (CSEC) File is designed to add another dimension of security to the system. The CSEC contains one record for every operator in the system. Whereas the SEC is used with all BASE24 products, the CSEC is used only with BASE24-pos CRT Authorization. It allows institutions to prohibit an operator from performing certain transactions and functions from the Online Transaction screen and the POS Referral File (PRF) screen. However, the CSEC is used in conjunction with the SEC. Information contained in the SEC is used by the system to access the corresponding CSEC record for a specific operator. Therefore, a SEC record must exist before the CSEC record can be accessed for a specific operator. If no record exists in the SEC for the specified operator, an error message is displayed on the CSEC screen to indicate this condition.

The financial institution has the flexibility of determining the transaction set that a specific operator can perform by setting up records for each operator using CSEC screens. This makes it possible for the institution to restrict certain operators from performing certain transactions. More specifically, the CSEC is used to provide additional security in two ways. First, it is used to determine if a particular operator is allowed to perform a certain transaction. Second, this file is used to determine if the operator has security access to perform some or all of the following functions for each transaction:

- Process the transaction from the Online Transaction screen (cancel, reverse, or adjust)
- Force post the transaction from the Online Transaction screen (cancel, reverse, or adjust transactions that have been force posted)
- Override the transaction from the PRF screen

An institution can read, add, delete, or update the transaction set for a specific operator in the CSEC using BASE24 files maintenance. Files maintenance functions are described in section 8.

OMF Auditing

The Online Maintenance File (OMF) contains information on users who have logged on and logged off the Pathway system as well as information on users who have read, added, changed, or deleted records in BASE24 files accessed through the BASE24 Pathway system. For reads, a record is only written to the OMF if the record contains cardholder data, for example, a PAN, as on screens such as the MRF and PRF.

In addition, OMF records are written when users attempt to read a record from the file or when a security violation occurs. These records will be logged with a record type of J. A security violation will occur if a user attempts to access a function they do not have the authority to access based on settings in the CSEC.

3: Online Transaction Screen

The Online Transaction screen is divided into two sections. From the upper portion of the screen, you can enter transaction requests made by a retailer, modify existing transactions appearing on the screen, or display a transaction for viewing. The lower portion of the Online Transaction screen contains a list of transactions appearing in the queue for the authorization center terminal. You can select a transaction for modification or viewing in the upper portion of the screen from this list.

This section describes the functionality of the Online Transaction screen. It provides information about using the screen and describes the function keys used to perform tasks from the screen. It also includes a sample Online Transaction screen and descriptions of its fields.

Using the Online Transaction Screen

The following paragraphs contain information about the entry of transactions on the Online Transaction screen, the handling of pending transactions displayed on the Online Transaction screen, and how the POS Referral File (PRF) is accessed from the Online Transaction screen.

Online Entry of Transactions

BASE24-pos CRT Authorization supports the entry of six types of transactions and three types of adjustments. The transactions supported are as follows:

- Normal purchases
- Purchase with cash back
- Mail or telephone orders
- Merchandise returns
- Cash advances
- Card verification requests

The adjustments supported are as follows:

- Adjustments to purchases
- Adjustments to merchandise returns
- Adjustments to cash advances

Note: Adjustments for mail or telephone orders are processed as adjustments to purchases.

The upper portion of the Online Transaction screen is designed to allow you to enter these types of transactions directly onto the Online Transaction screen for entry into the system when an authorization request is received.

Authorization requests are made when a merchant calls you at the authorization center and verbally requests an authorization for individual transactions. You then ask the merchant for the following information and enter it in the appropriate fields. To successfully complete an authorization request, the following information should be provided:

- Cardholder number
- Card expiration date
- BASE24 retailer ID
- Transaction code (defaults to normal purchase)
- Card type (default set in the COBNAMES file)
- Account type (default set in the COBNAMES file)
- Transaction amount

After you have entered the required information on the screen, press the **F1** key to send the transaction to the authorizer. The transaction is then moved automatically to the PENDING TRANSACTIONS section of the Online Transaction screen to allow you to process another request while awaiting the response.

Draft Capture Options

You can perform requests for draft capture transactions by entering a 1 in the DRAFT CAPTURE field in the upper portion of the Online Transaction screen. Entering a value of 1 in this field causes the transaction to be sent for authorization and at the same time electronically captured for settlement purposes. Entering a value of 0 in this field causes the transaction to be sent for authorization only. In this case, settlement occurs at a later time when paper follow-up is received by the financial institution. If the DRAFT CAPTURE field on the Online Transaction screen is blank, the system uses a default draft capture value set up by the financial institution in the POS Retailer Definition File (PRDF) through files maintenance. For more information about draft capture, refer to section 1.

Working Pending Transactions

The lower portion of the Online Transaction screen contains up to the seven most current transactions, which you can view or modify. Two types of transactions are displayed in the PENDING TRANSACTIONS section: *open* and *closed*. Open

transactions are transactions that have not yet received an authorization response. Closed transactions are transactions that have received an authorization response or open transactions that have been canceled.

When a new transaction is entered and the queue is full (that is, the queue already contains seven transactions), the oldest closed transaction is purged from the queue and is replaced with the new one. Open transactions are not purged from the queue. If seven open transactions are displayed on the Online Transaction screen, another transaction cannot be entered until one of the open transactions receives an authorization response and is closed or canceled. If an open transaction is canceled and later receives an authorization response, the transaction, if approved, is reversed automatically by the CRT Authorization Device Handler process. The following paragraphs describe how you can work with pending transactions.

Reading Pending Transactions

Two methods exist by which pending transactions can be read. Using the first method, the first four transactions are automatically displayed on the first page when you access the Online Transaction screen. By pressing the **F9** key, the remaining three transactions are displayed. Using the second method, all seven transactions can be read by pressing the **F8** key followed by the **F1** key. Pressing the **F11** key allows you to read the previous page of pending transactions. Transactions can be read at any time as long as no information is entered in the upper portion of the Online Transaction screen prior to reading.

Selecting a Pending Transaction

You can select one of the pending transactions being displayed in the lower portion of the Online Transaction screen by positioning the cursor next to the transaction number and pressing the **F2** key. The transaction is moved automatically to the upper portion of the screen for you to view or modify. Closed or open transactions can be selected using this function key. You can either view the transaction or relay the authorization response received from the authorizer to the merchant. The authorization response is displayed in the AUTH RESPONSE FOR TRANSACTION (0) field on the upper portion of the screen as a response code followed by an explanation. Once the authorization response has been relayed to the merchant, you can begin processing the next transaction.

Canceling a Pending Transaction

You can cancel open transactions being displayed on the screen. A transaction can be canceled only if it is open and has been selected using the **F2** key. To cancel an open transaction, position the cursor next to the transaction number on the screen and press the **F2** key. This causes the transaction to be displayed in the upper portion of the screen. You can then cancel the transaction by pressing the **F4** key. Once a transaction has been canceled, it appears in the PENDING TRANSACTIONS section on the Online Transaction screen as closed. Any subsequent authorization response received on this transaction results in an automatic reversal if the original outstanding transaction was approved.

Reversing a Transaction

Transactions can be reversed from the Online Transaction screen if they are closed and are currently being displayed on the screen and if they are in the proper state (have been approved, but not reversed, canceled, etc.). First, you must select the transaction to be reversed by positioning the cursor next to the transaction number and pressing the **F2** key. This causes the transaction to be displayed in the upper portion of the screen. You can then reverse the transaction, if it has not been modified and if you have security access to perform the transaction type. This is done by pressing the **F5** key. Transactions being displayed in the lower portion of the Online Transaction screen are identified as reversals when they are followed by the word “REVERSED.”

Merchandise Returns

If you have appropriate security access, you can perform merchandise returns and adjustments to merchandise returns from the Online Transaction screen. These two types of transactions are performed in the same manner as any other transaction: they can be entered in the upper portion of the Online Transaction screen or selected from the lower portion using the **F2** key.

Financial institutions may choose to set limits for the amount and number of merchandise returns that can be performed during a single usage accumulation period for a specific retailer. These limits can be set in the CRT Authorization Retailer Usage File (CRUF) using files maintenance. The CRUF is an optional file that not only allows financial institutions to set limits for the merchandise return activity for a retailer, but also automatically tracks the number and amount of merchandise return transactions that have been performed during a single usage accumulation period for a specific retailer. The limits are then compared by BASE24 to the amount and number of merchandise returns that have been

performed during the current usage accumulation period for a specific retailer. If the number or amount of merchandise return transaction activity exceeds the limits set by the financial institution in the CRUF, the transaction is declined and a decline response is displayed on the Online Transaction screen. For more information concerning the CRUF, refer to section 8.

Force Post Transactions

If you have appropriate security access, you can force post transactions. Force post transactions are transactions that have not been authorized, but that a merchant needs to have posted to a cardholder account. The transaction can be entered in the upper portion of the Online Transaction screen.

Force post transactions can be performed from the upper portion of the Online Transaction screen by entering transaction information directly onto the screen, changing at least one item of data, and pressing the **Shift-F1** keys. The transaction does not have to be displayed in the transaction queue on the Online Transaction screen to use this method.

A transaction also can be force posted from the lower portion of the Online Transaction screen if it has been selected using the **F2** key. To select a transaction from the lower portion of the Online Transaction screen, position the cursor next to the transaction number on the screen and press the **F2** key. This causes the transaction to be displayed in the upper portion of the screen. You can then change data and force post the transaction by pressing the **Shift-F1** keys. Once a transaction has been force posted, it appears in the PENDING TRANSACTIONS section on the Online Transaction screen as closed. Transactions being displayed in the lower portion of the of the Online Transaction screen are identified as force posts when they are followed by the letters FP.

If a transaction has previously been approved and needs to be force posted, you must enter the transaction manually in the upper portion of the screen. The financial institution can also choose to require that the transaction's original approval code be entered in the APPROVAL CODE field on the Online Transaction screen. The approval code is used by the financial institution as a tool to identify and monitor force post transaction activity throughout the settlement process.

Note: The force post capabilities to CRT Authorization provides you with added flexibility in authorizing transactions under a merchant floor limit. This capability, if used in conjunction with a point-of-sale terminal, may result in duplicate transaction posting under the following condition.

If a merchant is authorizing transactions using a POS terminal that uses merchant and terminal floor limits in a draft capture environment, transactions are typically stored in terminal memory and later sent to BASE24 as force post draft capture transactions. In the event that the terminal becomes inoperable before these transactions are sent to BASE24, merchants may want to enter these transactions into BASE24 using CRT Authorization in order to receive immediate draft capture credit for the transactions. These transactions can be duplicate posted by BASE24 if the POS terminal resends the transactions to BASE24 when the terminal becomes operable.

Adjusting Transactions from the Online Transaction Screen

Partial and full adjustments to transactions can be performed from the Online Transaction screen using two methods. In order to make an adjustment to a transaction that is not being displayed on the Online Transaction screen, you must enter the transaction information directly into the upper portion of the Online Transaction screen and fill in the AMOUNT 2 field with the adjusted amount of the transaction. Adjustments to transactions may need to be made several days after the original transaction has been performed. For this reason, the transaction does not have to be displayed on the Online Transaction screen. Transactions that do appear on the Online Transaction screen must be closed before being adjusted.

A transaction already being displayed on the Online Transaction screen can also be adjusted if it is a closed transaction. In order to perform an adjustment using this method, the transaction must first be selected using the **F2** key. Selecting the transaction moves it to the upper portion of the screen where the adjusted transaction amount can be entered. You must enter the adjusted transaction amount in the AMOUNT 2 field.

Once the transaction is displayed in the upper portion of the Online Transaction screen, you can press the **F3** key to perform a normal adjustment or the **Shift-F3** keys to perform an adjustment to a transaction that has previously been force posted. Pressing one of these function keys causes the adjustment to be formatted and, if you have security access to perform the transaction type, it is sent for authorization. The adjustment is also added to the transactions displayed on the Online Transaction screen, if it is not already there. This method must be used when a transaction needs to be adjusted and is not displayed in the lower portion of the Online Transaction screen. Either method can be used if a transaction is displayed in the lower portion of the Online Transaction screen. If the transaction is not displayed in the lower portion of the Online Transaction screen, the transaction must be entered in the upper portion of the Online transaction screen in order to be adjusted. Adjusted transactions are displayed in the lower portion of the Online Transaction screen and are identified when they are followed by the word "ADJUSTED." A force post adjustment is followed by FP ADJUSTED.

Accessing the PRF Screen

You can access the POS Referral File (PRF) from the Online Transaction screen. From the PRF screen, you can read referral information about the transaction, approve or decline the transaction (based on PRF information), or go to the Credibility History screen to determine if special authorization conditions are necessary. To access the PRF screen, select the transaction by positioning the cursor next to the transaction number in the lower portion of the screen, and press the **F2** key. This causes the selected transaction to be displayed in the upper portion of the screen. You can then press the **F14** key and go directly to the PRF screen for further processing. For more information about the PRF screen, refer to section 5.

Online Transaction Screen Function Keys

The usage of several function keys on the Online Transaction screen varies from the standard function keys explained in the *BASE24 User Security Manual*. The usage of these function keys is explained below.

The first column shows the function key. The second column provides a description of how the function key works for the Online Transaction screen.

Key	Description
F1	Read Transaction or Send Transaction — Two functions can be performed using the F1 key: reading the transaction queue or sending a transaction. When the Online Transaction screen is initially accessed, the queue is automatically read. You can read the queue at any time by clearing the upper portion of the screen and pressing the F1 key. When a transaction is entered in the upper portion of the screen, the F1 key is also used to send transactions to the appropriate authorizer.
F2	Select Transaction — Used to select a transaction from the lower portion of the Online Transaction screen.
F3	Adjust Transaction — Used to adjust transactions being displayed in the upper portion of the Online Transaction screen.
F4	Cancel Transaction — Used to cancel open transactions being displayed on the Online Transaction screen.
F5	Reverse Transaction — Used to reverse an approved transaction that is closed and is being displayed on the Online Transaction screen.
F8	Clear Transaction — This clears any data being displayed in the upper portion of the Online Transaction screen.

Key	Description
F9	Next Page Of Pending — Used to display the next page of pending transactions on the Online Transaction screen. Up to seven pending transactions can be displayed on the screen. The first four pending transactions are automatically displayed on the first page of the Online Transaction screen when the screen is accessed. Pressing the F9 key causes the remaining three transactions to be displayed.
F11	Previous Page Of Pending — Used to display the previous page of pending transactions on the Online Transaction screen. Up to seven pending transactions can be displayed on the screen. The first four pending transactions are automatically displayed on the first page of the Online Transaction screen when the screen is accessed. Pressing the F9 key causes the remaining three transactions to be displayed. Pressing the F11 key causes the previous page of pending transactions to be displayed.
F14	Go To PRF Screen — Allows you to go directly to the POS Referral File (PRF) screen from the Online Transaction screen.
Shift-F1	Send Force Post — Used to send a transaction being displayed in the upper portion of the Online Transaction screen for force posting.
Shift-F3	Force Post Adjustment — Used to adjust a force post transaction being displayed in the upper portion of the Online Transaction screen.

Online Transaction Screen Description

The upper portion of the Online Transaction screen is used to enter transactions or display transactions for viewing or modification. The lower portion of the screen is used for selecting transactions, viewing the transaction queue, and checking the status of transactions.

You can reach the Online Transaction screen by placing the cursor next to the OLT acronym on the POS Product Menu and pressing the **F1** key or by entering OLT in the FILE DESTINATION field of another screen and pressing the **F16** key.

Masking logic is not used on the Online Transaction screen because knowledge of the full primary account number is required to enter transactions.

The Online Transaction screen is shown below, followed by descriptions of its fields.

```

BASE24-BPS  ONLINE TRANS (OLT)          LLLL          YY/MM/DD HH:MM  01 OF 01
CARD NUMBER:                                MBR:          EXP DATE:
MERCHANT:                                TRAN CODE: NP  AMOUNT 1:
AMOUNT 2:                                APPROVAL CODE:
CVD VAL:          CVD PI: 0              AVS ADDR:          AVS POST CODE:
DRAFT CAPTURE:    CURRENCY CODE: 840    CARD TYPE: 1  ACCT TYPE: 31 CVD RESULT:
AVS RESULT:    AUTHORIZOR:                                REFERRAL NUM:
<<< AUTH RESPONSE FOR TRANSACTION ( 0 ): 000                                >>>
      CARD NUMBER                                MBR  SEQ #          MERCHANT ID          TRAN CODE

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                                  F12 - HELP

```

CARD NUMBER — The card number or primary account number (PAN) identifying the card used to attempt the transaction.

Field Length: 1–19 numeric characters

Required Field: Yes
Default Value: No default value
Data Name: PTLF.HEAD.CRD.CARD.CRD-NUM

MBR — The member number of the card used to attempt the transaction. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: 3 numeric characters
Required Field: No
Default Value: 000
Data Name: PTLF.HEAD.CRD.CARD.MBR-NUM

EXP DATE — The expiration date (YYMM or MMY) of the card used to attempt the transaction. The acceptance of YYMM or MMY is configurable using the COBNAMES file. A transaction attempted after the year and month indicated is declined.

Example: 0507 can indicate the card is valid through July 2005.
Field Length: 4 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.EXP-DAT

MERCHANT — The retailer ID identifying the merchant who is calling in the authorization request.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMES file is set to 1 (perform the institution-level security processing), the retailer ID entered in this field must match a retailer ID in the POS Retailer Definition File (PRDF) record, and the FIID defined in the merchant's PRDF record must match one of the allowed FIIDs specified in the user's SEC record.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMES file is set to a value other than 1, no message is sent to the PRDF server to retrieve the merchant's FIID, and, therefore, no message is sent to the SEC server to determine whether the operator is allowed access to the merchant's FIID.

Example: STORE10 or 1236549803216574329
Field Length: 1–19 alphanumeric characters

Required Field: Yes
Default Value: No default value
Data Name: PTLF.HEAD.TKEY.RKEY.RETAILER-ID

TRAN CODE — A code identifying the type of transaction being attempted.
Valid values are as follows:

AC = Card activation
CA = Cash advance
CV = Card verification
FR = Full redemption
MO = Mail or telephone order
MR = Merchandise return
NP = Normal purchase
PC = Purchase with cash back
RP = Replenishment

Field Length: 2 alphabetic characters
Required Field: Yes
Default Value: NP (Normal purchase)
Data Name: PTLF.AUTH.TRAN-CDE.TC

AMOUNT 1 — The amount, in whole or fractional currency units, of the original transaction. Note that you must manually enter the decimal point for transactions requiring one.

Example: 467.91
Field Length: 1–14 numeric characters for whole currency amounts,
depending on the currency code being used
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.AMT-1

AMOUNT 2 — The adjusted amount, in whole or fractional currency units, of the transaction. The AMOUNT 2 field is used only to adjust transactions. Note that you must manually enter the decimal point for transactions requiring one

Example: 532.22
Field Length: 1–14 numeric characters for whole currency amounts,
depending on the currency code being used

Required Field: Yes, for adjustment transactions only
Default Value: No default value
Data Name: PTLF.AUTH.AMT-2

APPROVAL CODE — A code used to identify the transaction throughout BASE24. Some institutions may require this field for force post transactions.

Field Length: 2–8 alphanumeric characters
Required Field: No, this field is optional unless it is changed to be required by the customer using the COBNAMES file.
Default Value: No default value
Data Name: PTLF.AUTH.APPRV-CDE

CVD VAL — Manually entered values such as the MasterCard Card Validation Codes (CVC2), and Visa Card Verification Value 2 (CVV2). Only the leftmost three bytes are used in CVC2 and CVV2 verification processing.

An operator may enter CVD2 data in this field while entering an authorization request, adjustment, force post transaction, or reversal. If so, it is the only time that the entered value is displayed. The CVD2 data is removed when the record is written to the TQE. It is also removed from the response when it is sent to the OLT requester. Therefore, this field displays spaces when a response is displayed and when an operator selects a transaction from the lower portion of the screen and displays it on the upper portion of the screen.

Field Length: Up to 4 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: PS51-TKN.CVD-FLD

CVD PI — A code indicating whether the card verification value is on the card. Valid values are as follows:

- 0 = CVV2 value is deliberately bypassed or not provided by the merchant
- 1 = CVV2 value is present
- 2 = CVV2 value is on the card, but is illegible
- 9 = Cardholder states that the card has no CVV2 imprint

Field Length: 1 numeric character

Required Field: No
Default Value: 0
Data Name: PS51-TKN.CVD-PRES-IND

AVS ADDR — The cardholder billing address received with the transaction if address verification was performed. When the transaction contains an address verification status code without an address or a postal code, this field contains zeros. If address verification was not performed, this field contains blanks.

Field Length: System protected
Data Name: PTLF.AUTH.ADDR

AVS POST CODE — The cardholder billing postal code received with the transaction if address verification was performed. When the transaction contains an address verification status code without an address or a postal code, this field contains zeros. If address verification was not performed, this field contains blanks. In the United States, postal code is synonymous with ZIP code.

Field Length: System protected
Data Name: PTLF.AUTH.ZIP-CDE

DRAFT CAPTURE — A code indicating whether this transaction request requires draft capture. Valid values are as follows:

0 = Authorize only
1 = Authorize and capture
blank = Use PRDF value

If this field is set to 0, a paper receipt is received by the financial institution at a later time to settle this transaction. If this field is set to 1, no further paper or electronic activity is necessary. If approved, the transaction is considered settled at the time the transaction is complete. If this field is blank, the draft capture defaults to the draft capture value set by the financial institution in the POS Retailer Definition File (PRDF).

Field Length: 1 numeric character
Required Field: Yes
Default Value: The default value is configurable using the COBNAMES file.
Data Name: PTLF.AUTH.DFT-CAPTURE-FLG

CURRENCY CODE — A code identifying the type of currency being used in the requested transaction (i.e., what nation printed the money). Valid values are listed in the ISO 4217 standard, *Codes for the Representation of Currencies and Funds*.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: The default value is configurable using the COBNAMES file.
Data Name: PTLF.AUTH.ORIG-CRNCY-CDE

CARD TYPE — A code identifying the type of card being used to attempt the transaction. Valid codes are as follows:

0 = None
1 = Credit
2 = Debit

Field Length: 1 numeric character
Required Field: Yes
Default Value: The default value is configurable using the COBNAMES file.
Data Name: PTLF.AUTH.TRAN-CDE.T

ACCT TYPE — A code identifying the type of account on which the transaction is being performed. This field must contain 00 when a card verification transaction is being performed. Valid values are as follows:

00 = None
01 = Checking (debit)
11 = Savings (debit)
31 = Credit

Field Length: 2 numeric characters
Required Field: Yes
Default Value: The default value is configurable using the COBNAMES file.
Data Name: PTLF.AUTH.TRAN-CDE.AA

CVD RESULT — Indicates the results of verifying the card. Valid values are as follows:

- 0 = Card verification was not performed because the transaction was denied before card verification processing started.
- C = Card verification was performed and the card verification digits (CVD) were invalid. The situation was noted, and transaction processing continued. This value is used when the appropriate byte of the CV-BAD-DISP field in the Base segment of the CPF contains the value 0.
- D = Card verification was performed and the CVD was invalid. The transaction was denied and the ERR-FLG field was set to C. This value is used when the appropriate byte of the CV-BAD-DISP field in the Base segment of the CPF contains the value 1, 2, or 3.
- J = CVV checking was not performed. The track length was in error. The BAD TRACK LEN flag in the CPF indicates that the transaction should be denied.
- K = Card verification was not performed. The track length was in error. The situation was noted and the transaction was referred (POS only).
- L = CVV checking was not performed. The track length was in error. The BAD TRACK LEN flag in the CPF indicates that processing should continue.
- N or *␣* = Authorizing entity has not attempted card verification or could not verify the CVD due to a security device error. (*␣* indicates a blank character.)
- O = CVD checking was not performed because the CVD was not on the card. Not all cards have a CVD value encoded. The card expiration date must be equal to or greater than the date defined in the CPF to ensure that the CVD field has been encoded. If the card expiration date is equal to or greater than the CPF date, the CVD checks are performed.
- P = Card verification was not performed. The CVD was ignored by the merchant or the user falsely claimed there was no CVD on the card.
- R = Card verification was performed and the CVD was invalid. The situation was noted and the transaction should be referred.
- U = The issuer has not certified or has not provided the encryption keys to the interchange.
- Y = Card verification was performed and the CVD was valid.

Field Length: System protected
Data Name: PS50-TKN.CRD-VRFY-FLG

AVS RESULT — A code identifying the result of comparing address verification information received in the transaction and address verification information contained in the processor's database. Valid values are as follows:

- A = ADDRESS—Addresses matched, but postal codes did not match.
- E = ERROR—The transaction was not eligible for address verification or an editing error occurred while attempting to process the message.
- N = NO—Addresses did not match and postal codes did not match.
- R = RETRY—Primary and secondary authorizers were unavailable or declined the transaction and address verification was not performed on BASE24-pos.
- S = SERVICE NOT SUPPORTED—BASE24-pos authorized the transaction, but did not have the add-on Address Verification module.
- U = UNAVAILABLE—Address information was not available to the processor performing address verification.
- W = WHOLE ZIP—Nine-digit postal codes matched, but addresses did not match.
- X = EXACT—Addresses and nine-digit postal codes matched.
- Y = YES—Addresses and five-digit postal codes matched.
- Z = ZIP—Five-digit postal codes matched, but addresses did not match.
- b* = Address verification information was not included in this transaction (*b* denotes a blank character).
- 0 = Address verification information was included in this transaction, but was not verified. A transaction to be verified by a host or interchange carries this code. A transaction to be verified on BASE24-pos, but declined before address verification could be performed also carries this code.

Field Length: System protected

Data Name: PTLF.AUTH.ADDR-VRFY-STAT

The following values are also valid, but are used only by Visa. They are not set by the BASE24-pos address verification function:

- B = Street address match. Postal code is not verified because of incompatible formats. (Acquirer sends both street address and postal code.)
- C = Street address and postal code is not verified because of incompatible formats. (Acquirer sends both street address and postal code.)
- D = Street addresses and postal codes match.
- G = Global non-participant in the Address Verification Service. Address is not verified for international transactions.
- I = Address information is not verified for international transactions.
- M = Street address and postal code match.
- P = Postal code match. Street address is not verified because of incompatible formats. (Acquirer sends both street address and postal code.)

AUTHORIZOR — A code identifying which authorizing entity responded to the transaction request. Four authorizers are predefined in BASE24. They are AUTHF, AUTHH, NEGN, and NEGF. This field may contain one of these values or it can contain a user-defined value that must match a symbolic process name in the BASE24-pos environment.

Example: P1A^VISA
Field Length: System protected
Data Name: PTLF.AUTH.AUTHORIZER

REFERRAL NUMBER — The telephone number used by the retailer to call in referral authorization requests to the CRT authorization center. The information in this field is formatted when a response to the transaction request is returned to the Online Transaction screen.

Field Length: System protected
Data Name: PRDF.RETAILER.RFRL-PHONE

AUTH RESPONSE FOR TRANSACTION (0) — A code identifying the response from the authorizing entity to a transaction. When a transaction is entered on the Online Transaction screen, the response code followed by an explanation is displayed in this field. The number in parentheses indicates the number of the transaction you selected from the lower portion of the screen.

Example: AUTH RESPONSE FOR TRANSACTION (5): 086
OVER FLOOR LIMIT
Field Length: System protected
Data Name: PTLF.AUTH.RESP-CDE

CARD NUMBER — The card number or primary account number (PAN) identifying the card used to attempt the transaction.

Field Length: System protected
Occurs: Up to 7 times
Data Name: PTLF.HEAD.CRD.CARD.CRD-NUM

MBR — The member number of the card. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: System protected
Occurs: Up to 7 times
Data Name: PTLF.HEAD.CRD.CARD.MBR-NUM

SEQ # — A number assigned to the transaction by the terminal on which the transaction was performed. This number uniquely identifies the transaction.

Field Length: System protected
Occurs: Up to 7 times
Data Name: PTLF.AUTH.SEQ-NUM

MERCHANT ID — The retailer ID identifying the merchant who is calling in the authorization request. The retailer ID must match the retailer ID contained in the POS Retailer Definition File (PRDF) record for the merchant.

Field Length: System protected
Occurs: Up to 7 times
Data Name: PTLF.HEAD.TKEY.RKEY.RETAILER-ID

TRAN CODE — A code identifying the type of transaction requested. The valid values are as follows:

10 = Normal purchase
13 = Mail or telephone order
14 = Merchandise return
15 = Cash advance
16 = Card verification
18 = Purchase with cash back
21 = Adjustment to purchase
22 = Adjustment to merchandise return
23 = Adjustment to cash advance

Field Length: System protected
Occurs: Up to 7 times
Data Name: PTLF.AUTH.TRAN-CDE.TC

ACI Worldwide, Inc.

4: Multiple Referrals Screen

The Multiple Referrals screen is used to view pending referrals and to select referrals for further processing. The Multiple Referrals screen is divided into two sections. From the upper portion of the screen, you can enter the retailer ID and date for which referrals are to be displayed, determine specific referrals to be displayed for that retailer ID, and read the referrals for that retailer ID. The lower portion of the screen provides you with a list of referrals that can be viewed for the identified retailer ID. These referrals can be selected from the Multiple Referrals screen and sent to the POS Referral File (PRF) screen for further processing.

This section describes the functionality of the Multiple Referrals screen. It provides information about using the screen and describes the function keys used to perform tasks from the screen. It also includes a sample Multiple Referrals screen and descriptions of its fields.

Using the Multiple Referrals Screen

The following paragraphs contain information about reading the Multiple Referrals screen referral queue and accessing the POS Referral File (PRF) screen from the Multiple Referrals screen.

Reading the Referral Queue

You can use the Multiple Referrals screen to obtain a list of referrals existing for a specific retailer ID. From this list, you can select a specific referral for viewing. Entries in the referral list provide you with information about specific referrals such as the referral code, the card number, the amount of the referral, and the authorization response code. The referral information is taken from the PRF and displayed on the Multiple Referrals screen. The following fields must be entered in the upper portion of the screen, in order to successfully read the referral queue from the Multiple Referrals screen:

- RETAILER ID (required)
- REFERRAL CODE (optional)
- TRANSACTION DATE (defaults to current date, if not entered)

Reading the referral queue can be performed in three ways.

- If only the retailer ID is entered, all referrals from the current day for that retailer ID are listed on the screen.
- If the retailer ID and the date are entered, all referrals from the specified date for that retailer ID are read.
- If the retailer ID and the referral code are entered, only the specific referral transaction is read.

All three methods are initiated by entering the information on the screen and pressing the **F2** key.

Accessing the PRF

You can use the list of pending referrals displayed in the lower portion of the Multiple Referrals screen to select specific referrals for viewing from the POS Referral File (PRF) screen. If you place the cursor next to the specific referral on the Multiple Referrals screen, and press the **F1** key, the referral is automatically

transferred to the PRF screen for further processing. To return to the Multiple Referrals screen, you can press the **F16** key from the PRF screen. For a description of the PRF screen, refer to section 5.

From the PRF screen, referrals can be approved or denied, or the Credibility History screen can be accessed to obtain information about the cardholder's history for debit or credit accounts. Information on the Credibility History screen can be used to assist you in determining if special authorization conditions exist. For a description of the Credibility History screen, refer to section 6.

Multiple Referrals Screen Function Keys

The usage of several function keys on the Multiple Referrals screen varies from the standard function keys explained in the *BASE24 User Security Manual*. The usage of these function keys is explained below.

The first column shows the function key. The second column provides a description of how the function key works for the Multiple Referrals screen.

Key	Description
F1	Select Transaction — Selects a specific referral from the PENDING REFERRALS section of the Multiple Referrals screen and displays it on the PRF screen for further processing.
F2	Read Queue — Used to read the referral queue for the retailer identified in the RETAILER ID field in the upper portion of the screen.

Multiple Referrals Screen Description

The upper portion of the Multiple Referrals screen is used to enter the retailer ID, referral code, and the transaction date. These fields identify the retailer and the transactions to be displayed on the lower portion of the screen. Reading the referral queue can be performed in three ways. If only the retailer ID is entered, all referrals from the current day for that retailer ID are listed on the screen. If the retailer ID and the date are entered, all referrals from the specified date for that retailer ID are displayed in the lower portion of the screen. If the retailer ID and the referral code are entered, only the specific referral transaction is read.

From the list of transactions displayed in the lower portion of the Multiple Referrals screen, referrals for the retailer ID can be viewed and selected. Once the referral has been selected, it is transferred to the PRF screen and displayed. The PRF screen uses information from the upper portion of the Multiple Referrals screen to retrieve the specific referral from the PRF. Using the information on the PRF screen, you can determine if the referral should be approved or declined or if the Credibility History screen needs to be accessed (this can be done from the PRF screen).

You can reach the Multiple Referrals screen by placing the cursor next to the MRF acronym on the POS Product Menu and pressing the **F1** key or by entering MRF in the FILE DESTINATION field of any other screen and pressing the **F16** key.

Multiple Referrals Screen

The Multiple Referrals screen allows you to view and select a retailer related and day-related set of pending POS referral transactions for further processing. Descriptions of these fields follow the screen display.

```

BASE24-POS    MULTIPLE REFERRALS (MRF)    LLLL          YY/MM/DD  HH:MM  01 OF 01

RETAILER ID:                REFERRAL CODE:                TRAN DATE: 990818

< < < < < < < P E N D I N G    R E F E R R A L S > > > > > > >
                                CURR AUTH
REF CODE  CARD NUMBER          MBR  SEQ #    TRN          AMOUNT    CODE RESP

***** BASE24 *****
FILE DESTINATION:                NEW LOGICAL NETWORK ID:
F1-SELECT  F2-READ QUEUE  F10-PRINT F13-CHANGE LNET  F16-EXIT  SF16-LOGOFF

```

RETAILER ID — The identifier of the merchant associated with the referrals being displayed on the Multiple Referrals screen. Referrals listed in the lower portion of the screen can be transferred to the PRF screen for further processing.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMES file is set to 1 (perform the institution-level security processing), the retailer ID entered in this field is used to find a record for the specified merchant in the POS Retailer Definition File (PRDF). If a PRDF record for the specified merchant is not found, the list of referrals for the specified merchant is displayed, and no additional checks are performed. If a PRDF record for the specified merchant is found, then the FIID defined in the merchant's PRDF record is compared to the allowed FIIDs specified for the user in the Security File (SEC). If the merchant's FIID is not among the allowed FIIDs in the user's SEC record, the list of referrals for the specified merchant is not displayed. If the the FIID is among the allowed FIIDs in the user's SEC record, the list of referrals for the specified merchant is displayed.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMES file is set to a value other than 1, no message is sent to the PRDF server to retrieve the merchant's FIID, and, therefore, no message is sent to the SEC server to determine whether the operator is allowed access to the merchant's FIID.

Field Length: 1–19 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: PRF.RFRL-KEY.RETAILER-ID

REFERRAL CODE — A code identifying a particular referral transaction. This code is used to locate the referral in the PRF. If the referral code is followed by a B, the transaction was authorized by BASE24. A value in this field indicates which referral is to be displayed for the retailer identified in the RETAILER ID field. If no referral code is entered, all referrals for the specified retailer ID and transaction date are listed on the Multiple Referrals screen.

Example: 437240 B
Field Length: 8 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: PRF.RFRL-KEY.RFRL-CDE

TRAN DATE — The date (YYMMDD) for which referrals for the retailer identified in the RETAILER ID field are to be displayed. If no date is entered, referrals for the current date are displayed.

Field Length: 6 numeric characters
Required Field: Yes
Default Value: The current date
Data Name: Not applicable

PENDING REFERRALS

The following eight fields contain information about pending referrals.

REF CODE — A code identifying a particular referral. This code is used to locate the referral in the PRF. If the referral code is followed by a B, the transaction was authorized by BASE24.

Field Length: System protected
Data Name: PRF.RFRL-KEY.RFRL-CDE

CARD NUMBER — The card number or primary account number (PAN) identifying the card with which the transaction was attempted.

Field Length: System protected
Data Name: PTLF.HEAD.CRD.CARD.CRD-NUM

Note: This field can be masked based on a setting in the Security File (SEC). The degree of masking is based on the setting of the AFT-PAN-DIGITS parameter in the Logical Network Configuration File.

MBR — The member number of the card with which the transaction was attempted. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: System protected
Data Name: PTLF.HEAD.CRD.CARD.MBR-NUM

SEQ # — A number assigned to the transaction by the terminal on which the transaction was performed. This number uniquely identifies the transaction.

Field Length: System protected
Data Name: PTLF.AUTH.SEQ-NUM

TRN — A code identifying the type of transaction being referred. Transactions not originally performed through CRT Authorization can be displayed on the Multiple Referrals screen. Valid values are the supported BASE24-pos transaction codes. Refer to the ***BASE24-pos Transaction Processing Manual*** for more information about two-digit transaction codes and the six-digit transaction identifier.

Field Length: System protected
Data Name: PTLF.AUTH.TRAN-CDE

AMOUNT — The amount, in whole and fractional currency units, of the referral.

Field Length: System protected
Data Name: PTLF.AUTH.AMT-1

CURR CODE — The alphabetic ISO code indicating the currency in which this transaction was logged. Valid values are listed in the ISO 4217 standard, *Codes for the Representation of Currencies and Funds*.

Field Length: System protected
Data Name: PRF-AUTH-ORIG-CRNCY-CDE

AUTH RESP — A code indicating a response from the authorizing entity to the referral request. Referral response codes are codes 100-149. Refer to the *BASE24-pos Transaction Processing Manual* for a complete listing of response codes.

Example: 101
Field Length: System protected
Data Name: PTLF.AUTH.RESP-CDE

ACI Worldwide, Inc.

5: POS Referral File (PRF) Screen

The POS Referral File (PRF) screen allows you to override authorization responses online for referrals, based on cardholder information contained on the screen.

This section describes the functionality of the PRF screen. It provides information about using the screen and describes the function keys used to perform tasks from the screen. It also includes a sample PRF screen and descriptions of its fields.

Using the PRF Screen

The following paragraphs provide information about approving and declining transactions from the PRF screen and accessing the Credibility History screen from the PRF screen.

Approving and Declining Transactions

You can approve or decline transactions based on information contained on the PRF screen and the Credibility History screen. Information taken from the Credibility History screen is used to override the referral authorization performed by the authorizing entity. The response code received from the authorizing entity (displayed in the RESPONSE CODE field of the PRF screen) indicates the reason the transaction was referred (e.g., 106 — AMOUNT IS OVER THE MAXIMUM). Referrals can be approved from the PRF screen by pressing the **F4** key. Referrals can be declined from the PRF screen by pressing the **F7** key. Pressing the **F3** key displays the next referral transaction for the retailer.

You can approve or decline transactions from the PRF only if you have the appropriate security access. Security access is established, by transaction type, in the CRT Authorization Security File (CSEC). The CSEC determines the types of transactions, if any, a particular operator is allowed to approve or decline from the PRF.

When you attempt to approve or decline a transaction from the PRF, the PRF requester formats a message requesting security access and sends it to the CSEC server. If the CSEC server grants security access, the PRF requester processes the transaction. If security access is denied, the PRF requester displays an error message. Refer to section 2 for more information on CRT Authorization security requirements and section 8 for more information about the CSEC.

Accessing the Credibility History Screen

When special circumstances do exist, additional information about the cardholder who is attempting the transaction can be accessed from the Credibility History screen. This screen contains history information about the cardholder for both debit and credit accounts. This information can be used to analyze cardholder debit and credit accounts and assist you in determining if a transaction should be approved or declined.

PRF Screen Function Keys

The usage of several function keys on the PRF screen varies from the standard function keys explained in the *BASE24 User Security Manual*. The usage of these function keys is explained below.

The first column shows the function key. The second column provides a description of how the function key works for the PRF screen.

Key	Description
F2	Read Transaction — Retrieves the selected referral from the PRF for reading.
F3	Next Transaction — Displays the next referral transaction on the screen.
F4	Approve Transaction — Allows you to issue an approval for the referral transaction currently displayed on the screen.
F7	Decline Transaction — Allows you to issue a denial for the referral transaction currently displayed on the screen.
F14	Credibility Screen — Allows you to move to the Credibility History screen. The Credibility History screen uses the transaction data currently displayed on the PRF screen to access additional cardholder debit or credit account history information used in determining whether a transaction should be approved or denied.

PRF Screen Description

The PRF screen is used to approve or decline referral requests. It can also be used to directly access the Credibility History screen in order to view additional information about cardholder accounts that can affect whether a transaction is approved or declined.

The POS Referral File (PRF) screen can be accessed from the Online Transaction screen by pressing the **F14** key. This brings up the screen for a selected transaction. The PRF can also be accessed from the Multiple Referrals screen by selecting a referral and pressing the **F1** key. You also can reach this screen by placing the cursor next to the PRF acronym on the POS Product Menu and pressing the **F1** key or by entering PRF in the FILE DESTINATION field of any other screen and pressing the **F16** key.

The PRF screen is shown below, followed by a description of its fields.

```

BASE24-POS   REFERRAL FILE (PRF)   LLLL   YY/MM/DD  HH:MM  01 OF 01

DATE(YYMMDD) :
RETAILER ID:                                     REFERRAL CODE:

CARD NUMBER:                                     CARD FIID:
ACCOUNT TYPE: 00                                EXPIRE DATE:
CURRENCY CODE: 000
REQUESTED AMT:                                     TRAN DATE: 000000
<amount>                                           TRAN TIME: 000000
TRAN TYPE: 00
TERMINAL ID:                                     REFERRAL PHONE:
                                           OVERRIDE APPROVAL CODE:

RESPONSE CODE: 000                                FRAUD RATING:
AUTHORIZOR:

CVD VALUE:          CVD PI:   CVD RESULT:

AVS ADDR:          AVS POST CODE:          AVS RESULT:

***** BASE24 *****
FILE DESTINATION:
F2-READ          F16-EXIT          SF16-LOGOFF

```

DATE (YYMMDD) — The processing date (YYMMDD). If no date is specified, referrals are displayed using the current date for the identified retailer ID.

Field Length: 6 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: Not applicable

RETAILER ID — The identifier of the merchant associated with the referral being displayed on the PRF screen.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMES file is set to 1 (perform the institution-level security processing), the retailer ID entered in this field is used to find a record for the specified merchant in the POS Retailer Definition File (PRDF). If a PRDF record for the specified merchant is not found, the specified referral is displayed, and no additional checks are performed. If a PRDF record for the specified merchant is found, then the FIID defined in the merchant's PRDF record is compared to the allowed FIIDs specified for the user in the Security File (SEC). If the merchant's FIID is not among the allowed FIIDs in the user's SEC record, the specified referral is not displayed. If the FIID is among the allowed FIIDs in the user's SEC record, the specified referral is displayed.

If the INST-SECURITY-CHECK-FLG flag in the COBNAMES file is set to a value other than 1, no message is sent to the PRDF server to retrieve the merchant's FIID, and, therefore, no message is sent to the SEC server to determine whether the operator is allowed access to the merchant's FIID.

Field Length: 1–19 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: PRF.RFRL-KEY.RETAILER-ID

REFERRAL CODE — A system-assigned code identifying a particular referral transaction. This code is used to locate the referral in the PRF. If the referral code is followed by a B, the transaction was authorized by BASE24.

Example: 440267 B
Field Length: 8 alphanumeric characters
Default Value: No default value
Data Name: PRF.RFRL-KEY.RFRL-CDE

CARD NUMBER — The card number or primary account number (PAN) identifying the card with which the transaction was attempted.

Field Length: System protected
Data Name: PTLF.HEAD.CRD.CARD.CRD-NUM

Note: This field can be masked based on a setting in the Security File (SEC). The degree of masking is based on the setting of the AFT-PAN-DIGITS parameter in the Logical Network Configuration File.

CARD FIID — The FIID of the financial institution that issued the card being used to attempt the transaction.

Example: BK01
Field Length: System protected
Data Name: PTLF.HEAD.CRD.FIID

ACCOUNT TYPE — A code identifying the type of account being reviewed. This field contains a numeric code followed by a descriptive phrase used to identify the account type. Valid values are as follows:

00 = None
01 = Checking
11 = Savings
31 = Credit

Example: 31 CREDIT CARD
Field Length: System protected
Data Name: PTLF.AUTH.TRAN-CDE.AA

EXPIRE DATE — The expiration date (YYMM) of the card used to attempt the transaction. A transaction attempted after the year and month indicated is denied.

Example: 0507 indicates that the card is valid through July 2005.
Field Length: System protected
Data Name: PTLF.AUTH.EXP-DAT

Note: This field can be masked based on a setting in the Security File (SEC).

CURRENCY CODE — The numeric ISO code identifying the type of currency being used in the transaction. This field is followed by the alphabetic ISO code. Valid values are listed in the ISO 4217 standard, *Codes for the Representation of Currencies and Funds*.

Field Length: System protected
Data Name: PRF.AUTH.ORIG-CRNCY-CDE

REQUESTED AMT — The amount, in whole and fractional currency units, of the transaction request.

Example: 841.67
Field Length: System protected
Data Name: PTLF.AUTH.AMT-1

TRAN DATE — The date (YYMMDD) on which the transaction request occurred.

Example: 000509 indicates that the transaction requested occurred on May 9, 2000.
Field Length: System protected
Data Name: PTLF.AUTH.TRAN-DAT

<amount> — The amount carried in the AMT-2 field of the PSTM. When the PRF screen displays a purchase adjustment, merchandise return adjustment, or cash advance adjustment, the field label is COMPLETED AMT and the value in this field is the adjustment amount. When the PRF screen displays a purchase with cash back, the field label is CASH AMOUNT and the value in this field is the cash back amount.

TRAN TIME — The time (HHMMSS) the transaction request occurred.

Example: 142524 indicates that the transaction occurred at 2:25 p.m. and 24 seconds.
Field Length: System protected
Data Name: PTLF.AUTH.TRAN-TIM

TRAN TYPE — A code identifying the type of transaction being processed. This field contains a numeric code followed by a descriptive phrase used to identify the transaction type. Transactions not originally performed through CRT

Authorization can be displayed on the MRF screen. Valid values are the supported BASE24-pos transaction codes. Refer to the ***BASE24-pos Transaction Processing Manual*** for more information about transaction codes.

Example: 10 NORMAL PURCHASE
Field Length: System protected
Data Name: PTLF.AUTH.TRAN-CDE.TC

TERMINAL ID — A code identifying the CRT terminal from which the override occurred.

Example: PB22667722115653421
Field Length: System protected
Data Name: PTLF.HEAD.RETL.TERM-ID

REFERRAL PHONE — The telephone number used by the retailer to call in referral authorization requests to the CRT authorization center.

Field Length: System protected
Data Name: PTLF.AUTH.RFRL-PHONE

OVERRIDE APPROVAL CODE — The approval code associated with this transaction. This field can accept values as well as display values. When viewing transactions, this field displays the value from the APPRV-CDE field in the PSTM. This field can also accept operator input. The first six characters entered in the OVERRIDE APPROVAL CODE field is validated. Once validation is successful, the code is used to update the APPRV-CDE field in the PSTM.

Example: 437240 (Embedded spaces are not allowed)
Field Length: 8 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: PTLF.AUTH.APPRV-CDE

RESPONSE CODE — The response to a referral transaction from the authorizing entity. This field contains a response code followed by an explanation. Referral response codes are 100-149. Refer to the *BASE24-pos Transaction Processing Manual* for a complete listing of response codes.

Example: 101 (ISSUE A CALL)
Field Length: System protected
Data Name: PTLF.AUTH.RESP-CDE

AUTHORIZOR — A code identifying which authorizing entity responded to the transaction request.

Example: AUTHH
Field Length: System protected
Data Name: PTLF.AUTH.AUTHORIZER

FRAUD RATING — A code identifying the type of account being reviewed. This field contains a numeric code followed by a descriptive phrase used to identify the account type. Valid values are as follows:

Example: 1 PRONE TO FRAUD
Field Length: System protected
Data Name: PS51-TKN.FRD-PRN-FLG

CVD VALUE — Manually entered values such as the MasterCard Card Validation Codes (CVC2) and Visa Card Verification Value 2 (CVV2). Only the leftmost three bytes are used in CVC2 and CVV2 verification processing.

This field always displays spaces because the BASE24-pos Device Handler/Router/Authorization process removes the value entered by the operator before it writes the record to the POS Referral File (PRF).

Field Length: Up to 4 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: PS51-TKN.CVD-FLD

CVD PI — A code indicating whether the Card Verification Value is on the card. Valid values are as follows:

- 0 = CVV2 value is deliberately bypassed or not provided by the merchant
- 1 = CVV2 value is present
- 2 = CVV2 value is on the card, but is illegible
- 9 = Cardholder states that the card has no CVV2 imprint

Field Length: 1 numeric character
Required Field: No
Default Value: 0
Data Name: PS51-TKN.CVD-PRES-IND

CVD RESULT — Indicates the results of verifying the card. Valid values are as follows:

- 0 = Card verification was not performed because the transaction was denied before card verification processing started.
- C = Card verification was performed and the card verification digits (CVD) were invalid. The situation was noted, and transaction processing continued. This value is used when the appropriate byte of the CV-BAD-DISP field in the Base segment of the CPF contains the value 0.
- D = Card verification was performed and the CVD was invalid. The transaction was denied and the ERR-FLG field was set to C. This value is used when the appropriate byte of the CV-BAD-DISP field in the Base segment of the CPF contains the value 1, 2, or 3.
- J = CVV checking was not performed. The track length was in error. The BAD TRACK LEN flag in the CPF indicates that the transaction should be denied.
- K = Card verification was not performed. The track length was in error. The situation was noted and the transaction was referred (POS only).
- L = CVV checking was not performed. The track length was in error. The BAD TRACK LEN flag in the CPF indicates that processing should continue.
- N or *b* = Authorizing entity has not attempted card verification or could not verify the CVD due to a security device error. (*b* indicates a blank character.)
- O = CVD checking was not performed because the CVD was not on the card. Not all cards have a CVD value encoded. The card expiration date must be equal to or greater than the date defined in the CPF to ensure that the CVD field has been encoded. If the card expiration date is equal to or greater than the CPF date, the CVD checks are performed.
- P = Card verification was not performed. The CVD was ignored by the merchant or the user falsely claimed there was no CVD on the card.

- R = Card verification was performed and the CVD was invalid. The situation was noted and the transaction should be referred.
- U = The issuer has not certified or has not provided the encryption keys to the interchange.
- Y = Card verification was performed and the CVD was valid.

Field Length: 1 alphanumeric character
Required Field: No
Default Value: 0
Data Name: PS50-TKN.CRD-VRFY-FLG

AVS ADDR — The cardholder billing address received with the transaction if address verification was performed. When the transaction contains an address verification status code without an address or a postal code, this field contains zeros. If address verification was not performed, this field contains blanks.

Field Length: System protected
Data Name: PTLF.AUTH.ADDR

AVS POST CODE — The cardholder billing postal code received with the transaction if address verification was performed. When the transaction contains an address verification status code without an address or a postal code, this field contains zeros. If address verification was not performed, this field contains blanks. In the United States, postal code is synonymous with ZIP code.

Field Length: System protected
Data Name: PTLF.AUTH.ZIP-CDE

AVS RESULT — A code identifying the result of comparing address verification information received in the transaction and address verification information contained in the processor's database. Valid values are as follows:

- A = ADDRESS—Addresses matched, but postal codes did not match.
- E = ERROR—The transaction was not eligible for address verification or an editing error occurred while attempting to process the message.
- N = NO—Addresses did not match and postal codes did not match.
- R = RETRY—Primary and secondary authorizers were unavailable or declined the transaction and address verification was not performed on BASE24-pos.
- S = SERVICE NOT SUPPORTED—BASE24-pos authorized the transaction, but did not have the add-on Address Verification module.

- U = UNAVAILABLE—Address information was not available to the processor performing address verification.
- W = WHOLE ZIP—Nine-digit postal codes matched, but addresses did not match.
- X = EXACT—Addresses and nine-digit postal codes matched.
- Y = YES—Addresses and five-digit postal codes matched.
- Z = ZIP—Five-digit postal codes matched, but addresses did not match.
- b* = Address verification information was not included in this transaction (*b* denotes a blank character).
- 0 = Address verification information was included in this transaction, but was not verified. A transaction to be verified by a host or interchange carries this code. A transaction to be verified on BASE24-pos, but declined before address verification could be performed also carries this code.

Field Length: System protected
 Data Name: PTLF.AUTH.ADDR-VRFY-STAT

The following values are also valid, but are used only by Visa. They are not set by the BASE24-pos address verification function:

- B = Street address match. Postal code is not verified because of incompatible formats. (Acquirer sends both street address and postal code.)
- C = Street address and postal code is not verified because of incompatible formats. (Acquirer sends both street address and postal code.)
- D = Street addresses and postal codes match.
- G = Global non-participant in the Address Verification Service. Address is not verified for international transactions.
- I = Address information is not verified for international transactions.
- M = Street address and postal code match.
- P = Postal code match. Street address is not verified because of incompatible formats. (Acquirer sends both street address and postal code.)

6: Credibility History Screen

The Credibility History screen provides you with an additional dimension to the BASE24-pos CRT Authorization system. The Credibility History screen contains credit or debit history information about the cardholder. This information can be used to analyze the cardholder account and to assist you in determining whether a referral request should be approved or declined. The Credibility History screen makes it possible for you to take other cardholder credit or debit history factors into consideration besides those contained on the POS Referral File (PRF) screen when determining the outcome of a transaction. The credit and debit history information contained on this screen is taken from fields in the Cardholder Authorization File (CAF), the Positive Balance File (PBF), and the Card History File (CHF). The CHF is an optional file. If it is not supported, the Credibility History screen only displays selected fields from the CAF and PBF.

This section describes the functionality of the Credibility History screen. It provides information about using the screen and describes the function keys used to perform tasks from the screen. It also includes sample Credibility History screens and descriptions of their fields.

Using the Credibility History Screen

The following paragraphs contain information about inquiries from the Credibility History screen and the relationship between the Credibility History screen and the POS Referral File (PRF).

Inquiries from the Credit or Debit History Screens

The Credibility History screen contains cardholder history for debit accounts and credit accounts. Debit accounts are savings, checking, or any other account that can be accessed through use of a debit card. Credit accounts are those accounts that can be accessed through use of credit cards. The Credibility History screen consists of two screens. The first contains information pertaining specifically to a cardholder's credit account history. Credit history includes items such as credit limit parameters, the number of days the credit card has been delinquent, the number of times the credit card has been delinquent, and the available credit left on the account. The second screen contains information pertaining specifically to a cardholder's debit account history. Debit history includes items such as the current ledger balance of the debit account, the last date on which a deposit has been made to the debit account, the number of times the debit account has contained insufficient funds in a particular month, and the number of times the debit account has been overdrawn in a particular month.

You can perform inquiries on cardholder accounts by accessing the Credibility History screen from the POS Product Menu or by pressing the **F14** key from the PRF screen. Inquiries on cardholder accounts provide additional credit or debit information and assist, in many cases, in determining whether a transaction should be approved or declined. The Credibility History screen that is displayed when an inquiry is initiated from the product menu contains no cardholder information. You are required to enter the card number or the account number and the FIID for which credit or debit history should be retrieved. You also have the option to enter the card member number and the type of account associated with the card (checking account, credit account, etc.). If you enter the account number, you must enter the account type. Once the required information is entered on the screen, press the **F2** key. This function key is used to read the credit or debit history information for the card number or account number entered on the screen.

Credit History, Debit History, and the PRF

The Credibility History screen can be accessed from the POS Referral File (PRF) screen by pressing the **F14** key. When the Credibility History screen is accessed from the PRF screen, the credit or debit history for the referral currently being displayed on the PRF screen is displayed on the Credibility History screen. Whether the credit history or the debit history is displayed depends on whether the transaction is being attempted using a debit or credit card. You can examine the credit or debit history of the cardholder attempting the transaction, take the credit or debit history information into consideration, and press the **F16** key to return to the PRF screen. The referral can then be approved or declined from the PRF screen. In this case, the Credibility History screen serves as an additional checkpoint that can be used in determining whether a referral should be approved or declined.

The following scenario provides an example of when the Credibility History screen can be a useful tool in assisting you in determining the outcome of a transaction request. A transaction request is made by the merchant. The transaction is being performed using a credit card. You enter the transaction (on the Online Transaction screen) and send it to be authorized. The transaction is returned from the authorizing entity with a referral response code indicating that the transaction exceeds the cardholder's credit limit. You can then transfer the transaction to the PRF screen by pressing the **F14** key from the Online Transaction screen. The same result can be achieved if you access the Multiple Referrals screen, select the referral, and press the **F1** key to transfer the referral to the PRF screen.

From the PRF screen, you can approve the transaction, decline the transaction, or access the Credibility History screen. Based on cardholder account data contained on the Credibility History screen, you may determine that the transaction should be approved, even though the response code indicates that the transaction would put the cardholder over his or her credit limit. In other words, because of the past credit history of the cardholder (e.g., the cardholder has never been delinquent, has had a credit line change since his or her last transaction, the transaction would not put the cardholder excessively over his or her credit limit, etc.) a transaction that may normally be declined could be approved. You can then return to the PRF screen by pressing the **F16** key. The referral is automatically displayed again on the PRF screen. Upon returning to the PRF screen, the transaction can be approved by pressing the **F4** key.

Credibility History Screen Function Keys

The usage of two function keys on the Credibility History screen varies from the standard function keys explained in the *BASE24 User Security Manual*. The usage of these function keys is explained below.

The first column shows the function key. The second column provides a description of how the function key works for the Credibility History screen.

Function Key	Description
F2	Read Transaction — Used to read a cardholder's credit or debit history when you make a cardholder inquiry.
F16	Exit — Allows you to exit from the Credibility History screen and return to the screen from which the referral or inquiry was invoked.

Credit History Screen Description

The credit history screen provides additional information concerning a cardholder's credit account. This information can be used to analyze the credit account and assist in determining whether a referral request should be approved or declined. Information contained on the Credibility History screen is taken from fields contained in the Cardholder Authorization File (CAF), the Positive Balance File (PBF), and the Card History File (CHF). The Credibility History screen is shown below, followed by a description of its fields.

```

BASE24-BPS    CREDIBILITY HISTORY    LLLL    YY/MM/DD  HH:MM  01 OF 01
CARD:
ACCOUNT:
CR LIMIT:
BALANCE:
AVAIL CR:
TOT FLT:
CUR FLT:
CRD STAT:
<primary cardholder name>
<pri address>
<pri city>
(1)
(2)
(3)
(4)
(5)
(6)
CASH ADV:
PURCHASE:
REFUNDS:
MAX/ALL:
EXP DATE:
FIRST USED:
LAST USED:
<secondary cardholder name>
<sec address>
<sec city>
BALANCES (MOST CURRENT=1, LEAST=12):
(7)
(8)
(9)
(10)
(11)
(12)
USE/PRD:
RFND/PRD:
DAYS DEL:
MONTHS ACT:
CYC1:
CYC2:
CYC3:
TOKEN ID:
CARDS ISSUED:
CREDIT LINE CHANGE DATE:
***** BASE24 *****
FILE DESTINATION:
NEW LOGICAL NETWORK ID:
F2-READ  F10-PRINT  F13-CHANGE LOGICAL NET  F16-EXIT  SF16-LOGOFF

```

CARD — The card number or primary account number (PAN) identifying the credit card with which the transaction was attempted. In order to read a record, a value must be entered in either the CARD field or the ACCOUNT field.

Field Length: 1–19 numeric characters
Required Field: Yes, unless a value has been entered in the ACCOUNT field.
Default Value: No default value
Data Name: CAF.CAFBASE.PRIKEY.PAN and CHF.PRI-KEY.CRD-
NUM

Note: This field can be masked based on a setting in the Security File (SEC). The degree of masking is based on the setting of the AFT-PAN-DIGITS parameter in the Logical Network Configuration File.

MBR — The member number of the credit card used to attempt the transaction. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: 3 numeric characters
Required Field: No
Default Value: 000
Data Name: CAF.CAFBASE.PRIKEY.MBR-NUM
CHF.PRI-KEY.MBR-NUM

ACCOUNT — The number identifying the credit account with which the card used to attempt the transaction is associated. In order to read a record, a value must be entered in either the CARD field or the ACCOUNT field.

Field Length: 1–19 alphanumeric characters
Required Field: Yes, unless a value has been entered in the CARD field.
Default Value: No default value
Data Name: PBF.PBFBASE.PRIKEY.NUM

TYPE — A code identifying the type of account on which the transaction is being performed. Valid values are as follows:

00 = None
01 = Checking
11 = Savings
31 = Credit

A value of 01 or 11 entered in this field causes debit history information to be displayed on the Credibility History screen. A value of 31 entered in this field causes credit history information to be displayed.

Field Length: 2 numeric characters
Required Field: Yes, when you enter a value in the ACCOUNT field.
Default Value: The default value is configurable in the COBNAMES file.
Data Name: PBF.PBFBASE.PRIKEY.TYP
CHF.PRI-KEY.TYP

FIID — The FIID of the financial institution that issued the credit card used to attempt the transaction.

Example: BK01
Field Length: 1–4 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CAF.CAFBASE.FIID
PBF.PBFBASE.PRIKEY.FIID
CHF.PRI-KEY.TYP

CR LIMIT — The maximum amount, in whole and fractional currency units, of credit allowed for this account. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.CR-LMT

ONLINE LIMITS

The next four fields represent the institution's credit limits for the cardholder using BASE24-pos during a single usage accumulation period. These values are taken from the CAF for the cardholder account. None of the limits set in the following fields apply to cards that have a VIP status.

CASH ADV — The maximum amount, in whole and fractional currency units, of cash advances allowed against credit accounts using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-LMT.TTL-CCA-LMT

PURCHASE — The maximum amount, in whole and fractional currency units, of purchases allowed against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-LMT.TTL-PUR-LMT

REFUNDS — The maximum amount, in whole and fractional currency units, of refunds allowed against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.TTL-RFND-CR-LMT

MAX/ALL — The maximum aggregate amount, in whole and fractional currency units, of cash advances, purchases, and refunds allowed against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-LMT.TTL-WDL-LMT

ONLINE THIS PERIOD

The next four fields represent an accumulation of credit cash advances, purchases, and refunds for the cardholder using BASE24-pos during the current usage accumulation period. These values are taken from the CAF record for the cardholder account.

CASH ADV — The total amount, in whole and fractional currency units, of cash advances accumulated against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-PRD.TTL-CCA-PRD

PURCHASE — The total amount, in whole and fractional currency units, of purchases accumulated against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-PRD.TTL-PUR-PRD

REFUNDS — The total amount, in whole and fractional currency units, of refunds accumulated against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.TTL-RFND-CR-PRD

MAX/ALL — The total aggregate amount, in fractional currency units, of cash advances, purchases, and refunds accumulated against a credit account using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-PRD.TTL-WDL-PRD

BALANCE — The credit balance for the account. The credit balance is the credit card account's current balance or total amount of charges on the account. It includes all transactions that have been authorized and the paperwork has been received. The amount of any refund for purchases from a credit-type account is subtracted from the amount in this field. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.CR-BAL

AVAIL CR — The amount, in whole and fractional currency units, remaining when the current charges are subtracted from the credit line for this credit account. Purchases or cash advances made from a credit card account are subtracted from the value in this field. This field may contain a negative amount. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.AVAIL-CR

TOT FLT — The balance amount, in whole and fractional currency units, of credit transactions associated with the account for which the paperwork has not been received.

This amount includes all transactions that have been authorized, but not posted to this account because the paperwork has not been received. The value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.POSPBF.TTL-FLOAT

CUR FLT — The transaction amount, in whole and fractional currency units, authorized during the current usage accumulation period for the credit account. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.POSPBF.CUR-FLOAT

CRD STAT — A code identifying the status of the card. This value is taken from the CAF record for the cardholder account. Valid status codes are as follows:

- 0 = Issued but not active—no transactions allowed; return card
- 1 = Open—transactions allowed; return card
- 2 = Lost—no transactions allowed; return card
- 3 = Stolen—no transactions allowed; retain card
- 4 = Restricted—no withdrawals allowed; return card
- 5 = VIP—transactions allowed; return card
- 6 = BASE24-pos—check reason code
- 9 = Closed—no transactions allowed; return card
- A = Referral—no transactions allowed; return card
- B = Maybe—transactions allowed; return card
- C = Denial—no transactions allowed; return card
- D = Signature required—transactions allowed; return card
- E = Country Club—transactions allowed; return card
- F = Expired card—no transactions allowed; return card
- G = Commercial—transactions allowed; return card

Field Length: System protected
Data Name: CAF.CAFBASE.CRD-STAT

EXP DATE — The expiration date (YYMM) of the credit card. A transaction attempted after the year and month indicated should be denied. This value is taken from the CAF record for the cardholder account.

Example: 0507 indicates the card is valid through July 2005.
Field Length: System protected
Data Name: CAF.CAFBASE.EXP-DAT

Note: This field can be masked based on a setting in the Security File (SEC).

FIRST USED — The date (YYMMDD) that the credit card was first used in the system. This value is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.CAFBASE.FIRST-USED-DAT

LAST USED — The date (YYMMDD) that the credit card was last used in the system or the date (YYMMDD) the usage accumulation fields were last cleared (the ONLINE LIMITS and ONLINE THIS PERIOD fields). This field is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.POSCAF.LAST-USED

<primary cardholder name> — An unlabeled field containing the name of the primary cardholder for the given account.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.NAME

Note: This field will be masked if the CARD field is configured for masking.

<pri address> — An unlabeled field containing the primary cardholder's address.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.ADDR

<pri city> — An unlabeled field containing the city portion of the primary cardholder's address.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.CITY

<pst> — An unlabeled field containing the state portion of the primary cardholder's address.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.STATE

<secondary cardholder name> — An unlabeled field containing the name of the secondary cardholder for the given account.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.NAME

Note: This field will be masked if the CARD field is configured for masking.

<sec address> — An unlabeled field containing the secondary cardholder's address.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.ADDR

<sec city> — An unlabeled field containing the city portion of the secondary cardholder's address.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.CITY

<sst> — An unlabeled field containing the state portion of the secondary cardholder's address.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.STATE

BALANCES (MOST CURRENT=1, LEAST=12) — The following fields contain up to 12 entries representing the status and balance of the credit account for up to 12 separate months. The first field (1) represents the most current month and the last field (12) represents the least current month. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Names: CHF.CREDIT-STAT-HIST.MM.ACCT-STAT
 CHF.CREDIT-STAT-HIST.MM.ACCT-BAL

USE/PRD — The number of times the credit card has been used at terminals in the system during the current usage accumulation period. This field is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.POSCAF.USED-PRD

RFND/PRD — The number of refunds performed using the credit card during the current usage accumulation period for which deposit credits have been granted. When the BASE24-pos Authorization process clears the usage accumulation totals, it clears this field. This field is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.POSCAF.NUM-RFND-CR-PRD

DAYS DEL — The total number of days this credit account has been delinquent. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.POSPBF.DAYS-DELINQ

MONTHS ACT — The number of months this credit account has been active. This field is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.POSPBF.MONTHS-ACTIVE

CYC1 — The number of times in the first cycle that this credit account has been delinquent. Cycles are user defined and can represent days, weeks, or months. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Names: PBF.POSPBF.CYCLE-1

CYC2 — The number of times in the second cycle that this credit account has been delinquent. Cycles are user defined and can represent days, weeks, or months. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Names: PBF.POSPBF.CYCLE-2

CYC3 — The number of times in the third cycle that this credit account has been delinquent. Cycles are user defined and can represent days, weeks, or months. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Names: PBF.POSPBF.CYCLE-3

TOKEN ID — A personal identifier used by the institution in special authorization circumstances. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.TOKEN-ID

CARDS ISSUED — The number of cards issued for this card number. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.NUM-CRDS-ISSUED

CREDIT LINE CHANGE DATE — The date (YYMMDD) the credit line was last changed for this account. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.CR-LINE-CHG-DAT

Debit History Screen Description

The debit history portion of the Credibility History screen provides additional information concerning a cardholder's debit accounts. This information can be used to analyze the account and assist in determining whether a referral request should be approved or declined. Information contained on the Credibility History screen is taken from fields contained in the Cardholder Authorization File (CAF), the Positive Balance File (PBF), and the Card History File (CHF). The Credibility History screen is shown below, followed by a description of its fields.

```

BASE24-BPS    CREDIBILITY HISTORY    LLLL    YY/MM/DD  HH:MM  01 OF 01
CARD:
ACCOUNT:
LEDG BAL:
AMT HLD:
AVAIL BAL:
LAST DEP:
OV DFT LMT:
EXP DAT:
CRD:
<primary cardholder name>
<pri address>
<pri city>
          <pst>
          BAL (MST CURR=1, LST=6):
            (1)
            (2)
            (3)
# NSF: (1)    (2)    (3)    (4)    (5)    (6)
# OD: (1)    (2)    (3)    (4)    (5)    (6)
TOKEN ID:
*****
          CARDS ISSUED:
          FILE DESTINATION:
F2-READ  F10-PRINT  F13-CHANGE LOGICAL NET  F16-EXIT  SF16-LOGOFF

          CASH ADV:
          PURCHASE:
          REFUNDS:
          MAX/ALL:
          USE/PRD:
          RFND/PRD:
          LST W/D DAT:
          LST DEP DAT:
          <secondary cardholder name>
          <sec address>
          <sec city>
          <sst>
          TYPE: 01  FIID:
          ONLINE LIMITS  ONLINE THIS PERIOD
          OVERDRAFT LIMIT CHANGE DATE:
*****
          NEW LOGICAL NETWORK ID:

```

CARD — The card number or primary account number (PAN) identifying the debit card with which the transaction was attempted. In order to read a record, a value must be entered in either the CARD field or the ACCOUNT field.

Field Length: 1–28 numeric characters
Required Field: Yes, unless a value is entered in the ACCOUNT field.
Default Value: No default value
Data Name: CAF.CAFBASE.PRIKEY.PAN and CHF.PRI-KEY.CRD-
NUM

Note: This field can be masked based on a setting in the Security File (SEC). The degree of masking is based on the setting of the AFT-PAN-DIGITS parameter in the Logical Network Configuration File.

MBR — The member number of the debit card used to attempt the transaction. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: 3 numeric characters
Required Field: No
Default Value: 000
Data Name: CAF.CAFBASE.PRIKEY.MBR-NUM and CHF.PRI-KEY.
MBR-NUM

ACCOUNT — The number identifying the debit account with which the debit card used to attempt the transaction is associated. In order to read a record, a value must be entered in either the CARD field or the ACCOUNT field.

Field Length: 1–19 alphanumeric characters
Required Field: Yes, unless a value is entered in the CARD field.
Default Value: No default value
Data Name: PBF.PBFBASE.PRIKEY.NUM

TYPE — A code identifying the type of debit account on which the transaction is being performed. Valid values are as follows:

00 = None
01 = Checking
11 = Savings
31 = Credit

A value of 01 or 11 entered in this field causes debit history information to be displayed on the Credibility History screen. A value of 31 entered in this field causes credit history information to be displayed on the Credibility History screen.

Field Length: 2 numeric characters
Required Field: Yes, when you enter a value in the ACCOUNT field.
Default Value: The default value is configurable in the COBNAMES file.
Data Name: PBF.PBFBASE.PRIKEY.TYP
CHF.PRI-KEY.TYP

FIID — The FIID of the financial institution that issued the debit card used to attempt the transaction.

Example: BK01
Field Length: 1–4 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CAF.CAFBASE.FIID
PBF.PBFBASE.PRIKEY.FIID
CHF.PRI-KEY.FIID

LEDG BAL — The current balance of the savings or checking account, identified in the ACCOUNT field, on which the transaction is to be performed. The amount in this field is taken from the PBF record for the cardholder account. The ledger balance is the available balance plus the amount on hold.

The available balance is the amount that may be withdrawn by the cardholder, excluding overdraft protection. The amount on hold is the amount of checking or savings account funds that need to be verified and are not yet available to the cardholder, but have been added to the ledger balance.

Field Length: System protected
Data Name: PBF.PBFBASE.LEDG-BAL

ONLINE LIMITS

The next four fields represent the institution's limits for the cardholder's debit accounts using BASE24-pos during a single usage accumulation period. These values are taken from the CAF for the savings or checking account. None of the limits set in the following fields apply to cards that have a VIP status.

CASH ADV — The maximum amount, in whole and fractional currency units, of cash advances allowed against savings or checking accounts using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-LMT.TTL-CCA-LMT

PURCHASE — The maximum amount, in whole and fractional currency units, of purchases allowed against savings or checking accounts using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-LMT.TTL-PUR-LMT

REFUNDS — The maximum amount, in whole and fractional currency units, of refunds allowed against savings or checking accounts using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.TTL-RFND-CR-LMT

MAX/ALL — The maximum aggregate amount, in whole and fractional currency units, of cash advances, purchases, and refunds allowed against savings or checking accounts using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-LMT.TTL-WDL-LMT

ONLINE THIS PERIOD

The next four fields represent an accumulation of cash advances, purchases, and refunds for the cardholder's debit accounts during the current usage accumulation period. These values are taken from the CAF record for the savings or checking account.

CASH ADV — The total amount, in whole and fractional currency units, of cash advances accumulated against savings or checking accounts using BASE24-pos.

Field Length: System protected
Data Name: CAF.POSCAF.GRP-PRD.TTL-CCA-PRD

PURCHASE — The total amount, in whole and fractional currency units, of purchases accumulated against savings or checking accounts using BASE24-pos.

Field Length: System protected

Data Name: CAF.POSCAF.GRP-PRD.TTL-PUR-PRD

REFUNDS — The total amount, in whole and fractional currency units, of refunds accumulated against savings or checking accounts using BASE24-pos.

Field Length: System protected

Data Name: CAF.POSCAF.TTL-RFND-CR-PRD

MAX/ALL — The total aggregate amount, in fractional currency units, of cash advances, purchases, and refunds accumulated against savings or checking accounts using BASE24-pos.

Field Length: System protected

Data Name: CAF.POSCAF.GRP-PRD.TTL-WDL-PRD

AMT HLD — The amount of savings or checking account funds that need to be verified and are not yet available to the cardholder. However, the amount on hold has been added to the ledger balance. An example of held funds might be a deposit for which no deposit credit is granted. Although the deposit amount is credited to the ledger balance, a cardholder cannot make use of the funds until they are verified or cleared. The amount in this field is taken from the PBF record for the cardholder account.

Field Length: System protected

Data Name: PRB.PBFBASE.AMT-ON-HOLD

AVAIL BAL — The maximum amount that may be withdrawn from this savings or checking account by the cardholder, excluding overdraft protection. This field may contain a negative amount because of overdraft limits. This value is taken from the PBF record for the cardholder account.

Field Length: System protected

Data Name: PBF.PBFBASE.AVAIL-BAL

LAST DEP AMT — The amount of the last deposit or transfer to this account. The amount in this field is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.LAST-DEP-AMT

OV DFT LMT — The maximum amount available for overdraft on this account. An overdraft is a withdrawal of money from a savings or checking account in excess of the amount of money actually in the account. This field makes it possible for a cardholder to perform transactions resulting in a zero or negative account balance. The amount in this field is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.OVERDRFT-LMT

EXP DATE — The expiration date (YYMM) of the debit card. A transaction attempted after the year and month indicated is denied. This value is taken from the CAF record for the cardholder account.

Example: 0507 indicates the card is valid through July 2005.
Field Length: System protected
Data Name: CAF.CAFBASE.EXP-DAT

Note: This field can be masked based on a setting in the Security File (SEC).

FIRST USED — The date (YYMMDD) that the debit card was first used in the system. This value is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.CAFBASE.FIRST-USED-DAT

LAST USED — The date (YYMMDD) that the debit card was last used in the system or the date (YYMMDD) the usage accumulation fields were last cleared (the ONLINE LIMITS and ONLINE THIS PERIOD fields). This field is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.POSCAF.LAST-USED

USE/PRD — The number of times the debit card has been used at terminals in the system during the current usage accumulation period. This field is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.POSCAF.USED-PRD

RFND/PRD — The number of refunds performed using the debit card during the current usage accumulation period for which deposit credits have been granted. When the BASE24-pos Authorization process clears the usage accumulation totals, it clears this field. This field is taken from the CAF record for the cardholder account.

Field Length: System protected
Data Name: CAF.POSCAF.NUM-RFND-CR-PRD

CRD — A code identifying the status of the debit card. This value is taken from the CAF record for the cardholder account. Valid status codes are as follows:

- 0 = Issued but not active—no transactions allowed; return card
- 1 = Open—transactions allowed; return card
- 2 = Lost—no transactions allowed; return card
- 3 = Stolen—no transactions allowed; retain card
- 4 = Restricted—no withdrawals allowed; return card
- 5 = VIP—transactions allowed; return card
- 6 = BASE24-pos—check reason code
- 9 = Closed—no transactions allowed; return card
- A = Referral—no transactions allowed; return card
- B = Maybe—transactions allowed; return card
- C = Denial—no transactions allowed; return card
- D = Signature required—transactions allowed; return card
- E = Country Club—transactions allowed; return card
- F = Expired card—no transactions allowed; return card
- G = Commercial—transactions allowed; return card

Field Length: System protected
Data Name: CAF.CAFBASE.CRD-STAT

MTHS ACTIVE — The number of months this savings or checking account has been active. This field is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.POSPBF.MONTHS-ACTIVE

LST W/D DAT — The date (YYMMDD) of the last withdrawal or transfer from this savings or checking account. This value is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.LAST-WDL-DAT

LST DEP DAT — The date (YYMMDD) of the last deposit or transfer to this account. The date in this field is taken from the PBF record for the cardholder account.

Field Length: System protected
Data Name: PBF.PBFBASE.LAST-DEP-DAT

<primary cardholder name> — An unlabeled field containing the name of the primary cardholder for the given account.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.NAME

Note: This field will be masked if the CARD field is configured for masking.

<pri address> — An unlabeled field containing the primary cardholder's address.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.ADDR

<pri city> — An unlabeled field containing the city portion of the primary cardholder's address.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.CITY

<pst> — An unlabeled field containing the state portion of the primary cardholder's address.

Field Length: System protected
Data Name: CHF.PRI-CARDHOLDER.STATE

<secondary cardholder name> — An unlabeled field containing the name of the secondary cardholder for the given account.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.NAME

Note: This field will be masked if the CARD field is configured for masking.

<sec address> — An unlabeled field containing the secondary cardholder's address.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.ADDR

<sec city> — An unlabeled field containing the city portion of the secondary cardholder's address.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.CITY

<sst> — An unlabeled field containing the state portion of the secondary cardholder's address.

Field Length: System protected
Data Name: CHF.SEC-CARDHOLDER.STATE

BAL (MST CURR=1, LST=6) — the following fields contain up to six entries representing the status and balance of the savings or checking account for up to six consecutive months. The first field (1) represents the most current month and the last field (6) represents the least current month. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.DEBIT-STAT-HIST.MM-D.ACCT-STAT
CHF.DEBIT-STAT-HIST.MM-D.ACCT-BAL

NSF — The following fields contain up to six entries representing the number of times during the particular month the savings or checking account did not contain sufficient funds. This field can be kept for up to six consecutive months. The first field (1) represents the most current month and the last field (6) represents the least current month. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.DEBIT-STAT-HIST.NSF.NSF-PER-MONTH

OD — The following fields contain up to six entries representing the number of times during the particular month the savings or checking account has been overdrawn. This field can be kept for up to six consecutive months. The first field (1) represents the most current month and the last field (6) represents the least current month. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.DEBIT-STAT-HIST.OD.OD-PER-MONTH

TOKEN ID — A personal identifier used by the institution in special authorization circumstances. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.TOKEN-ID

CARDS ISSUED — The number of debit cards issued for this card number. This field is taken from the CHF record for the cardholder account.

Field Length: System protected
Data Name: CHF.NUM-CRDS-ISSUED

OVERDRAFT LIMIT CHANGE DATE — The date (YYMMDD) the overdraft limit was last changed for this savings or checking account. This field is taken from the CHF record for the cardholder account.

Field Length: System protected

Data Name: CHF.OVRDRAFT-LIM-CHG-DAT

ACI Worldwide, Inc.

7: CRT Administration Maintenance Screens

The CRT Administration Maintenance screens are designed to allow you to process three additional types of transactions. The first screen is used to process sales drafts. The second screen is used to process chargebacks and representments.

This section describes the functionality of the CRT Administration Maintenance screens. It provides information about using the screens and describes the function keys used to perform tasks from the screens. It also includes sample CRT Administration Maintenance screens and descriptions of their fields.

The CRT Administration Maintenance screens do not use masking logic because knowledge of the full primary account number is required to enter post-event transactions.

Using the CRT Administration Maintenance Screens

The following paragraphs contain information about entering sales draft transactions on the CRT Administration Maintenance screens, reversing sales drafts from the CRT Administration Maintenance screens, and entering chargebacks and representments on the CRT Administration Maintenance screens.

Entering Sales Drafts

CRT Administration Maintenance screen 1 allows you to enter and process sales drafts online. A sales draft is a transaction performed when the cardholder is not present. Sales drafts are entered into the system at a later time than when a transaction occurs. For example, if a retailer becomes extremely busy during the day, in order to save time and accommodate the customers quickly, the retailer may decide to write down transaction information on drafts, then enter them into the system later in the day when business slows down.

Retailers can call in sales draft requests to the authorization center. You then ask the retailer for information about the sales draft, enter the required fields on CRT Administration Maintenance screen 1, and press the **F1** key to enter the sales draft into the system. Retailers may also choose to batch together all the sales drafts occurring during a business day and then send them to the financial institution. At the financial institution, the sales drafts can be processed using CRT Administration Maintenance screen 1.

Reversing Sales Drafts

Sales drafts can be reversed from CRT Administration Maintenance screen 1. Sales drafts can be reversed, for example, if data is entered incorrectly on the screen. Reversals must be performed before the next transaction is sent. To reverse a sales draft, press the **F4** key. This displays the last sales draft entered on the screen. Once this transaction is displayed on the screen, you can press the **F3** key to reverse the sales draft.

Entering Chargebacks and Representments

CRT Administration Maintenance screen 2 allows you to enter chargebacks and representments online. Chargebacks are monetary transactions that have been disputed by a cardholder and must be researched by the acquiring institution or retailer to determine if, in fact, the cardholder performed the transaction and should have the burden of paying the transaction amount. An example of a chargeback would be if a cardholder were charged twice for the same transaction.

Representments are monetary transactions that have been disputed by the cardholder (charged back to the acquiring institution or retailer), but the acquiring institution or retailer has researched the transaction and determined the transaction to be accurate as it stands and thus are presenting the transaction for settlement again. In this case, the cardholder is responsible for payment of the transaction amount.

Requests are made on chargebacks and representments by the retailer. If you have the security access required to perform chargebacks and representments, enter the required information on CRT Administration Maintenance screen 2, and press the **F3** key to enter the chargeback into the system. If the transaction is a representment, press the **F1** key to enter the transaction into the system.

CRT Administration Maintenance Function Keys

The usage of several function keys on the CRT Administration Maintenance screens varies from the standard function keys explained in the *BASE24 User Security Manual*. The usage of these function keys is explained below.

The first column shows the function key. The second column provides a description of how the function key works for the CRT Administration Maintenance screen.

Function Key	Description
F1	Sales Draft or Representation — The F1 key has two functions, depending on the CRT Administration Maintenance screen being used. If screen 1 is being used, the F1 key sends a sales draft to the authorizing entity to get an authorization response. If screen 2 is being used, the F1 key enters a representment into the system.
F3	Reverse Sales Draft or Send Chargeback — Used to reverse a sales draft from screen 1 or to enter a chargeback into the system from screen 2.
F4	Get Last Tran — Used to retrieve the last transaction processed on the CRT Administration Maintenance screen.

CRT Administration Maintenance Screen 1 Description

CRT Administration Maintenance screen 1 allows you to process sales drafts. You enter information required on the screen in order to process the sales draft. This information is obtained from the merchant when he or she calls the authorization center with the request.

```
BASE24-BPS      CRT ADMIN MAINTENANCE      LLLL  FIID  YY/MM/DD  HH:MM  01 OF 02

                                SALES DRAFTS

                                CARD NUMBER:
                                  MBR:
                                  EXP (YYMM):
                                MERCHANT ID:

                                TRAN TYPE: 10 (PURCHASE)
                                ACCOUNT TYPE: 31 (CREDIT CARD)
                                CARD TYPE: 1 (CREDIT CARD)
                                CURRENCY CODE: 840

                                AMOUNT:

                                AUTH RESPONSE: 000
                                APPROVAL CODE:

                                ***** BASE24 *****
                                NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                                F1-SALES DRAFT  F3-SALES DRAFT REVERSAL  F4-GET LAST TRAN  F12-HELP
```

SALES DRAFTS

The following fields pertain to sales drafts. These fields are used when sales draft requests are made by the merchant or when a sales draft needs to be reversed. When performing a sales draft reversal, you can reverse only the last sales draft entered on the screen. The last sales draft can be retrieved by pressing the **F4** key. If a sales draft is to be reversed, the reversal must be initiated before another sales draft is entered.

CARD NUMBER — The card number or primary account number (PAN) identifying the card used to initiate the sales draft.

Field Length: 1–28 numeric characters
 Required Field: Yes
 Default Value: No default value
 Data Name: PTLF.CRT Administration screen 1HEAD.CRD.CARD.
 CRD-NUM

MBR — The member number of the card used to initiate the sales draft. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: 3 numeric characters
 Required Field: No
 Default Value: 000
 Data Name: PTLF.CRT Administration screen 1HEAD.CRD.CARD.
 MBR-NUM

EXP (YYMM) — The expiration date (YYMM) of the card used to attempt the sales draft. A transaction attempted after the year and month indicated will be declined.

Example: 0507 indicates the card is valid through July 2005.
 Field Length: 4 numeric characters
 Required Field: Yes
 Data Name: PTLF.AUTH.EXP-DAT

MERCHANT ID — The retailer ID identifying the merchant who is calling in the authorization request. The retailer ID must match the retailer ID specified in the POS Retailer Definition File (PRDF).

Example: STORE10 or 1234560987654321456
 Field Length: 1–19 alphanumeric characters
 Required Field: Yes
 Default Value: No default value
 Data Name: PTLF.HEAD.TKEY.RKEY.RETAILER-ID

TRAN TYPE — A code identifying the type of sales draft requested. Valid values are as follows:

- 10 = Normal purchase
- 13 = Mail or telephone order
- 14 = Merchandise return

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 10 (PURCHASE)
Data Name: PTLF.AUTH.TRAN-CDE-TC

ACCOUNT TYPE — A code identifying the type of account on which the sales draft is being performed. Valid values are as follows:

- 00 = None
- 01 = Checking
- 11 = Savings
- 31 = Credit

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 31 (CREDIT CARD)
Data Name: PTLF.AUTH.TRAN-CDE.AA

CARD TYPE — A code identifying the type of card being used to attempt the sales draft. Valid codes are as follows:

- 0 = None
- 1 = Credit
- 2 = Debit

Field Length: 1 numeric character
Required Field: Yes
Default Value: 1 (CREDIT CARD)
Data Name: PTLF.AUTH.TRAN-CDE.T

CURRENCY CODE — A code indicating the type of currency being used in the requested transaction (i.e., what nation printed the money). Valid values are listed in the ISO 4217 standard, *Codes for the Representation of Currencies and Funds*.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: 840 (United States)
Data Name: PTLF.AUTH.ORIG-CRNCY-CDE

AMOUNT — The amount, in fractional currency units, of the sales draft. It should be noted that you must manually enter the decimal point on the screen for transactions requiring one.

Example: 467.91
Field Length: 1–14 numeric characters for whole currency amounts, depending on the currency code being used
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.AMT-1

AUTH RESPONSE — A code identifying the response from the authorizing entity regarding the sales draft. When a sales draft is entered on the screen, the response code followed by an explanation is displayed in this field.

Example: 001 (APPROVED NO BALANCES)
Field Length: System protected
Data Name: PTLF.AUTH.RESP-CDE

APPROVAL CODE — The approval code assigned to the sales draft by BASE24 or an interchange. When transactions are approved, they are assigned an approval code for reference. If the approval code is assigned to the sales draft by BASE24, a B is inserted into the last byte of the field.

Example: 724010 B
Field Length: System protected
Data Name: PTLF.AUTH.APPRV-CDE

CRT Administration Maintenance Screen 2 Description

CRT Administration Maintenance screen 2 allows you to process chargeback and representment transactions. The information entered on the screen is obtained from the merchant when he or she calls the authorization center with the request.

```

BASE24-BPS      CRT ADMIN MAINTENANCE      LLLL FIID YY/MM/DD HH:MM 02 OF 02
                REPRESENTATIONS / CHARGEBACKS

                CARD NUMBER:                MBR:
ACQUIRING INST CODE (RTTN):                TRAN TYPE: 10 (PURCHASE)
                CARD ACCEPTOR ID NUM:        ACCOUNT TYPE: 31 (CREDIT CARD)
                CURRENCY CODE: 840          CARD TYPE: 1 (CREDIT CARD)
                MERCHANT ID:

                ORIG AMOUNT:                ORIG MSG TYPE: 0200
                ORIG TIME (HHMM):            ORIG DATE (MMDD):
ORIG RETRIEVAL REF NUM:

                REASON FOR CHARGEBACK:      (***** )
                REPLACEMENT AMOUNT:
                NUMBER OF CHARGEBACK: 1

AUTH RESPONSE: 000
APPROVAL CODE:

***** BASE24 *****
NEW PAGE:      FILE DESTINATION:      NEW LOGICAL NETWORK ID:
F1-REPRESENTATION F3-CHARGEBACK F4-GET LAST TRAN F12-HELP

```

CARD NUMBER — The card number or primary account number (PAN) identifying the card associated with the chargeback or representment.

Field Length:	1–28 numeric characters
Required Field:	Yes
Default Value:	No default value
Data Name:	PTLF.HEAD.CRD.CARD.CRD-NUM

MBR — The member number of the card associated with the chargeback or representment. When multiple cards are issued with the same card number, this field distinguishes between the cards.

Field Length: 3 numeric characters
Required Field: No
Default Value: 000
Data Name: PTLF.HEAD.CRD.CARD.MBR-NUM

ACQUIRING INST CODE (RTTN) — The routing and transit number or issuer identification number of the acquiring institution.

Field Length: 11 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.ACQ.-INST-ID-NUM

TRAN TYPE — A code identifying the type of transaction associated with the chargeback or representment. The only valid value is 10 (normal purchase).

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 10 (PURCHASE)
Data Name: PTLF.AUTH.TRAN-CDE.TC

CARD ACCEPTOR ID NUM — A code identifying the host card acceptor on a transaction originating from an acquirer host. This field is only used in cases where the acquirer is not the actual card acceptor. Otherwise, this field is left blank.

Field Length: 11 numeric characters
Required Field: No
Default Value: No default value
Data Name: PTLF.AUTH.CRD.ACCEPT-ID-NUM

ACCOUNT TYPE — A code identifying the type of account on which the chargeback or representment is being performed. Valid values are as follows:

00 = None
01 = Checking
11 = Savings
31 = Credit card

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 31 (CREDIT CARD)
Data Name: PTLF.AUTH.TRAN-CDE.AA

CURRENCY CODE — A code indicating the type of currency being used in the requested transaction (i.e., what nation printed the money). Valid values are listed in the ISO 4217 standard, *Codes for the Representation of Currencies and Funds*.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: 840 (United States)
Data Name: PTLF.AUTH.ORIG-CRNCY-CDE

CARD TYPE — A code identifying the type of card associated with the chargeback or representment. Valid codes are as follows:

0 = None
1 = Credit
2 = Debit

Field Length: 1 numeric character
Required Field: Yes
Default Value: 1 (CREDIT CARD)
Data Name: PTLF.AUTH.TRAN-CDE.T

MERCHANT ID — The retailer ID identifying the merchant who is calling in the authorization request. The retailer ID must match the retailer ID specified in the POS Retailer Definition File (PRDF).

Example: STORE10 or 1234560987654321456
Field Length: 1–19 alphanumeric characters
Required Field: Yes
Data Name: PTLF.HEAD.TKEY.RKEY.RETAILER-ID

ORIG AMOUNT — The original amount, in fractional currency units, of the transaction being charged back or represented. You must manually enter the decimal point on the screen for transactions requiring one.

Example: 467.91
Field Length: 1–14 numeric characters for whole currency amounts, depending on the currency code being used
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.AMT-1

ORIG MSG TYPE — The original message type associated with the transaction being charged back or represented.

Field Length: 4 numeric characters
Required Field: Yes
Default Value: 0200
Data Name: PTLF.AUTH.ORIG-MSG-TYP

ORIG TIME (HHMM) — The original time (HHMM) at which the transaction being charged back or represented occurred.

Field Length: 4 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.ORIG-TRAN-TIM

ORIG DATE (MMDD) — The original date (MMDD) on which the transaction being charged back or represented occurred.

Field Length: 4 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.ORIG-TRAN-TIM

ORIG RETRIEVAL REF NUM — The sequence number assigned to the original transaction by the system at the time the transaction was originally performed. The sequence number is used to uniquely identify a transaction.

Field Length: 11 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: PTLF.AUTH.ORIG-SEQ-NUM

The following three fields on CRT Administration Maintenance screen 2 are applicable only for chargebacks. These fields are ignored for representments.

REASON FOR CHARGEBACK — A code identifying the reason the transaction was charged back. Valid values are as follows:

03 = Invalid merchant
12 = Invalid transaction
18 = Customer dispute
59 = Suspected fraud
63 = Security violation
64 = Original transaction amount is incorrect
68 = Supporting documentation received too late
93 = Transaction in violation of the law
94 = Duplicate transaction
96 = System malfunction

Field Length: 2 numeric characters
Required Field: Yes, for chargebacks
Default Value: (*****
Data Name: PTLF.AUTH.REA-FOR-CHRGBCK

REPLACEMENT AMOUNT — The new amount, in fractional currency units, of the transaction being charged back. This amount replaces the original amount of the transaction if it has changed due to a chargeback. It should be noted that you must manually enter the decimal point on the screen for transactions requiring one.

Example: 467.91
Field Length: 1–14 numeric characters for whole currency amounts,
depending on the currency code being used
Required Field: Yes, for chargebacks
Data Name: PTLF.AUTH.AMT-2

NUMBER OF CHARGEBACK — The number of times the transaction has been charged back. Valid values are 1 through 9.

Field Length: 1 numeric character
Required Field: Yes, for chargebacks
Default Value: 1
Data Name: PTLF.AUTH.NUM-OF-CHRGBCK

AUTH RESPONSE — A code identifying the response from the authorizing entity regarding the chargeback or representment. When a chargeback or representment is entered on the CRT Administration Maintenance screen, the response code followed by an explanation is displayed in this field.

Example: 001 (APPROVED NO BALANCES)
Field Length: System protected
Data Name: PTLF.AUTH.RESP-CDE

APPROVAL CODE — The approval code assigned to the original transaction by BASE24 or an interchange. When transactions are approved, they are assigned an approval code for reference. If the approval code is assigned by BASE24, a B is inserted into the last byte of the field.

Field Length: System protected
Data Name: PTLF.AUTH.APPRV-CDE

8: CRT Authorization Files Maintenance

BASE24 files maintenance manipulates Enscribe files through the use of formatted screens. This section describes the formatted screens used exclusively for BASE24-pos CRT Authorization files maintenance. The files maintenance functions described in this section should be performed only by personnel who have been assigned access to the files in the Security File (SEC).

The information provided in this section should be sufficient in itself to allow persons familiar with BASE24 CRT access and files maintenance to set up the necessary records in the CRT Authorization files and also to update these records. The documentation for each file consists of a brief description of the file, followed by samples of the screens associated with the file, and the field descriptions associated with the screens. Documentation for the following three files is included in this section.

- Card History File (CHF)
- CRT Authorization Retailer Usage File (CRUF)
- CRT Authorization Security File (CSEC)

Additional information on BASE24-pos files maintenance can be found in the *BASE24 Base Files Maintenance Manual*, the *BASE24-pos Files Maintenance Manual*, and the *BASE24 User Security Manual*.

Card History File (CHF)

The Card History File (CHF) is used with CRT Authorization to perform processing on BASE24-pos referrals. This file contains the credit card or debit card history for each account supported by CRT Authorization. The CHF is an optional file that contains information that can be used in conjunction with information from the Cardholder Authorization File (CAF) and the Positive Balance File (PBF) when making referral override decisions. Referral processing is used when human intervention is required to complete a transaction. Selected fields from the CHF, CAF, and PBF are displayed on the Credibility History screen. This allows you the flexibility of viewing a cardholder's credit or debit history and taking it into consideration when approving or declining a transaction. The CHF contains the credit account status and balance for each of the last 12 months, including the current month. Account status and balance for debit accounts is contained in the CHF for each of the last six months, including the current month. Once a record is added to the CHF, it is maintained by refreshing the file from the host or using files maintenance functions.

The CHF consists of two screens, which are explained in their entirety on the following pages. The FIID, CARD NUM, MEMBER NUM, and ACCOUNT TYPE combine to form the primary key for this file.

Card History File (CHF) Screen 1

Card History File (CHF) screen 1 contains the credit card history of the card number and is used in BASE24-pos CRT Authorization processing. You can reach CHF screen 1 by placing the cursor next to the CHF acronym on the POS Product Menu and pressing the **F1** key.

CHF screen 1 is shown below, followed by descriptions of its fields.

```

BASE24-BPS   CARD HISTORY                               LLLL  FIID  YY/MM/DD  HH:MM  01 OF 02
      FIID:                                CARD NUMBER:
MEMBER NUMBER: 000                      ACCOUNT TYPE: 31
      CARD TYPE:                                TOKEN ID:
CARDS ISSUED: 1                          CREDIT LINE CHANGE DATE:
                                     * PRIMARY CARDHOLDER *
NAME:                                SOC. SEC. NO.:
ADDR:                                CNTRY:                HOME PH:
CITY:                                STATE:          CNTY:          WORK PH:
                                     * SECONDARY CARDHOLDER *
NAME:                                SOC. SEC. NO.:
ADDR:                                CNTRY:                HOME PH:
CITY:                                STATE:          CNTY:          WORK PH:

ACCOUNT STATUS AND BALANCE(MOST CURRENT=1, LEAST=12):
1) 00                                2) 00                                3) 00
4) 00                                5) 00                                6) 00
7) 00                                8) 00                                9) 00
10) 00                               11) 00                               12) 00

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                  F12-HELP

```

FIID — The FIID of the financial institution that issued the credit card. The FIID is an identifier that must be unique within the logical network.

The system checks the Institution Definition File (IDF) for a valid FIID record. The CHF file name must be specified on screen 16 of the IDF.

Field Length: 1–4 alphanumeric characters
 Required Field: Yes
 Default Value: The FIID previously entered
 Data Name: CHF.PRI-KEY.FIID

CARD NUMBER — The account number identifying the credit card being used to perform the transaction.

Field Length: 1–28 numeric characters
 Required Field: Yes
 Data Name: CHF.PRI-KEY.CRD-NUM

Note: This field can be masked based on a setting in the Security File (SEC). The degree of masking is based on the setting of the AFT-PAN-DIGITS parameter in the Logical Network Configuration File.

MEMBER NUMBER — The member number for the credit card. When multiple cards are issued with the same card number, this field distinguishes between the cards. Institutions not supporting member numbers must allow this field to default to 000.

Field Length: 3 numeric characters
 Required Field: Yes
 Default Value: 000
 Data Name: CHF.PRI-KEY.MBR-NUM

ACCOUNT TYPE — A code identifying the type of account represented by this record. A value of 31 should be entered in this field for credit card accounts.

Field Length: 2 numeric characters
 Required Field: Yes
 Default Value: 31
 Data Name: CHF.PRI-KEY.TYP

CARD TYPE — A code identifying the type of card associated with the card number. Codes used in this field are either reserved for BASE24 or user-defined. Reserved codes are to be used only as defined, and include:

AD = Administrative (BASE24-atm only)
 AX = American Express credit
 BD = Business deposit (BASE24-atm only)
 CB = Carte Blanche credit
 D = Demonstration (BASE24-atm only)
 DC = Diners Club credit
 DS = Discover credit
 M = MasterCard credit

MD = MasterCard debit (See BASE24-pos note below)
MM = MasterCard dual (See BASE24-pos note below)
V = VISA credit
VD = VISA debit (See BASE24-pos note below)
VV = VISA dual (See BASE24-pos note below)

Administration (AD), Business deposit (BD), and Demonstration (D) are special-use card types utilized by BASE24-atm.

MasterCard dual (MM) and VISA dual (VV) may be processed as debit or credit card types, based on the values of the DEFAULT COMBO CARD TYPE field specified in the Card Prefix File (CPF).

BASE24-pos Note: BASE24-pos does not allow MasterCard debit (MD), MasterCard dual (MM), VISA debit (VD), or VISA dual (VV) card types in the POS Retailer Definition File (PRDF) and the POS Terminal Data File (PTDF). BASE24-pos automatically includes the MD and MM card types with the MasterCard credit (M) card type, and automatically includes the VD and VV card types with the VISA credit (V) card type.

User-defined codes: You can add any one- or two-character code not included in the Reserved Code list above, according to the following guidelines:

- The first character must be alphabetic (A through Z).
- The second character may be A through Z, 0 through 9, or a blank space.
- Codes with a first character of C (including C, C0–C9, CA, CC–CZ) are recommended to identify proprietary credit cards.
- Codes with a first character of P (including P, P0–P9, PA–PZ) are required to identify proprietary debit cards. BASE24 treats user-defined codes not starting with a P as credit cards.
- A valid COBNAMES file table entry is required for each user-defined code.

Field Length: 1–2 alphanumeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.CRD-TYP

TOKEN ID — A personal identifier used by the institution in special authorization circumstances.

Field Length: 1–10 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.TOKEN-ID

CARDS ISSUED — The number of credit cards issued for this card number.

Field Length: 1–4 numeric characters
 Required Field: No
 Default Value: 1
 Data Name: CHF.NUM-CRDS-ISSUED

CREDIT LINE CHANGE DATE — The date (YYMMDD) the credit line was last changed for this account.

Field Length: 6 numeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.CR-LINE-CHG-DAT

PRIMARY CARDHOLDER

The following nine fields contain information about the primary cardholder for this credit card account.

NAME — The name of the primary cardholder.

Field Length: 1–30 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.NAME

Note: This field can be masked based on a setting in the Security File (SEC).

SOC. SEC. NO. — The social security number of the primary cardholder.

Field Length: 11 numeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.SSN-NUM

ADDR — The address of the primary cardholder.

Field Length: 1–25 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.ADDR

CNTRY — A code indicating the country in which the primary cardholder is located.

Field Length: 1–2 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.CNTR

HOME PH — The home telephone number of the primary cardholder.

Example: 4023907600
Field Length: 1–14 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.HOME-PHONE

CITY — The city in which the primary cardholder is located.

Field Length: 1–13 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.CITY

STATE — A code indicating the state in which the primary cardholder is located. This field contains the valid standard postal abbreviation for the state.

Field Length: 1–3 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CCHF.PRI-CARDHOLDER.STATE

CNTY — A code identifying the county in which the primary cardholder is located.

Field Length: 1–15 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.CNTY

WORK PH — The work telephone number of the primary cardholder.

Example: 4023907600
 Field Length: 1–14 numeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.WRK-PHONE

SECONDARY CARDHOLDER

The following nine fields contain information about the secondary cardholder for this credit card account.

NAME — The name of the secondary cardholder.

Field Length: 1–30 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.NAME

Note: This field can be masked based on a setting in the Security File (SEC).

SOC. SEC. NO. — The social security number of the secondary cardholder.

Field Length: 11 numeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.SSN-NUM

ADDR — The address of the secondary cardholder.

Field Length: 1–25 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.ADDR

CNTRY — A code indicating the country in which the secondary cardholder is located.

Field Length: 1–2 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.CNTRY

HOME PH — The home telephone number of the secondary cardholder.

Example: 4023907600
Field Length: 1–14 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.HOME-PHONE

CITY — The city in which the secondary cardholder is located.

Field Length: 1–13 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.CITY

STATE — A code indicating the state in which the primary cardholder is located. This field contains the valid standard postal abbreviation for the state.

Field Length: 1–3 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CCHF.SEC-CARDHOLDER.STATE

CNTY — A code identifying the county in which the primary cardholder is located.

Field Length: 1–15 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.CNTY

WORK PH — The work telephone number of the primary cardholder.

Example: 4023907600
 Field Length: 1–14 numeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.WRK-PHONE

ACCOUNT STATUS AND BALANCE (MOST CURRENT=1

LEAST=12) — The following fields contain up to 12 entries representing the status and balance of the credit card account for up to 12 separate months. The first field (1) represents the most current month and the last field (12) represents the least current month.

<account status> — A unlabeled field identifying the status of the credit card account during a specific month. This field contains up to 12 entries.

Status codes can be user-defined; however, ACI recommends use of the predefined codes from the ACCT-STAT field of the Positive Balance File (PBF). Valid status codes from the PBF are as follows:

- 0 = No relationship (inactive account)
- 1 = Open
- 2 = Restricted to deposits

3 = Open primary account
4 = Restricted primary account
9 = Closed

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 00
Data Name: CHF.CREDIT-STAT-HIST.MM-ACCT-STAT

<account balance> — The balance of the credit card account for the month indicated. This unlabeled field contains up to 12 entries. For U.S. currency, the decimal point before the last two positions represents cents. This field may contain a positive (+) or negative (-) amount.

Field Length: 1–16 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.CREDIT-STAT-HIST.MM.ACCT-BAL

Card History File (CHF) Screen 2

Card History File (CHF) screen 2 contains the debit card history of the card number and is used in BASE24-pos CRT Authorization processing. CHF screen 2 is shown below, followed by descriptions of its fields.

```

BASE24-BPS   CARD HISTORY                               LLLL FIID YY/MM/DD HH:MM 02 OF 02
      FIID:                                CARD NUMBER:
MEMBER NUMBER: 000                      ACCOUNT TYPE: 31
      CARD TYPE:                                TOKEN ID:
CARDS ISSUED: 1                      OVERDRAFT LIMIT CHANGE DATE:
                                * PRIMARY CARDHOLDER *
NAME:                                SOC. SEC. NO.:
ADDR:                                CNTRY:                HOME PH:
CITY:                                STATE:                CNTY:                WORK PH:
                                * SECONDARY CARDHOLDER *
NAME:                                SOC. SEC. NO.:
ADDR:                                CNTRY:                HOME PH:
CITY:                                STATE:                CNTY:                WORK PH:
ACCOUNT STATUS AND BALANCE(MOST CURRENT=1, LEAST=6):
1) 00                                2) 00                                3) 00
4) 00                                5) 00                                6) 00
# OF INSUFFICIENT FUNDS PER MONTH      # OF OVERDRAFTS PER MONTH
1) 0 2) 0 3) 0                        1) 0 2) 0 3) 0
4) 0 5) 0 6) 0                        4) 0 5) 0 6) 0

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                                F12-HELP

```

FIID — The FIID of the financial institution that issued the debit card. The FIID is an identifier that must be unique within the logical network.

The system checks the Institution Definition File for a valid FIID record. The CHF file name must be specified on screen 16 of the IDF.

Field Length: 1–4 alphanumeric characters
 Required Field: Yes
 Default Value: The FIID previously entered
 Data Name: CHF.PRI-KEY.FIID

CARD NUMBER — The account number identifying the debit card being used to perform the transaction.

Field Length: 1–28 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.PRI-KEY.CRD-NUM

Note: This field can be masked based on a setting in the Security File (SEC). The degree of masking is based on the setting of the AFT-PAN-DIGITS parameter in the Logical Network Configuration File.

MEMBER NUMBER — The member number for the debit card. When multiple cards are issued with the same card number, this field distinguishes between the cards. Institutions not supporting member numbers must allow this field to default to 000.

Field Length: 3 numeric characters
Required Field: Yes
Default Value: 000
Data Name: CHF.PRI-KEY.MBR-NUM

ACCOUNT TYPE — A code identifying the type of account represented by this record. A value of 01 or 11 should be entered in this field for debit card accounts.

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 01
Data Name: CHF.PRI-KEY.TYP

CARD TYPE — A code identifying the type of card associated with the card number. Codes used in this field are either reserved for BASE24 or user-defined. Reserved codes are to be used only as defined, and include the following:

AD = Administrative (BASE24-atm only)
AX = American Express credit
BD = Business deposit (BASE24-atm only)
CB = Carte Blanche credit
D = Demonstration (BASE24-atm only)
DC = Diners Club credit
DS = Discover credit

M = MasterCard credit
 MD = MasterCard debit (See BASE24-pos note below)
 MM = MasterCard dual (See BASE24-pos note below)
 V = VISA credit
 VD = VISA debit (See BASE24-pos note below)
 VV = VISA dual (See BASE24-pos note below)

Administration (AD), Business deposit (BD), and Demonstration (D) are special-use card types utilized by BASE24-atm.

MasterCard dual (MM) and VISA dual (VV) may be processed as debit or credit card types, based on the default combo card type specified in the Card Prefix File (CPF).

BASE24-pos Note: BASE24-pos does not allow MasterCard debit (MD), MasterCard dual (MM), VISA debit (VD), or VISA dual (VV) card types in the POS Retailer Definition File (PRDF) and the POS Terminal Data File (PTDF). BASE24-pos automatically includes the MD and MM card types with the MasterCard credit (M) card type, and automatically includes the VD and VV card types with the VISA credit (V) card type.

User-defined codes: You can add any one- or two-character code not included in the Reserved Code list above, according to the following guidelines:

- The first character must be alphabetic (A through Z).
- The second character may be A through Z, 0 through 9, or a blank space.
- Codes with a first character of C (including C, C0–C9, CA, CC–CZ) are recommended to identify proprietary credit cards.
- Codes with a first character of P (including P, P0–P9, PA–PZ) are required to identify proprietary debit cards. BASE24 treats user-defined codes not starting with a P as credit cards.
- A valid COBNAMES file table entry is required for each user-defined code.

Field Length: 1–2 alphanumeric characters
 Required Field: Yes
 Default Value: No default value
 Data Name: CHF.CRD-TYP

TOKEN ID — A personal identifier used by the institution in special authorization circumstances.

Field Length: 1–10 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.TOKEN-ID

CARDS ISSUED — The number of debit cards issued for this card number.

Field Length: 1–4 numeric characters
Required Field: No
Default Value: 1
Data Name: CHF.NUM-CRDS-ISSUED

OVERDRAFT LIMIT CHANGE DATE — The date (YYMMDD) the overdraft limit was last changed for this savings or checking account. An overdraft is a withdrawal of money from a savings or checking account in excess of the amount of money actually in the account.

Field Length: 6 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.OVRDRFT-LIM-CHG-DAT

PRIMARY CARDHOLDER

The following nine fields contain information about the primary cardholder for this debit card account.

NAME — The name of the primary cardholder.

Field Length: 1–30 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.NAME

Note: This field can be masked based on a setting in the Security File (SEC).

SOC. SEC. NO. — The social security number of the primary cardholder.

Field Length: 11 numeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.SSN-NUM

ADDR — The address of the primary cardholder.

Field Length: 1–25 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.ADDR

CNTRY — A code indicating the country in which the primary cardholder is located.

Field Length: 1–2 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.CNTRY

HOME PH — The home telephone number of the primary cardholder.

Example: 4023907600
 Field Length: 1–14 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.HOME-PHONE

CITY — The city in which the primary cardholder is located.

Field Length: 1–15 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.PRI-CARDHOLDER.CNTY

STATE — A code indicating the state in which the primary cardholder is located. This field contains the valid standard postal abbreviation for the state.

Field Length: 1–3 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.STATE

CNTY — A code identifying the county in which the primary cardholder is located.

Field Length: 1–15 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.CNTY

WORK PH — The work telephone number of the primary cardholder.

Example: 4023907600
Field Length: 1–14 numeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.PRI-CARDHOLDER.WRK-PHONE

SECONDARY CARDHOLDER

The following nine fields contain information about the secondary cardholder for this debit card account.

NAME — The name of the secondary cardholder.

Field Length: 1–30 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.NAME

Note: This field can be masked based on a setting in the Security File (SEC).

SOC. SEC. NO. — The social security number of the secondary cardholder.

Field Length: 11 numeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.SSN-NUM

ADDR — The address of the secondary cardholder.

Field Length: 1–25 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.ADDR

CNTRY — A code indicating the country in which the secondary cardholder is located.

Field Length: 1–2 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.CNTRY

HOME PH — The home telephone number of the secondary cardholder.

Example: 4023907600
 Field Length: 1–14 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.HOME-PHONE

CITY — The city in which the secondary cardholder is located.

Field Length: 1–13 alphanumeric characters
 Required Field: No
 Default Value: No default value
 Data Name: CHF.SEC-CARDHOLDER.CITY

STATE — A code indicating the state in which the secondary cardholder is located. This field contains the valid standard postal abbreviation for the state.

Field Length: 1–3 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.STATE

CNTY — A code identifying the county in which the secondary cardholder is located.

Field Length: 1–15 alphanumeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.CNTY

WORK PH — The work telephone number of the secondary cardholder.

Example: 4023907600
Field Length: 1–14 numeric characters
Required Field: No
Default Value: No default value
Data Name: CHF.SEC-CARDHOLDER.WRK-PHONE

ACCOUNT STATUS AND BALANCE (MOST CURRENT=1, LEAST=6) — The following fields contain up to six entries representing the status and balance of the savings or checking account for up to six consecutive months. The first field (1) represents the most current month and the last field (6) represents the least current month.

<account status> — A unlabeled field identifying the status of the savings or checking account during a specific month. This field contains up to six entries.

Status codes can be user-defined; however, ACI recommends use of the predefined codes from the ACCT-STAT field of the Positive Balance File (PBF). Valid status codes from the PBF are as follows:

0 = No relationship (inactive account)
1 = Open
2 = Restricted to deposits

3 = Open primary account
4 = Restricted primary account
9 = Closed

Field Length: 2 numeric characters
Required Field: Yes
Default Value: 00
Data Name: CHF.DEBIT-STAT-HIST.MM-D.ACCT-STAT

<account balance> — The balance of the savings or checking account for the month indicated. This unlabeled field contains up to six entries. For U.S. currency, the decimal point before the last two positions represents cents. This field may contain a positive (+) or a negative (–) amount.

Field Length: 1–16 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.DEBIT-STAT-HIST.MM-D.ACCT-BAL

OF INSUFFICIENT FUNDS PER MONTH — The following fields contain up to six entries representing the number of times during the particular month the savings or checking account did not contain sufficient funds. This field can be kept for up to six consecutive months. The first field (1) represents the most current month and the last field (6) represents the least current month.

Field Length: 1–3 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.DEBIT-STAT-HIST.NSF.NSF-PER-MONTH

OF OVERDRAFTS PER MONTH — The following fields contain up to six entries representing the number of times during the particular month the savings or checking account has been overdrawn. This field can be kept for up to six consecutive months. The first field (1) represents the most current month and the last field (6) represents the least current month.

Field Length: 1–3 numeric characters
Required Field: Yes
Default Value: No default value
Data Name: CHF.DEBIT-STAT-HIST.OD.OD-PER-MONTH

CRT Authorization Retailer Usage File (CRUF)

The CRT Authorization Retailer Usage File (CRUF) is an optional file that is used to set limits and monitor merchandise return transactions, adjustments to merchandise returns, reversals on merchandise returns, and reversals on merchandise return adjustments being performed through BASE24-pos CRT Authorization. It contains one record for every retailer processing merchandise return transactions through BASE24-pos CRT Authorization.

CRUF Requirements

A CRUF record must exist for each retailer for which merchandise return limits are to be set and monitored. If a CRUF file name is not present in the Logical Network Configuration File (LCONF), the CRT Authorization Device Handler process assumes that merchandise return usages are not being kept for any retailers. In addition, if a CRUF does exist, only merchandise return transaction activity for retailers who have records set up in the CRUF is tracked. If a CRUF is present in the LCONF, the CRT Authorization Device Handler process attempts to access the CRUF by retailer ID. If a CRUF record does not exist for this retailer ID, the CRT Authorization Device Handler process assumes that merchandise return usages are not being kept for this specific retailer.

CRUF Activity Limits

The CRUF contains fields that are used to determine the maximum number and amount of merchandise return transactions that a specific retailer is allowed to perform during a single usage accumulation period. It also tabulates the number and amount of merchandise return transactions that have already been performed for a specific retailer during the current usage accumulation period. The activity limits are compared to the accumulated activity during the current usage accumulation period.

If the transaction is new, an authorization request (0200) is generated. If the transaction has already been performed, it is processed as a force post (0220). If the activity limits are exceeded in either count or amount, an error message is displayed. If the transaction is a 0200 (Authorization request), the transaction is declined with a response code of 253 (Declined—CRT Auth Merchandise Return Limits Exceeded) and the record is logged to the POS Transaction Log File (PTLF). If the transaction is a 0220 (Force post or Referral override), the transaction is not declined and the transaction is logged to the PTLF.

Usage Accumulation

The CRUF keeps track of merchandise return transaction activity during a single usage accumulation period. A usage accumulation period is defined from midnight to midnight or from logical network cutover to logical network cutover, depending on the value set in the CUTOVER FLAG field in the CRUF. During this time, all merchandise return activity is accumulated in count and amount. Each time a merchandise return transaction is performed through CRT Authorization, the activity limits in the CRUF are compared with the accumulated number and amount of merchandise return transaction activity that has occurred during the current usage accumulation period. This comparison allows the system to determine if the transaction being performed will cause the activity limits allowed for the specified retailer to be exceeded in either count or amount. Usage accumulation fields in the CRUF are cleared once the end of a usage accumulation period has been reached. These fields are cleared by the CRT Authorization Device Handler process.

CRUF Screen Description

The upper portion of the CRUF is used to enter the ID for the retailer and FIID for which merchandise return transaction activity is being kept. The bottom portion of the screen is used to set usage accumulation limits for the number and amount of merchandise return transactions allowed during a single usage accumulation period for the retailer. This portion of the screen also monitors merchandise return transaction activity that has already been performed during the current usage accumulation period for this retailer. The CRUF screen is shown below followed by descriptions of its fields.

```

BASE24-BPS   CRT AUTH RETAILER USAGE  APP1  LLLL  YY/MM/DD  HH:MM  01 OF 01

RETAILER ID:                               FIID:

                                MERCHANDISE RETURN USAGE CONTROL

                                ACTIVITY LIMITS                ACTIVITY THIS PERIOD

                                AMOUNT:                        0          AMOUNT:
                                COUNT:                         0          COUNT:

                                CUTOVER FLAG: L                LAST RESET DATE: 000000

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                   F12-HELP

```

RETAILER ID — The retailer ID identifying the merchant for whom merchandise return usage is being maintained.

Field Length: 1–19 alphanumeric characters
 Required Field: Yes
 Default Value: No default value
 Data Name: CRUF.PRIKEY.RETAILER-ID

FIID — The FIID of the financial institution with which the retailer is associated.

Field Length: 1–4 alphanumeric characters
 Required Field: Yes
 Default Value: No default value
 Data Name: CRUF.FIID

ACTIVITY LIMITS

The following two fields contain the limits for the maximum number and amount of merchandise return transactions allowed during a single usage accumulation period for the retailer specified in the retailer ID field.

AMOUNT — The maximum amount, in fractional currency units, of combined merchandise return transactions allowed during a single usage accumulation period for the retailer identified in the retailer ID field.

Field Length: 14 numeric characters
 Required Field: Yes
 Default Value: 0
 Data Name: CRUF.RETURN-LMT-AMT

COUNT — The maximum number of merchandise return transactions that may be performed during a single usage accumulation period by the retailer identified in the retailer ID field.

Field Length: 4 numeric characters
 Required Field: Yes
 Default Value: 0
 Data Name: CRUF.RETURN-LMT-CNT

ACTIVITY THIS PERIOD

The following two fields contain the accumulated number and amount of merchandise return transactions that have been performed during the current usage accumulation period for the retailer specified in the retailer ID field.

AMOUNT — The accumulated amount, in fractional currency units, of merchandise return transactions that have been performed during the current usage accumulation period by the retailer specified in the retailer ID field.

Field Length: System protected
Data Name: CRUF.RETURN-AMT

COUNT — The accumulated number of merchandise return transactions that have been performed during the current usage accumulation period by the retailer specified in the retailer ID field.

Field Length: System protected
Data Name: CRUF.RETURN-CNT

CUTOVER FLAG — A flag indicating the method of clearing usages in the CRUF. Merchandise return transaction activity can be accumulated from midnight to midnight or from logical network cutover to logical network cutover before being cleared from the CRUF. This flag indicates which method of clearing is used. Valid values are as follows:

L = Clear file usage at logical network cutover
M = Clear file usage at midnight

Field Length: 1 alphabetic character
Required Field: Yes
Default Value: L
Data Name: CRUF.CUTOVER-FLG

LAST RESET DATE — The date (YYMMDD) on which the file usage fields were last reset.

Field Length: System protected
Data Name: CRUF.LAST-RESET-DATE

CRT Authorization Security (CSEC) Screen

The CRT Authorization Security (CSEC) File contains one record for every CRT authorization operator in the system. This file is used only when setting up security parameters for BASE24-pos CRT Authorization. The CSEC allows institutions to restrict CRT authorization operators from performing certain transactions and functions on the Online Transaction screen and the POS Referral File (PRF) screen. This is accomplished by setting flags in the CSEC. This file not only determines if a CRT authorization operator can perform a specific transaction, but also whether he or she is allowed to force post the transaction from the Online Transaction screen (for those transactions that can be force posted) or override the transaction from the PRF screen.

The CSEC File is used in conjunction with the SEC File. Information contained in the SEC File is used by the system to access the corresponding CSEC record for a specific CRT authorization operator. Therefore, a SEC record must exist before the CSEC File record can be accessed for a specific CRT authorization operator. If no record exists in the SEC for the specified operator, an error message is displayed on the CSEC screen indicating this condition. Refer to the ***BASE24 User Security Manual*** for additional information about setting up security.

CSEC Screen Description

The first three fields on the CSEC screen contain information taken from the Security File (SEC). The remaining portion of the CSEC screen contains the transaction set allowed for the CRT authorization operator specified in the upper portion of the screen. Users who support stored value cards can process stored value transactions through the CRT authorization process. The CSEC screen is shown below, followed by descriptions of its fields.

```

BASE24-BPS   CSEC FILE                               LLLL  FIID  YY/MM/DD  HH:MM  01 OF 01
              CRT AUTHORIZATION SECURITY FILE

ALIAS:

              GROUP NUMBER:   255      USER NUMBER:           0
              GROUP NAME:                USER NAME:

NORMAL PURCHASE      NORMAL FORCED OVER              NORMAL FORCED OVER
PRE-AUTH PURCHASE    U    U    Y    ADJUST CASH ADV    Y    N    Y
PRE-AUTH PUR COMPL   U    U    Y    PURCHASE CASH BACK Y    N    Y
MAIL/PHONE ORDER     Y    N    Y    CASH ADVANCE       Y    N    Y
MERCHANDISE RETURN   N    N    Y    ADJUST CASH BACK   U    U    Y
BALANCE INQUIRY      U    U    U    CARD VERIFICATION Y    U    U
ADJUST PURCHASE      Y    N    Y    CHECK VERIFICATION U    U    U
ADJUST MERCH RTN     N    N    Y    CHECK GUARANTEE   U    U    U
CARD ACTIVATION      N    U    N    ADJUST AMT2 > AMT1 N    N    N
FULL REDEMPTION      N    U    U    REPLENISHMENT    N    U    U

ENTER 'Y' FOR EACH TRANSACTION ALLOWED

***** BASE24 *****
NEW PAGE:          FILE DESTINATION:          NEW LOGICAL NETWORK ID:
                  F12-HELP

```

ALIAS — A name identifying the BASE24 user. The alias is the primary key to the CSEC. It is required to read, add, delete, or update a CSEC record. The alias entered in this field must match the alias contained in the SEC for this CRT authorization operator. If the alias is entered incorrectly on the CSEC screen or a SEC record does not exist, an error message indicating the record cannot be found is displayed on the CSEC screen.

Field Length: 1–16 alphanumeric characters
 Required Field: Yes
 Default Value: No default value
 Data Name: CSEC.ALTKEY.PRIKEY.ALIAS

GROUP NUMBER — A group or section number that corresponds to the name entered in the ALIAS field. This field is taken from the SEC.

Field Length: System protected
Data Name: CSEC.ALTKEY.USER-GRP

USER NUMBER — A number that uniquely identifies the operator within the group displayed in the GROUP NUMBER field. This field is taken from the SEC.

Field Length: System protected
Data Name: CSEC.USER-NUM

GROUP NAME — Text that is used to further describe the group number field. This field is taken from the SEC and is used for informational purposes only.

Field Length: System protected
Data Name: CSEC.GROUP-NAME

USER NAME — Text that is used to further describe the user number field. This field is taken from the SEC and is used for informational purposes only.

Field Length: System protected
Data Name: CSEC.USER-NAME

NORMAL — The column heading for the flag that indicates whether an operator has security access to send a particular transaction type for authorization and cancel, adjust, or reverse that transaction from the Online Transaction screen. These are considered normal functions that can be performed from the Online Transaction screen. Valid values for the NORMAL column are as follows:

- Y = Yes, this CRT authorization operator can send this type of transaction for authorization and perform normal processing functions on the transaction from the Online Transaction screen.
- N = No, this CRT authorization operator is not allowed to perform this type of transaction from the Online Transaction screen.
- U = This type of transaction is currently unsupported through BASE24-pos CRT Authorization.

Field Length: 1 alphabetic character
Required Field: Yes
Default Value: The default value varies for each type of transaction.
Data Name: Not applicable

FORCED — The column heading for the flag that indicates whether an operator has security access to force post and adjust, reverse, or cancel the force post to the corresponding transaction type from the Online Transaction screen (for those transactions that can be force posted). Valid values for the FORCED column are as follows:

- Y = Yes, this CRT authorization operator can force post this type of transaction from the Online Transaction screen.
- N = No, this CRT authorization operator is not allowed to force post this type of transaction from the Online Transaction screen.
- U = Force post for this type of transaction is unsupported or the transaction type itself is currently unsupported through BASE24-pos CRT Authorization.

Field Length: 1 alphabetic character
Required Field: Yes
Default Value: The default value varies for each type of transaction.
Data Name: Not applicable

OVER — The column heading for the flag that indicates whether an operator has security access to perform an override on the corresponding transaction type from the PRF screen. Valid values for the OVER column are as follows:

- Y = Yes, this CRT authorization operator can perform an override on this type of transaction from the PRF screen.
- N = No, this operator is not allowed to perform an override on this type of transaction from the PRF screen.
- U = Override for this type of transaction is unsupported or the transaction type itself is currently unsupported through BASE24-pos CRT Authorization.

Field Length: 1 alphabetic character
Required Field: Yes
Default Value: The default value varies for each type of transaction.
Data Name: Not applicable

NORMAL PURCHASE — Indicates whether the CRT operator can perform normal, force post, or override transactions on normal purchases. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YNY
Data Name: CSEC.TRAN-SEC-ACCESS.NORMAL-PUR

PRE-AUTH PURCHASE — Indicates whether the CRT operator can perform normal, force post, or override transactions on preauthorization purchases. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: UUY
Data Name: CSEC.TRAN-SEC-ACCESS.PRE-AUTH-PUR

PRE-AUTH PUR COMPL — Indicates whether the CRT operator can perform normal, force post, or override transactions on preauthorization purchase completions. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: UUY
Data Name: CSEC.TRAN-SEC-ACCESS.PRE-AUTH-PUR-COMPL

MAIL/PHONE ORDER — Indicates whether the CRT operator can perform normal, force post, or override transactions on mail and telephone orders. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YNY
Data Name: CSEC.TRAN-SEC-ACCESS.MA-PHONE-ORDER

MERCHANDISE RETURN — Indicates whether the CRT operator can perform normal, force post, or override transactions on merchandise returns. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: NNY
Data Name: CSEC.TRAN-SEC-ACCESS.MERCH-RTRN

BALANCE INQUIRY — Indicates whether the CRT operator can perform normal, force post, or override transactions on balance inquiries. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: UUU
Data Name: CSEC.TRAN-SEC-ACCESS.BAL-INQ

ADJUST PURCHASE — Indicates whether the CRT operator can perform normal, force post, or override transactions on purchase adjustments. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YNY
Data Name: CSEC.TRAN-SEC-ACCESS.ADJ-PUR

ADJUST MERCH RTN — Indicates whether the CRT operator can perform normal, force post, or override transactions on merchandise return adjustments. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: NNY
Data Name: CSEC.TRAN-SEC-ACCESS.ADJ-MERCH-RTRN

ADJUST CASH ADV — Indicates whether the CRT operator can perform normal, force post, or override transactions on cash advance adjustments. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YNY
Data Name: CSEC.TRAN-SEC-ACCESS.ADJ-CASH-ADV

PURCHASE CASH BACK — Indicates whether the CRT operator can perform normal, force post, or override transactions on purchases with cash back. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YNY
Data Name: CSEC.TRAN-SEC-ACCESS.PUR-CASH-BACK

CASH ADVANCE — Indicates whether the CRT operator can perform normal, force post, or override transactions on cash advances. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YNY
Data Name: CSEC.TRAN-SEC-ACCESS.CASH-ADV

ADJUST CASH BACK — Indicates whether the CRT operator can perform normal, force post, or override transactions on cash back adjustments. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: UUY
Data Name: CSEC.TRAN-SEC-ACCESS.ADJ-CASH-BACK

CARD VERIFICATION — Indicates whether the CRT operator can perform normal, force post, or override transactions on card verifications. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: YUU
Data Name: CSEC.TRAN-SEC-ACCESS.CARD-VERIFY

CHECK VERIFICATION — Indicates whether the CRT operator can perform normal, force post, or override transactions on check verifications. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: UUU
Data Name: CSEC.TRAN-SEC-ACCESS.CHECK-VERIFY

CHECK GUARANTEE — Indicates whether the CRT operator can perform normal, force post, or override transactions on check guarantees. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: UUU
Data Name: CSEC.TRAN-SEC-ACCESS.CHECK-GUAR

ADJUST AMT 2 > AMT 1 — Indicates whether the CRT operator can perform normal, force post, or override transactions on adjustments when amount 2 is greater than amount 1. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: NNN
Data Name: CSEC.TRAN-SEC-ACCESS.ADJ-AMT2-AMT1

CARD ACTIVATION — Indicates whether the CRT operator can perform normal, force post, or override transactions on card activations for stored value cards. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: NUN
Data Name: CSEC.TRAN-SEC-ACCESS.CARD-ACTV

REPLENISHMENT — Indicates whether the CRT operator can perform normal, force post, or override transactions on replenishments for stored value cards. You must enter a valid value (Y, N, or U) under each of the NORMAL, FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: NUU
Data Name: CSEC.TRAN-SEC-ACCESS.REPLENISH

FULL REDEMPTION — Indicates whether the CRT operator can perform normal, force post, or override transactions on full redemptions of stored value cards. You must enter a valid value (Y, N, or U) under each of the NORMAL,

FORCED, and OVER headings. See the field descriptions for the NORMAL, FORCED, and OVER headings for more information about valid values and their meanings.

Field Length: 3 alphabetic characters
Required Field: Yes
Default Value: NUU
Data Name: CSEC.TRAN-SEC-ACCESS.FULL-REDEMP

Index

A

- Accessing CRT Authorization CRT and Administration functions, [2-1](#)
- Account balance
 - on CHF screen 1, [8-11](#)
 - on CHF screen 2, [8-20](#)
- Account status
 - on CHF screen 1, [8-10](#)
 - on CHF screen 2, [8-19](#)
- Activity accumulation
 - on Credibility History credit screen, [6-8](#)
 - on Credibility History debit screen, [6-18](#)
 - on CRUF screen, [8-25](#)
- Activity limits, on CRUF screen, [8-24](#)
- Adjusting transactions, [3-8](#)
- Administrative Queue File (AQF)
 - description, [1-21](#)
 - in CRT Administration transaction processing, chargebacks and representments, [1-26](#)
 - in CRT Administration transaction processing, sales drafts, [1-24](#)
- Amount data field on PRF screen, [5-7](#)
- Approving transactions, [5-2](#)

C

- Canceling transactions, [1-6](#)
- Card History File (CHF), [8-1](#), [8-2](#)
- Chargebacks
 - transaction processing, [1-25](#)
- Chargebacks, description, [7-3](#)
- Connecting to BASE24-pos, [1-28](#)
- Credibility History screen
 - access, [5-2](#)
 - credit history screen description, [6-5](#)
 - credit history, debit history, and the PRF, [6-3](#)
 - debit history screen description, [6-15](#)
 - function keys, [6-4](#)
 - inquiries from the Credit or Debit History screens, [6-2](#)
 - using the Credibility History screen, [6-2](#)
- CRT Administration
 - options, [1-22](#)
 - overview, [1-21](#)
 - screens, [2-3](#)
 - transaction processing, [1-23](#)

- CRT Administration Device Handler, [1-21](#)
- CRT Administration Maintenance screens
 - CRTA screen 1 description, [7-5](#)
 - CRTA screen 2 description, [7-9](#)
 - function keys, [7-4](#)
 - using the CRT Administration Maintenance screens, [7-2](#)
- CRT Authorization
 - files maintenance, [8-1](#)
 - force posting transactions, [1-6](#), [1-19](#)
 - options, [1-4](#)
 - overview, [1-2](#)
 - referral override transactions, [1-16](#)
 - screens, [2-2](#)
 - transaction processing, [1-11](#)
 - via telephone request, [1-12](#)
 - via telephone request for merchandise returns, [1-14](#)
 - via telephone requests, [1-5](#)
- CRT Authorization Device Handler, [1-2](#)
- CRT Authorization Retailer Usage File (CRUF)
 - activity limits, [8-21](#)
 - screen description, [8-23](#)
 - usage accumulation, [8-22](#)
- CRT Authorization Security (CSEC) screen, [8-27](#)
- CRT Authorization Security File (CSEC), [8-1](#)
 - overview, [2-11](#)
 - security access for PRF screen, [5-2](#)

D

- Debit and credit card support, [1-7](#)
- Declining transactions, [5-2](#)
- Draft capture entry, [1-9](#)
- Draft capture options, POS Retailer Definition File (PRDF), [3-3](#)
- Draft capture support
 - authorization and draft capture, [1-8](#)
 - authorization only, [1-8](#)
 - draft capture options, [1-9](#)

F

- Force post transactions, [3-6](#)

I

- Institution-level security
 - description, [2-10](#)
 - Multiple Referrals screen, [2-10](#)
 - Online Transaction screen, [2-10](#)
 - POS Referral File (PRF) screen, [2-10](#)
- Integration with BASE24-pos, [1-29](#)

L

- Logical Network Configuration File (LCONF), [8-21](#)

M

- Menu selection, [2-5](#)
- Merchandise returns, [3-5](#)
- Multiple Referrals screen
 - function keys, [4-4](#)
 - reading the referral queue, [4-2](#)
 - screen description, [4-5](#)
 - using the Multiple Referrals screen, [4-2](#)

O

- Online limits
 - on Credibility History credit screen, [6-7](#)
 - on Credibility History debit screen, [6-17](#)
- Online Maintenance File (OMF) Auditing, [2-12](#)
- Online Transaction screen
 - function keys, [3-10](#)
 - online entry of transactions, [3-2](#)
 - screen description, [3-12](#)
 - using the Online Transaction screen, [3-2](#)

P

- Pending transactions
 - canceling a pending transaction, [3-5](#)
 - reading pending transactions, [3-4](#)
 - selecting a pending transaction, [3-4](#)
- POS Referral File (PRF)
 - accessing from Multiple Referrals screen, [4-2](#)
 - accessing from Online Transaction screen, [3-9](#)
 - and CRT Device Handler module, [1-3](#)
 - relationship with Credibility History screen, [6-2](#)
- POS Referral File (PRF) screen
 - function keys, [5-3](#)
 - screen description, [5-4](#)
 - using the PRF screen, [5-2](#)
- POS Retailer Definition File (PRDF), [1-7](#)
- POS Transaction Log File (PTLF)
 - and CRT Administration Device Handler process, [1-21](#)
 - and CRT Authorization Device Handler module, [1-3](#)
 - in CRT Administration transaction processing, [1-24](#), [1-26](#)
 - in CRT Authorization transaction processing, [1-15](#), [1-17](#), [1-20](#)

Primary cardholder information

- on CHF screen 1, [8-6](#)
- on CHF screen 2, [8-15](#)
- on Credibility History credit screen, [6-11](#)
- on Credibility History debit screen, [6-22](#)

R

- Referral processing, [1-7](#)
- Reporting for CRT Authorization and Administration, [1-31](#)
- Representment, description, [7-3](#)
- Representments, [1-25](#)
- Reversing a transaction, [3-5](#)

S

- Sales draft
 - description, [7-2](#)
 - entering, [7-2](#)
 - reversing, [7-2](#)
- Secondary cardholder information
 - on CHF screen 1, [8-8](#)
 - on CHF screen 2, [8-17](#)
 - on Credibility History credit screen, [6-12](#)
 - on Credibility History debit screen, [6-23](#)
- Security File (SEC)
 - description, [2-9](#)
 - security for CRT Authorization files maintenance, [8-1](#)
- Security requirements, [2-9](#)

T

- Terminal Queue File (TQF)
 - description, [1-3](#)
 - in CRT Authorization transaction processing, [1-13](#), [1-15](#)
- Terminals, [1-27](#)

Index by Field Name

Note: Unlabeled fields are not included in this index; they appear by subject in the main index.

Special Characters

NSF, [6-24](#)

OD, [6-24](#)

OF INSUFFICIENT FUNDS PER MONTH, [8-20](#)

OF OVERDRAFTS PER MONTH, [8-20](#)

A

ACCOUNT

Credibility History credit screen, [6-6](#)

Credibility History debit screen, [6-16](#)

ACCOUNT STATUS AND BALANCE (MOST CURRENT=1, LEAST=12), [8-10](#)

ACCOUNT STATUS AND BALANCE (MOST CURRENT=1, LEAST=6), [8-19](#)

ACCOUNT TYPE

CHF screen 1, [8-4](#)

CHF screen 2, [8-13](#)

CRT Administration screen 1, [7-7](#)

CRT Administration screen 2, [7-11](#)

PRF screen, [5-6](#)

ACCT TYPE, [3-17](#)

ACQUIRING INST CODE (RTTN), [7-10](#)

ADDR

CHF screen 1, [8-7](#), [8-9](#)

CHF screen 2, [8-16](#), [8-18](#)

ADJUST AMT 2 > AMT 1, [8-35](#)

ADJUST CASH ADV, [8-32](#)

ADJUST CASH BACK, [8-33](#)

ADJUST MERCH RTN, [8-32](#)

ADJUST PURCHASE, [8-32](#)

ALIAS, [8-27](#)

AMOUNT

CRT Administration screen 1, [7-8](#)

CRUF screen, [8-24](#), [8-25](#)

Multiple Referrals screen, [4-9](#)

AMOUNT 1, [3-14](#)

AMOUNT 2, [3-14](#)

AMT HLD, [6-19](#)

APPROVAL CODE

CRT Administration screen 1, [7-8](#)

CRT Administration screen 2, [7-14](#)

Online Transaction screen, [3-15](#)

AUTH RESP, [4-9](#)

AUTH RESPONSE

CRT Administration screen 1, [7-8](#)

CRT Administration screen 2, [7-14](#)

AUTH RESPONSE FOR TRANSACTION (0), [3-20](#)

AUTHORIZOR

Online Transaction screen, [3-20](#)

PRF screen, [5-9](#)

AVAIL BAL, [6-19](#)

AVAIL CR, [6-9](#)

AVS ADDR, [3-16](#), [5-11](#)

AVS POST CODE, [3-16](#), [5-11](#)

AVS RESULT, [3-19](#), [5-11](#)

B

BAL (MST CURR=1, LST=6), [6-24](#)

BALANCE, [6-9](#)

BALANCE INQUIRY, [8-31](#)

BALANCES (MOST CURRENT=1, LEAST=12), [6-13](#)

C

CARD

Credibility History credit screen, [6-6](#)

Credibility History debit screen, [6-16](#)

CARD ACCEPTOR ID NUM, [7-10](#)

CARD ACTIVATION, [8-35](#)

CARD FIID, [5-6](#)

CARD NUMBER

CHF screen 1, [8-4](#)

CHF screen 2, [8-13](#)

CRT Administration screen 1, [7-6](#)

CRT Administration screen 2, [7-9](#)

Multiple Referrals screen, [4-8](#)

Online Transaction screen, [3-12](#), [3-20](#)

PRF screen, [5-6](#)

CARD TYPE

- CHF screen 1, [8-4](#)
- CHF screen 2, [8-13](#)
- CRT Administration screen 1, [7-7](#)
- CRT Administration screen 2, [7-11](#)
- Online Transaction screen, [3-17](#)

CARD VERIFICATION, [8-34](#), [8-35](#)

CARDS ISSUED

- CHF screen 1, [8-6](#)
- CHF screen 2, [8-15](#)
- Credibility History credit screen, [6-14](#)
- Credibility History debit screen, [6-24](#)

CASH ADV

- Credibility History credit screen, [6-7](#), [6-8](#)
- Credibility History debit screen, [6-18](#)

CASH ADVANCE, [8-33](#)

CHECK GUARANTEE, [8-34](#)

CHECK VERIFICATION, [8-34](#)

CITY

- CHF screen 1, [8-7](#), [8-9](#)
- CHF screen 2, [8-16](#), [8-18](#)

CNTRY

- CHF screen 1, [8-7](#), [8-9](#)
- CHF screen 2, [8-16](#), [8-18](#)

CNTY

- CHF screen 1, [8-8](#), [8-10](#)
- CHF screen 2, [8-19](#)

COUNT, [8-24](#), [8-25](#)

CR LIMIT, [6-7](#)

CRD, [6-21](#)

CRD STAT, [6-10](#)

CREDIT LINE CHANGE DATE

- CHF screen 1, [8-6](#)
- Credibility History credit screen, [6-14](#)

CUR FLT, [6-10](#)

CURR CODE

- Multiple Referrals screen, [4-9](#)

CURRENCY CODE

- CRT Administration screen 1, [7-8](#)
- CRT Administration screen 2, [7-11](#)
- Online Transaction screen, [3-16](#)
- PRF screen, [5-7](#)

CUTOVER FLAG, [8-25](#)

CVD PI, [3-15](#), [5-10](#)

CVD RESULT, [3-18](#), [5-10](#)

CVD VAL, [3-15](#)

CVD VALUE, [5-9](#)

CYC1, [6-14](#)

CYC2, [6-14](#)

CYC3, [6-14](#)

D

DATE (YYMMDD), [5-5](#)

DAYS DEL, [6-13](#)

E

EXP (YYMM), [7-6](#)

EXP DATE

- Credibility History credit screen, [6-11](#)
- Credibility History debit screen, [6-20](#)
- Online Transaction screen, [3-13](#)

EXPIRE DATE, [5-6](#)

F

FIID

- CHF screen 1, [8-3](#)
- CHF screen 2, [8-12](#)
- Credibility History credit screen, [6-7](#)
- Credibility History debit screen, [6-17](#)
- CRUF screen, [8-24](#)

FIRST USED

- Credibility History credit screen, [6-11](#)
- Credibility History debit screen, [6-20](#)

FORCED, [8-29](#)

FRAUD RATING

- PRF screen, [5-9](#)

G

GROUP NAME, [8-28](#)

GROUP NUMBER, [8-28](#)

H

HOME PH

- CHF screen 1, [8-7](#), [8-9](#)
- CHF screen 2, [8-16](#), [8-18](#)

L

LAST DEP AMT, [6-20](#)

LAST RESET DATE, [8-25](#)

LAST USED

- Credibility History credit screen, [6-11](#)
- Credibility History debit screen, [6-20](#)

LEDG BAL, [6-17](#)

LST DEP DAT, [6-22](#)

LST W/D DAT, [6-22](#)

M

MAIL/PHONE ORDER, [8-31](#)

MAX/ALL

- Credibility History credit screen, [6-8](#), [6-9](#)
- Credibility History debit screen, [6-18](#), [6-19](#)

MBR

Credibility History credit screen, [6-6](#)
Credibility History debit screen, [6-16](#)
CRT Administration screen 1, [7-6](#)
CRT Administration screen 2, [7-10](#)
Multiple Referrals screen, [4-8](#)
Online Transaction screen, [3-13](#), [3-21](#)

MEMBER NUMBER

CHF screen 1, [8-4](#)
CHF screen 2, [8-13](#)

MERCHANDISE RETURN, [8-31](#)**MERCHANT, [3-13](#)****MERCHANT ID**

CRT Administration screen 1, [7-6](#)
CRT Administration screen 2, [7-12](#)
Online Transaction screen, [3-21](#)

MONTHS ACT, [6-13](#)**MTHS ACTIVE, [6-22](#)****N****NAME**

CHF screen 1, [8-6](#), [8-8](#)
CHF screen 2, [8-15](#), [8-17](#)

NORMAL, [8-28](#)**NORMAL PURCHASE, [8-30](#)****NUMBER OF CHARGEBACK, [7-14](#)****O****ORIG AMOUNT, [7-12](#)****ORIG DATE (MMDD), [7-13](#)****ORIG MSG TYPE, [7-12](#)****ORIG RETRIEVAL REF NUM, [7-13](#)****ORIG TIME (HHMM), [7-12](#)****OV DFT LMT, [6-20](#)****OVER, [8-29](#)****OVERDRAFT LIMIT CHANGE DATE**

CHF screen 2, [8-15](#)
Credibility History debit screen, [6-25](#)

OVERRIDE APPROVAL CODE, [5-8](#)**P****PRE-AUTH PUR COMPL, [8-30](#)****PRE-AUTH PURCHASE, [8-30](#)****PURCHASE**

Credibility History credit screen, [6-8](#)
Credibility History debit screen, [6-18](#), [6-19](#)

PURCHASE CASH BACK, [8-33](#)**R****REASON FOR CHARGEBACK, [7-13](#)****REF CODE, [4-8](#)****REFERRAL CODE**

Multiple Referrals screen, [4-7](#)
PRF screen, [5-5](#)

REFERRAL NUMBER, [3-20](#)**REFERRAL PHONE, [5-8](#)****REFUNDS**

Credibility History credit screen, [6-8](#), [6-9](#)
Credibility History debit screen, [6-18](#), [6-19](#)

REPLACEMENT AMOUNT, [7-14](#)**REQUESTED AMT, [5-7](#)****RESPONSE CODE**

PRF screen, [5-9](#)

RETAILER ID

CRUF screen, [8-23](#)
Multiple Referrals screen, [4-6](#)
PRF screen, [5-5](#)

RFND/PRD

Credibility History credit screen, [6-13](#)
Credibility History debit screen, [6-21](#)

S**SEQ #**

Multiple Referrals screen, [4-8](#)
Online Transaction screen, [3-21](#)

SOC. SEC. NO.

CHF screen 1, [8-7](#), [8-9](#)
CHF screen 2, [8-16](#), [8-18](#)

STATE

CHF screen 1, [8-8](#), [8-10](#)
CHF screen 2, [8-19](#)

T**TERMINAL ID, [5-8](#)****TOKEN ID**

CHF screen 1, [8-6](#)
CHF screen 2, [8-15](#)
Credibility History credit screen, [6-14](#)
Credibility History debit screen, [6-24](#)

TOT FLT, [6-10](#)**TRAN CODE, [3-14](#), [3-21](#)****TRAN DATE**

Multiple Referrals screen, [4-7](#)
PRF screen, [5-7](#)

TRAN TIME, [5-7](#)**TRAN TYPE, [5-7](#)**

CRT Administration screen 1, [7-7](#)
CRT Administration screen 2, [7-10](#)

TRN, [4-8](#)**TYPE**

Credibility History credit screen, [6-6](#)
Credibility History debit screen, [6-16](#)

U

USE/PRD

Credibility History credit screen, [6-13](#)

Credibility History debit screen, [6-21](#)

USER NAME, [8-28](#)

USER NUMBER, [8-28](#)

W

WORK PH

CHF screen 1, [8-8](#), [8-10](#)

CHF screen 2, [8-17](#), [8-19](#)

Index by Data Name

A

ALTKEY.PRIKEY.ALIAS, [8-27](#)
ALTKEY.USER-GRP, [8-28](#)
AUTH.ACQ.-INST-ID-NUM, [7-10](#)
AUTH.ADDR
 Online Transaction screen, [3-16](#)
 PRF screen, [5-11](#)
AUTH.ADDR-VRFY-STAT
 Online Transaction screen, [3-19](#)
 PRF screen, [5-12](#)
AUTH.AMT-1
 CRT Administration screen 1, [7-8](#)
 CRT Administration screen 2, [7-12](#)
 Multiple Referrals screen, [4-9](#)
 Online Transaction screen, [3-14](#)
 PRF screen, [5-7](#)
AUTH.AMT-2
 CRT Administration screen 2, [7-14](#)
 Online Transaction screen, [3-15](#)
AUTH.APPRV-CDE
 CRT Administration screen 1, [7-8](#)
 CRT Administration screen 2, [7-14](#)
 Online Transaction screen, [3-15](#)
 PRF screen, [5-8](#)
AUTH.AUTHORIZER
 Online Transaction screen, [3-20](#)
 PRF screen, [5-9](#)
AUTH.CRD.ACCPT-ID-NUM, [7-10](#)
AUTH.DFT-CAPTURE-FLG, [3-16](#)
AUTH.EXP-DAT
 CRT Administration screen 1, [7-6](#)
 Online Transaction screen, [3-13](#)
 PRF screen, [5-6](#)
AUTH.NUM-OF-CHRGBCK, [7-14](#)
AUTH.ORIG-CRNCY-CDE
 CRT Administration screen 1, [7-8](#)
 CRT Administration screen 2, [7-11](#)
 Online Transaction screen, [3-17](#)
AUTH.ORIG-MSG-TYP, [7-12](#)
AUTH.ORIG-SEQ-NUM, [7-13](#)
AUTH.ORIG-TRAN-TIM
 CRT Administration screen 2, [7-12](#), [7-13](#)
AUTH.REA-FOR-CHRGBCK, [7-13](#)

AUTH.RESP-CDE
 CRT Administration screen 1, [7-8](#)
 CRT Administration screen 2, [7-14](#)
 Multiple Referrals screen, [4-9](#)
 Online Transaction screen, [3-20](#)
 PRF screen, [5-9](#)
AUTH.RFRL-PHONE, [5-8](#)
AUTH.RIG-CRNCY-CDE, [5-7](#)
AUTH.SEQ-NUM
 Multiple Referrals screen, [4-8](#)
 Online Transaction screen, [3-21](#)
AUTH.TRAN-CDE, [4-8](#)
AUTH.TRAN-CDE.AA
 CRT Administration screen 1, [7-7](#)
 CRT Administration screen 2, [7-11](#)
 Online Transaction screen, [3-17](#)
 PRF screen, [5-6](#)
AUTH.TRAN-CDE.T
 CRT Administration screen 1, [7-7](#)
 CRT Administration screen 2, [7-11](#)
 Online Transaction screen, [3-17](#)
AUTH.TRAN-CDE.TC
 CRT Administration screen 2, [7-10](#)
 Online Transaction screen, [3-14](#), [3-21](#)
 PRF screen, [5-8](#)
AUTH.TRAN-CDE-TC, [7-7](#)
AUTH.TRAN-DAT, [5-7](#)
AUTH.ZIP-CDE
 Online Transaction screen, [3-16](#)
 PRF screen, [5-11](#)

C

CAFBASE.CRD-STAT
 Credibility History credit screen, [6-10](#)
 Credibility History debit screen, [6-21](#)
CAFBASE.EXP-DAT
 Credibility History credit screen, [6-11](#)
 Credibility History debit screen, [6-20](#)
CAFBASE.FIID
 Credibility History credit screen, [6-7](#)
 Credibility History debit screen, [6-17](#)
CAFBASE.FIRST-USED-DAT
 Credibility History credit screen, [6-11](#)
 Credibility History debit screen, [6-20](#)

CAFBASE.PRIKEY.MBR-NUM
Credibility History credit screen, [6-6](#)
Credibility History debit screen, [6-16](#)

CAFBASE.PRIKEY.PAN
Credibility History credit screen, [6-6](#)
Credibility History debit screen, [6-16](#)

CHF.PRI-KEY.CRD-NUM, [6-16](#)

CHF.SEC-CARDHOLDER.NAME, [8-17](#)

CRD-TYP
CHF screen 1, [8-5](#)
CHF screen 2, [8-14](#)

CRD-VRFY-FLG
Online Transaction screen, [3-18](#)
PRF screen, [5-11](#)

CREDIT-STAT-HIST.MM.ACCT-BAL
CHF screen 1, [8-11](#)
Credibility History credit screen, [6-13](#)

CREDIT-STAT-HIST.MM.ACCT-STAT, [6-13](#)

CREDIT-STAT-HIST.MM-ACCT-STAT, [8-11](#)

CR-LINE-CHG-DAT
CHF screen 1, [8-6](#)
Credibility History credit screen, [6-14](#)

CUTOVER-FLG, [8-25](#)

CVD-FLD
Online Transaction screen, [3-15](#)
PRF screen, [5-9](#)

CVD-PRES-IND
Online Transaction screen, [3-16](#)
PRF screen, [5-10](#)

D

DEBIT-STAT-HIST.MM-D.ACCT-BAL
CHF screen 2, [8-20](#)
Credibility History debit screen, [6-24](#)

DEBIT-STAT-HIST.MM-D.ACCT-STAT
CHF screen 2, [8-20](#)
Credibility History debit screen, [6-24](#)

DEBIT-STAT-HIST.NSF.NSF-PER-MONTH
CHF screen 2, [8-20](#)
Credibility History debit screen, [6-24](#)

DEBIT-STAT-HIST.OD.OD-PER-MONTH
CHF screen 2, [8-20](#)
Credibility History debit screen, [6-24](#)

F

FIID, [8-24](#)

FRD-PRN-FLG
PRF screen, [5-9](#)

G

GROUP-NAME, [8-28](#)

H

HEAD.CRD.CARD.CRD-NUM
CRT Administration screen 2, [7-9](#)
Multiple Referrals screen, [4-8](#)
Online Transaction screen, [3-13](#), [3-20](#)
PRF screen, [5-6](#)

HEAD.CRD.CARD.MBR-NUM
CRT Administration screen 2, [7-10](#)
Multiple Referrals screen, [4-8](#)
Online Transaction screen, [3-13](#), [3-21](#)

HEAD.CRD.FIID, [5-6](#)

HEAD.RETL.TERM-ID, [5-8](#)

HEAD.TKEY.RKEY.RETAILER-ID
CRT Administration screen 1, [7-6](#)
CRT Administration screen 2, [7-12](#)
Online Transaction screen, [3-14](#), [3-21](#)

L

LAST-RESET-DATE, [8-25](#)

N

NUM-CRDS-ISSUED
CHF screen 1, [8-6](#)
CHF screen 2, [8-15](#)
Credibility History credit screen, [6-14](#)
Credibility History debit screen, [6-24](#)

O

OVRDRFT-LIM-CHG-DAT
CHF screen 2, [8-15](#)
Credibility History debit screen, [6-25](#)

P

PBFBASE.AMT-ON-HOLD, [6-19](#)

PBFBASE.AVAIL-BAL, [6-19](#)

PBFBASE.AVAIL-CR, [6-9](#)

PBFBASE.CR-BAL, [6-9](#)

PBFBASE.CR-LMT, [6-7](#)

PBFBASE.LAST-DEP-AMT, [6-20](#)

PBFBASE.LAST-DEP-DAT, [6-22](#)

PBFBASE.LAST-WDL-DAT, [6-22](#)

PBFBASE.LEDG-BAL, [6-17](#)

PBFBASE.OVERDRFT-LMT, [6-20](#)

PBFBASE.PRIKEY.FII
Credibility History credit screen, [6-7](#)
Credibility History debit screen, [6-17](#)

PBFBASE.PRIKEY.NUM
Credibility History credit screen, [6-6](#)
Credibility History debit screen, [6-16](#)

PBFBASE.PRIKEY.TYP
Credibility History credit screen, [6-7](#)
Credibility History debit screen, [6-17](#)

- POSCAF.GRP-LMT.TTL-CCA-LMT
 Credibility History credit screen, 6-7
 Credibility History debit screen, 6-18
- POSCAF.GRP-LMT.TTL-PUR-LMT
 Credibility History credit screen, 6-8
 Credibility History debit screen, 6-18
- POSCAF.GRP-LMT.TTL-WDL-LMT
 Credibility History credit screen, 6-8
 Credibility History debit screen, 6-18
- POSCAF.GRP-PRD.TTL-CCA-PRD
 Credibility History credit screen, 6-8
 Credibility History debit screen, 6-18
- POSCAF.GRP-PRD.TTL-PUR-PRD
 Credibility History credit screen, 6-8
 Credibility History debit screen, 6-19
- POSCAF.GRP-PRD.TTL-WDL-PRD
 Credibility History credit screen, 6-9
 Credibility History debit screen, 6-19
- POSCAF.LAST-USED
 Credibility History credit screen, 6-11
 Credibility History debit screen, 6-20
- POSCAF.NUM-RFND-CR-PRD
 Credibility History credit screen, 6-13
 Credibility History debit screen, 6-21
- POSCAF.TTL-RFND-CR-LMT
 Credibility History credit screen, 6-8
 Credibility History debit screen, 6-18
- POSCAF.TTL-RFND-CR-PRD
 Credibility History credit screen, 6-9
 Credibility History debit screen, 6-19
- POSCAF.USED-PRD
 Credibility History credit screen, 6-13
 Credibility History debit screen, 6-21
- POSPBF.CUR-FLOAT, 6-10
- POSPBF.CYCLE-1, 6-14
- POSPBF.CYCLE-2, 6-14
- POSPBF.CYCLE-3, 6-14
- POSPBF.DAYS-DELINQ, 6-13
- POSPBF.MONTHS-ACTIVE
 Credibility History credit screen, 6-13
 Credibility History debit screen, 6-22
- POSPBF.TTL-FLOAT, 6-10
- PRI-CARDHOLDER.ADDR
 CHF screen 1, 8-7
 CHF screen 2, 8-16
 Credibility History credit screen, 6-11
 Credibility History debit screen, 6-22
- PRI-CARDHOLDER.CITY
 CHF screen 1, 8-7
 Credibility History credit screen, 6-12
 Credibility History debit screen, 6-22
- PRI-CARDHOLDER.CNTRY
 CHF screen 1, 8-7
 CHF screen 2, 8-16
- PRI-CARDHOLDER.CNTY
 CHF screen 1, 8-8
 CHF screen 2, 8-16, 8-17
- PRI-CARDHOLDER.HOME-PHONE
 CHF screen 1, 8-7
 CHF screen 2, 8-16
- PRI-CARDHOLDER.NAME
 CHF screen 1, 8-6
 CHF screen 2, 8-15
 Credibility History credit screen, 6-11
 Credibility History debit screen, 6-22
- PRI-CARDHOLDER.SSN-NUM
 CHF screen 1, 8-7
 CHF screen 2, 8-16
- PRI-CARDHOLDER.STATE
 CHF screen 1, 8-8
 CHF screen 2, 8-17
 Credibility History credit screen, 6-12
 Credibility History debit screen, 6-23
- PRI-CARDHOLDER.WRK-PHONE
 CHF screen 1, 8-8
 CHF screen 2, 8-17
- PRI-KEY.CRD-NUM
 CHF screen 1, 8-4
 CHF screen 2, 8-13
 Credibility History credit screen, 6-6
- PRI-KEY.FIID
 CHF screen 1, 8-3
 CHF screen 2, 8-12
 Credibility History debit screen, 6-17
- PRI-KEY.MBR-NUM
 CHF screen 1, 8-4
 CHF screen 2, 8-13
 Credibility History credit screen, 6-6
 Credibility History debit screen, 6-16
- PRIKEY.RETAILER-ID, 8-23
- PRI-KEY.TYP
 CHF screen 1, 8-4
 CHF screen 2, 8-13
 Credibility History credit screen, 6-7
 Credibility History debit screen, 6-17
- ## R
- RETAILER.RFRL-PHONE, 3-20
- RETURN-AMT, 8-25
- RETURN-CNT, 8-25
- RETURN-LMT-AMT, 8-24
- RETURN-LMT-CNT, 8-24
- RFRL-KEY.RETAILER-ID
 Multiple Referrals screen, 4-7
 PRF screen, 5-5
- RFRL-KEY.RFRL-CDE
 Multiple Referrals screen, 4-7, 4-8
 PRF screen, 5-5

S

SEC-CARDHOLDER.ADDR

- CHF screen 1, [8-9](#)
- CHF screen 2, [8-18](#)
- Credibility History credit screen, [6-12](#)
- Credibility History debit screen, [6-23](#)

SEC-CARDHOLDER.CITY

- CHF screen 1, [8-9](#)
- CHF screen 2, [8-18](#)
- Credibility History credit screen, [6-12](#)
- Credibility History debit screen, [6-23](#)

SEC-CARDHOLDER.CNTRY

- CHF screen 1, [8-9](#)
- CHF screen 2, [8-18](#)

SEC-CARDHOLDER.CNTY

- CHF screen 1, [8-10](#)
- CHF screen 2, [8-19](#)

SEC-CARDHOLDER.HOME-PHONE

- CHF screen 1, [8-9](#)
- CHF screen 2, [8-18](#)

SEC-CARDHOLDER.NAME

- CHF screen 1, [8-8](#), [8-9](#)
- CHF screen 2, [8-17](#)
- Credibility History credit screen, [6-12](#)
- Credibility History debit screen, [6-23](#)

SEC-CARDHOLDER.SSN-NUM

- CHF screen 1, [8-9](#)
- CHF screen 2, [8-18](#)

SEC-CARDHOLDER.STATE

- CHF screen 1, [8-10](#)
- CHF screen 2, [8-19](#)
- Credibility History credit screen, [6-12](#)
- Credibility History debit screen, [6-23](#)

SEC-CARDHOLDER.WRK-PHONE

- CHF screen 1, [8-10](#)
- CHF screen 2, [8-19](#)

T

TOKEN-ID

- CHF screen 1, [8-6](#)
- CHF screen 2, [8-15](#)
- Credibility History credit screen, [6-14](#)
- Credibility History debit screen, [6-24](#)

TRAN-SEC-ACCESS.ADJ-AMT2-AMT1, [8-35](#)TRAN-SEC-ACCESS.ADJ-CASH-ADV, [8-32](#)TRAN-SEC-ACCESS.ADJ-CASH-BACK, [8-33](#)TRAN-SEC-ACCESS.ADJ-MERCH-RTRN, [8-32](#)TRAN-SEC-ACCESS.ADJ-PUR, [8-32](#)TRAN-SEC-ACCESS.BAL-INQ, [8-31](#)TRAN-SEC-ACCESS.CARD-ACTV, [8-35](#)TRAN-SEC-ACCESS.CARD-VERIFY, [8-34](#)TRAN-SEC-ACCESS.CASH-ADV, [8-33](#)TRAN-SEC-ACCESS.CHECK-GUAR, [8-34](#)TRAN-SEC-ACCESS.CHECK-VERIFY, [8-34](#)TRAN-SEC-ACCESS.FULL-REDEMP, [8-36](#)TRAN-SEC-ACCESS.MA-PHONE-ORDER, [8-31](#)TRAN-SEC-ACCESS.MERCH-RTRN, [8-31](#)TRAN-SEC-ACCESS.NORMAL-PUR, [8-30](#)TRAN-SEC-ACCESS.PRE-AUTH-PUR, [8-30](#)TRAN-SEC-ACCESS.PRE-AUTH-PUR-
COMPL, [8-30](#)TRAN-SEC-ACCESS.PUR-CASH-BACK, [8-33](#)TRAN-SEC-ACCESS.REPLENISH, [8-35](#)**U**USER-NAME, [8-28](#)USER-NUM, [8-28](#)UTH.TRAN-TIM, [5-7](#)