



BASE24 Remote BankingTM

End-of-Period Processing and Reporting Manual

© 2000 by ACI Worldwide Inc. All rights reserved.

All information contained in this document is confidential and proprietary to ACI Worldwide Inc. This material is a trade secret and its confidentiality is strictly maintained. Use of any copyright notice does not imply unrestricted or public access to these materials. No part of this document may be photocopied, electronically transferred, modified, or reproduced in any manner without the prior written consent of ACI Worldwide Inc.

ACI, BASE24, BASE24-billpay, BASE24 Remote Banking, and BASE24-telebanking are trademarks or registered trademarks of ACI Worldwide Inc., Transaction Systems Architects, Inc., or their subsidiaries.

Other companies' trademarks, service marks, or registered trademarks and service marks are trademarks, service marks, or registered trademarks and service marks of their respective companies.

Print Record

07/2000, Version 2 (Reissue)

03/97, Version 1 (New)

Contents

Preface	xiii
Conventions Used in this Manual	xix
Section 1	
Introduction	1-1
Remote Banking Products	1-2
Remote Banking Settlement	1-4
Remote Banking Product Role in Settlement	1-5
Defining the Network Participants	1-6
Customers	1-6
Customer ID Issuers	1-6
Vendors	1-7
System Owner	1-7
Financial Transactions	1-8
Remote Banking Business and Remittance Days	1-9
BASE24-telebanking Business Day	1-9
Institution Cutover	1-9
Logical Network Cutover	1-9
BASE24-billpay Business and Remittance Days	1-12
Business Day	1-12
Remittance Day	1-12
End-of-Period Processing Cycle	1-15
Reporting, Posting, and Remittance Tasks	1-17
BASE24-billpay Billing Application Tasks	1-18
Enhanced Telebanking/BASE24-billpay Daily Reporting Tasks	1-18
Database Cleanup and Archival Tasks	1-18
Miscellaneous Tasks	1-19

Introduction *continued*

End-of-Period Processing and Reporting Database	1-21
BASE24-telebanking Files	1-21
Institution Definition File (IDF)	1-21
Institution Periodic Reporting File (IPRF)	1-21
ITS Transaction Log File (ITLF)	1-22
Logical Network Configuration File (LCONF)	1-26
Processing Code Definition File (PCDF)	1-26
BASE24-billpay Files and Tables	1-26
Bank Notice Table (BKNT)	1-26
Bank Transaction Advice Table (BKAV)	1-26
Customer/Personal ID Relation Table (CPIT)	1-27
Customer Vendor Summary Table (CVS)	1-27
Customer Vendor Table (CVND)	1-27
Loan Application Table (LOAN)	1-27
Logical Network Configuration File (LCONF)	1-27
Miscellaneous Request Table (MISC)	1-27
Payment Summary Table (PST)	1-28
Personal Information Table (PIT)	1-28
Report Action Table (RPTA)	1-28
Vendor Branch Table (VNDB)	1-28
Vendor Table (VNDR)	1-28
Timers	1-29
BASE24-telebanking Timers	1-29
Financial Institution Cutover Timer	1-29
Logical Network Cutover Lead Timer	1-29
Logical Network Cutover Timer	1-29
Midnight Cutover Timer	1-30
Start Reports Timer	1-30
BASE24-billpay Timers	1-30
Logical Network Cutover Timer	1-30
Lag Timer	1-31
BASE24-telebanking Reports	1-32
BASE24-billpay Reports	1-33

Section 2

BASE24-telebanking End-of-Period Processing	2-1
End-of-Period Process	2-2
Financial Institution Cutover Timer	2-4
Logical Network Cutover Lead Timer	2-5
Logical Network Cutover Timer	2-7
Midnight Cutover Timer	2-8
Start Reports Timer	2-9
Sample Report Obey File	2-10
Process Configuration, Startup, and Control	2-10
LCONF Assigns and Params	2-10
Object Configuration and Control	2-10
BASE24-telebanking Issuer Reporting Program	2-11
Program Startup	2-14
Initialization Processing	2-14
Normal Processing	2-15
LCONF Assigns and Params	2-17
Assigns	2-17
Params	2-18

Section 3

BASE24-billpay End-of-Period Processing	3-1
TMF Processing	3-2
ACHclear Program	3-3
HIST Processing	3-3
VNDR Processing	3-3
Program Startup	3-4
OMF Processing	3-4
LCONF Assigns and Params	3-4
Assigns	3-4
Params	3-4
Example LCONF Configuration	3-5
Spooler Output Reports	3-6

BASE24-billpay End-of-Period Processing *continued*

Archive Program	3-7
Archive Levels	3-7
FIID-Specific Level Archiving	3-7
System-Level Archiving	3-7
Archive Files	3-8
System-Level Archive Files	3-8
FIID-Specific Level Archive Files	3-8
FIID-Level Archiving Configuration	3-11
System-Level Archiving Configuration	3-11
Retention Day Calculation	3-11
OMF Processing	3-12
LCONF Assigns and Params	3-12
Assigns	3-12
Params	3-12
Example System-Level LCONF Configuration	3-13
Example FIID-Level LCONF Configuration	3-14
Example FIID-Level CLPT Configuration	3-16
Program Startup	3-16
Spooler Output Reports	3-16
Cleanup Program	3-17
Cleanup Configuration Table (CLPT)	3-17
Cleanup Groups	3-18
Cleanup Processes	3-19
Daily Cleanup	3-19
Bank Billing Summary Table (BKBS)	3-19
Bank Transaction Summary Table (BKTS)	3-19
Context Table (CNTX)	3-20
Customer Billing Summary Table (CBLS)	3-20
Loan Application Table (LOAN)	3-20
Miscellaneous Request Table (MISC)	3-20
Payment Summary Table (PST)	3-20
Report Action Table (RPTA)	3-21
Retention Day Calculation	3-21
Year-End Cleanup	3-22
Deletion Year Calculation	3-22

Cleanup Program *continued*

OMF Processing	3-23
LCONF Assigns and Params	3-24
Assigns	3-24
Params	3-24
Example Configuration	3-24
Example LCONF Configuration	3-26
Example CLPT Configuration	3-27
Spooler Output Reports	3-28
Remittance File Cleanup Macro	3-29
Report TACL Routines	3-30
Customer Notice Report TACL Routine	3-30
Customer Vendor List Report TACL Routine	3-30
Customer Vendor Year-End Summary Report TACL Routine	3-31
Loan Application Report TACL Routine	3-31
Master Vendor Report TACL Routine	3-31
Miscellaneous Request Report TACL Routine	3-31
New Customer Report TACL Routine	3-32
Payment Summary Report TACL Routine	3-32
Remittance Transaction Alert Report TACL Routine	3-32
Scheduled Transaction Alert Report TACL Routine	3-33

Section 4

BASE24-telebanking Reports	4-1
IDF Reporting Information Fields	4-2
Daily Customer Activity Detail Report (TB01)	4-3
Daily Customer Activity Summary Report (TB02)	4-8
Daily Financial Activity Detail Report (TB03)	4-14
Daily Financial Activity Summary Report (TB04)	4-16
Monthly Customer Activity Summary Report (TB05)	4-23
Monthly Financial Activity Summary Report (TB06)	4-30
Statistics and Errors Report	4-37

Section 5

BASE24-billpay Reports	5-1
Date Display Format	5-2
Customer Notice Report	5-3
Customer Vendor List Report	5-9
Customer Vendor Year-End Summary Report	5-13
Loan Application Report	5-17
Master Vendor Report	5-21
Miscellaneous Request Report	5-23
New Customer Report	5-25
Payment Summary Report	5-27
Remittance Transaction Alert Report	5-36
Scheduled Transaction Alert Report	5-40
Spooler Output Reports	5-45
ACHclear Reports	5-45
VNDR Output	5-45
HIST Output	5-46
Archive Reports	5-47
System-Level Archiving Output	5-47
FIID-Level Archiving Output	5-49
Cleanup Reports	5-52
FIID-Specific Table Cleanup Output	5-52
System-Wide Table Cleanup Output	5-54
VNDR and VNDB Output	5-56

Section 6

End-of-Period Processing and Reporting Operations	6-1
Monitoring Event Messages	6-2
Generating Remittance Output	6-4
Extracting the ITLF	6-5
Refreshing the PBF and THF	6-6

End-of-Period Processing and Reporting Operations *continued*

Producing BASE24-telebanking Reports	6-7
Running BASE24-telebanking Reports Manually	6-7
Obey File.	6-7
TACL Command	6-8
Scheduling BASE24-telebanking Reports	6-10
Suppressing BASE24-telebanking Reports	6-11
Producing BASE24-billpay Reports	6-12
Date Display Format.	6-12
Customer Notice Report	6-13
Macro Example.	6-13
TACL Command	6-13
Customer Vendor List Report.	6-14
Macro Example.	6-14
TACL Command	6-15
Customer Vendor Year-End Summary Report.	6-15
Macro Example.	6-16
TACL Command	6-16
Loan Application Report	6-17
Macro Example.	6-17
TACL Command	6-17
Master Vendor Report	6-17
Macro Example.	6-18
TACL Command	6-18
Miscellaneous Request Report	6-18
Macro Example.	6-18
TACL Command	6-19
New Customer Report	6-19
Macro Example.	6-19
TACL Command	6-20
Payment Summary Report	6-20
Macro Example.	6-21
TACL Command	6-21
Remittance Transaction Alert Report	6-21
Macro Example.	6-22
TACL Command	6-22

Producing BASE24-billpay Reports *continued*

Scheduled Transaction Alert Report	6-22
Macro Example	6-23
TACL Command	6-23
Scheduling BASE24-billpay Reports	6-23
Suppressing BASE24-billpay Reports	6-24
Regenerating Reports	6-24
Reports Generated from Specific Tables	6-25
Reports Generated from the Report Action Table (RPTA)	6-25
Running the ACHclear Programs	6-27
Program Startup	6-27
Macro Example	6-27
TACL Command	6-27
Running the Archive Programs	6-29
Program Startup	6-29
FIID-Level Archiving Macro Example	6-29
System-Level Archiving Macro Example	6-30
TACL Command	6-30
BASE24-billpay Database Cleanup Procedures	6-31
Program Startup	6-32
Daily Context Table Cleanup Macro Example	6-32
Daily Billing Tables Cleanup Macro Example	6-32
Daily Loan Application Table Cleanup Macro Example	6-33
Daily Miscellaneous Request Table Cleanup Macro Example	6-33
Daily Payment Summary Table Cleanup Macro Example	6-33
Daily Report ActionTable Cleanup Macro Example	6-33
Yearly Customer Vendor Table Cleanup Macro Example	6-34
Yearly Billing Tables Cleanup Macro Example	6-34
Yearly Bank Notice Table Cleanup Macro Example	6-34
Yearly Vendor Table Cleanup Macro Example	6-34
TACL Command	6-35
Remittance File Cleanup Procedures	6-36
Macro Example	6-36
Obey File	6-37
TACL Command	6-37
Archiving ITLFs	6-38

End-of-Period Processing and Reporting Operations *continued*

Regenerating Payment Remittance Files	6-39
NetBatch Submission File Example	6-41

Appendix A**End-of-Period Process Object Design A-1**

Kernel Configuration	A-2
Object Usage	A-2
Kernel File Configuration	A-2
End-of-Period Process Object	A-4
Initialization Processing	A-4
LCONF Assigns and Params	A-7
Assigns	A-7
Params	A-7
Assign Warmboot Command	A-8
Param Warmboot Command	A-8
LCONF Warmboot Command	A-9
Server Control Commands	A-9
ELF CREATE Command	A-9
MIDNIGHT Command	A-10
RESETIDFDATES Command	A-11
RPT CREATE Command	A-12
TLF CREATE Command	A-14
Extended Memory Table Usage	A-16

Appendix B**BASE24-telebanking Report Error Messages B-1****Index Index-1**

ACI Worldwide Inc.

Preface

The ***BASE24 Remote Banking End-of-Period Processing and Reporting Manual*** describes end-of-period and report processing for the BASE24-telebanking and BASE24-billpay products. This processing allows institutions to maintain an efficient and up-to-date processing database, track system activity, and generate customer correspondence.

Report processing tools include statistical financial and nonfinancial activity reports, customer service representative (CSR) activity reports, and customer correspondence reports. CSR activity reports include reports of all loan applications and miscellaneous requests entered as well as all new customers added or activated from CSR terminals. Customer correspondence reports include a list of a customer's current vendors, a year-end summary of a customer's payment activity, and customer notices of significant processing events. These reports are suitable for mailing directly to a customer.

End-of-period processing tools cut over settlement entities to new business days at appropriately configured times, provide extracted transaction data, and ensure that data is updated, deleted, or archived from selected files and tables in the Remote Banking database.

Audience

This manual is intended for the BASE24 operational staff who monitor and control BASE24 Remote Banking cutover, end-of-period processing, and reporting. It also provides End-of-Period process initialization and cutover procedures for technical support personnel.

Prerequisites

Persons using this manual should be familiar with the BASE24 Remote Banking products, their basic functions, their terminology, and the BASE24 files and tables they use.

Additional Documentation

The BASE24 documentation set is arranged so that each BASE24 manual presents a topic or group of related topics in detail. When one BASE24 manual presents a topic that has already been covered in detail in another BASE24 manual, the topic is summarized and the reader is directed to the other manual for additional information. Information has been arranged in this manner to be more efficient for readers who do not need the additional detail and at the same time provide the source for readers who require the additional information.

This manual contains references to the following BASE24 publications:

- The ***BASE24 Base Files Maintenance Manual*** describes the Institution Definition File (IDF) screens used to configure BASE24-telebanking end-of-period processing and reporting.
- The ***BASE24 Logical Network Configuration File Manual*** describes the assigns and params used in configuring BASE24-telebanking and BASE24-billpay processes.
- The ***BASE24 Refresh and Extract Operators Manual*** provides detailed information for refreshing and extracting data to and from BASE24 files and tables.
- The ***BASE24 Remote Banking Customer Service Support Manual*** provides detailed descriptions and valid values for fields appearing on the customer service representative (CSR) activity reports.
- The ***BASE24 Remote Banking Transaction Processing Manual*** describes how transactions are processed by the BASE24-telebanking and BASE24-billpay products.
- The ***BASE24-billpay Billing Application Manual*** provides detailed information on billing and billing-related end-of-period processing operations.
- The ***BASE24-billpay Tables Maintenance Manual***, ***BASE24 Base Files Maintenance Manual***, and ***BASE24 ITS Kernel Files Maintenance Manual*** provide detailed descriptions and valid values for the configuration or control fields discussed in this manual.
- The ***BASE24 ITS Kernel Files Maintenance Manual*** provides detailed information about sending warmboot and server control commands to objects.
- The ***BASE24 ITS Kernel Objects Reference Manual*** provides detailed information about the function and operation of each kernel object.

- The ***BASE24 ITS Kernel Configuration Manual*** provides information about suppressing event messages from objects.

This manual contains references to the following NET24-XPNET publications:

- The ***NET24-XPNET Network Control Operations Guide*** and ***NET24-XPNET Network Control Command Reference Manual*** provide detailed information on network control facilities used to start and control processes that run under control of the XPNET process and to perform refresh and extract processing.

This manual contains references to the following Tandem publications:

- The ***FastSort Manual*** contains descriptions of error codes that can appear in messages written to the BASE24-telebanking Statistics and Errors report.
- The ***Guardian Procedure Errors and Messages Manual*** contains detailed information on errors that can appear in messages written to the BASE24-telebanking Statistics and Errors report.
- The ***Guardian User's Guide*** contains detailed information for using PERUSE to view and print reports, as well as file and tape utilities for archiving and purging files and data.
- The ***NetBatch Manual*** contains detailed information for scheduling and managing batch jobs using the NetBatch product.

This manual references the 1988 ANSI X3.38 standard, ***Identification of the States, the District of Columbia, and the Outlying and Associated Areas of the United States for Information Interchange***, for the state codes displayed on various BASE24 Remote Banking reports.

Software

This manual documents standard processing for BASE24-telebanking release 1.3 and BASE24-billpay release 1.3.

Customer-specific code modifications (that is, CSMs) may result in processing that differs from the material presented in this manual. The customer is responsible for identifying and noting these changes.

Manual Summary

The following is a summary of the contents of this manual.

“Conventions Used in this Manual” follows this preface and describes notation and documentation conventions necessary to understand the information in the manual.

Section 1, “Introduction,” introduces you to the basics of BASE24 Remote Banking end-of-period processing (cutover processing), settlement, reporting, and operating procedures. It includes definitions of the BASE24 Remote Banking business day, remittance day, and the end-of-period processing cycle.

Section 2, “BASE24-telebanking End-of-Period Processing,” describes the end-of-period processing performed by the End-of-Period process and the BASE24-telebanking Issuer Reporting program, as well as the options that configure and control this processing.

Section 3, “BASE24-billpay End-of-Period Processing,” describes the end-of-period processing performed by various BASE24-billpay programs and routines, as well as the options that configure and control this processing.

Section 4, “BASE24-telebanking Reports,” describes each of the reports produced by the BASE24-telebanking product.

Section 5, “BASE24-billpay Reports,” describes each of the reports produced by the BASE24-billpay product.

Section 6, “End-of-Period Processing and Reporting Operations,” describes the tasks that an operator must perform to manage end-of-period processing and reporting from day to day. Some of these tasks can be scheduled to be performed automatically at predetermined times, while others must be performed manually.

Appendix A, “End-of-Period Process Object Design,” describes the processing performed by the End-of-Period Process object, as well as the options that configure and control the object.

Appendix B, “BASE24-telebanking Report Error Messages,” describes the error messages that can appear on the BASE24-telebanking Statistics and Errors Report.

Publication Identification

Two entries appearing at the bottom of each page uniquely identify this BASE24 publication. The publication number (for example, TB-AE000-06 for the ***BASE24 Remote Banking End-of-Period Processing and Reporting Manual***) appears on every page to assist readers in applying updates to the appropriate manual. The publication date (for example, 07/2000 for July, 2000) identifies the last time material on a particular page has been revised. This date can be used to verify that the reader has the most current information and is particularly helpful when dealing with HELP24 to answer operating questions.

The print record, located on the page immediately following the title page, is also helpful when verifying that a manual contains the most current information. An entry is added to the print record each time a BASE24 publication is modified in any way. Each print record entry includes the date of the change, a unique version number, and the type of change (new, update, reissue, or preliminary). Version 1 is assigned to a *new* manual. Later versions can be updates or reissues, depending on the changes being made. An *update* typically involves changes on a small number of pages throughout the manual. A *reissue* occurs when all pages of the manual are replaced because changes affect a large number of pages. A manual is identified as *preliminary* when it is released to customers on a limited basis, but it has not yet reached final form.

ACI Worldwide Inc.

Conventions Used in this Manual

This section explains how command syntax notation is documented in this manual. It also explains a change in Nucleus process terminology.

Syntax Notation

Syntax descriptions in this manual use several symbols and conventions to denote how commands must be entered. These conventions are described in the table below.

Notation	Meaning
UPPERCASE LETTERS	Indicate key words and literals that must be entered exactly as shown.
<i>lowercase italics</i>	Identify variables that you must provide.
Brackets []	Enclose optional syntax items that you can enter in the command.
Braces { }	Enclose a group of items from which you are required to choose one item. The items are separated within the braces by a vertical bar ().
Vertical bar	Separates alternatives in a list of items.
Ellipsis ...	Indicates the immediately preceding syntactical item can occur one or more times.
Punctuation	Must be entered as shown. This includes parentheses, commas, semicolons, and other symbols not previously described.

Spaces	Are required as delimiters wherever it would be otherwise impossible to discriminate between adjacent words or symbols. Additional spaces can be inserted between any adjacent words or symbols, but cannot be inserted within a word or multiple character symbol.
Indented lines	Indicates a continuation of the preceding line of syntax. If the syntax of a command is too long to fit on a single line, each continuation line is indented.

Nucleus Process Terminology Change

There is one process that is the hub of an XPNET system. It manages message queues; controls all lines, stations, and processes in the system; and serves as an interprocess interface. Throughout this manual, this process is referred to as the XPNET process.

In other manuals, you may see references to the Nucleus process as performing these same functions. These two terms (Nucleus process and XPNET process) should be viewed as synonymous. The Nucleus process and the XPNET process perform the same functions and processing. As manuals are reissued, references to the Nucleus process will be replaced with references to the XPNET process.

Section 1

Introduction

This section introduces you to BASE24 Remote Banking end-of-period processing (that is, cutover processing), settlement, and operating procedures. Operating procedures include the generation of payment remittance output, archiving data, generating reports, and cleaning up the database. The topics discussed in this section include the role of BASE24 Remote Banking products in cutover, settlement, and reporting; the financial entities (or network participants) involved in settlement; the BASE24 Remote Banking business day and daily processing cycle; descriptions of the files and tables used in generating settlement information and reports; and an overview of end-of-period processing procedures.

Remote Banking Products

The BASE24 Remote Banking product family currently includes two products—BASE24-telebanking and BASE24-billpay.

The BASE24-telebanking product provides online banking services (e.g., balance inquiries, check clearance inquiries, and immediate transfers between two accounts) to customers using remote banking devices (e.g., a touch-tone telephone or personal computer) or calling a customer service representative (CSR) or branch employee.

The BASE24-billpay product provides automated payment and scheduled transfer services (e.g., immediate, future, and recurring payments, future and recurring transfers, and associated inquiries) to customers using remote devices or calling a CSR or branch employee. The BASE24-billpay product provides files that can be used as input to programs that generate checks and Automated Clearing House (ACH) output for payments; however, the BASE24-billpay product does not currently include these programs. The BASE24-billpay product also provides facilities for signing up new customers and accounts, accessing customer information, listing financial institutions and branches, and entering or inquiring on loan applications and miscellaneous requests.

Optional Enhanced Telebanking product modules provide financial institutions and service providers the ability to support all BASE24-telebanking transactions as well as the subset of banking transactions that are provided with the BASE24-billpay product. These product modules consist of a subset of the BASE24-billpay software.

Enhanced Telebanking provides for the scheduling of one-time future transfers and recurring transfers. The product modules monitor future and recurring transfers, and on the scheduled transaction date, automatically initiate the transfer transaction. When Enhanced Telebanking initiates a transfer, BASE24 routes the transaction to the appropriate authorizing entity for authorization. Various reports are available directly related to these transfer transactions.

Enhanced Telebanking also supports customer and account maintenance transactions, financial institution and financial institution branch list inquiry transactions, loan application transactions, and miscellaneous request transactions.

The BASE24-telebanking software provides two functions used to support the services provided by the BASE24-telebanking, Enhanced Telebanking, and BASE24-billpay products—customer verification and funds authorization.

Customer verification involves identifying the customer and verifying his or her authenticity. Funds authorization involves checking the customer's account to ensure that sufficient funds are available to perform a transfer or payment.

Because the BASE24-billpay and Enhanced Telebanking products rely on the BASE24-telebanking software to support its services, BASE24-billpay and Enhanced Telebanking cannot be installed without BASE24-telebanking. The BASE24-telebanking product can be installed without the BASE24-billpay or Enhanced Telebanking product; however, scheduled transfer capabilities and customer signup functions are available only if both the BASE24-telebanking product and either the Enhanced Telebanking or BASE24-billpay products are installed.

This manual documents end-of-period processing procedures for the BASE24-telebanking, Enhanced Telebanking, and BASE24-billpay products. In this manual, the introduction to each procedure indicates whether it is for the BASE24-telebanking, Enhanced Telebanking, or BASE24-billpay. Throughout this manual, references are made to BASE24, BASE24 Remote Banking, BASE24-telebanking, Enhanced Telebanking, and BASE24-billpay, as follows:

- BASE24 includes BASE24-telebanking, Enhanced Telebanking, and BASE24-billpay, as well as other BASE24 products.
- BASE24 Remote Banking includes BASE24-telebanking, Enhanced Telebanking, and BASE24-billpay.
- BASE24-telebanking indicates the BASE24-telebanking product with or without the Enhanced Telebanking or BASE24-billpay product. For example, the BASE24-telebanking Integrated Authorization process withdraws funds from a customer's account for a BASE24-telebanking transaction, Enhanced Telebanking, or BASE24-billpay transaction.
- Enhanced Telebanking indicates the subset of BASE24-billpay transactions described above.
- BASE24-billpay indicates the BASE24-billpay product only.

Remote Banking Settlement

The BASE24 Remote Banking logical network is cut over and settled each day. Settlement, in this context, is actually a reconciliation effort whereby the transaction activity for the current day is closed out and reported and the logical network is shown to be in balance.

BASE24 Remote Banking settlement differs from the settlement carried out by the various institutions in the logical network in that BASE24 Remote Banking products do not move funds to physically settle accounts. However, the BASE24 Remote Banking products do provide the support for participants in the logical network to initiate this movement of funds.

Remote Banking Product Role in Settlement

The role of BASE24 Remote Banking products in settlement is one of transaction management and reporting. BASE24 Remote Banking products define the reporting day, log and keep track of the transaction activity for each day; provide a daily file of transactions for back-end processing by a host, and report all financial transaction activity on a daily and monthly basis. The BASE24-billpay product also provides daily files for generation of payment remittances as well as a daily summary report of payments approved for the day.

Although BASE24 Remote Banking processing and reporting is designed specifically to enhance network participants' internal settlement and accounting, participating financial institutions are themselves responsible for the tangible aspects of settlement. They must debit and credit their customer accounts, settle among themselves, and provide accurate payment remittances to vendors associated with the network. BASE24 Remote Banking products facilitate this settlement effort by providing a file of all BASE24-telebanking transactions and certain BASE24-billpay transactions processed during the business day. This file is known as the ITS Transaction Log File (ITLF). The exact BASE24-billpay transactions logged to the ITLF are discussed in the ITLF description provided elsewhere in this section.

The following tools are provided to facilitate settlement:

- ITLF
- Statistical reports that reflect customer activity on both a daily and monthly basis from the ITLF
- Daily vendor payment remittance files for the generation of remittances
- Payment Summary Report

Defining the Network Participants

The BASE24-telebanking and BASE24-billpay products interact with a number of financial entities or network participants. Each of these financial entities, or network participants, plays a unique role in the initiation and processing of BASE24-telebanking or BASE24-billpay transactions and each has its own unique settlement requirements.

Customers

Customers are individuals or businesses who have been issued a customer ID that they can use to initiate remote banking financial and nonfinancial transactions. Financial transactions include transfers between two accounts owned by the same financial institution and payments made from a customer account to a vendor.

BASE24 Remote Banking products do not consider customers to be settlement entities. This means that they do not compute a daily settlement position for each customer as they do for other network participants. BASE24-telebanking does, however, log all BASE24-telebanking and BASE24-billpay financial transactions initiated by customers in the daily ITS Transaction Log File (ITLF), allowing institutions to post these transactions to the appropriate customer accounts on a host.

Customer ID Issuers

Customer ID issuers are financial organizations that issue identifiers to their customers for use at a remote banking endpoint device or a customer service representative (CSR) terminal. These identifiers access the individual accounts established at the customer's financial institution.

The BASE24-telebanking product captures all BASE24-telebanking and BASE24-billpay financial transaction activity in a daily file, which customer ID issuers can extract and use to post customer transactions to the appropriate accounts on a host.

The BASE24-telebanking product provides an audit trail report of all financial customer activity for each customer ID issuer on a daily basis. This report lists customer transactions in customer ID and account number order and provides institutions with the information necessary to trace specific financial transactions in cases of customer service problems or customer disputes.

The statistical reports BASE24-telebanking provides for use by customer ID-issuing institutions are listed below. These reports are described in section 4.

- Daily Customer Activity Detail (TB01)
- Daily Customer Activity Summary (TB02)
- Daily Financial Activity Detail (TB03)
- Daily Financial Activity Summary (TB04)
- Monthly Customer Activity Summary (TB05)
- Monthly Financial Activity Summary (TB06)

Vendors

Vendors are individuals or businesses to which a customer makes a financial payment and are considered to be the third party beneficiary in a financial payment transaction. All approved payment transactions for the current business day are included on the Payment Summary Report. This report shows the cash-out position of the BASE24-billpay logical network for the current processing day and is automatically generated on a daily basis after network cutover. You can use this report to settle between the cash-out position for the current processing day and the authorized payment transactions for the business day as reported on the Daily Financial Activity Detail (TB03) and Daily Financial Activity Summary (TB04) Reports.

Note: Because the BASE24-billpay product allows for a lag time after logical network cutover before transactions are posted to the next processing day, the totals reflected in the Payment Summary Report may not match the totals reflected in the BASE24-telebanking reports for the same day. In this case, the difference should be reflected in the Payment Summary Report for the next day. For more information, refer to the “BASE24-billpay Business Day” discussion elsewhere in this section.

System Owner

A system owner is an organization that runs the BASE24 remote banking system on behalf of client financial institutions. The system owner is responsible for providing the appropriate settlement and statistical reporting instruments to each client institution. This may include the institution’s statistical reports, a tape extract of the institution’s transactions from the ITLF, and a file of transactions archived for the institution from the History Table (HIST).

Financial Transactions

The following transactions are considered to be financial transactions. The transaction type for these transactions is enclosed in parentheses. The transfer – immediate transaction and all user-defined transactions are BASE24-telebanking transactions, while the rest of the transactions are BASE24-billpay transactions. The transfer – future and transfer – recurring transactions are also included with Enhanced Telebanking. The BASE24-billpay product does not support user-defined transactions.

- Transfer – immediate (40)
- User-defined transactions with a message type identifier (MTI) value of 12xx
- Transfer – future (4A)
- Transfer – recurring (4B)
- Payment – immediate (50)
- Payment – future (5A)
- Payment – recurring (5B)

Remote Banking Business and Remittance Days

The BASE24-telebanking and BASE24-billpay products manage transaction activity according to their business and remittance days. Transactions these products process during a defined business day are included in the ITLF or Payment Summary Table (PST) for that day and, consequently, on the reports for that day. The remittance day applies to the BASE24-billpay product only and defines when remittances for approved payments are generated.

BASE24-telebanking Business Day

The BASE24-telebanking business day is defined by a series of daily cutovers during which the BASE24-telebanking product stops posting transactions to the current posting day and begins posting transactions to the next business day. There are two daily cutovers: institution cutover and logical network cutover.

Institution Cutover

Institution cutover consists of a number of institution-level actions. BASE24-telebanking customer ID issuers are defined at the institution level. Actions related to settlement include increasing the business and reporting processing dates in the institution's IDF record by one. The cyclic and periodic usage accumulation periods for the institution are also calculated at institution cutover. The withdrawal usage period used to accumulate bad PIN tries can also be reset at this time if the institution is configured to do so.

Each institution controls its cutover time in the Institution Definition File (IDF) by defining a window during which it can cut over to a new business day. At the end of this window, the End-of-Period process increases the institution's business dates to the date of the next business day.


Logical Network Cutover

At logical network cutover, the entire logical network moves to a new business day. The BASE24-telebanking business day revolves around logical network cutover. All institutions should be cut over before the logical network cuts over.

At a set time prior to logical network cutover, which is defined by a param in the LCONF, the End-of-Period process creates a new ITLF and ELF in preparation for logical network cutover.

At logical network cutover, the BASE24-telebanking product stops logging transactions to the files for the current business day, closes the files, opens the files for the new next business day, and starts logging transactions to the files for the next business day. Thus, the files for the next business day become the files for the current business day. There are two ITLFs and two ELF's open at all times. One set of files is for the current logical network business day and another set of files is for the next logical network business day. The BASE24-telebanking statistical reports are produced after logical network cutover.

The BASE24-telebanking business day is depicted in the illustration on the following page. Transactions that occur during the business day for the network are logged to the ITLF for the same business day. Exceptions that are encountered during the business day for the network are logged to the ELF for the same business day.

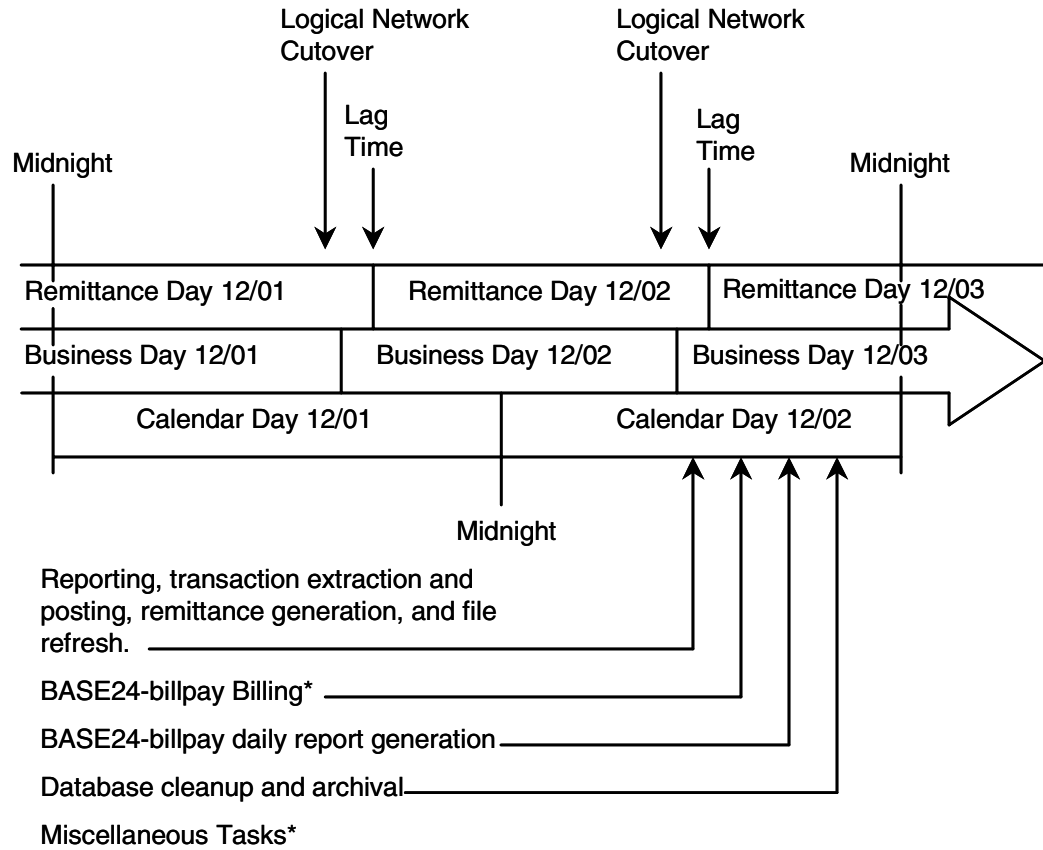

*Optional tasks. Required only if BASE24-billpay Billing Application is installed.

BASE24-billpay Business and Remittance Days

The BASE24-billpay business and remittance days are defined by logical network cutover and a lag time. Institution cutover is not used with the BASE24-billpay product because BASE24-billpay payment transactions for each vendor can involve multiple institutions. Using only the logical network cutover ensures that institutions and vendors involved in a payment transaction are processed on the same business day.

Business Day

BASE24-billpay transactions are logged to the History Table (HIST) with the business date established at logical network cutover. The BASE24-telebanking and BASE24-billpay products use the same logical network cutover time to move to a new business day.

A lead time is not required for the BASE24-billpay product because the HIST is not a dated file. There is always only one HIST which retains transactions for a configurable number of days before they are archived.

Note: The BASE24-billpay Scheduled Transaction Initiator process is responsible for initiating payments and transfers that were previously scheduled to be performed once on a future date or several times on a recurring basis. A processing window defines when future and recurring payments and transfers scheduled for the current business day can be initiated by the Scheduled Transaction Initiator process. This processing window must be coordinated with logical network cutover and is defined by params in the LCONF.

Remittance Day

When the lag time after logical network cutover expires, the Remittance Generator processes close the remittance files for the business day just ended, write final totals to the Payment Summary Table (PST), and open new remittance files. The BASE24-billpay remittance day is offset from the BASE24-billpay business day by the duration of the lag time. The lag time is defined by a param in the LCONF.

The lag time allows time for an immediate scheduled payment made at a remote banking device or customer service representative (CSR) terminal to be canceled before a remittance is generated for the payment. The Remittance Generator processes do not generate a remittance for an approved payment until it has been in the HIST for the time period specified by this param.

The lag time also applies to selected BASE24-billpay nonfinancial transactions logged to the HIST that are also logged to the ITLF by the Bank Advice program. Transactions are selected for this processing by their configuration in the Bank Transaction Advice Table (BKAV). A selected transaction must reside in the HIST for the specified lag time duration before this program will log the transaction to the ITLF. The lag time does not apply to BASE24-billpay financial transactions since these transactions are always logged to the ITLF immediately by the BASE24-telebanking Integrated Authorization Server process when funds for the transaction are authorized.


Note: It is possible that a Remittance Generator process may not finish processing payments from the HIST for the current business day before the lag time after logical network cutover expires. This can occur if a payment is approved and logged to the HIST immediately (for example, a few seconds) prior to logical network cutover. When the lag time after logical network cutover expires, the Remittance Generator process continues processing, but any remaining payments not included in the remittance file it just closed are written to the remittance file for the next business day. When the Remittance Generator process starts processing for the next business day, it first retrieves any payments in the HIST left over from the previous business day and then starts processing for the current business day. Separate totals are included in the PST for each remittance day and business day combination.

The BASE24-billpay business and remittance days are depicted on the next page. The shaded portions of the diagram relate when transactions occur to the files to which they are logged. A key to the abbreviations is shown below.

Key

HIST = History Table


TLF = ITS Transaction Log File

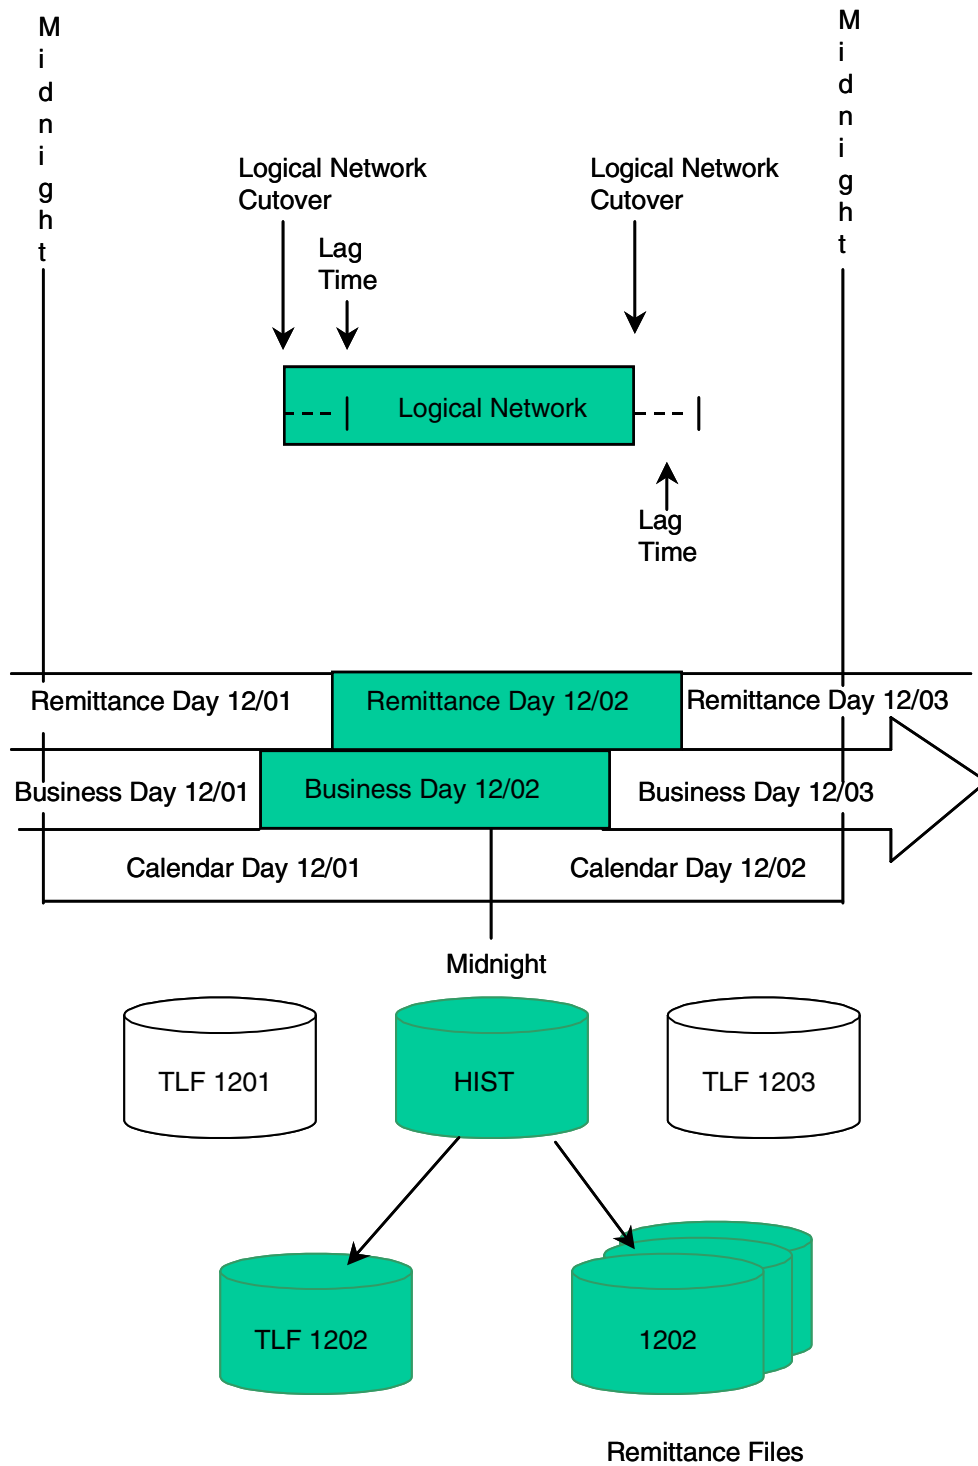

End-of-Period Processing Cycle

The daily end-of-period processing cycle for the BASE24-telebanking and BASE24-billpay products revolves around the remote banking business day, remittance day, and the various timers that control the business and remittance days. Processing events must be coordinated to occur in the correct order and at the desired times. Operations staff must be available to perform certain manual tasks while other tasks can be scheduled using a batch scheduler such as the Tandem NetBatch product.

The following illustration shows you the order in which various tasks should be performed in relation to the previous business and remittance days. Each of these tasks are described on the pages following the illustration. Detailed procedures for each of these tasks are provided in section 6.

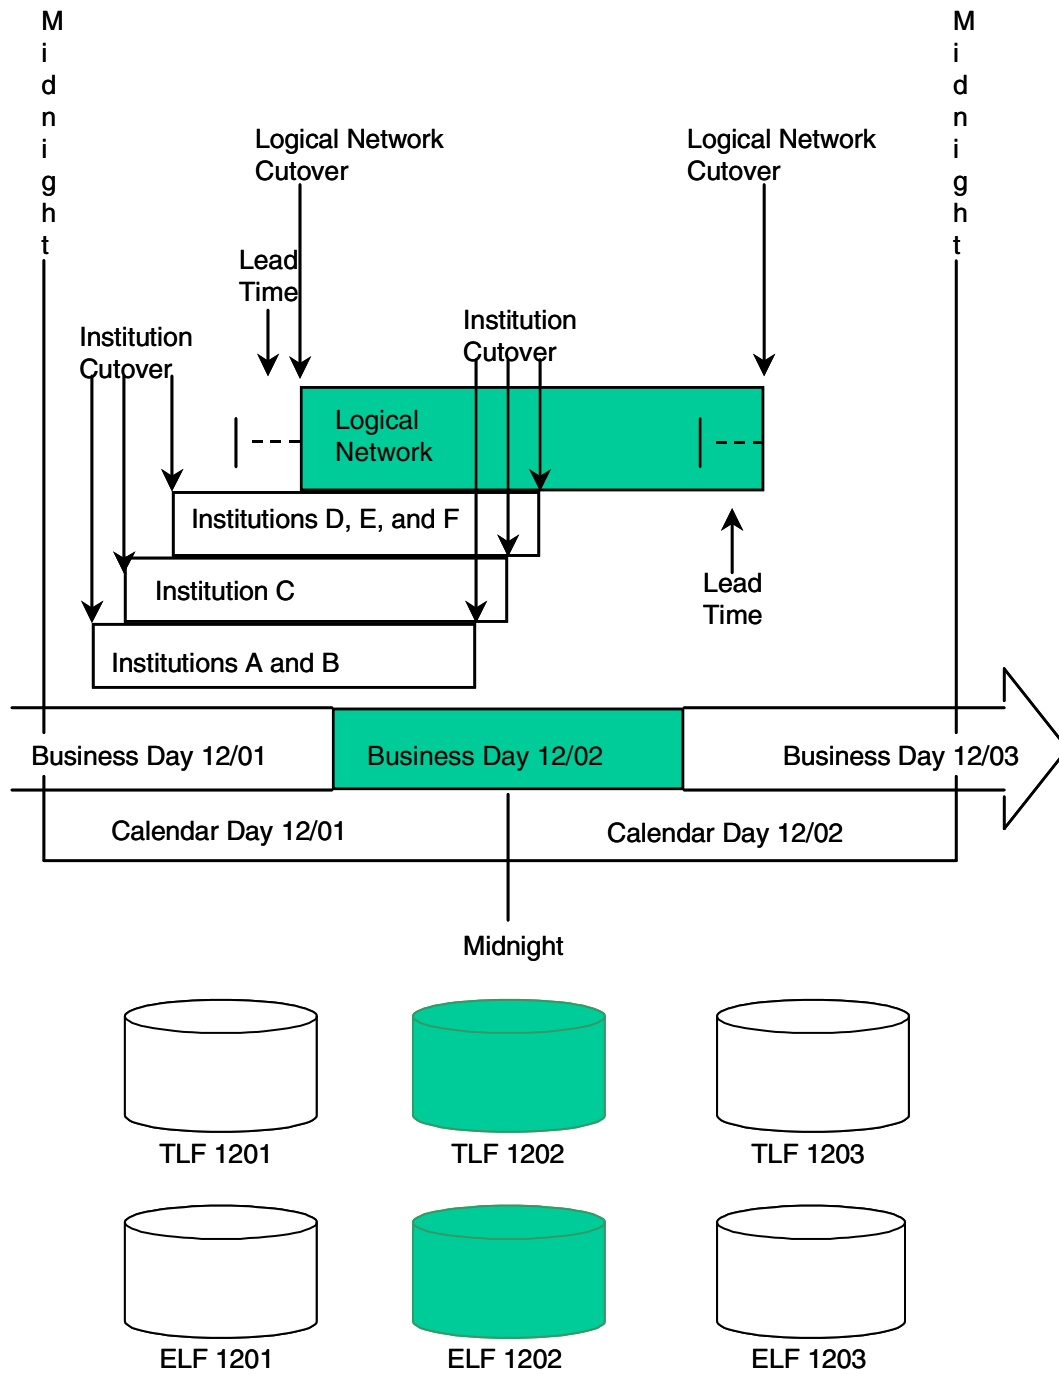

Unless specified otherwise in the following paragraphs, all tasks listed under the same heading can be performed in any sequence. Some allowances to these general ordering recommendations may be required for your specific operating procedures.

Reporting, Posting, and Remittance Tasks

The following table summarizes the tasks that should be performed as soon after logical network cutover (plus the BASE24-billpay lag time if the BASE24-billpay product is installed) as possible. The first column describes the task. A check mark (✓) in the second through fourth columns indicates whether the task is required for BASE24-telebanking, Enhanced Telebanking, or BASE24-billpay.

Task	TB	Enhanced TB	BP
Generate the Payment Summary Report.			✓
Generate the Remittance Transaction Alert Report.			✓
Generate the Scheduled Transactions Alert Report.		✓	✓
Generate BASE24-telebanking reports.	✓		
Using the remittance files as input, generate all remittance output required using user-defined programs or procedures.			✓
Extract the ITLF.	✓		
Post ITLF transactions to customer accounts on the host.	✓		
Refresh the Positive Balance File (PBF) from the host. Note: This task is required only if at least one customer ID issuer in your logical network uses the Positive Customer with Balances/History Authorization method.	✓		
Refresh the Transaction History File (THF) from the host.	✓		

BASE24-billpay Billing Application Tasks

The following tasks are required only if you are using the BASE24-billpay Billing Application. These tasks should be performed only after the settlement, posting, and remittance tasks have been completed.

- Run the Bank Billing programs
- Run the Customer Billing programs

These programs can be run manually from a TACL prompt or can be scheduled to run daily using a batch scheduler program. For detailed information on billing tasks, refer to the *BASE24-billpay Billing Application Manual*.

Enhanced Telebanking/BASE24-billpay Daily Reporting Tasks

The following BASE24-billpay daily reports that are not critical to financial settlement or billing should be generated on a daily basis for Enhanced Telebanking or BASE24-billpay:

- Customer Notices Report
- Customer Vendor List Report
- Loan Application Report
- Miscellaneous Request Report
- New Customer Report

Each of these reports is generated by executing the appropriate TACL routine. These routines can be run manually from a TACL prompt or can be scheduled to run daily using a batch scheduler program. These reports should be run before the BASE24-billpay database is cleaned up.

Database Cleanup and Archival Tasks

The following table summarizes the tasks that involve cleaning up the BASE24-telebanking and BASE24-billpay databases, identifying payments remitted by ACH processing that have cleared in the History Table (HIST), and archiving old rows from the HIST. The first column describes the task. A check mark (✓) in the second through fourth columns indicates whether the task is required for BASE24-telebanking, Enhanced Telebanking, or BASE24-billpay. Each of these tasks can be executed manually from a TACL prompt or scheduled

using a batch scheduler program. These tasks should be performed only after all previously summarized tasks have been completed. The ACHclear programs should be run before the Cleanup and Archive programs.

Task	TB	Enhanced TB	BP
Archive old ITLFs.	✓		
Run the ACHclear programs.			✓
Run the Archive programs.		✓	✓
Run the daily Cleanup programs.		✓	✓
Run the remittance file cleanup TACL macro.			✓

Miscellaneous Tasks

The following table summarizes the tasks performed on an as-needed basis. The first column describes the task. A check mark (✓) in the second through fourth columns indicates that the task is required for BASE24-telebanking, Enhanced Telebanking, or BASE24-billpay. Year-end cleanup should only be performed after other year-end processing (for example, generation of the Customer Vendor Year-End Summary Report) is completed.

Procedures for performing these miscellaneous tasks are provided in section 6 and appendix A.

Task	TB	Enhanced TB	BP
Create Exception Log Files (ELFs) for a specified date. ELFs are normally created automatically on a daily basis by the End-of-Period process.	✓		
Create ITS Transaction Log Files (ITLFs) for a specified date. ITLFs are normally created automatically on a daily basis by the End-of-Period process.	✓		

Task	TB	Enhanced TB	BP
Create report obey files for a specified date. Report obey files are normally created automatically on a daily basis by the End-of-Period process.	✓		
Force midnight cutover.	✓		
Generate the Customer Vendor Year-End Summary Report.			✓
Generate the Master Vendor Report.			✓
Regenerate payment remittance.			✓
Regenerate reports as necessary.	✓	✓	✓
Reset cyclic and periodic usage periods for all institutions in the IDF. Note: This task should be required only if the End-of-Period process has been stopped for several days.	✓		
Run the year-end Cleanup programs.		✓	✓

End-of-Period Processing and Reporting Database

Remote banking products use several files and tables for cutover, end-of-period processing, and reporting purposes. Each of these files and tables is described below by BASE24 Remote Banking product.

BASE24-telebanking Files

The following files are used to generate BASE24-telebanking reports.

Institution Definition File (IDF)

The Institution Definition File (IDF) contains several fields that control the following:

- Business and reporting days for each institution
- Usage period for bad PIN tries accumulated in the Customer Table (CSTT)
- Cyclic and periodic usage periods for transaction usage and amount accumulation fields maintained in the Positive Balance File (PBF)
- Number of days summary information is maintained in the Institution Periodic Reporting File (IPRF) for each institution
- Whether individual BASE24-telebanking reports are generated for each institution

Refer to the *BASE24 Base Files Maintenance Manual* for more information on the IDF.

Institution Periodic Reporting File (IPRF)

The Institution Periodic Reporting File (IPRF) stores a summary of daily transaction activity information required for periodic reporting. The IPRF contains one record for each processing code and product ID supported by a financial institution for each business day. Each record contains the following statistics:

- The number of approved transactions (financial and nonfinancial)
- The number of approved financial transactions

- The amount of approved financial transactions
- The number of declined transactions (financial and nonfinancial)
- The number of declined financial transactions
- The amount of declined financial transactions

Information in the IPRF is used to generate the following reports:

- Monthly Customer Activity Summary Report (TB05)
- Monthly Financial Activity Summary Report (TB06)

ITS Transaction Log File (ITLF)

BASE24-telebanking logs daily transaction activity to the ITLF, and this forms the basis for BASE24-telebanking reporting. The ITLF contains one record for each transaction, approved or denied, processed by the Integrated Authorization Server process during a single BASE24-telebanking business day. If a given transaction has been reversed, the ITLF may contain more than one record for the original transaction. All BASE24-telebanking transactions are logged to the ITLF, except for the customer select (BF) and customer verify (BG) transactions, which are never logged to the ITLF.

The ITLF also contains one record for certain BASE24-billpay transactions, including all transactions acquired from a host or remote banking endpoint device, and all financial transactions (that is, 4A, 4B, 50, 5A, and 5B) generated by the XPNET Billpay Server process or Scheduled Transaction Initiator process. The ITLF also contains records for nonfinancial BASE24-billpay transactions acquired from a CSR terminal that have been configured in the Bank Transaction Advice Table (BKAV) to be logged to the ITLF.

The following table lists all BASE24-billpay transactions that can be logged to the ITLF during authorization. Entries in the Transaction Source column identifies which transactions are always logged from a particular source. The following codes identify the transaction source:

C = CSR terminal
H = Acquirer host
R = RBSI-compliant device
S = Scheduled Transaction Initiator process
X = XPNET Billpay Server process

A transaction with a source code in the Logged ITLF column is logged to the ITLF only if it originates from the source indicated. If a transaction originates from a source other than those indicated in the Logged ITLF column, it must be configured in the Bank Transaction Advice Table (BKAV) in order to be logged to the ITLF. A separate record must be added to the BKAV for each combination of transaction code and transaction source to be logged to the ITLF. Transactions already indicated in the Logged ITLF column should not be configured in the BKAV, since this would cause them to be logged to the ITLF twice.

Transaction			Logged ITLF
Description	Code	Source	
Customer vendor list inquiry	3H	C, H, R	H, R
Scheduled payments list inquiry	3J	C, H, R	H, R
Scheduled transfers list inquiry	3K	C, H, R	H, R
History inquiry – payments and transfers	3L	C, H, R	H, R
Scheduled transactions list inquiry	3M	C, H, R	R
Transfer – future	4A	S	S
Transfer – recurring	4B	S	S
Payment – immediate	50	X	X
Payment – future	5A	S	S
Payment – recurring	5B	S	S
Schedule payment – immediate	9A	C, H, R	H, R
Schedule payment – future	9B	C, H, R	H, R
Schedule payment – recurring	9C	C, H, R	H, R
Schedule transfer – future	9D	C, H, R	H, R
Schedule transfer – recurring	9E	C, H, R	H, R
Scheduled payment delete	9F	C, H, R	H, R
Scheduled transfer delete	9G	C, H, R	H, R

Transaction			Logged ITLF
Description	Code	Source	
Scheduled payment update	9H	C, H, R	H, R
Scheduled transfer update	9J	C, H, R	H, R
Customer add	9K	C, R	R
Customer inquiry	9L	C, R	R
Customer update	9M	C, R	R
Customer vendor add	9N	C, R	R
Customer vendor deactivate	9P	C, R	R
Customer vendor update	9Q	C, R	R
Master vendor list inquiry	9R	C, R	R
Customer vendor request mailing	9T	C, R	R
Loan application	9V	C, R	R
Miscellaneous request	9W	C, R	R
History inquiry – all transactions	9X	C, R	R
Bank list inquiry	B1	C, R	R
Bank branch list inquiry	B2	C, R	R
Miscellaneous request inquiry	B4	C, R	R
Customer account add	B5	C, R	R
Customer account activate	B6	C, R	R
Customer account deactivate	B7	C, R	R
Customer account delete	B8	C, R	R
Customer account update	B9	C, R	R
Customer activate	BB	C, R	R

Transaction			Logged ITLF
Description	Code	Source	
Customer deactivate	BC	C, R	R
Customer vendor activate	BD	C, R	R
Customer vendor mask verify inquiry	BE	C, R	R

The End-of-Period process creates the ITLF a set number of minutes prior to logical network cutover (that is, the logical network cutover lead time) for use by the Integrated Authorization Server process. The End-of-Period process also purges old ITLFs at logical network cutover based on the value of the TLF-FILE-RETENTION param in the LCONF.

The BASE24-telebanking product bases its business day on logical network cutover. Each ITLF is representative of those transactions BASE24-telebanking recognizes for the defined business day. By extracting the ITLF, institutions can process the transactions against their customer accounts, affecting the daily settlement with these accounts.

Institutions and system owners can gain access to information in the ITLF by perusing the ITLF online, extracting the file for host reporting, or running BASE24-telebanking reports. Refer to the ***BASE24 Core Files and Tables Maintenance Manual*** for more information concerning ITLF perusal. The ITLF can be extracted while the file is open or closed, thereby allowing institutions or system owners to perform partial extracts in the middle of the day. However, to run reports, the ITLF must be closed by a daily cutover.

The ITS Transaction Log File (ITLF) is the primary instrument for settling customer accounts. The ITLF includes one record for each approved or denied financial transaction (that is, a transfer or payment), processed during a single BASE24-telebanking business day, that affects the balance of customer accounts.

After the ITLF has been closed for the previous business day, it is available for generating the BASE24-telebanking reports.

Logical Network Configuration File (LCONF)

The End-of-Period process and the BASE24-telebanking Issuer Reporting program read the LCONF at initialization to retrieve the assigns and params they need for processing.

Processing Code Definition File (PCDF)

All BASE24-telebanking activity summary reports use the PCDF to provide totals for each processing code configured for an institution in the PCDF. These reports can optionally include totals by categories of transaction processing codes.

BASE24-billpay Files and Tables

The following files and tables are used to generate BASE24-billpay reports or log BASE24-billpay transactions.

Bank Notice Table (BKNT)

The BKNT defines all the action codes that can be returned for a transaction for which a Customer Notice Report is generated. For example, a Customer Notice Report could be generated when a payment or transfer is declined due to insufficient funds.

Bank Transaction Advice Table (BKAV)

The BKAV defines all the BASE24-billpay nonfinancial transactions that are logged to the ITLF as well as the HIST. The ITLF can be extracted to a host while the HIST cannot. After a BASE24-billpay nonfinancial transaction configured in the BKAV has been resident in the HIST for the BASE24-billpay lag time, the Bank Advice process sends an advice of the transaction to the Integrated Authorization Server process for logging to the ITLF. To avoid duplicate logging, only those BASE24-billpay nonfinancial transactions that are not automatically logged to the ITLF should be configured in the BKAV. The ITS Transaction Log File (ITLF) description earlier in this section lists all BASE24-billpay nonfinancial transactions that are automatically logged to the ITLF.

Each row in the BKAV identifies one combination of FIID, transaction source, and transaction type for which the Bank Advice process provides an advice for a record in the ITLF.

Customer/Personal ID Relation Table (CPIT)

The CPIT relates customers to customer IDs. This table can be used optionally to obtain Personal Information Table (PIT) row information to be included on the New Customer Report.

Customer Vendor Summary Table (CVS)

The CVS accumulates the total number and amount of payments made to each customer vendor in the logical network. Information in this table is used to generate the Customer Vendor Year-End Summary Report.

Customer Vendor Table (CVND)

The CVND contains a row for each customer vendor in the logical network. Information from this table is included in the Customer Vendor List Report.

Loan Application Table (LOAN)

The LOAN contains a row for each loan application entered by a customer service representative. Information from rows found in this table is included in the daily Loan Application Report.

Logical Network Configuration File (LCONF)

BASE24-billpay programs read the LCONF at initialization to retrieve the assigns and params they need for processing.

Miscellaneous Request Table (MISC)

The MISC contains a row for each miscellaneous request entered by a customer service representative. Information from rows found in this table is included in the daily Miscellaneous Request Report.

Payment Summary Table (PST)

The PST contains a summary of the total number and amount of payments made to each vendor in the logical network for a particular business day. Information from this table is included on the Payment Summary Report.

Personal Information Table (PIT)

The PIT contains customer information included on the New Customer Report when a new customer is added by a customer service representative. Customer mailing information from this table is also printed in the header of the Customer Notice Report, the Customer Vendor List Report, and the Customer Vendor Year-End Summary Report.

Report Action Table (RPTA)

The RPTA keeps track of processing actions for which the following reports are to be generated: Customer Notice Report, Customer Vendor List Report, and New Customer Report.

Vendor Branch Table (VNDB)

The VNDB contains one row for each vendor branch in the logical network and is used to generate the Master Vendor Report.

Vendor Table (VNDR)

The VNDR contains one row for each vendor in the logical network and is used to generate the Master Vendor Report.

Timers

Various timers are used to control the remote banking business and remittance days. Each of these timers are described below by product.

BASE24-telebanking Timers

The cutover and reporting actions the End-of-Period process performs are controlled and triggered by timers. These timers are listed and briefly described below. For more detailed information on these timers, refer to section 2.

Financial Institution Cutover Timer

The financial institution cutover timer indicates when a financial institution within the logical network must cut over. BASE24-telebanking maintains one financial institution cutover timer for each institution in the logical network. When the financial institution cutover timer for an institution expires, the End-of-Period process calculates a new current business date and a new report business date, as well as new cyclic and periodic usage periods for the institution.

If the FIELD CUTOVER field on IDF screen 3 is set for logical network cutover, the process also resets the withdrawal usage period dates on IDF screen 4 when this timer expires. This usage period is used for bad PIN tries accumulated in the Customer Table (CSTT).

Logical Network Cutover Lead Timer

The logical network cutover lead timer indicates when the End-of-Period process creates new ITS Transaction Log Files (ITLFs) and a new Exception Log File (ELF) for the day after the next business date. This is done in preparation for cleanup of ITLFs and ELF files during logical network cutover.

Logical Network Cutover Timer

The logical network cutover timer indicates when the logical network must be cut over. When the logical network cutover timer expires, the End-of-Period process cuts over the entire logical network to a new business day. This processing includes cleanup of the ITLFs, ELF files, and report obey files.

Midnight Cutover Timer

The midnight cutover timer indicates whether the withdrawal usage period dates on IDF screen 4 are reset if the FIELD CUTOVER flag on IDF screen 3 is set for midnight. These dates control the usage period for bad PIN tries accumulated in the Customer Table (CSTT).

Start Reports Timer

The start reports timer initiates the production of a report or reports. When the BASE24-telebanking start reports timer expires, the End-of-Period process creates and opens a TACL process that executes a report obey file. The report obey file executes the BASE24-telebanking Issuer Reporting program for a specified date. At this time, the process also creates the obey file for the next reporting date and resets the timer.

BASE24-billpay Timers

The cutover actions the BASE24-billpay processes perform are controlled and triggered by timers. These timers are listed and briefly described below.

Note: The BASE24-billpay product does not use the financial institution cutover timer, logical network cutover lead timer, or the midnight timer.

Logical Network Cutover Timer

The logical network cutover timer indicates when the logical network cuts over to a new business day. When this timer expires, the Billpay Server and Scheduled Transaction Initiator processes increase the business date by one. All transactions processed after logical network cutover are logged to the History Table (HIST) with the new business date, except for reversals of immediate payments that are received before the lag time after logical network cutover expires. These specific transactions are logged with the previous business date.

Lag Timer

The lag timer specifies how long a transaction must reside in the HIST before it can be processed by a Remittance Generator process or Bank Advice process.

Note: Any transactions other than reversals logged to the HIST after logical network cutover and before the lag time expires, are logged to the new business and remittance dates.

BASE24-telebanking Reports

BASE24-telebanking provides reports that include statistical information on both financial and nonfinancial transaction activity. Some statistical reports show the number and amount of approved and declined financial transactions by customer ID, account, and by type of transaction on a daily basis. Financial transaction totals are provided for each financial institution and for the entire logical network on both a daily and monthly basis. Other statistical reports are an accumulation of totals for approved and declined financial and nonfinancial transactions categorized by customer ID and account, institution, and logical network. These statistical reports are also provided on a daily and monthly basis.

The BASE24-telebanking product generates reports using transactions accumulated during each institution's business day. Thus, daily reports contain transactions accumulated during a single business day. They are based on the daily transaction activity of customers. Monthly reports are printed for the last full month and provide an overview of all daily customer transaction activity during that month.

Fields on Institution Definition File (IDF) screen 42 control whether reports are generated and statistics accumulated for an institution for each of the BASE24-telebanking reports. If the field for a report is set to the value N on this screen, no data will be accumulated for that report for the institution in the Institution Periodic Reporting File (IPRF) and none will be displayed on the report for the institution when the report is generated.

The BASE24-telebanking Issuer Reporting program generates all BASE24-telebanking reports. This program also generates a Statistics and Errors Report each time the program is run. This report summarizes the processing performed.

Refer to section 4 for details on each BASE24-telebanking report.

BASE24-billpay Reports

BASE24-billpay provides a Payment Summary Report that summarizes all payment remittances generated for a particular day as well as a number of reports that provide the following:

- Customer notification of significant processing events (for example, a scheduled payment denied due to insufficient funds) configured in the Bank Notice Table (BKNT) that occurred during the previous processing day.
- Customer vendor lists that were requested during the previous processing day.
- A year-end summary of a customer's payment activity for the previous calendar year.
- Detailed reports of all loan applications and miscellaneous requests entered by customer service representatives during the previous processing day.
- A detailed report of all new customers added or activated during the previous processing day.
- A list of all the vendors currently configured for the logical network.
- A processing summary report for each ACHclear, Archive, and Cleanup process that is run.
- A list of any transactions that the Remittance Generator process failed to process for the specified period.
- A list of any scheduled transactions the Scheduled Transaction Initiator process failed to process for the specified period.

Refer to section 5 for details on each BASE24-billpay report.

ACI Worldwide Inc.

Section 2

BASE24-telebanking End-of-Period Processing

All BASE24-telebanking end-of-period processing is performed by the End-of-Period process and the BASE24-telebanking Issuer Reporting program.

The End-of-Period process runs continually and is responsible for performing the following cutover functions when various timers expire:

- Create, execute, and purge the BASE24-telebanking report obey files.
- Create and purge the ITS Transaction Log Files (ITLFs).
- Create and purge the Exception Log Files (ELFs).
- Cut over each financial institution in the logical network.
- Maintain the correct business date and usage accumulation periods.
- Cut over the logical network.


The BASE24-telebanking Issuer Reporting program runs as a batch process and is responsible for generating each of the BASE24-telebanking reports described in section 4 of this manual.

This section describes the above processing functions in detail, explains how the End-of-Period process and BASE24-telebanking Issuer Reporting program are configured and controlled.

End-of-Period Process

This subsection describes the processing performed by the End-of-Period process as well as the requirements and facilities for configuring and controlling the process.

All processing performed by the End-of-Period process is controlled through the use of timers or server control commands. The following illustration depicts the processing performed by the End-of-Period process when a particular timer expires or a particular server control command is received. A key to the abbreviations follows the illustration. Timer processing is described on the following pages while server control command processing is described in appendix A.

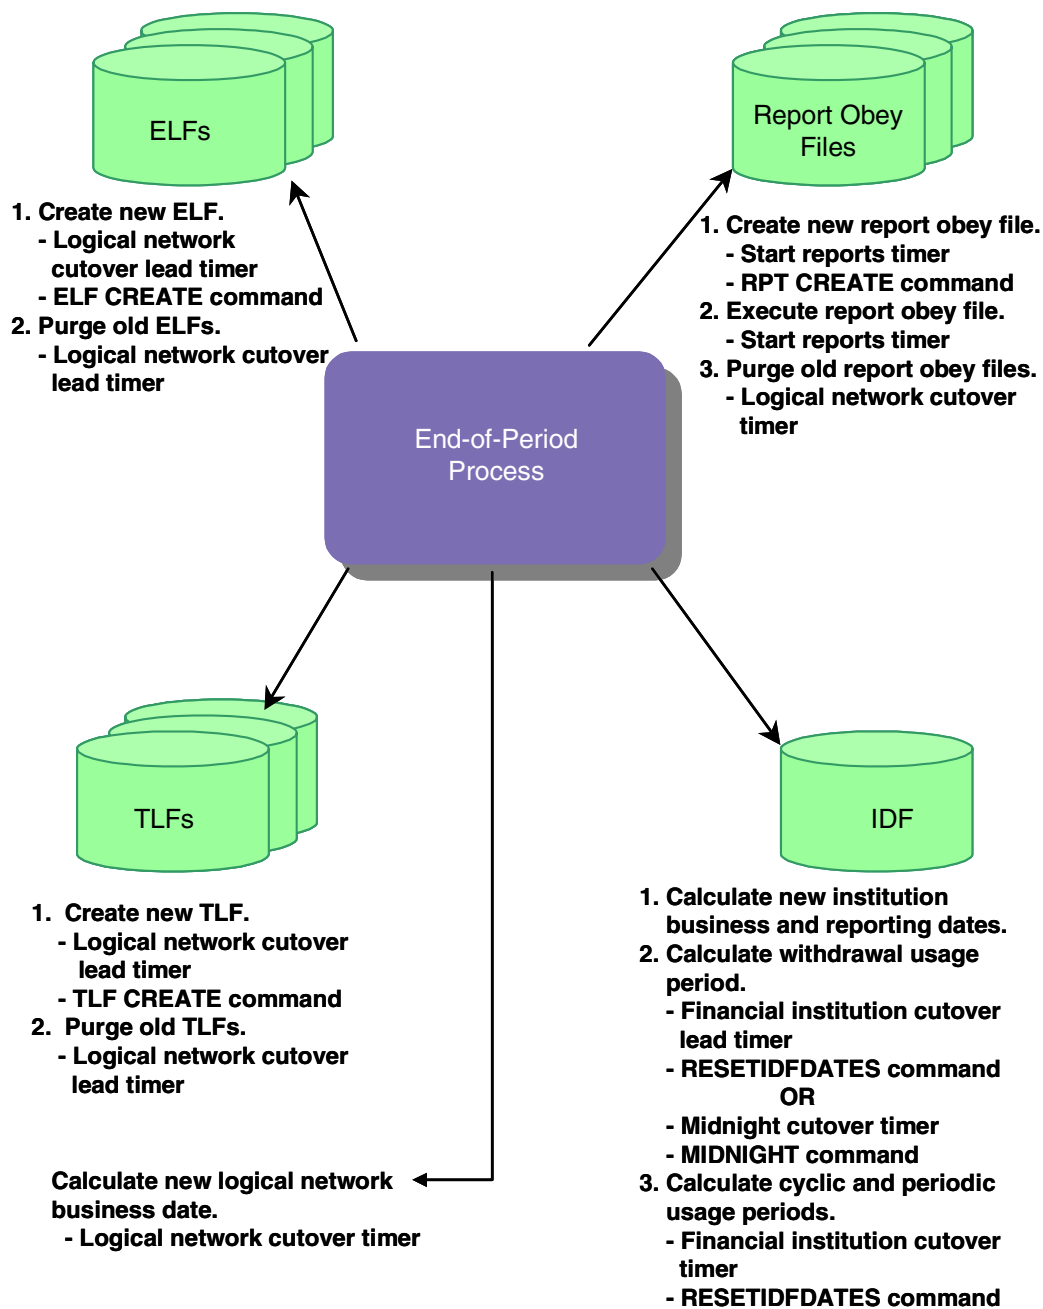

Key

ELF = Exception Log File
 IDF = Institution Definition File
 TLF = ITS Transaction Log File

Financial Institution Cutover Timer

When a financial institution cutover timer expires, the End-of-Period process begins institution cutover. The End-of-Period process maintains a separate timer for each institution in the logical network.

An institution's cutover time is based on the value in the CUTOVER END field on Institution Definition File (IDF) screen 40 for the institution. The financial institution cutover timer expires each day at the time specified in this field.

When a financial institution cutover timer expires, the End-of-Period process performs the following:

1. Determines whether the institution supports the BASE24-telebanking product. If it does not, no further processing is performed.
2. Calculates a new current business date.

If the value in the CUTOVER END field on IDF screen 40 is greater than the current system time, the CURRENT BUSINESS DATE field on IDF screen 40 is set to the current system date. Otherwise, the value in the CURRENT BUSINESS DATE field is increased by one.

3. Calculates a new report business date.

The value in the REPORT BUSINESS DATE field on IDF screen 40 is set to the value in the CURRENT BUSINESS DATE field minus one.

4. Calculates new withdrawal period dates if the FIELD CUTOVER field on IDF screen 3 is set for logical network cutover. If the FIELD CUTOVER field is set for midnight cutover, these dates are calculated at midnight.

If the process calculates new withdrawal period dates, the values of the BEGINNING DATE and NEXT BEGINNING DATE fields on IDF screen 4 are calculated as follows:

- If the WORK DAY CODE field on IDF screen 4 is set to use the holiday list, the process uses the values in the HOLIDAYS field on IDF screen 4 to calculate the new beginning and next beginning dates.
- If the WORK DAY CODE field on IDF screen 4 is set to not use the holiday list, the process uses the value from the PERIOD LENGTH field on IDF screen 4 to calculate the new beginning and next beginning dates.

5. Calculates new periodic and cyclic usage accumulation periods.

Note: These periods can also be reset manually at any time using the RESETIDFDATES command. Refer to the “Server Control Commands” discussion in appendix A.


- If the USAGE INDICATOR field on IDF screen 41 is set for periodic usage periods or periodic and cyclic usage periods, the process calculates new dates in the CURRENT PERIODIC USAGE BEGIN DATE and NEXT PERIODIC USAGE BEGIN DATE fields using the following information:
 - ❑ Current system date
 - ❑ Value of the PERIODIC WORK DAY field on IDF screen 41
 - ❑ Value of the PERIODIC USAGE LENGTH field on IDF screen 41
 - ❑ Values from the HOLIDAYS field on IDF screen 4
 - ❑ Value from the CUTOVER END field on IDF screen 40
- If the USAGE INDICATOR field on IDF screen 41 is set for cyclic usage periods or cyclic and periodic usage periods, the process calculates new dates in the CURRENT CYCLIC USAGE BEGIN DATE and NEXT CYCLIC USAGE BEGIN DATE fields using the following information:
 - ❑ Current system date
 - ❑ Value of the CYCLIC WORK DAY field on IDF screen 41
 - ❑ Value of the CYCLIC USAGE LENGTH field on IDF screen 41
 - ❑ Values from the HOLIDAYS field on IDF screen 4
 - ❑ Value from the CUTOVER END field on IDF screen 40

6. Resets the financial institution timer.

Logical Network Cutover Lead Timer

When the logical network cutover lead timer expires prior to logical network cutover, the End-of-Period process creates the ITLF and ELF required for the day after the next business date. The logical network cutover lead timer is set based on the value of the LGNT-CUTOVER param in the Logical Network Configuration File (LCONF) minus the number of minutes specified in the LGNT-CUTOVER-LEAD-TIME param.

The following illustration depicts the processing performed when the logical network lead timer expires. A key to the abbreviations follows the illustration. Step-by-step descriptions of logical network cutover lead timer processing are also provided following the illustration.

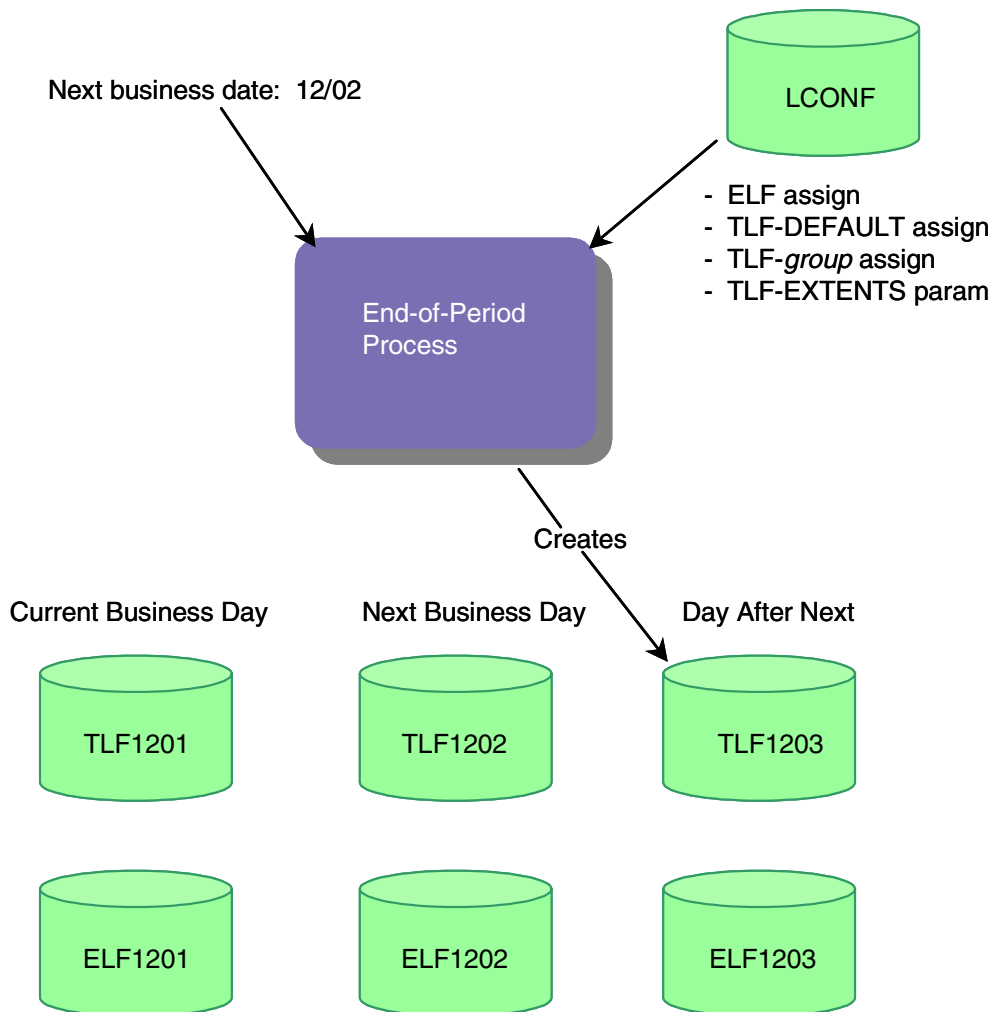

Key

ELF = Exception Log File
LCONF = Logical Network Configuration File
TLF = ITS Transaction Log File

When the logical network cutover lead timer expires, the End-of-Period process performs the following:

1. Creates an ITLF for the day after the next business day for the TLF-*group* assign in the LCONF and for two days after the next business day for the TLF-DEFAULT assign in the LCONF. The date is appended to the file name. The process creates all primary and alternate key files required as dictated by the attributes for the template file specified for each assign.
2. Opens the primary file for each ITLF.
3. Allocates extents for each primary key file as specified by the TLF-EXTENTS param.
4. Opens any alternate key files created for each ITLF.
5. Allocates extents for each alternate key file as specified by the TLF-EXTENTS param.
6. Writes the first record to each ITLF. The Super Extract process requires and uses this record during its processing.
7. Creates an ELF for the day after the next business day for the ELF assign in the LCONF. The date is appended to the file name.

Logical Network Cutover Timer

When the logical network cutover timer expires, the End-of-Period process begins logical network cutover.

The End-of-Period process sets its logical network cutover timer so that it expires at the time specified in the CUTOVER END field on IDF screen 40. The End-of-Period process sets this timer at initialization and at logical network cutover.

When the logical network cutover timer expires, the End-of-Period process performs the following:

1. Deallocates unused extents in all of the ITLFs for the current business day and then closes them.
2. Increases the value of the current business date and next business date for the logical network in its frame by one.
3. Purges any ELFs that are older than the file retention period specified by the ELF-FILE-RETENTION param in the LCONF.

4. Purges any ITLFs that are older than the file retention period specified by the TLF-FILE-RETENTION param in the LCONF.
5. Purges any report obey files that are older than the obey file retention period specified by the TB-RPT-ISS-FILE-RETENTION param in the LCONF.
6. Generates an event message to indicate that logical network cutover has occurred.
7. Resets the logical network cutover timer.
8. Resets the logical network cutover lead timer.

Midnight Cutover Timer

When the midnight timer expires, the End-of-Period process begins midnight cutover processing. One midnight timer exists for the entire logical network, if one or more institutions are set up to clear bad PIN tries from the Customer Table (CSTT) at midnight instead of at financial institution cutover.

The End-of-Period process sets the midnight cutover timer at initialization if at least one institution that uses the BASE24-telebanking product has specified midnight cutover in the FIELD CUTOVER field on IDF screen 3.

When the midnight cutover timer expires, the End-of-Period process reads the first record in the IDF and performs the following:

1. Reads the IDF record for the institution. If the institution does not support the BASE24-telebanking product, the process reads the next record in the IDF.
2. Checks the value in the FIELD CUTOVER field on IDF screen 3 to determine whether withdrawal and usage periods are to be calculated at midnight or at financial institution cutover.
 - If the FIELD CUTOVER field is set for logical network cutover, withdrawal and usage periods are to be calculated at financial institution cutover. In this case, the process skips steps 3 and 4 and repeats steps 1 and 2 for the next record in the IDF.
 - If the FIELD CUTOVER field is set for midnight cutover, the process continues with the next step.
3. Calculates new withdrawal period dates. The values of the BEGINNING DATE and NEXT BEGINNING DATE fields on IDF screen 4 are calculated and updated as follows:

- If the WORK DAY CODE field on IDF screen 4 is set to use the holiday list, the process uses the values in the HOLIDAYS field on IDF screen 4 to calculate the new beginning and next beginning dates.
 - If the WORK DAY CODE field on IDF screen 4 is set to not use the holiday list, the process uses the value from the PERIOD LENGTH field on IDF screen 4 to calculate the new beginning and next beginning dates.
4. Resets the midnight cutover timer.

Start Reports Timer

A start reports timer is used for each set of reports to be generated during end-of-period processing. One start reports timer is used to generate all six of the BASE24-telebanking reports, since the same program creates all of these reports. This timer is based on the value of the TB-RPT-ISS-TIM param in the LCONF. A timer is set for the BASE24-telebanking issuer reports only if the TB-RPT-ISS-RUN param in the LCONF is set to the value Y.

When the start reports timer expires, the End-of-Period process performs the following:

1. Creates an obey file for the start reports timer that just expired. For the BASE24-telebanking product, a single obey file is created to execute the BASE24-telebanking Issuer Reporting program. This obey file is named in the format `TBRmmdd`, where `mmdd` indicates the month and day of the ITS Transaction Log File (ITLF) to be used for reporting. This obey file is located on the volume and subvolume specified by the value of the TB-RPT-ISS-OBEY-FILE assign in the LCONF. The syntax of the RUN command used in this obey file is described in section 6.
2. Creates a TACL process to execute the report obey file.
3. Opens the TACL process. If the End-of-Period process cannot open the TACL process, it generates an event message indicating that the obey file must be executed manually.
4. Writes a startup message to the TACL process. The report obey file is specified as an in file in the startup message.
5. Waits three seconds and verifies that the TACL process started the BASE24-telebanking Issuer Reporting program.
6. Closes the TACL process.
7. Resets the start reports timer.

Sample Report Obey File

A sample of an obey file created by the End-of-Period Processing process is shown below. The name of this obey file is TBR1231 and would be executed for transactions that were logged to the ITLF on December 31.

```
run \B24.$DATA.PRO1DATA.TBRPT1/name $RP01, out \B24.$S.#TBRPT1, cpu 3, pri 100/&
lconf \B24.$DATA.PRO1EXEC.L1CONF, date 1231
```

Process Configuration, Startup, and Control

The End-of-Period process is configured, started, and controlled using standard XPNET process network control facilities. For more information on these facilities, refer to the following manuals:

- *NET24-XPNET Network Control Command Reference Manual*
- *NET24-XPNET Network Control Operations Guide*

LCONF Assigns and Params

Since the End-of-Period process is an object-oriented process, all LCONF assigns and params are used by the objects contained in the process. For a list of all applicable assigns and params, refer to appendix A.

Object Configuration and Control

Because the End-of-Period process is an object-oriented process, the process and its objects are also configured and controlled using the BASE24 ITS kernel facilities. All object-oriented configuration and control information for the End-of-Period process is described in appendix A.

BASE24-telebanking Issuer Reporting Program

This subsection describes the processing performed by the BASE24-telebanking Issuer Reporting program, the configuration requirements for the program, and how the program is started and controlled. The BASE24-telebanking Issuer Reporting program is not object-oriented.

The BASE24-telebanking Issuer Reporting program is a stand-alone module that uses the ITS Transaction Log Files (ITLFs) to generate the following customer transaction activity and financial transaction activity reports. Each of these reports is described in detail in section 4.

- Daily Customer Activity Detail (TB01)
- Daily Customer Activity Summary (TB02)
- Daily Financial Activity Detail (TB03)
- Daily Financial Activity Summary (TB04)
- Monthly Customer Activity Summary (TB05)
- Monthly Financial Activity Summary (TB06)

The BASE24-telebanking Issuer Reporting program should be scheduled to run some time after logical network cutover. If the BASE24-billpay product is installed, the BASE24-telebanking Issuer Reporting program should not be started until the BASE24-billpay lag time after logical network cutover has expired. Preferably, running this program should be one of the first tasks performed in the daily end-of-period processing cycle.

Each of the BASE24-telebanking reports can be configured on Institution Definition File (IDF) screen 42 to be produced for each financial institution. If a report is not configured to be produced for an institution, the program will not collect or accumulate any data for that institution in the Institution Periodic Reporting File (IPRF) and the report will be printed with no data for that institution.

The daily activity detail reports document individual transactions processed during a single business day and are based on the daily transaction activity of customers. A monthly report is generated for the entire reporting month and provides a summary of all customer activity during the month.


The daily and monthly summary reports provide an accumulation of totals, including amounts for financial transactions, for approved and declined transactions categorized by institution and transaction type. The

BASE24-telebanking Issuer Reporting program uses the IPRF to generate the monthly reports. The program writes totals for each institution to the IPRF on a daily basis and accumulates these records on the last day of the reporting month to generate the monthly reports. The program deletes old records from the IPRF, based on the value in the PERIODIC FILE RETENTION field on IDF screen 42.

The End-of-Period process can be configured to automatically execute the BASE24-telebanking Issuer Reporting program after logical network cutover on a daily basis using an obey file. The program can also be run manually at any time by executing the appropriate obey file from a TACL prompt. The only requirement is that the ITLFs for the business day to be reported must be closed when the program is run.

When the BASE24-telebanking Issuer Reporting program is run, it uses Tandem's FastSort utility to sort and merge all ITLFs for the specified business day into a single output file. Currently, BASE24-telebanking only supports a single daily ITLF. The FastSort utility executes two to eight configurable Subsort processes for parallel sort and merge processing and can sort and merge up to 32 files at a time.

The processing performed by the BASE24-telebanking Issuer Reports program is depicted in the following illustration. A key to the abbreviations follows the illustration. A detailed processing description is also provided following the illustration.

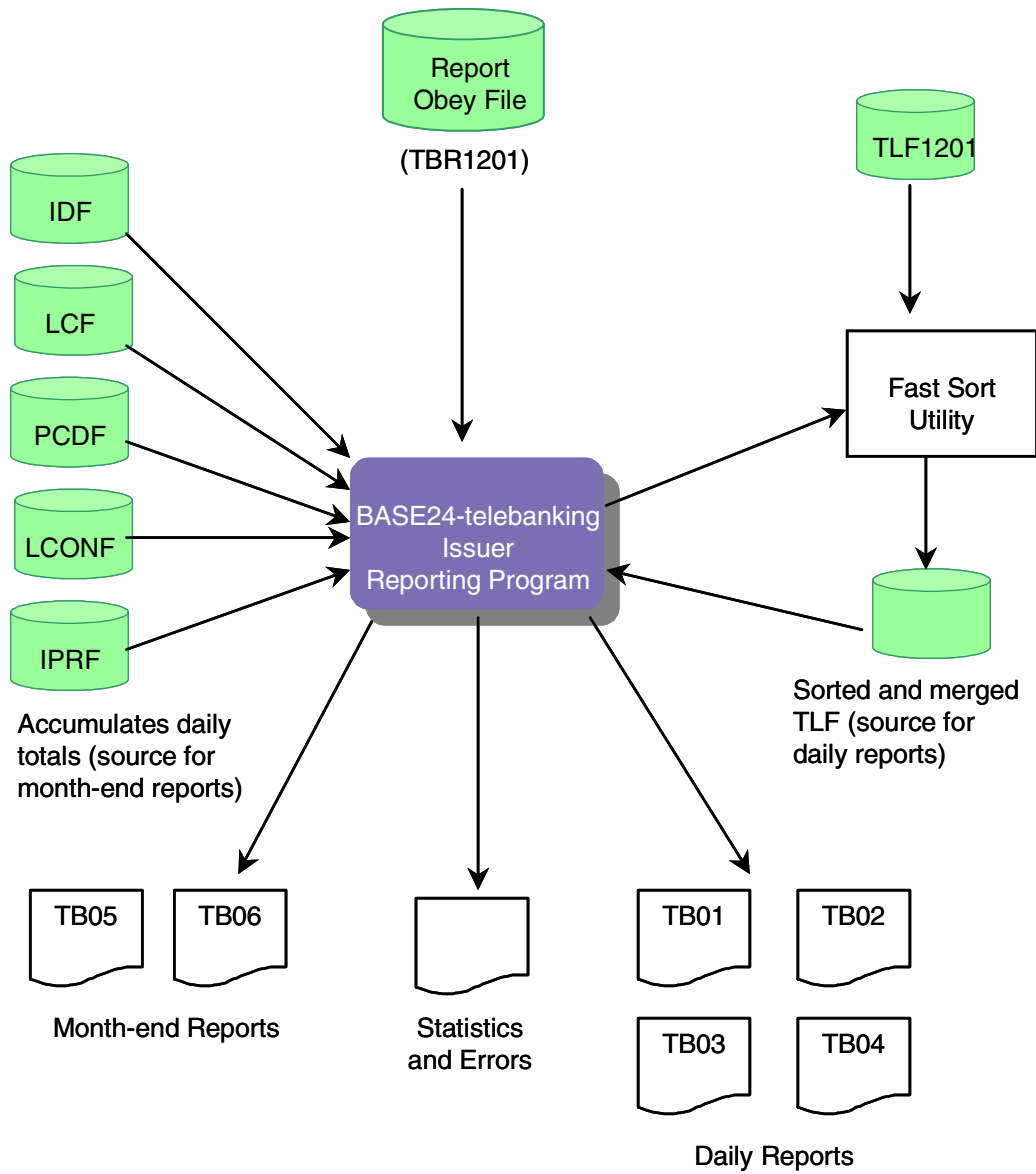

Key

IDF	= Institution Definition File
IPRF	= Institution Periodic Reporting File
LCF	= Log Configuration File
LCONF	= Logical Network Configuration File
PCDF	= Processing Code Definition File
TLF	= ITS Transaction Log File

Program Startup

The BASE24-telebanking Issuer Reporting program is started when you enter the appropriate RUN command from a TACL prompt or execute an obey file containing the RUN command. The syntax for this RUN command is described in section 6.

Initialization Processing

Upon receipt of the start-up message, the BASE24-telebanking Issuer Reporting program performs the following processing:

1. Initializes global variables and structures.
2. Initializes the event logging facilities.
3. Reads and validates the start-up message.
4. Starts the Statistics and Errors report and writes it to the spooler location specified in the start-up message.
5. Opens the LCONF specified in the start-up message and retrieves all required and optional assigns and params, except for the TLF-DEFAULT and TLF-*group* assigns.
6. Opens the Log Configuration File (LCF) specified by the LCF assign in the LCONF to obtain the ITLF logging location for ITS processes. Currently all ITS processes must log to the same location.
7. Retrieves TLF-DEFAULT and TLF-*group* assigns from the LCONF.
8. Updates ITLF file names retrieved from the LCONF with the reporting date provided in the start-up message.
9. Closes the LCONF.
10. Starts the event logging facilities.
11. Opens the IDF, Processing Code Definition File (PCDF), and IPRF specified in the LCONF assigns.
12. Writes data to the Statistics and Errors report indicating the LCONF, LCF, IDF, IPRF, and PCDF file names used in this run.
13. Allocates an extended memory table to maintain information from the IDF (FIID table) and PCDF (transaction table).

14. Reads the IDF and initializes the internal FIID table with values from the following fields for each institution that supports the BASE24-telebanking product:
 - FIID, screen 1
 - FI-NAME, screen 1
 - CURRENCY CODE, screen 3
 - ROUTE PROFILE, screen 40
 - PERIODIC FILE RETENTION, screen 42
 - PRODUCE field for each report, screen 42 (these fields indicate which reports are produced for the institution)
15. Reads the PCDF and initializes the transaction table with values from the following fields for each allowed transaction for each institution and routing code combination retrieved from the IDF in the previous step:
 - PROCESSING CODE
 - TRANSACTION DESCRIPTION

The transaction table is an internal table used to accumulate transaction statistics (counts and amounts) for approved and declined transactions by processing code for each institution as the ITLF is read.
16. Closes the IDF and PCDF.
17. Verifies that the specified TLFs exist, opens each TLF, writes the name of each TLF to the Statistics and Errors report, and closes each TLF.

Normal Processing

After the BASE24-telebanking Issuer Reporting program is initialized, it performs the following:

1. Using the Tandem FastSort utility, the program sorts and merges all TLFs in the logical network for the specified reporting date. This utility starts anywhere from two to eight Subsort processes for parallel processing.
2. Once the TLFs have been sorted and merged into a single output file, the program generates the daily reports, as follows:
 - a. For each FIID in the FIID table configured to produce the TB01 report, the program generates the Daily Customer Activity Detail Report.

- b. For each FIID in the FIID table configured to produce the TB02 report, the program generates the Daily Customer Activity Summary Report.
 - c. For each FIID in the FIID table configured to produce the TB03 report, the program generates the Daily Financial Activity Detail Report.
 - d. For each FIID in the FIID table configured to produce the TB04 report, the program generates the Daily Financial Activity Summary Report.
3. Writes daily totals to the IPRF.
4. If the date being reported is the last day of a month, the program performs the following processing. Otherwise, the program skips to step 5.
 - a. Accumulates monthly totals for each institution that produces the TB05 or TB06 reports. The program reads through the IPRF and accumulates totals for approved and declined transactions in the transaction table.
 - b. Generates the Monthly Customer Activity Summary Report for each FIID configured to produce the TB05 report.
 - c. Generates the Monthly Financial Activity Summary Report for each FIID configured to produce the TB06 report.
5. Closes the IPRF.
6. Closes and purges the ITLF sort file.
7. Writes sort file information to the Statistics and Errors Report.
8. Deallocates the extended memory segment.
9. Purges the swap file used by the FastSort utility.
10. Writes the end date and time to the Statistics and Errors Report and closes the report.
11. Closes any open BASE24-telebanking reports.
12. Stops running.

LCONF Assigns and Params

The BASE24-telebanking Issuer Reporting program uses the following LCONF assigns and params. For detailed information on each of these assigns and params, refer to the ***BASE24 Logical Network Configuration File Manual***.

Assigns

The BASE24-telebanking Issuer program uses the following assigns from the LCONF.

- ALT-COLL
- IDF
- IPRF
- LCF
- PCDF
- PRI-COLL
- TB-RPT-ISS-FS-DIST
- TB-RPT-ISS-FS-DIST-SORTPROG
- TB-RPT-ISS-FS-DIST-SWAP
- TB-RPT-ISS-FS-SS1
- TB-RPT-ISS-FS-SS1-SORTPROG
- TB-RPT-ISS-FS-SS1-SWAP
- TB-RPT-ISS-FS-SS2
- TB-RPT-ISS-FS-SS2-SORTPROG
- TB-RPT-ISS-FS-SS2-SWAP
- TB-RPT-ISS-FS-SS3
- TB-RPT-ISS-FS-SS3-SORTPROG
- TB-RPT-ISS-FS-SS3-SWAP
- TB-RPT-ISS-FS-SS4
- TB-RPT-ISS-FS-SS4-SORTPROG
- TB-RPT-ISS-FS-SS4-SWAP

- TB-RPT-ISS-FS-SS5
- TB-RPT-ISS-FS-SS5-SORTPROG
- TB-RPT-ISS-FS-SS5-SWAP
- TB-RPT-ISS-FS-SS6
- TB-RPT-ISS-FS-SS6-SORTPROG
- TB-RPT-ISS-FS-SS6-SWAP
- TB-RPT-ISS-FS-SS7
- TB-RPT-ISS-FS-SS7-SORTPROG
- TB-RPT-ISS-FS-SS7-SWAP
- TB-RPT-ISS-FS-SS8
- TB-RPT-ISS-FS-SS8-SORTPROG
- TB-RPT-ISS-FS-SS8-SWAP
- TB-RPT-ISS-SORTFILE
- TB-RPT-ISS-SWAPFILE
- TB-RPT-ISS-TB01-LOC
- TB-RPT-ISS-TB02-LOC
- TB-RPT-ISS-TB03-LOC
- TB-RPT-ISS-TB04-LOC
- TB-RPT-ISS-TB05-LOC
- TB-RPT-ISS-TB06-LOC
- TLF-DEFAULT
- TLF-*group*

Params

The BASE24-telebanking Issuer Reporting program uses the following params from the LCONF:

- ALT-TIM-LMT
- CONSOLE-PRT
- DATE-DISPLAY-TYPE

- LOGICAL-NET
- PRI-TIM-LMT
- TB-RPT-ISS-FS-DIST-CPU
- TB-RPT-ISS-FS-DIST-MEM
- TB-RPT-ISS-FS-DIST-PRI
- TB-RPT-ISS-FS-DIST-SEG
- TB-RPT-ISS-FS-SS1-CPU
- TB-RPT-ISS-FS-SS1-MEM
- TB-RPT-ISS-FS-SS1-PRI
- TB-RPT-ISS-FS-SS1-SEG
- TB-RPT-ISS-FS-SS2-CPU
- TB-RPT-ISS-FS-SS2-MEM
- TB-RPT-ISS-FS-SS2-PRI
- TB-RPT-ISS-FS-SS2-SEG
- TB-RPT-ISS-FS-SS3-CPU
- TB-RPT-ISS-FS-SS3-MEM
- TB-RPT-ISS-FS-SS3-PRI
- TB-RPT-ISS-FS-SS3-SEG
- TB-RPT-ISS-FS-SS4-CPU
- TB-RPT-ISS-FS-SS4-MEM
- TB-RPT-ISS-FS-SS4-PRI
- TB-RPT-ISS-FS-SS4-SEG
- TB-RPT-ISS-FS-SS5-CPU
- TB-RPT-ISS-FS-SS5-MEM
- TB-RPT-ISS-FS-SS5-PRI
- TB-RPT-ISS-FS-SS5-SEG
- TB-RPT-ISS-FS-SS6-CPU
- TB-RPT-ISS-FS-SS6-MEM
- TB-RPT-ISS-FS-SS6-PRI
- TB-RPT-ISS-FS-SS6-SEG

- TB-RPT-ISS-FS-SS7-CPU
- TB-RPT-ISS-FS-SS7-MEM
- TB-RPT-ISS-FS-SS7-PRI
- TB-RPT-ISS-FS-SS7-SEG
- TB-RPT-ISS-FS-SS8-CPU
- TB-RPT-ISS-FS-SS8-MEM
- TB-RPT-ISS-FS-SS8-PRI
- TB-RPT-ISS-FS-SS8-SEG
- TB-RPT-ISS-SUP-TXN-CAT-TTLS

Section 3

BASE24-billpay End-of-Period Processing

This section describes the end-of-period processing performed by the following BASE24-billpay programs, TACL macros, or TACL routines:

- ACHclear
- Archive
- Cleanup
- Remittance File Cleanup
- Reports

The ACHclear program clears automated clearinghouse (ACH) payment transactions in the History Table (HIST) that are considered to have been paid and flags vendors in the Vendor Table (VNDR) for which ACH prenotification processing is considered to be complete.

The Archive program removes old rows from the HIST and places them in dated files for long-term safe storage.

The Cleanup program deletes obsolete information from the BASE24-billpay database based on parameters in the Cleanup Configuration Table (CLPT).

The Remittance File Cleanup TACL macro purges old payment remittance files based on a retention period provided in the startup command.

Individual report TACL routines create each of the reports provided for the BASE24-billpay product.

This section describes the above processing functions in detail as well as how each of the above programs, TACL macros, and TACL routines are configured and controlled.

TMF Processing

Each of the following BASE24-billpay processes use Tandem's Transaction Monitoring Facility (TMF) to batch multiple transactions:

- ACHclear
- Archive
- Cleanup

Each of the above processes batches multiple transactions into a single Transaction Monitoring Facility (TMF) transaction for efficiency. The BP-TMF-BATCH-SIZE param in the Logical Network Configuration File (LCONF) determines how many individual transactions are included in a single TMF transaction. The BP-TMF-BATCH-DURATION-TIME param in the LCONF determines the maximum length of time a TMF batch can exist before it is committed.

ACHclear Program

ACHclear is a batch program run on a daily basis after logical network cutover to clear ACH payments in the History Table (HIST) that are considered to be paid or to mark vendor entries in the Vendor Table (VNDR) for which ACH prenotification is considered complete. Separate programs must be designated for each of these functions. The ACHclear programs should be run near the end of the daily processing cycle, after the BASE24-billpay reports have been generated and before the Cleanup and Archive programs are run.

Only one copy of the program is required to update the VNDR, while a separate copy of the program is required for each partition of the HIST. LCONF params indicate whether a particular copy of the program updates the VNDR or a particular partition of the HIST.

HIST Processing

An ACH returns transactions that fail; however, it does not confirm successful transactions. Therefore, the ACHclear program flags transactions as having been paid (that is, having a remittance status of COMPLETED) in the HIST after a configurable number of days have elapsed since the ACH payment transaction was approved and logged to the HIST. For each row found in a HIST partition with a remittance type value of ACH, a collection status of COMPLETED, and a remittance status of SENT OUT, the program determines whether the row has been in the HIST for the number of days specified by the BP-ACH-PAID-DAYS param in the LCONF. If so, the remittance status is changed to COMPLETED. This will flag the payment as having been PAID in historical inquiry transactions. Payment transactions remitted by other means (for example, check) are considered to be paid as soon as the remittance status has been changed to SENT OUT.

VNDR Processing

When a new vendor to receive remittances using ACH processing is added to the VNDR, ACH prenotification must be completed before the vendor can receive ACH payments. When the ACH prenotification is submitted for a vendor, the verification status for the vendor row in the VNDR is set to a value of P (pending ACH). The ACHclear program is responsible for changing the verification status value of VNDR rows from P (pending ACH prenotification) to V (verified) after a configurable number of days have elapsed since the verification status was set to a

value of P. This number of days is specified by the BP-ACH-PRENOTE-DAYS param in the LCONF. A vendor cannot be used in a payment transaction until it has a verified status.

Program Startup

The RUN command used to start the ACHclear program is provided in section 6.

OMF Processing

Updates made to the Vendor Table (VNDR) as a result of ACHclear program processing are logged to the Online Maintenance File (OMF).

LCONF Assigns and Params

The ACHclear program uses the following LCONF assigns and params. For detailed information on each of these assigns and params, refer to the ***BASE24 Logical Network Configuration File Manual***.

Assigns

The ACHclear program uses the OMF assign from the LCONF.

Params

The ACHclear program uses the following params from the LCONF:

- BP-ACH-PAID-DAYS
- BP-ACH-PRENOTE-DAYS
- BP-ACH-PROCESS-VEND
- BP-DATE-FORMAT
- BP-HISTORY-PARTITION-NUM
- BP-NUM-HISTORY-PART-EXT
- BP-TMF-BATCH-DURATION-TIME
- BP-TMF-BATCH-SIZE

- LGNT-COUNTRY-ABBR
- OMF-AUDIT

Example LCONF Configuration

The following tables show you an example LCONF configuration for the ACHclear program. This example assumes two partitions for the HIST. The first table shows you the assign configuration while the second table shows you the param configuration. The first column of each table indicates the value of the Process Name field for the assign or param. The second column provides the name of the assign or param. The third column provides the value configured for the assign or param.

Process Name	Assign Name	Assign Value
*****	OMF	\B24.\$DATA.PRO1DATA.OMF (data file name) \B24.\$DATA.PRO1TPLT.AYYMMDDX (template file name)

Process Name	Param Name	Param Value
ACHCLEAR	BP-TMF-BATCH-DURATION-TIME	60
ACHCLEAR	BP-TMF-BATCH-SIZE	20
ACHCLEAR1	BP-HISTORY-PART-NUM	1
ACHCLEAR1	BP-ACH-PROCESS-VEND	N
ACHCLEAR2	BP-HISTORY-PART-NUM	2
ACHCLEAR2	BP-ACH-PROCESS-VEND	N
ACHCLVEND	BP-ACH-PROCESS-VEND	Y
BILLPAY	BP-ACH-PAID-DAYS	3
BILLPAY	BP-ACH-PRENOTE-DAYS	10
BILLPAY	BP-HISTORY-PART-EXT	2
*****	LGNT-COUNTRY-ABBR	US
*****	OMF-AUDIT	1

Spooler Output Reports

Examples of the spooler output reports generated by the ACHclear program are described in section 5.

Archive Program

Archive is a batch program run periodically to archive and remove old rows from the History Table (HIST) for subsequent long-term safe storage. The program runs after cutover on a nightly basis, preferably as one of the last steps in the daily cycle. In addition, the ACHclear program must be run before the Archive program.

Archive Levels

The Archive program can operate at a system-wide level or an FIID-specific level, depending on the setting of the BP-ARCHIVE-BY-FIID param in the Logical Network Configuration File (LCONF). When the Archive program operates at the system-wide level, it does not use the Cleanup Configuration Table (CLPT) and all HIST rows are retained for the same time period, regardless of FIID. When the Archive program operates at the FIID-specific level, one CLPT row must exist for each financial institution's HIST rows to be archived. All HIST rows for a given financial institution must be archived after the same length of time. FIIDs using the same retention period can be configured to the same archive group. Rows archived for different archive groups are placed in separate files.

FIID-Specific Level Archiving

If you archive HIST rows by FIID, a value in a field on CLPT screen 1 indicates how many days rows are retained in the HIST for the FIID before they are archived. For FIID-level archiving, one Archive process must be configured for each HIST partition and archive group combination. The Archive program only recognizes a value of history in the Parameter Name field on CLPT screen 1.

Note: When the HIST is archived by FIID, an additional alternate index containing the from_fiid column must be added to the table. This index prevents full table scans which can severely impact system performance. If you are archiving at the system level, this additional alternate index should not be used.

System-Level Archiving

If you archive HIST rows at the system level, the BP-ARCHIVE-BY-SYSTEM-DAYS param in the LCONF indicates how many days rows are retained in the HIST before they are archived. For system-level archiving, one Archive process must be configured for each partition of the HIST.

Archive Files

Rows removed from the HIST by the Archive program are placed into Enscribe relative files. These files are always named ARyymmdd, where yymmdd is the date on which the row was logged to the HIST. The BP-ARCHIVE assign in the LCONF indicates the volume, subvolume, and file name used for the archive files (for example, \$DATA.ARCH.ARYMMDD). In addition, the template file for this assign indicates the attributes used when creating the archive files. Archive programs write to the same dated files, regardless of the particular partition of the HIST each program processes.


System-Level Archive Files

If you are archiving at the system level, all archive files are placed on the same volume and subvolume indicated by the BP-ARCHIVE assign. Depending on how many days have elapsed since the Archive program was last run, one or several archive files may be created. For example, if an Archive program is run on December 20, 1999 and the number of retention days is 10, all rows that were logged to the HIST on or before December 10, 1999 would be archived. If the Archive program had not been run for three days, the following three archive files would be created: AR991208, AR991209, and AR991210.

FIID-Specific Level Archive Files

If you are archiving at the FIID-level, each archive file is placed on the same volume specified by the BP-ARCHIVE assign, but on a different subvolume named after the archive group to which the FIID belongs in the CLPT. Thus, you can configure the CLPT so that each financial institution's data resides in its own file on its own subvolume, or that a group of financial institutions' data resides in one archive file on a separate subvolume.


The processing performed by the Archive program is summarized in the following illustrations. The first illustration depicts system-level archiving, while the second depicts FIID-level archiving. A key to the abbreviations follows each illustration. The Archive processes are named according to the example configurations provided later in this section.

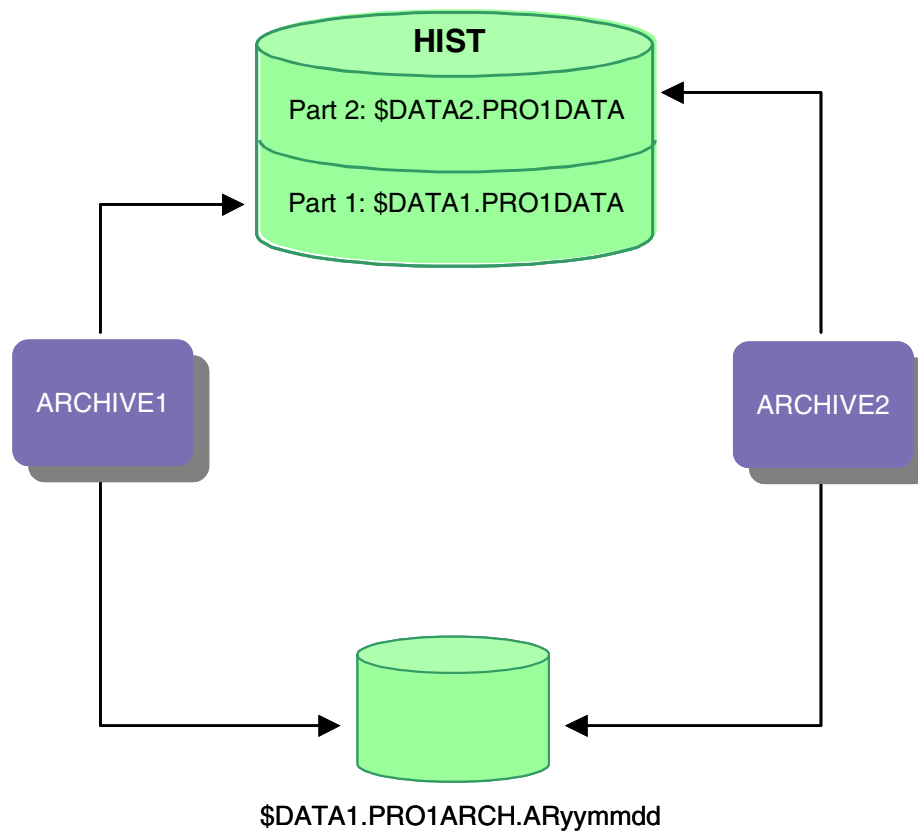

System Level Archiving

Key

HIST = History Table

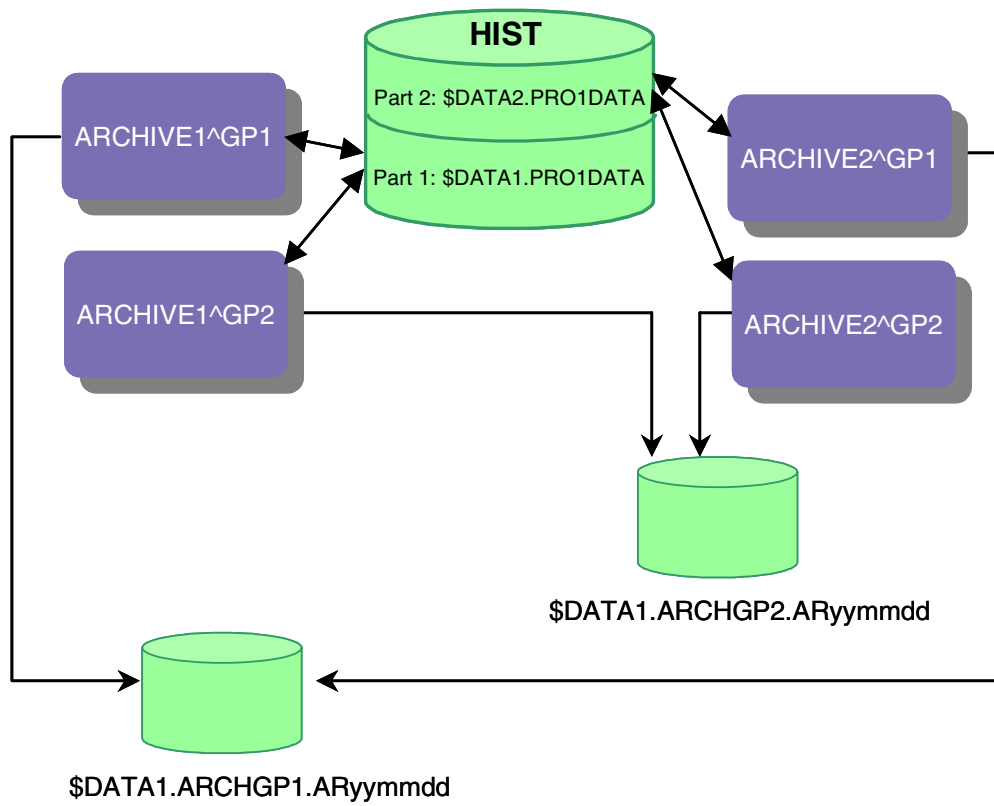

FIID-Level Archiving

Key

HIST = History Table

FIID-Level Archiving Configuration

To archive HIST rows at the FIID level, the BP-ARCHIVE-BY-FIID param in the LCONF must be set to a value of Y.

The group of CLPT rows that define the processing performed by one Archive program is called an archive group. An archive group can have any number of financial institutions; however, all CLPT rows in one archive group must have the same number of retention days for the HIST rows.

For example, if five financial institutions use one retention period and five financial institutions use a different retention period, there have to be at least two archive groups (one archive group for each retention period). If necessary, more archive groups can be defined, making each group smaller and reducing the amount of processing time by dividing the work among more Archive programs.

Each archive group must have its own Archive process. Each Archive process must have a unique symbolic process name and uses its own BP-ARCHIVE-GROUP and BP-HISTORY-PARTITION-NUM params in the LCONF to determine which archive group and which partition of the HIST to process. The value in the Cleanup Group field on CLPT screen 1 must match the cleanup group specified in a BP-ARCHIVE-GROUP param. The value in the Parameter Name field on CLPT screen 1 must be history and the value in the Parameter Value field on CLPT screen 1 is the minimum number of retention days for rows in the HIST.

System-Level Archiving Configuration

To archive HIST rows at the system level, the BP-ARCHIVE-BY-FIID param in the LCONF must be set to a value of N. The value of the BP-ARCHIVE-BY-SYSTEM-DAYS param then controls the number of retention days for all HIST rows. As with FIID archiving, the BP-HISTORY-PARTITION-NUM param indicates the HIST partition processed by a particular Archive program.

Retention Day Calculation

When determining how long rows are retained in the HIST, the Archive program uses the number of retention days for the cleanup group in the CLPT (for archiving by FIID) or the value of the BP-ARCHIVE-BY-SYSTEM-DAYS param in the LCONF (for system-wide archiving), the current Tandem system date, and the hist_gmt column in the HIST.

If the value from the `hist_gmt` column for a table row plus the number of retention days configured in the CLPT or LCONF is less than or equal to the current Tandem system date, the row is archived. If not, the row is retained. For FIID-specific level archiving, the FIID specified for the archive group in the CLPT must also match the FIID value associated with the HIST row before the row is archived.

OMF Processing

When an Archive process deletes rows from the HIST, the delete operations are recorded in the Online Maintenance File (OMF) according to the value of the OMF-AUDIT param in the LCONF.

LCONF Assigns and Params

The Archive program uses the following LCONF assigns and params. For detailed information on each of these assigns and params, refer to the ***BASE24 Logical Network Configuration File Manual***.

Assigns

The Archive program uses the following assigns from the LCONF:

- BP-ARCHIVE
- OMF

Params

The Archive program uses the following params from the LCONF:

- BP-ARCHIVE-BY-FIID
- BP-ARCHIVE-BY-SYSTEM-DAYS
- BP-ARCHIVE-GROUP
- BP-HISTORY-PARTITION-NUM
- BP-NUM-HISTORY-PART-EXT
- BP-TMF-BATCH-DURATION-TIME
- BP-TMF-BATCH-SIZE

- LGNT-COUNTRY-ABBR
- OMF-AUDIT

Example System-Level LCONF Configuration

The following tables show you an example LCONF configuration for the Archive program using system-level archiving. This example assumes two partitions for the HIST. The first table shows you the assign configuration while the second table shows you the param configuration. The first column of each table indicates the value of the Process Name field for the assign or param. The second column provides the name of the assign or param. The third column provides the value configured for the assign or param.

Process Name	Assign Name	Assign Value
BILLPAY	BP-ARCHIVE	\B24.\$DATA.PRO1ARCH.ARYMMDD (data file name) \B24.\$DATA.PRO1TPLT.ARCHTPLT (template file name)
*****	OMF	\B24.\$DATA.PRO1DATA.OMF (data file name) \B24.\$DATA.PRO1TPLT.AYMMDDX (template file name)

Process Name	Param Name	Param Value
ARCHIVE	BP-ARCHIVE-BY-FIID	N
ARCHIVE	BP-ARCHIVE-BY-SYSTEM-DAYS	90
ARCHIVE1	BP-HISTORY-PARTITION-NUM	1
ARCHIVE2	BP-HISTORY-PARTITION-NUM	2
BILLPAY	BP-NUM-HISTORY-PART-EXT	2
ARCHIVE	BP-TMF-BATCH-DURATION-TIME	60
ARCHIVE	BP-TMF-BATCH-SIZE	50
*****	LGNT-COUNTRY-ABBR	US
*****	OMF-AUDIT	1

Example FIID-Level LCONF Configuration

The following tables show you an example LCONF configuration for the Archive program using FIID-level archiving. This example also assumes two partitions for the HIST. The first table shows you the assign configuration while the second table shows you the param configuration. The first column of each table indicates the value of the Process Name field for the assign or param. The second column provides the name of the assign or param. The third column provides the value configured for the assign or param.

Process Name	Assign Name	Assign Value
BILLPAY	BP-ARCHIVE	\B24.\$DATA.PRO1ARCH.ARYMMDD (data file name) \B24.\$DATA.PRO1TPLT.ARCHTPLT (template file name)
*****	OMF	\B24.\$DATA.PRO1DATA.OMF (data file name) \B24.\$DATA.PRO1TPLT.AYYMMDDX (template file name)

Process Name	Param Name	Param Value
ARCHIVE	BP-ARCHIVE-BY-FIID	Y
ARCHIVE	BP-TMF-BATCH-DURATION-TIME	60
ARCHIVE	BP-TMF-BATCH-SIZE	50
ARCHIVE1^GP1	BP-HISTORY-PARTITION-NUM	1
ARCHIVE1^GP1	BP-ARCHIVE-GROUP	ARCHGP1
ARCHIVE2^GP1	BP-HISTORY-PARTITION-NUM	2
ARCHIVE2^GP1	BP-ARCHIVE-GROUP	ARCHGP1
ARCHIVE1^GP2	BP-HISTORY-PARTITION-NUM	1
ARCHIVE1^GP2	BP-ARCHIVE-GROUP	ARCHGP2
ARCHIVE2^GP2	BP-HISTORY-PARTITION-NUM	2
ARCHIVE2^GP2	BP-ARCHIVE-GROUP	ARCHGP2
BILLPAY	BP-NUM-HISTORY-PART-EXT	2

Process Name	Param Name	Param Value
*****	LGNT-COUNTRY-ABBR	US
*****	OMF-AUDIT	1

Example FIID-Level CLPT Configuration

The following table shows you the Cleanup Configuration Table (CLPT) configuration that supports the example FIID-specific level LCONF configuration above. Note that the number of retention days in each archive group must be the same for all FIIDs in that group. Each row in the following table represents a row in the CLPT. Each column of the table specifies the value for each field appearing on CLPT screen 1.

FIID	Parameter Name	Parameter Value	Cleanup Group
FID1	history	90	ARCHGP1
FID2	history	30	ARCHGP2
FID3	history	30	ARCHGP2

Program Startup

The command syntax used to start the Archive program is described in section 6.

Spooler Output Reports

The spooler output reports that can be generated by the Archive program are described in section 5.

Cleanup Program

Cleanup is a batch program run after logical network cutover on a daily basis to remove obsolete data from BASE24-billpay tables. Preferably, the Cleanup program should be run as one of the last steps in the daily processing cycle. The ACHclear program should always run prior to the Cleanup program.

The Cleanup program can remove obsolete rows from up to 13 BASE24-billpay tables. Some of these tables are accessed with BASE24-billpay table maintenance screens or by customer service representatives, and some are maintained by BASE24-billpay programs only. Regardless of the access method option used, each table falls into one of the following groups:

- System-wide tables cleaned daily
- FIID-specific tables cleaned daily
- System-wide tables cleaned annually
- FIID-specific tables cleaned annually

Cleanup Configuration Table (CLPT)

System-wide tables contain data used across the system, while FIID-specific tables contain data used specifically by individual financial institutions. The Cleanup program uses parameters defined in the Cleanup Configuration Table (CLPT) to determine how cleanup processing is performed for each of these groups. For FIID-specific cleanup, rows cleaned daily or annually must have an FIID value that matches the FIID associated with the cleanup group for the table in the CLPT. For system-wide cleanup, the FIID value in the CLPT for the cleanup group must be set to all hyphens (----).

The CLPT contains configuration values that determine which tables are cleaned and how long data is retained in each table before it can be removed. For tables cleaned on a daily basis, parameter values determine how many days rows are retained in each table before they are deleted by the Cleanup program. For tables cleaned on an annual basis, a flag indicates whether or not the table is cleaned and the BP-CLEANUP-YEAR param in the Logical Network Configuration File (LCONF) specifies the year for which data is to be deleted by the Cleanup program. Rows in tables cleaned up on a yearly basis are deleted if the cleanup group has a parameter value of Y in the CLPT and the row has a specified date field with a date that is equal to or less than 12/31/yyyy, where yyyy is the value of the BP-CLEANUP-YEAR param in the LCONF.

The Cleanup program only recognizes certain values in the Parameter Name field of CLPT rows. The following table shows you the currently recognized Parameter Name field values and the table to which each value applies. For detailed information on the CLPT, refer to the ***BASE24-billpay Tables Maintenance Manual***.

Parameter Name	Table
bankbillsum	Bank Billing Summary
banknotice	Bank Notice
banktxnsum	Bank Transaction Summary
billgrp	Billing Group
billrate	Billing Rate
context	Context
custbillsum	Customer Billing Summary
custvend	Customer Vendor
custvendsum	Customer Vendor Summary
loan	Loan
miscreq	Miscellaneous Request
pmtsum	Payment Summary
reportaction	Report Action
vend	Vendor, Vendor Branch

Cleanup Groups

Parameters in the CLPT are configured by cleanup group. The BP-CLEANUP-GROUP param in the Logical Network Configuration File (LCONF) determines which cleanup group in the CLPT is used by each Cleanup process. Using cleanup groups, multiple Cleanup processes can be configured to run simultaneously, if required, with each process cleaning a different table or cleaning the same table but for different FIIDs, where applicable.

An example configuration using 13 cleanup groups is provided later in this section.

Cleanup Processes

Each Cleanup process must be configured to perform either daily cleanup processing or annual cleanup processing. A single Cleanup process cannot perform both. In addition, FIID-specific tables and system-wide tables must also belong to different cleanup groups, and all tables in a daily group must have the same number of retention days.

A separate Cleanup process must be configured for each cleanup group; multiple Cleanup processes cannot be configured for the same cleanup group. The exact number of Cleanup groups and processes to configure is basically a performance issue. In general, the more cleanup processing that can be performed simultaneously by separate processes running in different CPUs, the faster cleanup processing can be completed.

Daily Cleanup

The following paragraphs describe the rationale used to determine how long rows need to be retained in each table cleaned on a daily basis and provide the recommended number of retention days for each table.

Bank Billing Summary Table (BKBS)

Rows in the Bank Billing Summary Table (BKBS) should be retained for as many billing cycle periods as are required for research purposes. ACI recommends a minimum retention period of 60 days for rows in this table.

This table is present only if you have purchased the BASE24-billpay Billing Application.

Bank Transaction Summary Table (BKTS)

Rows in the Bank Transaction Summary Table (BKTS) should be retained for as many days as are required for research purposes. ACI recommends a minimum retention period of 90 days for rows in this table.

This table is present only if you have purchased the BASE24-billpay Billing Application.

Context Table (CNTX)

Rows in the Context Table (CNTX) should be retained for at least one hour. If the Cleanup program for the Context Table is scheduled to run after 2:00 am in the daily processing cycle, ACI recommends a minimum retention period of 0 days. This value will cause all rows to be retained for the current day. If the Cleanup program for the Context Table is scheduled to run immediately after midnight, ACI recommends a minimum retention period of 1 day for rows in this table. This will ensure that rows created within the last hour are retained.

Customer Billing Summary Table (CBLS)

Rows in the Customer Billing Summary Table (CBLS) should be retained for as many billing cycle periods as are required for research purposes. ACI recommends a minimum retention period of 60 days for rows in this table.

This table is present only if you have purchased the BASE24-billpay Billing Application.

Loan Application Table (LOAN)

Rows in the Loan Application Table (LOAN) should be retained until after the Loan Application report has been successfully generated and verified. ACI recommends a minimum retention period of 2 days for rows in this table.

Miscellaneous Request Table (MISC)

Rows in the Miscellaneous Request Table (MISC) should be retained for as long as customer service representatives need on-line access to requests. ACI recommends a minimum retention period of 180 days for rows in this table.

Payment Summary Table (PST)

Rows in the Payment Summary Table (PST) should be retained for as many days as are required for research about remittances generated for vendors. ACI recommends a minimum retention period of 10 days for rows in this table.

Report Action Table (RPTA)

Rows in the Report Action Table (RPTA) should be retained for as many days as are required to allow Customer Notices, Customer Vendor List, and New Customer Reports to be re-generated. ACI recommends a minimum retention period of 180 days for rows in this table.

Retention Day Calculation

The following information is used to determine how long rows are retained in tables cleaned on a daily basis before they are deleted:

- The number of retention days for the cleanup group
- The current Tandem system date
- The value of a specified date column from the SQL table row

If the sum of the value from the specified date column for a table row plus the number of retention days configured for the cleanup group is less than or equal to the current Tandem system date, the row is deleted. If not, the row is retained. For FIID-specific tables, the FIID specified for the cleanup group in the CLPT must also match the FIID value associated with the table row before the row is deleted.

The following table shows you the specified date columns used in this calculation for each table that is cleaned on a daily basis. The first column identifies the table. The second column identifies the name of the SQL column that contains the specified date.

Table Name	Specified Date Column
Bank Billing Summary [*]	CYCLE_END_DATE
Bank Transaction Summary [*]	BUS_DATE
Context	HANDLE
Customer Billing Summary [*]	CYCLE_END_DATE
Loan Application	TXN_SRC_LCT
Miscellaneous Request	TXN_SRC_LCT
Payment Summary	REMIT_BUS_DATE

Table Name	Specified Date Column
Report Action	HIST_GMT

* These tables are present only if you have purchased the BASE24-billpay Billing Application.

Year-End Cleanup

Yearly cleanup should be performed once a year and must be coordinated to follow year-end reporting (for example, following generation of the Customer Vendor Year-End Summary report).

Warning: To avoid accidental loss of data, ACI recommends that yearly Cleanup processes not be scheduled using a batch scheduler or configured in the LCONF until they are actually run. In addition, the parameter values for yearly cleanup groups in the CLPT should always be set to a value of N until immediately prior to running the processes. Before running these programs, you should also verify that the BP-CLEANUP-YEAR param in the LCONF is set to the previous year and not to the current year. If yearly Cleanup programs are run for the current year, all current data will be deleted from the applicable tables.

Deletion Year Calculation

Values for the following parameter names in the CLPT determine whether a table is cleaned when the yearly Cleanup programs are run: banknotice, billgrp, billrate, custvend, custvendsum, and vend. For more information on these parameter values, refer to the Cleanup Configuration Table (CLPT) discussion earlier in this section. If a particular parameter is set to a value of Y, the corresponding table in the cleanup group is cleaned. If a particular parameter is set to a value of N, the corresponding table in the cleanup group is not cleaned.

If a table is cleaned, the value of the BP-CLEANUP-YEAR param, a month and day of December 31, and a specified date column from the SQL table row are used as follows to determine whether a row is deleted from the table. If the value of the specified date column for a table row is less than or equal to the date of December 31 for the specified year, the row is deleted. If not, the row is retained. For FIID-specific tables, the FIID specified for the cleanup group in the CLPT must also match the FIID value associated with the table row before the row is deleted.

Note: When cleaning the Vendor Branch Table, the date calculation is not used. All vendor branch rows associated with a row deleted from the Vendor Table due to the year-end date calculation are automatically deleted.

The following table shows you the specified date columns used in this calculation for each table cleaned on a yearly basis. The first column identifies the table. The second column identifies the name of the SQL column that contains the specified date.

Table Name	Specified Date Column
Bank Notice	END_DATE
Billing Group*	CYCLE_END_DATE
Billing Rate*	EFF_END_DATE
Customer Vendor	ACCT_END_DATE
Customer Vendor Summary	YEAR_LCT
Vendor	END_DATE

* These tables are present only if the BASE24-billpay Billing Application is installed.

OMF Processing

When a Cleanup process deletes rows from tables that are normally managed through table maintenance or CSR processing, the delete operations are recorded in the Online Maintenance File (OMF) according to the value of the OMF-AUDIT param in the LCONF. These tables include the following:

- Billing Group Table (BLG)
- Billing Rate Table (BLRT)
- Customer Vendor Table (CVND)
- Vendor Table (VNDR)
- Vendor Branch Table (VNDB)

LCONF Assigns and Params

The Cleanup program uses the following LCONF assigns and params. For detailed information on each of these assigns and params, refer to the ***BASE24 Logical Network Configuration File Manual***.

Assigns

The Cleanup program uses the OMF assign from the LCONF.

Params

The Cleanup program uses the following params from the LCONF:

- BP-CLEANUP-GROUP
- BP-CLEANUP-YEAR
- BP-DATE-FORMAT
- BP-TMF-BATCH-DURATION-TIME
- BP-TMF-BATCH-SIZE
- LGNT-COUNTRY-ABBR
- OMF-AUDIT

Example Configuration

The following paragraphs present an example configuration for the Cleanup program, including both LCONF and CLPT configuration requirements. This example is provided for illustrative purposes only and should not be construed as a definitive configuration for any particular BASE24-billpay installation.

This example assumes that cleanup processing is distributed among 13 Cleanup processes. The following table shows you the tables each process is responsible for cleaning. The first column provides the symbolic process name, the second column indicates the tables cleaned by each process, and the third column indicates how often they are cleaned (daily or annually).

Process Name	Tables Cleaned	Frequency
CLEANUPDAYCNTX	Context	Daily
CLEANUPDAYPST	Payment Summary	Daily
CLEANUPDAYLOAN1 CLEANUPDAYLOAN2	Loan	Daily
CLEANUPDAYMISC1 CLEANUPDAYMISC2	Miscellaneous Request	Daily
CLEANUPDAYRPTA	Report Action	Daily
CLEANUPYRCV	Customer Vendor Customer Vendor Summary	Annually
CLEANUPYRVND	Vendor Vendor Branch	Annually
CLEANUPYRBKNT	Bank Notice	Annually
CLEANUPDAYBILL1* CLEANUPDAYBILL2*	Bank Billing Summary Bank Transaction Summary Customer Billing Summary	Daily
CLEANUPYRBILL*	Billing Group Billing Rate	Annually

* These processes would be required only if the BASE24-billpay Billing Application is installed.

Example LCONF Configuration

The following tables show you the LCONF assign and param configuration for this example Cleanup program configuration. The first column of the tables indicates the value of the Process Name field for the assign or param. The second column provides the name of the assign or param. The third column provides the value configured for the assign or param.

Note: The value of the BP-CLEANUP-GROUP param must match the value of the Cleanup Group field on CLPT screen 1 for a row in the CLPT.

Process Name	Assign Name	Assign Value
*****	OMF	\B24.\$DATA\B24.\$DATA.PRO1DATA.OMF (data file name) \B24.\$DATA.PRO1TPLT.AYYMMDDX (template file name)

Process Name	Param Name	Param Value
CLEANUPDAYCNTX	BP-CLEANUP-GROUP	DAILYCONTEXT
CLEANUPDAYPST	BP-CLEANUP-GROUP	DAILYPMTSUM
CLEANUPDAYLOAN1	BP-CLEANUP-GROUP	DAILYLOAN1
CLEANUPDAYLOAN2	BP-CLEANUP-GROUP	DAILYLOAN2
CLEANUPDAYMISC1	BP-CLEANUP-GROUP	DAILYMISCREQ1
CLEANUPDAYMISC2	BP-CLEANUP-GROUP	DAILYMISCREQ2
CLEANUPDAYRPTA	BP-CLEANUP-GROUP	DAILYREPORTACTION
CLEANUPDAYBILL1*	BP-CLEANUP-GROUP	DAILYBILL1
CLEANUPDAYBILL2*	BP-CLEANUP-GROUP	DAILYBILL2
CLEANUPYRBILL*	BP-CLEANUP-GROUP	YEARLYBILL
CLEANUPYRBKNT	BP-CLEANUP-GROUP	YEARLYBANKNOTICE
CLEANUPYRCV	BP-CLEANUP-GROUP	YEARLYCUSTVEND
CLEANUPYRVND	BP-CLEANUP-GROUP	YEARLYVEND
CLEANUP	BP-CLEANUP-YEAR	1999

Process Name	Param Name	Param Value
CLEANUP	BP-TMF-BATCH-DURATION-TIME	60
CLEANUP	BP-TMF-BATCH-SIZE	30
*****	LGNT-COUNTRY-ABBR	US
*****	OMF-AUDIT	1

* These LCONF entries would be required only if the BASE24-billpay Billing Application is installed.

Example CLPT Configuration

The following table shows you how the CLPT could be configured to support this example Cleanup program configuration. The first column of the table indicates the value of the FIID field. The second column contains the value of the Cleanup Group field. The third column contains the value of the Parameter Name field, and the fourth column contains the value of the Parameter Value field.

This example CLPT configuration assumes just two FIIDs using different parameter values and that the daily Cleanup programs are run after 2:00 am.

Note: The CLPT accepts values other than those provided here for the Parameter Name field, however, the Parameter Name field values provided here are the only values currently recognized by the Cleanup program.

FIID	Cleanup Group	Parameter Name	Parameter Value
BK01	DAILYBILL1	bankbillsum	90
BK01	DAILYBILL1	banktxnsum	90
BK01	DAILYBILL1	custbillsum	90
BK01	DAILYLOAN1	loan	20
BK01	DAILYMISCREQ1	miscreq	30
BK01	YEARLYBANKNOTICE	banknotice	Y
BK01	YEARLYBILL	billgrp	Y

FHID	Cleanup Group	Parameter Name	Parameter Value
BK01	YEARLYBILL	billrate	Y
BK02	DAILYBILL2	bankbillsum	30
BK02	DAILYBILL2	banktxnsum	30
BK02	DAILYBILL2	custbillsum	30
BK02	DAILYLOAN2	loan	10
BK02	DAILYMISCREQ2	miscreq	60
BK02	YEARLYBANKNOTICE	banknotice	Y
BK02	YEARLYBILL	billgrp	Y
BK02	YEARLYBILL	billrate	Y
----	DAILYCONTEXT	context	0
----	DAILYPMTSUM	pmtsum	90
----	DAILYREPORTACTION	reportaction	180
----	YEARLYCUSTVEND	custvend	Y
----	YEARLYCUSTVEND	custvendsum	Y
----	YEARLYVEND	vend	Y

Spooler Output Reports

The spooler output reports that can be generated by the Cleanup program are described in section 5.

Remittance File Cleanup Macro

The remittance file cleanup TACL macro is a batch cleanup tool run periodically to purge old remittance files that are no longer needed. The macro can be run manually from a TACL prompt or it can be scheduled using a batch scheduler such as Tandem's NetBatch product. You specify the number of days files are retained when the macro is run. Remittance files should be retained long enough so that they are still available if any remittances need to be regenerated.

When executed, the macro searches the subvolume specified in the BP-REMIT assign in the LCONF, and purges all files with a date in the file name that is older than the specified retention period. For example, if the specified retention period is 7 days and the current Tandem system date is 12/31/99, all remittance files with a file name date equal to or less than 12/24/99 would be purged. The macro does not check the creation or modification timestamps associated with a remittance file.

Remittance files are always named in the format *Xymmdd*, where *X* is the first character of the type of remittances contained in the file (that is, A for ACH, C for check, or another character for user-defined remittance types) and *yymmdd* represents the year, month, and day on which the remittances were generated. All remittance files are cleaned in the same manner, regardless of the type of remittances contained within the file.

Procedures for starting and scheduling the remittance file cleanup macro are provided in section 6.

Report TACL Routines

This subsection briefly describes the processing performed by the TACL routines that generate the BASE24-billpay reports. Each report is generated by a separate TACL routine that loads the SQL table defines, starts an SQL conversational interface (SQLCI) session, selects data from the appropriate tables, and formats the report data using SQLCI and SQL Report Writer commands. The formatted report is sent to the report location (typically, a spooler location) specified in the routine.

The command syntax used to manually execute these TACL routines is described in section 6. Section 6 also describes example TACL macros for automatically executing these routines on a scheduled basis.

The following paragraphs provide a brief processing description for each routine and lists the tables accessed by each routine.

Samples and descriptions of each report generated by these routines are provided in section 5.

Customer Notice Report TACL Routine

The RPNOTE TACL routine generates the Customer Notice report. This routine accesses the Report Action Table (RPTA), History Table (HIST), Personal Information Table (PIT), and Response Text Table (RTXT). It optionally accesses the Customer/Personal ID Relation Table (CPIT), if the CPIT is being used.

The routine searches through the RPTA for any rows with action values of NOTICE (a processing event occurred for which a customer needs to be notified). For each row found, the routine prints the appropriate customer notice information on the report.

Customer Vendor List Report TACL Routine

The RPCVND TACL routine generates the Customer Vendor List report. This routine accesses the Report Action Table (RPTA), Customer Vendor Table (CVND), Vendor Table (VNDR), and the Personal Information Table (PIT). It optionally accesses the Customer/Personal ID Relation Table (CPIT), if the CPIT is being used.

The routine searches through the RPTA for any rows with action values of CUSTVEND. A row for this action is written to the RPTA when a customer service representative requests a Customer Vendor List to be printed on behalf of a calling customer. If at least one row is found for a customer, the routine prints the appropriate customer vendor information on the report. If multiple rows are found for the same customer, the customer vendor information is still printed only once on the report.

Customer Vendor Year-End Summary Report TACL Routine

The RPCVSUM TACL routine generates the Customer Vendor Year-End Summary report. This routine accesses the Customer Vendor Summary Table (CVS), Customer Vendor Table (CVND), and the Personal Information Table (PIT). It optionally accesses the Customer/Personal ID Relation Table (CPIT), if the CPIT is being used.

The routine searches through the CVS for all rows for the specified year. For each row that matches the specified year, the routine prints the appropriate customer vendor summary information on the report.

Loan Application Report TACL Routine

The RPLOAN TACL routine generates the Loan Application report. This routine accesses the Loan Application Table (LOAN) and prints all of the loan application data from each row on the report.

Master Vendor Report TACL Routine

The RPMVND TACL routine generates the Master Vendor report. This routine accesses the Vendor Table (VNDR) and Vendor Branch Table (VNDB). The routine prints all the vendor information for each row in the VNDR, as well as the branch information for each associated row in the VNDB, on the report.

Miscellaneous Request Report TACL Routine

The RPMISC TACL routine generates the Miscellaneous Request report. This routine accesses the Miscellaneous Request Table (MISC).

The routine searches through the MISC for all rows written to the table on the previous calendar day. For each row found, the routine prints all of the request data from the row on the report.

New Customer Report TACL Routine

The RPNCST TACL routine generates the New Customer report. This routine accesses the Report Action Table (RPTA) and the Personal Information Table (PIT). It optionally accesses the Customer/Personal ID Relation Table (CPIT), if the CPIT is being used.

The routine searches through the RPTA for any rows with action values of NEWCUST (a new customer without preloaded data was added), NEWCUSTI (a new customer with preloaded data was activated), or NEWCUSTV (a new customer without preloaded data was activated). For each row found, the routine prints the appropriate customer information on the report.

Payment Summary Report TACL Routine

The RPPSUM TACL routine generates the Payment Summary report. This routine accesses the Payment Summary Table (PST) and creates temporary tables to summarize payments remitted on the same day they were authorized (remittance day equals business day), as opposed to payments remitted on the following day (business day is one less than remittance day). These temporary tables are used to create parts one and two of the report and to accumulate grand totals for part three of the report.

Remittance Transaction Alert Report TACL Routine

The RPRTAR TACL routine generates the Remittance Transaction Alert report. This routine accesses the History Table (HIST) and Vendor Table (VNDR) to list any payments that should have been remitted but the Remittance Generator processes failed to process them for the specified date.

The routine searches through the HIST for any rows for scheduled payment – immediate (9A), payment – future (5A), or payment – recurring (5B) transactions that have a business date less than or equal to the date specified in the run command or the current date, a remittance status of initial, and a collection status of completion. For each row found, the routine adds a row to a temporary table that is used to print the transaction identification data on the report.

Scheduled Transaction Alert Report TACL Routine

The RPSTAR TACL routine generates the Scheduled Transaction Alert report. This routine accesses the Future Table (FUTR) and Vendor Table (VNDR) to list any scheduled transactions that should have been performed but the Scheduled Transaction Initiator processes failed to process them for the specified date.

The routine searches through the FUTR for any rows that have an execution date (STI_PMT_DATE) less than or equal to the date specified in the run command or the current date. For each row found, the routine adds a row to a temporary table that is used to print the transaction identification data on the report.

ACI Worldwide Inc.

Section 4

BASE24-telebanking Reports

This section describes the reports the BASE24-telebanking product provides to meet the reporting needs of its institutions. The information contained in these reports enables issuer institutions to settle with customers, as well as track customer transaction activity.

BASE24-telebanking reports provide detailed and summary transaction information for all BASE24-telebanking and BASE24-billpay transactions logged to the ITS Transaction Log File (ITLF). If a transaction is not logged to the ITLF, it will not appear on any of these reports. In addition, the reporting information fields on screen 42 of the Institution Definition File (IDF) must be properly set for a report to be produced for a particular institution. The use of these fields is discussed on the following page.

The BASE24-telebanking reports discussed in this section are listed below.

- Daily Customer Activity Detail (TB01)
- Daily Customer Activity Summary (TB02)
- Daily Financial Activity Detail (TB03)
- Daily Financial Activity Summary (TB04)
- Monthly Customer Activity Summary (TB05)
- Monthly Financial Activity Summary (TB06)
- Statistics and Errors

IDF Reporting Information Fields

Fields on IDF screen 42 control the way reports are generated for each institution.

The PERIODIC FILE RETENTION field indicates how many days transaction activity is maintained in the Institution Periodic Reporting File (IPRF) for each institution before it is purged. For proper generation of monthly reports, this field must be set to a value equal to or greater than 31.

The PRODUCE field for each of the six reports (TB01 through TB06) indicates whether statistics are collected for the institution for each report. If the PRODUCE field for a particular report is set to the value N for an institution, the report will still be generated for the institution, but no data will appear on the report.

Refer to the *BASE24 Base Files Maintenance Manual* for IDF screen illustrations and field descriptions.

Daily Customer Activity Detail Report (TB01)

The Daily Customer Activity Detail Report (TB01) contains a detailed listing of all customer transaction activity logged to the ITS Transaction Log File (ITLF) by issuer institutions for the specified processing day. Transactions are reported in customer ID and account number order within each FIID, and in ascending chronological order for each customer ID and account number. The report includes all BASE24-telebanking transactions and BASE24-billpay transactions that are logged to the ITLF. This report is suitable for resolving individual transaction disputes and for reconciling individual customer accounts after transactions from the ITLF are posted.

A page break occurs and a new report header line is printed each time the FIID changes. The message END OF REPORT FOR *fiid* is displayed at the end of the transaction listings for a particular financial institution, where *fiid* is the FIID of the financial institution. The message END OF REPORT TB01 is printed at the end of the report.

The Daily Customer Activity Detail Report can be generated automatically on a daily basis and can also be generated manually on an as-needed basis from a TACL prompt. The report is generated in the spooler location defined by the TB-RPT-ISS-TB01-LOC assign in the Logical Network Configuration File (LCONF). The default spooler location is \$\$.#TB01.

A sample of the Daily Customer Activity Detail Report is shown on the following page, followed by descriptions of its fields.

REPORT: TB01 CUSTOMER ACTIVITY DETAIL			BNK1 - FIRST FINANCIAL			MMM DD YY PAGE		
CUSTOMER ID	ACCOUNT 1 NUMBER	DESCRIPTION	ACCOUNT 2 NUMBER	TXN DATE	TXN TIME	SEQUENCE NUM	TXN AMOUNT	
				SOURCE/AUTH	PT SVC	APPROVAL CODE	ACTION/IND	
400100000000000000	400100000000000000	AVAIL FUNDS INQ	*****	NOV-30-96	15:33:08	001923153308	114	<p> *<typ>*
		*****		VRU B24	5			*<spec-cond>*
400100000000000000	400100000000000000	AVAIL FUNDS INQ SAV	*****	NOV-30-96	15:36:33	001923153633	000	<p> *<typ>*
40011101	40011101	*****		VRU B24	5	217029		*<spec-cond>*
400100000000000000	400100000000000000	TRANSFER DDA, SAV		NOV-30-96	15:37:46	002923153746	114	100.00<p> *<typ>*
40011101	40011101			VRU B24	5			*<spec-cond>*
400100000000000000	400100000000000000	TRANSFER DDA, SAV		NOV-30-96	15:38:14	003923153814	000	100.00<p> *<typ>*
40011101	40011101			VRU B24	5	410133		*<spec-cond>*
400100000000000000	400100000000000000	TRANSFER (RECUR) DDA, SAV		NOV-30-96	15:39:07	004923153907	000	250.00<p> *<typ>*
40011101	40011101			STI B24	5	218373		*<spec-cond>*
400100000000000000	400100000000000000	PAYMENT, SAV		NOV-30-96	15:40:26	005923153026	000	25.32<p> *<typ>*
40011101	40011101	4024937743		BPS B24	5	121657		*<spec-cond>*
< END OF REPORT FOR BNK1 >								
< END OF REPORT TB01 >								

CUSTOMER ID — The customer ID number used in the transaction.

DESCRIPTION — The text description for the transaction as configured in the Processing Code Definition File (PCDF).

TXN DATE — The date, in MMM-DD-YY format, the transaction was logged to the ITLF.

TXN TIME — The time, in HH:MM:SS format, the transaction was logged to the ITLF.

SEQUENCE NUM — The sequence number assigned to the transaction by BASE24-telebanking or BASE24-billpay.

TXN AMOUNT — The amount of the transaction in whole and fractional currency units.

<p> — A code identifying the results of the transaction posting attempt for the transaction. Valid values are as follows:

- N = The transaction was not posted to the BASE24 authorization database.
- P = The transaction was partially posted to the BASE24 authorization database.
- Ø = The transaction was posted to the BASE24 authorization database or was not applicable (that is, the code is used for a condition that does not involve updating the database).

<typ> — The type of message that was logged to the ITLF for the transaction if it was not a response. Requests are logged to the ITLF when an exception occurs. Valid values are as follows:

- Advc = Authorization or financial advice to an Integrated Server process, or an authorization or financial advice response from an Integrated Server process
- Rqst = Authorization or financial request to an Integrated Server process
- Rvsl = Reversal advice to an Integrated Server process or a reversal advice response from an Integrated Server process

ACCOUNT 1 NUMBER — The account number associated with the first account involved in transactions other than transfers or payments. This account number is associated with the *from* account involved in a transfer or payment transaction.

ACCOUNT 2 NUMBER — The account number associated with the second account involved in transactions other than transfers. This account number associated with the *to* account involved in a transfer transaction.

SOURCE — A code indicating where the transaction originated. Valid values are as follows:

B24 = Integrated Authorization Server process
BPS = Billpay Server process
CSR = Customer service representative
DEV = Remote banking endpoint device
HOST = Host
STI = Scheduled Transaction Initiator process
TERM = Terminal
VRU = Switch or interactive voice response system

AUTH — A code indicating where the transaction was authorized. Valid values are as follows:

B24 = Integrated Authorization Server process
BPS = Billpay Server process
CSR = Customer service representative
DEV = Remote banking endpoint device
HOST = Host
STI = Scheduled Transaction Initiator process
TERM = Terminal
VRU = Switch or interactive voice response system

PT SVC — A code indicating whether the terminal is attended by the transaction acceptor and where the terminal is located. The BASE24-telebanking and BASE24-billpay products use this code to indicate whether the transaction is initiated through a remote banking endpoint device or a customer service representative (CSR) terminal. Valid values are as follows:

0 = No terminal used.
1 = Attended terminal located on the premises of the transaction acceptor.
For the BASE24-telebanking and BASE24-billpay products, this code identifies a customer service representative (CSR) terminal.
2 = Unattended terminal located on the premises of the transaction acceptor.
3 = Attended terminal located off the premises of the transaction acceptor.

- 4 = Unattended terminal located off the premises of the transaction acceptor.
- 5 = Unattended terminal located on the premises of the accountholder. For the BASE24-telebanking and BASE24-billpay products, this code identifies a remote banking endpoint device (for example, a interactive voice response system).
- 6–7 = Reserved for International Organization for Standardization (ISO) use.
- 8 = Reserved for national use.
- 9 = Reserved for private use.
- A–I = Reserved for ISO use.
- J–R = Reserved for national use.
- S–Z = Reserved for private use.

APPROVAL CODE — The approval code assigned to the transaction by the transaction authorizer. An approval code is a random number that is only generated when a transaction is approved.

ACTION/IND — The action indicator for the transaction. This is the action code associated with the transaction.

Valid action codes are defined in the ***BASE24 Remote Banking Transaction Processing Manual***.

<spec-cond> — A code used by interface objects to identify message processing results that were not normal. If processing results were normal, this field is blank. Valid values are as follows:

- Advc 1 Error = Advice 1 not sent
- Advc 2 Error = Advice 2 not sent
- Duplicate = Duplicate transaction
- Fail Preauth = Failed preauthorization
- Format Error = Format error
- Not Sent = Not sent to authorizer
- Rspdr Down = Responder down
- Rvsl Not Fnd = Reversal not found
- System Error = System error
- Timeout = Timeout

Daily Customer Activity Summary Report (TB02)

The Daily Customer Activity Summary Report (TB02) provides a summary of transaction activity logged to the ITS Transaction Log File (ITLF) by issuer institutions for the specified processing day. The report includes transaction processing totals for each transaction processing code configured for the institution in the Processing Code Definition File (PCDF). The number of approved, declined, and total transactions are provided for each processing code (for example, AVAIL FUNDS INQ SAV). The report can optionally include transaction processing totals by transaction category (for example, all available funds inquiry transactions, regardless of account type). The value of the TB-RPT-ISS-SUP-TXN-CAT-TTLS param in the LCONF determines whether totals are included for transaction categories. The report includes all BASE24-telebanking transactions and BASE24-billpay transactions that are logged to the ITLF.

A new report header line is printed each time the FIID changes. An institution totals page is provided at the end of each institution's transactions that provides the total number of all transactions approved, declined, and processed for the institution for the specified processing day. The message END OF REPORT FOR *fiid* or NO ACTIVITY FOR *fiid* is printed at the end of the transaction summary listings for a particular financial institution, where *fiid* is the FIID of the institution.

A grand totals page is provided at the end of the report that lists the number of approved, declined, and processed transactions for all institutions in the logical network for the specified processing day. The message END OF REPORT TB02 is printed at the end of the report.

The Daily Customer Activity Summary Report can be generated automatically on a daily basis and can also be generated manually on an as-needed basis from a TACL prompt. The report is generated in the spooler location defined by the TB-RPT-ISS-TB02-LOC assign in the LCONF. The default spooler location is \$S.#TB02.

A sample of the Daily Customer Activity Summary Report is shown on the following pages, followed by descriptions of its fields. For illustrative purposes, totals for only a few of the default transaction processing codes configured in the PCDF are shown in the sample. The actual report includes totals for all transaction processing codes configured in the PCDF, even if no transactions were processed for a code.

REPORT: TB02 CUSTOMER ACTIVITY SUMMARY			BNK1 - FIRST FINANCIAL		MM DD YY		PAGE
INSTITUTION TOTALS							1
DESCRIPTION			APPROVED	DECLINED	TOTAL		
AVAIL FUNDS INQUIRY	TXN COUNT		2,252	300	2,552		
AVAIL FUNDS INQUIRY	TXN COUNT		38	2	40		
AVAIL FUNDS INQUIRY SAV/DDA	TXN COUNT		5	7	12		
MULTILE ACCTS BALANCE INQUIRY	TXN COUNT		0	0	0		
TRANSACTION CATEGORY TOTALS:	TXN COUNT		2,295	309	2,604		
TRANSFER IMMED	TXN COUNT		120	15	135		
TRANSFER IMMED SAV, SAV	TXN COUNT		798	103	901		
TRANSFER IMMED SAV, DDA	TXN COUNT		8,242	1,008	9,250		
TRANSFER IMMED SAV, CR	TXN COUNT		0	0	0		
TRANSACTION CATEGORY TOTALS:	TXN COUNT		9,160	1,126	10,286		
PAYMENT IMMED	TXN COUNT		225	15	240		
PAYMENT IMMED SAV	TXN COUNT		0	0	0		
PAYMENT IMMED DDA	TXN COUNT		702	33	735		
TRANSACTION CATEGORY TOTALS:	TXN COUNT		927	48	975		

REPORT: TB02	CUSTOMER ACTIVITY SUMMARY	BNK1 - FIRST FINANCIAL	MM	DD	YY	PAGE	2
INSTITUTION TOTALS							
SUMMARY							
		APPROVED	DECLINED		TOTAL		
ALL TRANSACTIONS	TXN COUNT	20,882	1,483		22,365		
< END OF REPORT FOR BNK1 >							

REPORT: TB02 CUSTOMER ACTIVITY SUMMARY				MM	DD	YY	PAGE	n
GRAND TOTALS								
SUMMARY								
ALL TRANSACTIONS				TXN COUNT	APPROVED	DECLINED	TOTAL	
					1,545,791	33,638	1,579,329	
< END OF REPORT TB02 >								

INSTITUTION TOTALS

The following fields provide approved, declined, and total transaction counts for each transaction processing code configured for the institution in the Processing Code Definition File (PCDF) for the specified processing day.

DESCRIPTION — A text description for the transaction processing code as configured in the Processing Code Definition File (PCDF).

APPROVED — The total number of transactions approved for the transaction processing code or transaction category for the specified processing day.

DECLINED — The total number of transactions declined for the transaction processing code or transaction category for the specified processing day.

TOTAL — The total number of transactions processed (approved or declined) for the transaction processing code or transaction category for the specified processing day.

SUMMARY

The following fields provide total approved, declined, and total transaction counts for all transaction processing codes configured for the institution in the PCDF for the specified processing day.

APPROVED — The total number of transactions approved for the institution for the specified processing day.

DECLINED — The total number of transactions declined for the institution for the specified processing day.

TOTAL — The total number of transactions processed (approved and declined) for the institution for the specified processing day.

GRAND TOTALS

The following fields provide the total number of approved, declined, and processed transactions for all institutions in the logical network for the specified processing day.

APPROVED — The total number of transactions approved for the logical network for the specified processing day.

DECLINED — The total number of transactions declined for the logical network for the specified processing day.

TOTAL — The total number of transactions processed (approved and declined) for the logical network for the specified processing day.

Daily Financial Activity Detail Report (TB03)

The Daily Financial Activity Detail Report (TB03) contains a detailed listing of all customer financial transaction activity logged to the ITS Transaction Log File (ITLF) by issuer institution for the specified processing day. Financial transactions are reported in customer ID and account number order within each FIID, and in ascending chronological order for each customer ID and account number. The report includes all BASE24-telebanking and BASE24-billpay financial transactions that are logged to the ITLF.

A page break occurs and a new report header line is printed each time the FIID changes. The message END OF REPORT FOR *fiid* is displayed at the end of the financial transaction listings for a particular financial institution, where *fiid* is the FIID of the financial institution. The message END OF REPORT TB03 is printed at the end of the report.

The Daily Financial Activity Detail Report can be generated automatically on a daily basis and manually on an as-needed basis from a TACL prompt. The report is generated in the spooler location defined by the TB-RPT-ISS-TB03-LOC assign in the LCONF. The default spooler location is \$S.#TB03.

A sample of the Daily Financial Activity Detail Report is shown on the following page. The format of the fields on the Daily Financial Activity Detail Report is identical to that of the Daily Customer Activity Detail Report (TB01). Refer to the Daily Customer Activity Detail report (TB01) for descriptions of the fields appearing on the TB03 report.

REPORT: TB03 FINANCIAL ACTIVITY DETAIL				BNK1 - FIRST FINANCIAL		MMM DD YY PAGE		1	
CUSTOMER ID	ACCOUNT 1 NUMBER	DESCRIPTION	ACCOUNT 2 NUMBER	TXN DATE	TXN TIME	SEQUENCE NUM	TXN AMOUNT		
				SOURCE/AUTH	PT SVC	APPROVAL CODE	ACTION/IND		
400100000000000000	4001101	TRANSFER DDA, SAV	4001101	NOV 30 96	15:37:46	002923153746	114	100.00	*<typ>* *<spec-cond>*
				VRU	B24 5				
400100000000000000	4001101	TRANSFER DDA, SAV	4011101	NOV 30 96	15:38:14	003923153814	000	100.00	*<typ>* *<spec-cond>*
				VRU	B24 5	410133			
400100000000000000	4001101	TRANSFER (RECUR) DDA, SAV	4011101	NOV 30 96	15:39:07	004923153907	000	250.00	*<typ>* *<spec-cond>*
				STI	B24 5	218373			
400100000000000000	4001101	PAYMENT, SAV	4024937743	NOV 30 96	15:40:26	005923153026	000	25.32	*<typ>* *<spec-cond>*
				BPS	B24 5	121657			
< END OF REPORT FOR BNK1 >									
< END OF REPORT TB03 >									

< END OF REPORT FOR BNK1 >
< END OF REPORT TB03 >

Daily Financial Activity Summary Report (TB04)

The Daily Financial Activity Summary Report (TB04) provides a summary of financial transaction activity logged to the ITS Transaction Log File (ITLF) by issuer institutions for the specified processing day. The report includes transaction processing totals (counts and amounts) for each financial transaction processing code configured for the institution in the PCDF. The number and amount of approved, declined, and processed financial transactions are provided for each financial transaction processing code (for example, TRANSFER SAV, DDA).

The report can optionally include transaction processing totals by financial transaction category (for example, all immediate transfer transactions, regardless of account type). These totals are suitable for statistical analysis and can be used for reconciliation against the total customer account postings for the processing day. The value of the TB-RPT-ISS-SUP-TXN-CAT-TTLS param in the LCONF determines whether totals are included for transaction categories. The report includes all BASE24-telebanking and BASE24-billpay financial transactions that are logged to the ITLF.

A new report header line is printed each time the FIID changes. An institution totals page is provided at the end of each institution's transactions that provides the total number and amount of all financial transactions approved, declined, and processed for the institution for the specified processing day. These totals can be used for institution reconciliation against the total customer account postings for the processing day. The message END OF REPORT FOR *fiid* or NO ACTIVITY FOR *fiid* is printed at the end of the financial transaction summary listings for a particular financial institution, where *fiid* is the FIID of the institution.

A grand totals page is provided at the end of the report that lists the number of approved, declined, and processed financial transactions for all institutions for the specified processing day. These totals can be used by the system owner to reconcile against individual financial institution totals for the processing day. The message END OF REPORT TB04 is printed at the end of the report.

The Daily Financial Activity Summary Report can be generated automatically on a daily basis and can also be generated manually on an as-needed basis from a TACL prompt. The report is generated in the spooler location defined by the TB-RPT-ISS-TB04-LOC assign in the LCONF. The default spooler location is \$S.#TB04.

A sample of the Daily Financial Activity Summary Report is shown on the following page, followed by descriptions of its fields. For illustrative purposes, totals for only a few of the default financial transaction processing codes

configured in the PCDF are shown in the sample. The actual report includes totals only for financial transaction processing codes configured in the PCDF for which transaction activity occurred on the specified processing day.

REPORT: TB04 FINANCIAL ACTIVITY SUMMARY				BNK1 - FIRST FINANCIAL		MMM DD YY		PAGE
1								
INSTITUTION TOTALS								
DESCRIPTION				APPROVED	DECLINED	TOTAL		
TRANSFER FUTURE	TXN COUNT	120	15				135	
	TXN AMOUNT	5,000.00	1,350.00				6,350.00	
TRANSFER IMMED SAV, SAV	TXN COUNT	798	103				901	
	TXN AMOUNT	798,000.00	103,000.00				901,000.00	
TRANSFER RECURRING SAV, DDA	TXN COUNT	8,242	1,008				9,250	
	TXN AMOUNT	10,563,725.38	876,235.95				11,439,961.33	
TRANSACTION CATEGORY TOTALS:				9,160	1,126		10,286	
PAYMENT RECURRING	TXN COUNT	11,364,725.38	980,585.95				12,347,311.33	
	TXN AMOUNT	225	15				240	
PAYMENT IMMED DDA	TXN COUNT	11,250.00	525.00				11,775.00	
	TXN AMOUNT	702	33				735	
TRANSACTION CATEGORY TOTALS:				586,723.92	2,385.27		589,109.19	
	TXN COUNT	927	48				975	
	TXN AMOUNT	597,973.92	2,910.27				600,884.19	

REPORT: TB04 FINANCIAL ACTIVITY SUMMARY		BNK1 - FIRST FINANCIAL		MM	DD	YY	PAGE	2
INSTITUTION TOTALS								
SUMMARY								
		APPROVED		DECLINED		TOTAL		
		TXN COUNT		1,174		11,261		
		TXN AMOUNT		983,496.22		12,946,195.22		
ALL TRANSACTIONS		10,087						
		11,962,699.30						
< END OF REPORT FOR BNK1 >								

REPORT: TB04 FINANCIAL ACTIVITY SUMMARY				MM	DD	YY	PAGE	7
GRAND TOTALS								
SUMMARY								
ALL TRANSACTIONS				TXN COUNT	APPROVED	DECLINED	TOTAL	
					1,545,791	33,638	1,579,329	
< END OF REPORT TB04 >								

INSTITUTION TOTALS

The following fields provide approved, declined, and total financial transaction counts and amounts for each transaction processing code configured for the institution in the PCDF on which activity occurred for the specified processing day. Amounts are expressed in whole and fractional currency units.

DESCRIPTION — A text description for the financial transaction processing code as configured in the PCDF.

APPROVED — The total number and amount of financial transactions approved for the transaction processing code or transaction category for the specified processing day.

DECLINED — The total number and amount of financial transactions declined for the transaction processing code or transaction category for the specified processing day.

TOTAL — The total number and amount of financial transactions processed (approved or declined) for the transaction processing code or transaction category for the specified processing day.

SUMMARY

The following fields provide total approved, declined, and processed transaction counts and amounts for all financial transaction processing codes configured for the institution in the PCDF on which activity occurred for the specified processing day. Amounts are expressed in whole and fractional currency units.

APPROVED — The total number and amount of financial transactions approved for the institution for the specified processing day.

DECLINED — The total number and amount of financial transactions declined for the institution for the specified processing day.

TOTAL — The total number and amount of financial transactions processed (approved and declined) for the institution for the specified processing day.

GRAND TOTALS

The following fields provide the total number of approved, declined, and processed financial transactions for all institutions in the logical network for the specified processing day.

APPROVED — The total number of financial transactions approved for the logical network for the specified processing day.

DECLINED — The total number of financial transactions declined for the logical network for the specified processing day.

TOTAL — The total number of financial transactions processed (approved and declined) for the logical network for the specified processing day.

Monthly Customer Activity Summary Report (TB05)

The Monthly Customer Activity Summary Report (TB05) provides a summary of transaction activity logged to the ITS Transaction Log File (ITLF) by issuer institutions for the previous processing month. The report is identical to the Daily Customer Activity Summary Report (TB02), except it reports data for an entire processing month rather than a single processing day.

The TB05 report includes monthly transaction processing totals for each transaction processing code configured for the institution in the PCDF. The number of approved, declined, and total transactions are provided for each processing code (for example, AVAIL FUNDS INQ SAV). The report can optionally include transaction processing totals by transaction category (for example, all available funds inquiry transactions, regardless of account type). The value of the TB-RPT-ISS-SUP-TXN-CAT-TTLS param in the LCONF determines whether totals are included for transaction categories. The report includes all BASE24-telebanking transactions and BASE24-billpay transactions that are logged to the ITLF.

A new report header line is printed each time the FIID changes. An institution totals page is provided at the end of each institution's transactions that provides the total number of all transactions approved, declined, and processed for the institution for the processing month. The message END OF REPORT FOR *fiid* or NO ACTIVITY FOR *fiid* is printed at the end of the transaction summary listings for a particular financial institution, where *fiid* is the FIID of the institution.

A grand totals page is provided at the end of the report that lists the number of approved, declined, and processed transactions for all institutions for the processing month. The message END OF REPORT TB05 is printed at the end of the report.

The Monthly Customer Activity Summary Report can be generated automatically on a monthly basis and manually on an as-needed basis from a TACL prompt. The report is generated in the spooler location defined by the TB-RPT-ISS-TB05-LOC assign in the LCONF. The default spooler location is \$\$#TB05.

A sample of the Monthly Customer Activity Summary Report is shown on the following pages, followed by descriptions of its fields. For illustrative purposes, totals for only a few of the default transaction processing codes configured in the PCDF are shown in the sample. The actual report includes totals for all transaction processing codes configured in the PCDF, even if no transactions were processed for the code.

REPORT: TB05 MONTHLY CUSTOMER SUMMARY			BNK1 - FIRST FINANCIAL		MMM DD YY		PAGE	1
INSTITUTION TOTALS								
DESCRIPTION			APPROVED	DECLINED	TOTAL			
AVAIL FUNDS INQUIRY	TXN COUNT		2,252	300		2,552		
AVAIL FUNDS INQUIRY SAV	TXN COUNT		38	2		40		
AVAIL FUNDS INQUIRY SAV, DDA	TXN COUNT		5	7		12		
MULTIPLE ACCTS BALANCE INQUIRY	TXN COUNT		0	0		0		
TRANSACTION CATEGORY TOTALS:			2,295	309		2,604		
TRANSFER RECURRING			120	15		135		
TRANSFER FUTURE SAV, SAV			798	103		901		
TRANSFER IMMED SAV, DDA			8,242	1,008		9,250		
TRANSFER IMMED SAV, CR			0	0		0		
TRANSACTION CATEGORY TOTALS:			9,160	1,126		10,286		
PAYMENT IMMED			225	15		240		
PAYMENT IMMED SAV			0	0		0		
PAYMENT FUTURE DDA			702	33		735		
TRANSACTION CATEGORY TOTALS:			927	48		975		

REPORT: TB05 MONTHLY CUSTOMER SUMMARY	ENK1 - FIRST FINANCIAL	MM DD YY	PAGE	2
INSTITUTION TOTALS				
SUMMARY				
	APPROVED	DECLINED	TOTAL	
ALL TRANSACTIONS	20,882	1,483	22,365	
	TXN COUNT			
< END OF REPORT FOR ENK1 >				

REPORT: TB05 MONTHLY CUSTOMER SUMMARY				MM	DD	YY	PAGE	7
GRAND TOTALS								
SUMMARY								
ALL TRANSACTIONS				TXN COUNT	APPROVED	DECLINED	TOTAL	
					1,545,791	33,638	1,579,329	
< END OF REPORT TB05 >								

INSTITUTION TOTALS

The following fields provide approved, declined, and total transaction counts for each transaction processing code configured for the institution in the PCDF for the processing month.

DESCRIPTION — A text description for the transaction processing code as configured in the PCDF.

APPROVED — The total number of transactions approved for the transaction processing code or transaction category for the processing month.

DECLINED — The total number of transactions declined for the transaction processing code or transaction category for the processing month.

TOTAL — The total number of transactions processed (approved or declined) for the transaction processing code or transaction category for the processing month.

SUMMARY

The following fields provide approved, declined, and total transaction counts for all transaction processing codes configured for the institution in the PCDF for the processing month.

APPROVED — The total number of transactions approved for the institution for the processing month.

DECLINED — The total number of transactions declined for the institution for the processing month.

TOTAL — The total number of transactions processed (approved or declined) for the institution for the processing month.

GRAND TOTALS

The following fields provide the total number of approved, declined, and processed transactions for all institutions in the logical network for the processing month.

APPROVED — The total number of transactions approved for the logical network for the processing month.

DECLINED — The total number of transactions declined for the logical network for the processing month.

TOTAL — The total number of transactions processed for the logical network for the processing month.

Monthly Financial Activity Summary Report (TB06)

The Monthly Financial Activity Summary Report (TB06) provides a summary of financial transaction activity logged to the ITS Transaction Log File (ITLF) by issuer institutions for the previous processing month. The report is identical to the Daily Financial Activity Summary Report (TB04), except it reports data for an entire processing month rather than a single processing day. This report can be used for month-end institution reconciliation.

The TB06 report includes transaction processing totals (counts and amounts) for each financial transaction processing code configured for the institution in the PCDF. The number and amount of approved, declined, and processed financial transactions are provided for each financial transaction processing code (for example, TRANSFER SAV, DDA). The report can optionally include transaction processing totals by financial transaction category (for example, all immediate transfer transactions, regardless of account types). The value of the TB-RPT-ISS-SUP-TXN-CAT-TTLS param in the LCONF determines whether totals for transaction categories are printed or suppressed. The report includes all BASE24-telebanking and BASE24-billpay financial transactions that are logged to the ITLF.

A new report header line is printed each time the FIID changes. An institution totals page is provided at the end of each institution's transactions that provides the total number and amount of all financial transactions approved, declined, and processed for the institution for the processing month. The message END OF REPORT FOR *fiid* or NO ACTIVITY FOR *fiid* is printed at the end of the financial transaction summary listings for a particular financial institution, where *fiid* is the FIID of the institution.

A grand totals page is provided at the end of the report that lists the number of approved, declined, and processed financial transactions for all institutions for the processing month. The message END OF REPORT TB06 is printed at the end of the report.

The Monthly Financial Activity Summary Report can be generated automatically on a monthly basis and manually on an as-needed basis from a TACL prompt. The report is generated in the spooler location defined by the TB-RPT-ISS-TB06-LOC assign in the LCONF. The default spooler location is \$S.#TB06.

A sample of the Monthly Financial Activity Summary Report is shown on the following page, followed by descriptions of its fields. For illustrative purposes, totals for only a few of the default financial transaction processing codes

configured in the PCDF are shown in the sample. The actual report includes totals only for financial transaction processing codes configured in the PCDF for which transaction activity occurred during the previous processing month.

REPORT: TB06 MONTHLY FINANCIAL SUMMARY	BNK1 - FIRST FINANCIAL	MM DD YY	PAGE	2
INSTITUTION TOTALS				
SUMMARY				
ALL TRANSACTIONS	TXN COUNT	APPROVED	DECLINED	TOTAL
	TXN AMOUNT			
		10,087	1,174	11,261
		11,962,699.30	983,496.22	12,946,195.22
< END OF REPORT FOR BNK1 >				

REPORT: TB06 MONTHLY FINANCIAL SUMMARY				MM	DD	YY	PAGE	7
GRAND TOTALS								
SUMMARY								
ALL TRANSACTIONS				TXN COUNT	APPROVED	DECLINED	TOTAL	
					1,545,791	33,638	1,579,329	
< END OF REPORT TB06 >								

REPORT: TB06 MONTHLY FINANCIAL SUMMARY			BNK1 - FIRST FINANCIAL		MM DD YY		PAGE	1
INSTITUTION TOTALS								
DESCRIPTION			APPROVED	DECLINED	TOTAL			
TRANSFER IMMED	TXN COUNT	120	15	15	135			
	TXN AMOUNT	5,000.00	1,350.00	1,350.00	6,350.00			
TRANSFER IMMED SAV, SAV	TXN COUNT	798	103	103	901			
	TXN AMOUNT	798,000.00	103,000.00	103,000.00	901,000.00			
TRANSFER FUTURE SAV, DDA	TXN COUNT	8,242	1,008	1,008	9,250			
	TXN AMOUNT	10,563,725.38	876,235.95	876,235.95	11,439,961.33			
TRANSACTION CATEGORY TOTALS:			9,160	1,126	10,286			
PAYMENT IMMED	TXN AMOUNT	11,364,725.38	980,585.95	980,585.95	12,347,311.33			
	TXN COUNT	225	15	15	240			
PAYMENT IMMED DDA	TXN AMOUNT	11,250.00	525.00	525.00	11,775.00			
	TXN COUNT	702	33	33	735			
TRANSACTION CATEGORY TOTALS:	TXN AMOUNT	586,723.92	2,385.27	2,385.27	589,109.19			
	TXN COUNT	927	48	48	975			
			597,973.92	2,910.27	600,884.19			

INSTITUTION TOTALS

The following fields provide approved, declined, and total financial transaction counts and amounts for each transaction processing code configured for the institution in the PCDF on which activity occurred for the previous processing month.

DESCRIPTION — A text description for the financial transaction processing code as configured in the PCDF.

APPROVED — The total number and amount of financial transactions approved for the transaction processing code or transaction category for the previous processing month.

DECLINED — The total number and amount of financial transactions declined for the transaction processing code or transaction category for the previous processing month.

TOTAL — The total number and amount of financial transactions processed (approved or declined) for the transaction processing code or transaction category for the previous processing month.

SUMMARY

The following fields provide total approved, declined, and processed transaction counts and amounts for all financial transaction processing codes configured for the institution in the PCDF on which activity occurred for the previous processing month.

APPROVED — The total number and amount of financial transactions approved for the institution for the previous processing month.

DECLINED — The total number and amount of financial transactions declined for the institution for the previous processing month.

TOTAL — The total number and amount of financial transactions processed (approved or declined) for the institution for the previous processing month.

GRAND TOTALS

The following fields provide the total number of approved, declined, and processed financial transactions for all institutions in the logical network for the previous processing month.

APPROVED — The total number of financial transactions approved for the logical network for the previous processing month.

DECLINED — The total number of financial transactions declined for the logical network for the previous processing month.

TOTAL — The total number of financial transactions processed for the logical network for the previous processing month.

Statistics and Errors Report

The Statistics and Errors Report is generated by the BASE24-telebanking Issuer Reporting program each time the program is run. It provides statistical and error information for the report run.

Statistical information includes the start and end dates and times for the run, the data files accessed during the run, the ITLFs accessed during the run, the number of records processed by Tandem's FastSort utility, the processing time used by the FastSort utility, the number of report pages generated for each report, and the file attributes for the temporary sort file used during the run.

Error messages are output to the report as they are encountered, and as a result, the format of the report can vary for each report run. One blank line is displayed between logical groups of statistical information and between each error message on the report. If the BASE24-telebanking Issuer Reporting program terminates due to an error, whatever information is available at the time of the failure is output to the report before the program terminates.

The Statistics and Errors report is generated in the spooler location specified by the TB-RPT-ISS-OUT-FILE assign from the LCONF or the specified out location in the report program RUN command. The default value for this assign is \$S.#TB1RPT.

A description of each error message that can appear on the report is provided in appendix B.

ACI Worldwide Inc.

Section 5

BASE24-billpay Reports

This section describes the reports BASE24-billpay provides to meet the reporting needs of its institutions. The information contained in these reports enables institutions to settle with customers and vendors, track customer service representative activity, generate customer correspondence, report on the vendor database, report on scheduled transaction and remittance processing, and report on end-of-period processing performed by BASE24-billpay programs.

The BASE24-billpay reports discussed in this section are listed below.

- Customer Notice Report
- Customer Vendor List Report
- Customer Vendor Year-End Summary Report
- Loan Application Report
- Master Vendor Report
- Miscellaneous Request Report
- New Customer Report
- Payment Summary Report
- Remittance Transaction Alert Report
- Scheduled Transactions Alert Report

This section also describes various spooler output reports that are generated by the ACHclear, Archive, and Cleanup programs.

Date Display Format

The format in which most dates on BASE24-billpay reports are displayed is determined by a parameter entered when each report is started. The following table provides the available formats, an example of a date using each format, and the parameter for each format. Dates controlled by a parameter are identified with the <date-fmt> variable on report samples.

Format	Example	Parameter
MMMDDYY	DEC 31 99	M3D2Y2
MMMDDYYYY	DEC 31 1999	M3D2Y4
MMDDYY	12 31 99	M2D2Y2
MMDDYYYY	12 31 1999	M2D2Y4
DDMMYY	31 DEC 99	D2M3Y2
DDMMYYYY	31 DEC 1999	D2M3Y4
DDMMYY	31 12 99	D2M2Y2
DDMMYYYY	31 12 1999	D2M2Y4

Customer Notice Report

The Customer Notice Report is generated any time a customer needs to be informed of a processing event that affects their service (for example, a recurring payment denied due to insufficient funds). The Customer Notice Report displays notification text explaining the processing event that occurred and information identifying the transaction on which the event occurred. The customer can then take the appropriate action to rectify the situation.

A separate report entry is generated for each NOTICE action found in the Report Action Table (RPTA). A NOTICE action is automatically generated by the system whenever an action code configured in the Bank Notice Table (BKNT) is detected by the XPNET Billpay Server or Scheduled Transaction Initiator process. The notification text is retrieved from the Response Text Table (RTXT).

The top of each Customer Notice Report page displays the customer mailing information so the notice can be used in a windowed envelope and mailed to the customer. The date the notice was generated is displayed in the upper right-hand corner in the date format specified when the report was started.

The Customer Notice Report can be run automatically on a daily basis using a batch scheduler and can also be generated manually on an as-needed basis from a TACL prompt.

A sample Customer Notice Report page is shown on the next page, followed by descriptions of its fields.

<customer name> <address line 1> <address line 2> <city>		<date-fmt> (402) 123-1234 (402) 456-7890	
<st> <postalcode>		Home Phone: Work Phone:	
CUSTOMER NOTICE			
Notification ----- This transaction was denied due to insufficient funds.		Reference Business Number Date ----- 123456 MM/DD/YYYY	
Transaction From Account and Type Amount To Account and Type To Vendor Name and Account		-----	
5B	1234567890123456789	20	\$250.00
		ABC Phone Company 1234567890123456789	

<customer name> — The given name or first name of this customer, followed by the customer's middle initial and the family name or last name of this customer. The first name, middle initial, and last name are each separated by a space.

This field displays special characters required for languages other than U.S. English.

<date-fmt> — The date this report was generated in the format specified when the report was started.

<address line 1> — The first line of the street or mailing address for this customer.

<address line 2> — The second line of the street or mailing address for this customer.

Home Phone — The home telephone number for this customer.

<city> — The name of the city for this customer's residence or mailing address.

<st> — The two-letter U.S. state or Canadian province abbreviation for this customer's residence or mailing address.

The U.S. state codes are based on the 1988 ANSI X3.38 standard, *Identification of the States, the District of Columbia, and the Outlying and Associated Areas of the United States for Information Interchange*.

<postalcde> — The postal code of this customer's residence or mailing address.

Work Phone — The work telephone number for this customer.

CUSTOMER NOTICE

The following fields describe the processing event that occurred and the transaction on which the event occurred.

Notification — User-defined text from the Response Text Table (RTXT) explaining the processing event that occurred.

Reference Number — A unique system-generated number used to reference historical data for this transaction. Every transaction processed by the XPNET Billpay Server and Scheduled Transaction Initiator processes is assigned a unique reference number.

Business Date — The date, in MM/DD/YYYY format, this transaction was entered into the system (that is, processed by the XPNET Billpay Server or Scheduled Transaction Initiator process).

Transaction — A code indicating the type of transaction processed. The following default transaction type codes can appear in this field:

- 3H = Customer vendor list inquiry
- 3J = Scheduled payments list inquiry
- 3K = Scheduled transfers list inquiry
- 3L = History inquiry – payments and transfers
- 3M = Scheduled transactions list inquiry
- 4A = Transfer – future
- 4B = Transfer – recurring
- 50 = Payment – immediate
- 5A = Payment – future
- 5B = Payment – recurring
- 9A = Schedule payment – immediate
- 9B = Schedule payment – future
- 9C = Schedule payment – recurring
- 9D = Schedule transfer – future
- 9E = Schedule transfer – recurring
- 9F = Scheduled payment delete
- 9G = Scheduled transfer delete
- 9H = Scheduled payment update
- 9J = Scheduled transfer update
- 9K = Customer add
- 9L = Customer inquiry
- 9M = Customer update
- 9N = Customer vendor add
- 9P = Customer vendor deactivate
- 9Q = Customer vendor update
- 9R = Master vendor list inquiry
- 9S = Master vendor add (internal transaction)
- 9T = Customer vendor request mailing
- 9V = Loan application
- 9W = Miscellaneous request
- 9X = History inquiry – all transactions
- B0 = Customer account list inquiry (internal transaction)

B1 = Bank list inquiry
B2 = Bank branch list inquiry
B3 = Cancel immediate payment (internal transaction)
B4 = Miscellaneous requests inquiry
B5 = Customer account add
B6 = Customer account activate
B7 = Customer account deactivate
B8 = Customer account delete
B9 = Customer account update
BB = Customer activate
BC = Customer deactivate
BD = Customer vendor activate
BE = Customer vendor mask verify inquiry

From Account and Type — The number of the customer account debited in a payment or transfer transaction, followed by a code identifying the type of account. This is the account from which a payment or transfer was to be made.

The following default transaction type codes are provided by ACI in the Account Type Table File (ATT):

00 = No account
10 = Savings account
1A = Savings account
1B = Savings account
1C = Savings account
1D = Savings account
1E = Savings account
1F = Savings account
20 = Demand deposit account
2A = Demand deposit account
2B = Demand deposit account
2C = Demand deposit account
2D = Demand deposit account
2E = Demand deposit account
2F = Demand deposit account
2G = Demand deposit account
2H = Demand deposit account
30 = Credit account
3A = Credit account
3B = Credit account
3C = Credit account
3D = Credit account
3E = Credit account

3F = Credit account
3G = Credit account
38 = Line of credit
58 = Certificate
59 = Retirement account
90 = Interest-bearing checking account
9A = Commercial loan
9B = Installment loan
9C = Mortgage loan

Amount — For financial transactions, this field displays the amount of the payment or transfer attempted in whole and fractional currency units (for example, U.S. dollars and cents). A decimal point will be displayed if the amount includes fractional currency units.

To Account and Type — The number of the customer account and a code identifying the type of account that was to be credited in a transfer transaction. This is the account to which a transfer was to be made.

Refer to the From Account and Type field description for a list of all possible transaction type codes that can appear in this field.

To Vendor Name and Account — The name of the vendor that was to be paid in a payment transaction, followed by the number of the customer's account with the vendor to which the payment was to be posted or credited.

Customer Vendor List Report

The Customer Vendor List Report provides a list of all the customer vendors configured for a customer. It contains all the information the customer needs to initiate payments to a vendor from a remote banking endpoint device.

A separate report entry is generated for each customer with at least one CUSTVEND action recorded in the Report Action Table (RPTA). A CUSTVEND action is automatically generated any time a customer service representative requests a Customer Vendor List Report to be printed for a customer. If multiple CUSTVEND actions are recorded for the same customer, only one report entry is generated for that customer.

A Customer Vendor List Report is typically mailed to a customer when they are first signed up for BASE24-billpay service and any time changes are made to the customer's customer vendor information (for example, adding or deleting a customer vendor). Customers can also call a customer service representative to request a list.

The top of the list displays the customer's mailing information so the report can be used in a windowed envelope and mailed to the customer. The date the report was generated is displayed in the upper right-hand corner of the report. The customer vendors listed on the report are arranged in alphabetical order by vendor name.

The Customer Vendor List Report can be run automatically on a daily basis using a batch scheduler and can also be generated manually on an as-needed basis from a TACL prompt.

A sample Customer Vendor List Report page is shown on the following page, followed by descriptions of its fields.

<customer name> <address line 1> <address line 2> <city>		<customer id>	<date> <st> <postalcode>	<date> <fmt>
Vend #	Name of Vendor	Account With Vendor	Remit Type	
5	ABC Phone Company	123456789	ACH	
1	Bank	1234567890123456789	CIT	
2	Cable Company	12345678912345	ACH	
6	Dr. Goodbody	JOHNPCUSTOMER	CIT	
4	Local Utility Company	98765432101	GIT	
3	WaterWorks Inc.	543216789012345	ACH	

<customer name> — The given name or first name of this customer, followed by the customer's middle initial and the family name or last name of this customer. The first name, middle initial, and last name are each separated by a space.

This field displays special characters required for languages other than U.S. English.

<customer id> — The customer ID of a Customer Table (CSTT) row this customer is allowed to access.

<date-fmt> — The date this report was generated in the format specified when the report was started.

<address line 1> — The first line of the street or mailing address for this customer.

<address line 2> — The second line of the street or mailing address for this customer.

<city> — The name of the city for this customer's residence or mailing address.

<st> — The two-letter U.S. state or Canadian province abbreviation for this customer's residence or mailing address.

The U.S. state codes are based on the 1988 ANSI X3.38 standard, *Identification of the States, the District of Columbia, and the Outlying and Associated Areas of the United States for Information Interchange*.

<postalcde> — The postal code of this customer's residence or mailing address.

Vend # — The customer vendor number generated by the system when this customer vendor was added. This number is unique among all vendors for this customer. This is the number the customer must enter to initiate a payment to this vendor from a remote banking endpoint device.

Name of Vendor — The name of the vendor to whom this customer makes payments.

Account With Vendor — The customer's account number with this vendor. This is the number of the account to which payments from this customer are posted or credited.

Remit Type — A code indicating how this vendor receives remittances for customer payments. Reserved values are as follows:

ACH = Vendor is paid electronically through automated clearinghouse payments.

CIT = Vendor is paid using single-item checks.

CGP = Vendor is paid using grouped-item checks.

User-defined remittance types may also appear in this field.

Customer Vendor Year-End Summary Report

The Customer Vendor Year-End Summary Report is generated once a year on an as-needed basis for each customer and summarizes all customer payment activity for the year. The report includes the total number of payments made to each customer vendor, the total amount of payments made to each customer vendor, and the budget categories to which the payments applied. This information is recorded in the Customer Vendor Summary Table (CVS) and Vendor Budget Category Table (VBUD). This report also displays grand totals for the total number of payments and total amount of payments made to all customer vendors for the prior year. The Customer Vendor Year-End Summary Report serves as a year-end reconciliation tool for the customer.

Like the Customer Vendor List Report, the top of the Customer Vendor Year-End Summary Report page displays the customer's mailing information so this report page can be used in a windowed envelope and mailed to the customer. The date the report was generated is displayed in the upper right-hand corner of the report. The customer vendors listed on the report are arranged in alphabetical order by vendor name. A sample Customer Vendor Year-End Summary Report is shown on the next page, followed by descriptions of its fields.

07/2000 TB-AE000-06
ACI Worldwide Inc.

1999 Year End Vendor Summary

Vend #	Name of Vendor	Account With Vendor	Number of Payments	Payment Amount	Budget Category
5	ABC Phone Company	123456789	12	\$ 1,121.32	PHON
1	Bank	1234567890123456789	24	\$ 6,989.79	MRTG
2	Cable Company	123456789012345	12	\$ 360.00	CABL
6	Dr. Goodbody	JOHNPCUSTOMER	4	\$ 202.27	MEDS
4	Local Utility Company	98765432101	12	\$ 729.51	UTIL
3	WaterWorks Inc.	543216789012345	12	\$ 367.42	UTIL
Total Payments for Year ended 12/31/1999			76	\$9,768.31	

<customer name> — The given name or first name of this customer, followed by the customer's middle initial and the family name or last name of this customer. The first name, middle initial, and last name are each separated by a space.

This field displays special characters required for languages other than U.S. English.

<customer id> — The customer ID of a Customer Table (CSTT) row this customer is allowed to access.

<date-fmt> — The date this report was generated in the format specified when the report was started.

<address line 1> — The first line of the street or mailing address for this customer.

<address line 2> — The second line of the street or mailing address for this customer.

<city> — The name of the city for this customer's residence or mailing address.

<st> — The two-letter U.S. state or Canadian province abbreviation for this customer's residence or mailing address.

The U.S. state codes are based on the 1988 ANSI X3.38 standard, *Identification of the States, the District of Columbia, and the Outlying and Associated Areas of the United States for Information Interchange*.

<postalcde> — The postal code of this customer's residence or mailing address.

Year End Vendor Summary

The following six fields summarize the customer's payment activity for the previous year.

Vend # — The customer vendor number generated by the system when this customer vendor was added. This number is unique among all customer vendors for this customer.

Name of Vendor — The name of the vendor to whom this customer made payments.

Account With Vendor — The customer's account number with this vendor. This is the number of the account to which payments from this customer were posted or credited.

Number of Payments — The total number of payments the customer made to this vendor during the previous year.

Payment Amount — The total amount of payments, in whole and fractional currency units (for example, U.S. dollars and cents), the customer made to this vendor during the previous year. A decimal point will be displayed if the amount includes fractional currency units.

Budget Category — The budget category (for example, UTIL for utility payments or MRTG for mortgage payments) to which the payments to this vendor are classified.

Total Payments for Year ended

The following two fields display grand totals for the total number of payments and total amount of payments made by this customer during the previous year.

Number of Payments — The grand total number of payments the customer made to all vendors during the previous calendar year.

Payment Amount — The grand total amount of payments, in whole and fractional currency units (for example, U.S. dollars and cents), the customer made to all vendors during the previous calendar year. A decimal point will be displayed if the amount includes fractional currency units.

Loan Application Report

The Loan Application Report includes all loan applications entered by customer service representatives on behalf of calling customers for the processing day.

Each loan application is entered in a separate row in the Loan Application Table (LOAN). Rows from this table are cleaned up on a daily basis after the Loan Application Report is generated.

The Loan Application Report is sorted by FIID, and is essentially a field-by-field dump of the loan application entered on the Loan Application screens from a CSR terminal or from a loan application transaction received from a remote banking endpoint device.

This report can be generated automatically on a daily basis using a batch scheduler and can also be generated manually on an as-needed basis from a TACL prompt.

A sample Loan Application Report is shown on the following pages. For descriptions of its fields, refer to the Loan Application screen documentation in the ***BASE24 Remote Banking Customer Service Support Manual***.

Loan Application		PAGE 1
BK01		
Loan Type: Y	WALDO	Date Requested: YY/MM/DD
Referred By: ZUMMALT		
Amount Requested: \$ 10,020.00		Collateral: COLLATERAL
Purpose of Loan: PERSONAL LOAN		
----- Applicant Information -----		
Name: Family CUSTOMER	Date of Birth: YY/MM/DD	
Given SUSIE	Government ID: GOVT 12A	
Middle Q	Home Phone: 4021231234	
Number of Dependents: 2	Married: Y	
Ages: 12 22		
Current Address:		
1021 BANK ONE BLVD		
City: OMAHA	ST: NE	Postal Code: 68114
Years at Address: 2	Monthly Payment: \$	1,020.00
Own: Y		
Rent Payments are made to		
Previous (if current less than 4 yrs):		
101 RETAILER ROAD		
City: COUNCIL BLUFFS	ST: IA	Postal Code: 50102
Years at Address: 1		
Own: Y		
----- Employment Information -----		
Employer: JOHN Q CUSTOMER		
Occupation: BANKER		
Current Address:		
1201 B ST.		
City: OMAHA	ST: NE	Postal Code: 68114
Years: 1	Monthly Income: \$	9876.54
Other Source of Income: NONE	Amount: \$	0.00
Previous Address:		
12018 D ST.		
City: OMAHA	ST: NE	Postal Code: 68102
Years: 7	Monthly Income: \$	5432.10
Judgements: Y		
Bankruptcy: N		
Back Taxes: Y		
Income Reduction: N		

Loan Application		PAGE 2
BK01		
Loan Type: Y	WALDO ZUMMALT	Date Requested: YY/MM/DD
Referred By: WALDO		
Amount Requested: \$ 10,020.00		Collateral: COLLATERAL
Purpose of Loan: PERSONAL LOAN		
----- Coapplicant Information -----		
Name: Family CARTWHEEL	Date of Birth: YY/MM/DD	
Given MELANIE	Government ID: GOVT 12B	
Middle A	Home Phone: 4021234567	
Relationship: FRIEND		
Employer: SUDS R US		
Occupation: CAR WASHER		
Current Address:		
10122 E. St.		
APARTMENT 3D		
City: OMAHA	ST: NE	Postal Code: 68102
Years: 1	Monthly Income: \$ 3500.00	
Other Source of Income: NONE	Amount: \$ 0.00	
Previous Address (if current less than 2 yrs):		
707 G St.		
APT 15		
City: KEARNEY	ST: NE	Postal Code: 68121
Years: 22	Monthly Income: \$ 2595.80	
----- Assets -----		
Institution Name/Address	Account Number	Type Value
INSTITUTE 121	10200121	A1 \$ 12345.01
12101 H ST.		
INSTITUTE 122	10200122	A2 \$ 54321.02
12102 H ST.		
INSTITUTE 123	10200123	A3 \$ 9876.03
12103 H ST.		
Auto 1: Year 1992 Make FORD	Model F-150	
Auto 2: Year 1982 Make DODGE	Model STRATUS	
Residence Purchase Price: \$ 125,100.00	Down Payment: \$ 15,000.00	
Life Insurance Value: \$ 75,000.00		
Other Property: N		
Other Assets: N	NONE	

Loan Application			PAGE 3
BK01			
Loan Type:	Y		Date Requested: YY/MM/DD
Referred By:	WALDO	ZUMMALT	
Amount Requested:	\$	10,020.00	Collateral: COLLATERAL
Purpose of Loan: PERSONAL LOAN			
----- Liabilities -----			
Type of Liability	Institution Name	Amount Owed	Monthly Payment
LIABILITY 121	INSTITUTE 121	\$	121.00 \$
LIABILITY 122	INSTITUTE 122	\$	122.00 \$
LIABILITY 123	INSTITUTE 123	\$	123.00 \$
LIABILITY 124	INSTITUTE 124	\$	124.00 \$
LIABILITY 125	INSTITUTE 125	\$	125.00 \$
LIABILITY 126	INSTITUTE 126	\$	126.00 \$
LIABILITY 127	INSTITUTE 127	\$	127.00 \$
LIABILITY 128	INSTITUTE 128	\$	128.00 \$
LIABILITY 129	INSTITUTE 129	\$	129.00 \$
LIABILITY 1210	INSTITUTE 1210	\$	1,210.00 \$
LIABILITY 1211	INSTITUTE 1211	\$	1,211.00 \$

Master Vendor Report

The Master Vendor Report contains a list of all vendors currently configured in the Vendor Table (VNDR) and is generated on an as-needed basis. All of the associated vendor branches configured for each vendor in the Vendor Branch Table (VNDB) are also included on this report. The report is sorted in alphabetical order by vendor name and by branch number within each vendor.

An example of the Master Vendor Report is shown on the following page. The date the report was generated is displayed in the upper right-hand corner of the report. For descriptions of the fields appearing on this report, refer to the Vendor Table (VNDR) and Vendor Branch Table (VNDB) screen documentation in the *BASE24-billpay Tables Maintenance Manual*.

Master Vendor Report										<date-fmt>	PAGE	1
Number		Vendor Name		Verify Status/ Date	Valid Date Range	Remittance Information			Vendor Main Type Branch Group	Mask		
-----		-----		-----	-----	Remit Type	Report Govt Type ID	-----	-----	-----		
201 OPPD				V	1999-01-01 1999-07-31 3999-12-31	CGP 01	GOVT ID 01	P	11	V010		
				Account and Account Type								

				989801 20								
				Remit Branch Number and Contact								

				UTIL \$ 500.00 OPPD BRANCH ONE								

				Audio Token								

				AUDIO TKN 01								

				Phone								
				Cnty FAX Phone		Contact Person		Mask	Group	-----		
				Crty Comm Phone		-----		-----	-----	-----		
11		OPPS BRANCH ONE		001	4021231234	AMELIA AMPS						
10010		OPPD BLVD		840	4023214321							
PO BOX 11				PCOM ONE ONE								
OMAHA				NE								
68114												
12		OPPS BRANCH TWO		001	4021231235	WALTER WATTS						
10020		OPPD BLVD		840	4023214329							
PO BOX 12				PCOM ONE TWO								
OMAHA				NE								
68154												
End of Master Vendor Report												

Miscellaneous Request Report

The Miscellaneous Request Report contains a list of all miscellaneous requests entered by customer service representatives for a specified processing day.

The Loan Application Report includes all loan applications entered by customer service representatives on behalf of calling customers for the processing day.

All information contained in the report is stored in the Miscellaneous Request Table (MISC). The report is sorted in FIID order and by last name within each FIID.

This report can be run automatically on a daily basis using a batch scheduler can also be generated manually on an as-needed basis from a TACL prompt.

An example of the Miscellaneous Request Report is shown on the following page. The date the report was generated is displayed in the upper right-hand corner of the report. For descriptions of the fields appearing on this report, refer to the Miscellaneous Request screen documentation in the ***BASE24 Remote Banking Customer Service Support Manual***.

Miscellaneous Request Report							<date-fmt>	PAGE	1
FIID	Last Name, First Name/ Phone	Request Date	Customer ID	Contact Type	Pri	Department	Request Type		
BK40	DRYSDALE 4023211234	12/29/1999	380004	C	4	DEPARTMENT 44	R		
		Has found her check book. Will not be in to close out her checking account.							
	DRYSDALE 4023211234	12/29/1999	380004	C	4	DEPARTMENT 44	R		
		Lost her check book. Is thinking about cancelling her account. Suggested she come in to open a new account and transfer from the old account.							

New Customer Report

The New Customer Report contains a list of all customers with preloaded data that have been activated by a customer service representative, all customers without preloaded data that have either been added or activated by a customer service representative, and all customers that have been reactivated for the current processing day.

All information contained in the report is stored in the Personal Information Table (PIT), Customer/Personal ID Relation Table (CPIT), and Report Action Table (RPTA). The report is sorted in FIID order and in alphabetical order by last name within each FIID.

If a customer without preloaded data was added, the report displays ADDED for the customer. If a customer ID without preloaded data was activated, the report displays ACTIVATE/ADDED for the customer. If a customer ID with preloaded data was activated, the report displays ACTIVATE/PRELOAD for the customer. If a customer ID is reactivated, the report displays REACTIVATED for the customer.

This report can be run automatically on a daily basis using a batch scheduler and can also be generated manually on an as-needed basis from a TACL prompt.

An example of the New Customer Report is shown on the following page. For descriptions of the fields appearing on this report, refer to the Customer Signup screen documentation in the ***BASE24 Remote Banking Customer Service Support Manual***.

New Customer Report										<date-fmt>	PAGE	1
FIID	Family Name/ Title	Given Name	M	Customer ID Address/City/State/Postal Code	Country	Personal ID	DOB/ Govt ID/ Language					
----	-----	-----	-	-----	-----	-----	-----					
BK10	JONES SIR	GEORGE	Q	123456789 1234 MAIN NEW HAMPTON 94564	840	123456789	1902-01-14 471556789					
	ADDED											
				Home Phone 1231234444 Work Phone 1231235555								
BK10	JONES SIR	GEORGE	Q	123456789 1234 MAIN NEW HAMPTON 94564	840	123456789	1902-01-14 471556789					
	ACTIVATED											
				Home Phone 1231234444 Work Phone 1231235555								

Payment Summary Report

The Payment Summary Report shows the cash-out position of the BASE24-billpay system for the current processing day. This report can be used to settle between the cash-out position for the current processing day and the authorized payment transactions for the business day. You specify the remittance day used when the report is generated.

This report can be used to settle between institutions and vendors and between the institution cash-out position for the current processing day and the authorized payment transactions that debited customer accounts for the institution for the business day. It can also be used to offset the total amount of payments authorized for the institution on the Daily Financial Activity Summary Report (TB04) and to offset the total amount of remittances generated for each remittance type.

The Payment Summary Report includes payment totals for each FIID in the system as well as grand totals for the entire system. The report can be generated at any time, however, if it is generated before the lag time after logical network cutover has expired, it will only contain partial information.

FIID totals are provided in three parts. Each of these parts are described below.

The first part contains totals where the transaction business date is prior to the specified remittance date. This includes totals for transactions that were authorized on the previous business day and remitted on the specified remittance date (that is, transactions that were authorized prior to logical network cutover, but could not be remitted before the BASE24-billpay lag time after logical network cutover expired). Part one of the report can be used to validate any cash-out differences between the BASE24-telebanking and BASE24-billpay products for a specific remittance date.

The second part contains totals where the transaction business date is the same as the specified remittance business day (that is, transactions that were authorized and remitted on the same date). Totals for parts one and two of the report are further broken down by remittance type within each FIID and by vendor number for each remittance type.

The third part contains the total of all payments from parts 1 and 2 for each FIID.

Grand totals for all FIIDs reported in parts 1 and 2 are provided for each remittance type, for part 1, for part 2, and for the remittance date (parts 1 and 2). Grand totals include the number of payment transactions as well as the amount of the transactions.

When the Payment Summary Report is generated, the report program selects all rows from the Payment Summary Table (PST) that have the remittance date specified when the program was started.

This report can be run automatically on a daily basis using a batch scheduler and can also be generated manually on an as-needed basis from a TACL prompt.

A sample of the Payment Summary Report is shown on the following pages, followed by descriptions of its fields.

Payment Summary Report for YYYY-MM-DD

FIID

BNK1

Part 1: Transaction Business Date Prior to Remit Business Date

Tran Date ----- YYYY-MM-DD	Remit Type ----- CGP	Vendor Number ----- 201	Total Count ----- 41	Total Amount ----- \$ 664.02
			41	664.02
	CIT	202	218	\$ 6272.95
		205	1	\$ 10.01
			219	6282.96
Tran Date Total:			261	6946.98
Part 1 Total:			261	6946.98

Payment Summary Report for YYYY-MM-DD

FIID

BNK1

Part 2: Transaction Business Date Same as Remit Business Date

Tran Date	Remit Type	Vendor Number	Total Count	Total Amount
-----	-----	-----	-----	-----
YYYY-MM-DD	CIT	202	1	\$ 10.01
		205	702	\$ 9253.29
			-----	-----
			703	9263.30

Tran Date Total:

703 9263.30

Part 2 Total:

703 9263.30

Part 3 Total Remittance for FIID BNK1

964 16210.28

Payment Summary Report for YYYY-MM-DD

	Total Count	Total Amount
	-----	-----
Total for Remittance Type ACH	9	\$ 366.63
Total for Remittance Type CGP	1,438	\$ 18,209.74
Total for Remittance Type CIT	7,266	\$ 128,620.05
-----	-----	-----
Total for Business Date (Part 1) .	5,993	\$ 100,792.76
-----	-----	-----
Total for Business Date (Part 2) ..	2,720	\$ 46,403.66
-----	-----	-----
Grand Total for Remittance Date ...	8,713	\$ 147,196.42

Payment Summary Report

The title of the report indicating the remittance date specified when the report was generated.

FIID — The FIID of a financial institution from which customer payments were made for the specified remittance date. The FIID is unique within the logical network and is used throughout BASE24 products to identify each BASE24 institution.

Part 1: Transaction Business Date Prior to Remit Business Date

The following five fields indicate the total payment activity for this customers' FIID for a transaction business date prior to the specified remittance date.

Tran Date — The business date on which payments were made for customers belonging to this FIID.

Remit Type — A code indicating the type of remittances generated for the payment transactions reflected in these totals. Reserved values are as follows:

ACH = Automated clearinghouse (ACH) payment
CGP = Grouped-item check
CIT = Single-item check

This field may also display a user-defined remittance type.

Vendor Number — An internal number assigned to the vendor that received the payments reflected on this line of the report.

Total Count — The total number of payments made to this vendor for the specified remittance type and previous transaction business date.

This column also displays the following:

- The total number of payments made to all vendors for the specified remittance type and previous transaction business date
- The total number of payments made to all vendors and all remittance types for the previous transaction business date

Total Amount — The total amount of payments, in whole and fractional currency units, made to this vendor for the specified remittance type and previous transaction business date. The number of digits displayed is determined when the report is generated.

This column also displays the following:

- The total amount of payments, in whole and fractional currency units, made to all vendors for the specified remittance type and previous transaction business date
- The total amount of payments, in whole and fractional currency units, made to all vendors and all remittance types for the previous transaction business date

Part 2: Transaction Business Date Same as Remit Business Date

The following five fields indicate the total payment activity for this FIID for a transaction business date equal to the specified remittance date. These are payments that were authorized and remitted on the same date.

Tran Date — The business date on which payments were made for customers belonging to this FIID.

Remit Type — A code indicating the type of remittances generated for the payment transactions reflected in these totals. Reserved values are as follows:

ACH = Automated clearinghouse (ACH) payment
CGP = Grouped-item check
CIT = Single-item check

This field may also display a user-defined remittance type.

Vendor Number — An internal number assigned to the vendor that received the payments reflected on this line of the report.

Total Count — The total number of payments made to this vendor for the specified remittance type and remittance date.

This column also displays the following:

- The total number of payments made to all vendors for the specified remittance type and remittance date
- The total number of payments made to all vendors and all remittance types for the specified remittance date

Total Amount — The total amount of payments, in whole and fractional currency units, made to this vendor for the specified remittance type and remittance date. The number of digits displayed is determined when the report is generated.

This column also displays the following:

- The total amount of payments, in whole and fractional currency units, made to all vendors for the specified remittance type and remittance date
- The total amount of payments, in whole and fractional currency units, made to all vendors and all remittance types for the specified remittance date

Part 3: Total Remittance for FIID

The total number and amount of payments made by customers of this FIID for parts 1 and 2.

Total for Remittance Type

The total number and amount of payments made by customers of all FIIDs from parts 1 and 2 to all vendors for a particular remittance type.

Total for Business Date (Part 1)

The total number and amount of payments made by customers of all FIIDs for all remittance types and vendors from part 1.

Total for Business Date (Part 2)

The total number and amount of payments made by customers of all FIIDs for all remittance types and vendors from part 2.

Grand Total for Remittance Date

The grand total number and amount of payments made by customers of all FIIDs for all remittance types and vendors from parts 1 and 2.

Remittance Transaction Alert Report

The Remittance Transaction Alert Report identifies payments that should have been remitted for a specified date but the Remittance Generator processes failed to process them. You can specify the business date used when the report is generated or allow the date to default to the current calendar date.

This report can be used to research payments that failed to be remitted and to determine whether payment remittance needs to be regenerated using the *redo* Remittance Generator processes.

The report lists each scheduled payment – immediate (9A), payment – future (5A), or payment – recurring (5B) transaction that should have been remitted for the specified date, but failed to be processed for some reason. These transactions are identified with a remittance status of I (Initial) in the HIST. Transaction identification information is provided for each transaction listed, along with the remittance status for the payment and the business date.

Information on this report is obtained from the History Table (HIST) and Vendor Table (VNDR).

This report can be run automatically on a daily basis using a batch scheduler and can be run manually as needed from a TACL prompt.

A sample of the Remittance Transaction Alert Report is shown on the following page, followed by descriptions of its fields.

Remittance Transaction Alert Report							PAGE	1
Customer Id	Ref Num	Txn Type	Vendor Name Account With Vendor	From Account	Type	<date-fmt>		
123456789	123456	5A	ABC Phone Company 987654321	192837465	20			
Business Date: MM/DD/YY								
1234567890123456789	654321	5B	Local Utility Company 987654321	9876543210	20			
Business Date: MM/DD/YY								
123456789	123457	9A	ABC Phone Company 987654321	192837465	20			
Business Date: MM/DD/YY								

Customer Id — The identifier of the customer for this payment transaction.

Ref Num — The unique reference number assigned by the Billpay Server process or Scheduled Transaction Initiator process for this payment transaction.

Txn Type — A code identifying the type of transaction performed. Only transaction types of 5A (payment – future), 5B (payment – recurring), or 9A (schedule payment – immediate) can appear on this report.

Vendor Name — The name of the vendor to whom this payment is to be remitted.

Account With Vendor — A value that uniquely identifies the relationship between this customer and vendor.

From Account — The number of the customer account from which funds were collected for this payment.

Type — A code identifying the type of *from* account. The following default transaction type codes are provided by ACI in the Account Type Table File (ATT):

- 00 = No account
- 10 = Savings account
- 1A = Savings account
- 1B = Savings account
- 1C = Savings account
- 1D = Savings account
- 1E = Savings account
- 1F = Savings account
- 20 = Demand deposit account
- 2A = Demand deposit account
- 2B = Demand deposit account
- 2C = Demand deposit account
- 2D = Demand deposit account
- 2E = Demand deposit account
- 2F = Demand deposit account
- 2G = Demand deposit account
- 2H = Demand deposit account
- 30 = Credit account
- 3A = Credit account
- 3B = Credit account
- 3C = Credit account

3D = Credit account
3E = Credit account
3F = Credit account
3G = Credit account
38 = Line of credit
58 = Certificate
59 = Retirement account
90 = Interest-bearing checking account
9A = Commercial loan
9B = Installment loan
9C = Mortgage loan

Business Date — The date (MM/DD/YY) when this transaction was started.
This is the date on which the customer's funds were collected for this payment.

Scheduled Transaction Alert Report

The Scheduled Transaction Alert Report identifies any scheduled payments or transfers that should have been performed but the Scheduled Transaction Initiator processes failed to process them for some reason. You can specify the business date used when the report is generated or allow the date to default to the current calendar date.

This report can be used to research scheduled transactions that failed to be processed.

The report lists each of the following scheduled transactions that should have been processed on or before the specified date, but failed for some reason:

- Schedule payment – immediate (9A)
- Schedule payment – future (9B)
- Schedule payment – recurring (9C)
- Schedule transfer – future (9D)
- Schedule transfer – recurring (9E)

These transactions are identified with an STI_PMT_DATE value in the Future Table (FUTR) that is equal to or less than the business date specified in the run command or the current calendar date. Transaction identification information is provided for each transaction listed, along with the processing status, payment date, the payment date calculated by the Scheduled Transaction Initiator process, and the date and time for the next retry processing attempt.

Information on this report is obtained from the Future Table (FUTR) and Vendor Table (VNDR).

This report can be run automatically on a daily basis using a batch scheduler and can be run manually as needed from a TACL prompt.

A sample of the Scheduled Transaction Alert Report is shown on the following page, followed by descriptions of its fields.

Scheduled Transaction Alert Report					<date-fmt>	PAGE	1
Customer Id	Ref Num	Txn Type	Vendor Name	Account With Vendor	From Account From Account Type To Account To Account Type		
123456789	123456	9A	ABC Phone Company	987654321	192837465 20		
Processing Status: - Not Started							
Payment Date: MM/DD/YY							
STI Calculated Date: MM/DD/YY							
Retry Date/Time: MM/DD/YY HH:MM:SS							
123456789	654321	9D			9876543210 10 1029384756 20		
Processing Status: PA - Pending							
Payment Date: MM/DD/YY							
STI Calculated Date: MM/DD/YY							
Retry Date/Time: MM/DD/YY HH:MM:SS							
123456789	123457	9E			192837465 20 998877665 30		
Processing Status: RW - Retry Waiting							
Payment Date: MM/DD/YY							
STI Calculated Date: MM/DD/YY							
Retry Date/Time: MM/DD/YY HH:MM:SS							

Customer Id — The identifier of the customer for this scheduled transaction.

Ref Num — The unique reference number assigned by the Billpay Server process or Scheduled Transaction Initiator process for this scheduled transaction.

Txn Type — A code identifying the type of transaction performed. Only transaction types of 9A (scheduled payment – immediate), 9B (schedule payment – future), 9C (schedule payment – recurring), 9D (schedule transfer – future), or 9E (schedule transfer – recurring) can appear on this report.

Vendor Name — The name of the vendor to whom this scheduled payment is to be made. No value appears in this column for scheduled transfers.

Account With Vendor — A value that uniquely identifies the relationship between this customer and vendor for scheduled payments. No value appears in this column for scheduled transfers.

From Account — The number of the customer account to be debited for this scheduled payment or transfer.

From Account Type — A code identifying the type of *from* account. The following default transaction type codes are provided by ACI in the Account Type Table File (ATT):

00	= No account
10	= Savings account
1A	= Savings account
1B	= Savings account
1C	= Savings account
1D	= Savings account
1E	= Savings account
1F	= Savings account
20	= Demand deposit account
2A	= Demand deposit account
2B	= Demand deposit account
2C	= Demand deposit account
2D	= Demand deposit account
2E	= Demand deposit account
2F	= Demand deposit account
2G	= Demand deposit account
2H	= Demand deposit account
30	= Credit account

3A = Credit account
3B = Credit account
3C = Credit account
3D = Credit account
3E = Credit account
3F = Credit account
3G = Credit account
38 = Line of credit
58 = Certificate
59 = Retirement account
90 = Interest-bearing checking account
9A = Commercial loan
9B = Installment loan
9C = Mortgage loan

To Account — The number of the customer account to be credited for this scheduled transfer. No value appears in this column for scheduled payments.

To Account Type — A code identifying the type of *to* account. Refer to the From Account Type field description for a list of default transaction type codes are provided by ACI.

Processing Status — A code indicating the current status of processing by the Scheduled Transaction Initiator process for this transaction. A text description is displayed to the right of the value. Possible values are as follows, where *b* represents a blank space:

bb = Processing not started
PA = Pending authorization
RP = Pending retry processing
RW = Waiting for retry processing

Payment Date — The date (MM/DD/YY) when this transaction was scheduled to be performed.

STI Calculated Date — The date (MM/DD/YY) that the Scheduled Transaction Initiator process has calculated to perform this transaction. This date may be different from the date displayed in the Payment Date field if transaction retries have extended into the next business day.

Retry Date/Time — The date and time (MM/DD/YY HH:MM:SS) that the Scheduled Transaction Initiator process is scheduled to attempt the next retry for this transaction. If this FUTR row is not for a transaction to be retried, this field displays a value of January 1, 0001.

Spooler Output Reports

This subsection describes the spooler output reports that can be generated by the ACHclear, Archive, and Cleanup programs.

ACHclear Reports

The following paragraphs describe the report output generated when the ACHclear program processes the Vendor Table (VNDR) or a partition of the History Table (HIST). These reports are sent to the spooler location identified by the OUT keyword in the RUN command.

VNDR Output

The following is an example of the spooler output generated when the ACHclear program processes the VNDR. Field descriptions are provided following the sample.

```
ACH Clear: Vendor table summary.

BILLPAY parameters used.
  BP-ACH-PAID-DAYS           : 3
  BP-ACH-PRENOTE-DAYS        : 10

ACHCLEAR parameters used.
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE           : 30

Begin      : YYYYMMDD, HH:MM:SS
Rows updated: 256
End        : YYYYMMDD, HH:MM:SS
```

BILLPAY parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of BILLPAY. The name and value of each param used is provided.

ACHCLEAR parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of ACHCLEAR. The name and value of each param used is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, the ACHclear program began processing the VNDR.

Rows updated — The number of rows updated in the VNDR for this run.

End — The date and time, in YYYYMMDD HH:MM:SS format, the ACHclear program stopped processing.

HIST Output

The following is an example of the spooler output generated when the ACHclear program processes a partition of the HIST. This example assumes there are 2 partitions of the HIST and this program processes the second partition. A separate summary output is generated for each partition of the HIST processed. Field descriptions are provided following the sample.

```
ACH Clear: History table summary.

BILLPAY parameters used.
  BP-ACH-PAID-DAYS           : 3
  BP-ACH-PRENOTE-DAYS       : 10
  BP-NUM-HISTORY-PART-EXT    : 2

ACHCLEAR parameters used.
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE          : 30

ACHCLEAR2 parameters used.
  BP-HISTORY-PARTITION-NUM    : 2

Begin      : YYYYMMDD, HH:MM:SS
Rows updated: 1,543
End        : YYYYMMDD, HH:MM:SS
```

BILLPAY parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of BILLPAY. The name and value of each param used is provided.

ACHCLEAR parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of ACHCLEAR. The name and value of each param used is provided.

ACHCLEAR2 parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of ACHCLEAR n , where n indicates the number of the HIST partition processed by this ACHclear program. The name and value of each param used is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, the ACHclear program began processing this partition of the HIST.

Rows updated — The number of rows updated in a partition of the HIST for this run.

End — The date and time, in YYYYMMDD HH:MM:SS format, the ACHclear program stopped processing.

Archive Reports

The following paragraphs describe the report output generated when the Archive program processes a partition of the HIST for both system-level and FIID-level archiving. These reports are sent to the spooler location identified by the OUT keyword in the RUN command.

System-Level Archiving Output

The following is an example of the spooler output generated for an Archive program that performs system-level archiving. In this example, the program has not been run for several days and HIST rows are retained for 14 days. This particular Archive program processes the first partition of the HIST. It places the archived data into different dated archive files for the different dates found in partition 1 of the HIST. For this configuration, one other Archive program would be run against partition 2 of the HIST and would produce its own spooler output. Archived data from both Archive programs would be placed in the same dated archive files. Field descriptions are provided following the sample.

```
Archive

LCONF file: \B24.$DATA.PRO1EXEC.L1CONF

ARCHIVE1 parameters used.
  BP-ARCHIVE-GROUP           : ARCHGP1
  BP-HISTORY-PARTITION-NUM   : 1

ARCHIVE parameters used.
  BP-ARCHIVE-BY-FIID         : N
  BP-ARCHIVE-BY-SYSTEM-DAYS  : 14
  BP-ARCHIVE                 : Filename \B24.$DATA.PRO1DATA.ARYMMDD
  BP-ARCHIVE                 : Template \B24.$DATA.PRO1TPLT.ARCHTPLT
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE          : 20

BILLPAY parameters used.
  BP-NUM-HISTORY-PART-EXT    : 2

Begin      : YYYYMMDD, HH:MM:SS

Archive File used \B24.$DATA.PRO1DATA.AR991215

          792 rows archived

Archive File used \B24.$DATA.PRO1DATA.AR991216

          1514 rows archived

Archive File used \B24.$DATA.PRO1DATA.AR991217

          395 rows archived

End        : YYYYMMDD, HH:MM:SS
```

LCONF file — The fully qualified location of the LCONF from which assigns and params were obtained.

ARCHIVE1 parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of ARCHIVE1. The name and value of each param is provided.

ARCHIVE parameters used — Indicates each of the LCONF assigns and params used where the Process Name field was set to a value of ARCHIVE. The name and value of each param is provided.

BILLPAY parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of BILLPAY. The name and value of each param is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, the Archive program began processing partition 1 of the HIST.

Archive File used — The fully qualified location of an archive file created during this run.

rows archived — The total number of HIST rows moved into the archive file listed immediately above.

End — The date and time, in YYYYMMDD HH:MM:SS format, the Archive program stopped processing.

FIID-Level Archiving Output

The following is an example of the spooler output generated for an Archive program that performs FIID-level archiving. The program has not been run for three days. This particular Archive program processes archive group ARCHGP2 from the second partition of the HIST. ARCHGP2 contains two FIIDs—FID3 and FID4—and has a retention day period of 2 days. All archive files created by this program are placed in a subvolume called ARCHGP2. The archived data for FID3 and FID4 are placed in the same dated archive files.

```
Archive

LCONF file: \B24.$DATA.PRO1EXEC.L1CONF

ARCHIVE2^GP2 parameters used.
  BP-ARCHIVE-GROUP           : ARCHGP2
  BP-HISTORY-PARTITION-NUM   : 2

ARCHIVE parameters used.
  BP-ARCHIVE-BY-FIID         : Y
  BP-ARCHIVE-BY-SYSTEM-DAYS  : 0
  BP-ARCHIVE                 : Filename \B24.$DATA.PRO1DATA.ARYMMDD
  BP-ARCHIVE                 : Template \B24.$DATA.PRO1TPLT.ARCHTPLT
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE          : 20

BILLPAY parameters used.
  BP-NUM-HISTORY-PART-EXT    : 2

Begin      : YYYYMMDD, HH:MM:SS

Group Retention Days: 2

FIID: FID3
Archive File used \B24.$DATA.ARCHGP2.AR991227
          92 rows archived

FIID: FID3
Archive File used \B24.$DATA.ARCHGP2.AR991228
          14 rows archived

FIID: FID3
Archive File used \B24.$DATA.ARCHGP2.AR991229
          95 rows archived

FIID: FID4
Archive File used \B24.$DATA.ARCHGP2.AR991227
          79 rows archived

FIID: FID4
Archive File used \B24.$DATA.ARCHGP2.AR991228
          151 rows archived

FIID: FID4
Archive File used \B24.$DATA.ARCHGP2.AR991229
          39 rows archived

End        : YYYYMMDD, HH:MM:SS
```

LCONF file — The fully qualified location of the LCONF from which assigns and params were obtained.

ARCHIVE2^GP2 parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of ARCHIVE2^GP2. The name and value of each param is provided.

ARCHIVE parameters used — Indicates each of the LCONF assigns and params used where the Process Name field was set to a value of ARCHIVE. The name and value of each param is provided.

BILLPAY parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of BILLPAY. The name and value of each param is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, this Archive program began processing partition 2 of the HIST.

Group Retention Days — The number of retention days configured for this archive group in the Cleanup Configuration Table (CLPT).

FIID — The value of a financial institution identifier for which rows were archived for this archive group.

Archive File used — The fully qualified location of an archive file created during this run where this financial institution's rows were archived.

rows archived — The total number of rows archived into the archive file listed immediately above for this FIID.

End — The date and time, in YYYYMMDD HH:MM:SS format, this Archive program stopped processing.

Cleanup Reports

The following paragraphs describe the report output generated when the Cleanup program is run. The exact output generated depends on the configured symbolic process names, cleanup groups, and which tables were cleaned by the program. These reports are sent to the spooler location specified when the Cleanup program was started. Slightly different report formats are used for tables cleaned on an FIID or system-wide basis.

FIID-Specific Table Cleanup Output

The following is an example of the spooler output generated when a Cleanup process cleans the Billing Group Table (BLG) and the Billing Rate Table (RATE) on an FIID-specific, yearly basis. Field descriptions are provided following the sample.

Similar reports would be generated for the following tables, also cleaned on an FIID-specific basis:

- Bank Billing Summary Table (BKBS)
- Bank Notice Table (BKNT)
- Bank Transaction Summary Table (BKTS)
- Customer Billing Summary Table (CBLS)
- Loan Application Table (LOAN)
- Miscellaneous Request Table (MISC)

Note: Cleanup of billing tables is required only if the BASE24-billpay Billing Application is installed.

```

Cleanup

LCONF file: \B24.$DATA.PRO1EXEC.L1CONF

CLEANUPYRBILL parameters used.
  BP-CLEANUP-GROUP          : YEARLYBILL

CLEANUP parameters read.
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE          : 30
  BP-CLEANUP-YEAR            : 1995

Begin      : YYYYMMDD, HH:MM:SS

Billing Group Table

    <fi>
    <#rows>

    BK02
        15

    BK03
        2

Billing Rate Table

    BK01
        0

    BK02
        15

    BK03
        0

End      : YYYYMMDD, HH:MM:SS

```

LCONF file — The fully qualified location of the LCONF from which assigns and params were obtained.

CLEANUPYRBILL parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of CLEANUPYRBILL. The name and value of each param is provided.

CLEANUP parameters read — Indicates each of the LCONF params read where the Process Name field was set to a value of CLEANUP. The name and value of each param is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, the Cleanup program began processing the BLG and RATE.

<fi> — The FIID (for example, BK02) for which rows were deleted from the BLG or RATE for this run.

<#rows> — The number of rows deleted from the BLG or RATE for this FIID during this run.

End — The date and time, in YYYYMMDD HH:MM:SS format, the Cleanup program stopped processing.

System-Wide Table Cleanup Output

The following is an example of the spooler output generated when a Cleanup process cleans the Context Table (CNTX) on a system-wide (that is, non-FIID cleanup), daily basis. Field descriptions are provided following the sample.

Similar reports would be generated for the following tables, also cleaned on a system-wide basis: Customer Vendor Table (CVND), Customer Vendor Summary Table (CVS), Payment Summary Table (PST), and Report Action Table (RPTA). The Vendor Table (VNDR) and Vendor Branch Table (VNDB) are also cleaned on a system-wide basis, but use a slightly different report format described separately.

```
Cleanup

LCONF file: \B24.$DATA.PRO1EXEC.L1CONF

CLEANUPDAYCNTX parameters used.
  BP-CLEANUP-GROUP          : DAILYCONTEXT

CLEANUP parameters read.
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE          : 30
  BP-CLEANUP-YEAR            : 1995

Begin      : YYYYMMDD, HH:MM:SS

Context Table

          Non-FIID cleanup.          Retention Days:0
          <#rows>

End        : YYYYMMDD, HH:MM:SS
```


LCONF file — The fully qualified location of the LCONF from which assigns and params were obtained.

CLEANUPDAYCNTX parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of CLEANUPDAYCNTX. The name and value of each param is provided.

CLEANUP parameters read — Indicates each of the LCONF params read where the Process Name field was set to a value of CLEANUP. The name and value of each param is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, the Cleanup program began processing the CNTX.

Non-FIID cleanup — Indicates that system-wide cleanup processing was performed.

Retention Days — The number of days rows are retained in the CNTX before they are deleted. A value of 0 indicates that all rows with a timestamp that is older than the current system date are deleted.

<#rows> — The number of rows deleted from the CNTX during this run.

End — The date and time, in YYYYMMDD HH:MM:SS format, the Cleanup program stopped processing.

VNDR and VNDB Output

The following is an example of the spooler output generated when a Cleanup process cleans the Vendor Table (VNDR) and the Vendor Branch Table (VNDB) on a system-wide, yearly basis. Because the VNDR and VNDB are relationally connected, they must always be cleaned together to ensure that no related rows are left in the database. Field descriptions are provided following the sample.

```
Cleanup

LCONF file: \B24.$DATA.PRO1EXEC.L1CONF

CLEANUPYRVND parameters used.
  BP-CLEANUP-GROUP          : YEARLYVEND

CLEANUP parameters read.
  BP-TMF-BATCH-DURATION-TIME : 1 minute
  BP-TMF-BATCH-SIZE          : 30
  BP-CLEANUP-YEAR            : 1995

Begin      : YYYYMMDD, HH:MM:SS

Vendor/Vendor Branch Table

      Vendors deleted      :      3
      Vendor Branches deleted:     10

End        : YYYYMMDD, HH:MM:SS
```

LCONF file — The fully qualified location of the LCONF from which assigns and params were obtained.

CLEANUPYRVND parameters used — Indicates each of the LCONF params used where the Process Name field was set to a value of CLEANUPYRVND. The name and value of each param is provided.

CLEANUP parameters read — Indicates each of the LCONF params read where the Process Name field was set to a value of CLEANUP. The name and value of each param is provided.

Begin — The date and time, in YYYYMMDD HH:MM:SS format, the Cleanup program began processing the VNDR and VNDB.

Vendors deleted — The number of rows deleted from the VNDR for this run.

Vendor Branches deleted — The number of rows deleted from the VNDB during this run.

End — The date and time, in YYYYMMDD HH:MM:SS format, the Cleanup program stopped processing.

ACI Worldwide Inc.

Section 6

End-of-Period Processing and Reporting Operations

This section describes the tasks that an operator must perform to manage end-of-period processing and reporting from day to day. Some of these tasks can be scheduled to be performed automatically at predetermined times, while others must be performed manually. Tasks are arranged in the general order in which they should be performed during the end-of-period processing cycle.

This section provides detailed procedures, if appropriate for a particular task, or directs you to another manual for detailed information. Some procedures may need to be modified according to your organization's own processing requirements and operating procedures.

This section does not provide procedures for tasks that are user-defined. Your organization must develop your own procedures for these tasks.

Monitoring Event Messages

Network operators should monitor the Event Management Service (EMS) output device for significant processing events during the end-of-period processing cycle. Both informational and error event messages may be generated. The following table shows you the subsystem names (also known as the product module ID) and subsystem numbers associated with each of the programs and processes used in end-of-period processing and reporting. A check mark (✓) in the BP column indicates whether the program or process is used with the BASE24-billpay product.

Subsystem numbers (also known as subsystem IDs) for objects can be used for ITS kernel event suppression purposes. For more information on event suppression and the subsystem names and numbers for kernel objects, refer to the ***BASE24 ITS Kernel Configuration Manual***.

Program, Routine, or Process	BP	Subsystem Name	Subsystem No.
ACHclear program	✓	TPBPACHC	796
Archive program	✓	TPBPARCH	797
Bank billing*	✓	TPBPBBLG	828
BASE24-telebanking Issuer Reporting program		ISTBRPT1	773
Billing utilities*	✓	TPBPBLG	798
Billpay utilities	✓	TPBPUTL	826
Cleanup program	✓	TPBPCLUP	799
Customer billing*	✓	TPBPCBLG	827
Database utilities	✓	TPBPDBUT	822
End-of-Period process		ISCOEOPP	777
Format utilities	✓	TPBPFX	824
Remittance File Cleanup Routine	✓	TPBPRMTG	801
Remittance Generator process	✓	TPBPRMTG	801

* These programs are present only if the BASE24-billpay Billing Application is installed.

Event message documentation for each of the BASE24-telebanking programs and processes is provided on the OK13LOGM subvolume on your system. The files on this subvolume are named according to the product module ID (PMID) associated with the program or process. For example, the OK13LOGM. ISTBRPT1 file documents all of the messages that can be logged by the BASE24-telebanking Issuer Reporting program.

For more information on online BASE24-telebanking event message documentation, refer to the ***BASE24 Log Message Reference Manual***.

Generating Remittance Output

Once the remittance files have been closed out for the previous business day, they can be used as input to generate the appropriate remittance output for your organization. Depending on your organization's procedures and business relationships, this may involve using the files as input to a payment subsystem running on the Tandem system, loading the files to tape or disk for processing on a host or by a third-party processor, or downloading the files to a personal computer for further processing. The exact procedures used are user-defined and beyond the scope of this manual.

Remittance files are always named in the format *Xyymmdd*, where *X* is the first character of the type of remittances contained in the file (for example, A for automated clearinghouse, C for single- or grouped-item checks, or another character for a user-defined remittance type), and *yymmdd* represents the remittance date. Remittance files are placed on the volume and subvolume specified by the BP-REMIT assign in the LCONF with the file characteristics of the template file specified for this assign.

Remittance files are retained for a specified number of days before they are purged by the remittance file cleanup TACL routine.

Extracting the ITLF

Records from the ITS Transaction Log File (ITLF) should be extracted to tape or a disk file on a daily basis for posting by the host. The Extract Configuration File (ECF) configures how extracts are performed and screen 23 of the ECF contains ITLF-specific extract information. The ITLF can be extracted once or multiple times a day.

Extracts can be performed manually from the Extract screens (EXTR) or network control facility or automatically based on the configuration of the ECF.

For detailed information on the ECF, refer to the ***BASE24 Base Files Maintenance Manual***. For detailed information on the EXTR screens, refer to the ***BASE24 Refresh and Extract Operators Manual***. For detailed information on network control facilities, refer to the ***NET24-XPNET Network Control Operations Guide***.

Refreshing the PBF and THF

If a financial institution in the logical network uses the Positive Customer with Balances/History Authorization method, the Positive Balance File (PBF) should be refreshed for that institution's customers on a daily basis. For the most current balance authorization information, this should be done after the transactions from the ITLF for the previous day have been extracted and posted to the institution's customer accounts on a host.

After a financial institution's transactions are posted on the institution's host, the Transaction History File (THF) should also be refreshed from a tape or disk file. All BASE24-telebanking historical inquiry transactions are performed against the information contained in this file. If the THF is not refreshed on a daily basis, BASE24-telebanking historical inquiry transactions may not reflect the most current transaction information.

Refresh can be performed from a refresh tape or disk using the Refresh screens (REFR) or a network control facility.

For detailed information on the REFR screens, refer to the ***BASE24 Refresh and Extract Operators Manual***. For detailed information on network control facilities, refer to the ***NET24-XPNET Network Control Operations Guide***.

Producing BASE24-telebanking Reports

BASE24-telebanking reports are produced when you execute the BASE24-telebanking Issuer Reporting program. This can be done manually or automatically. Any time this program is run, you should monitor the EMS log device for informational and error messages. After the program completes processing, you should check the individual report output as well as the Statistics and Errors report to ensure the reports were successfully generated. All BASE24-telebanking reports are described in section 4.

Running BASE24-telebanking Reports Manually

At times, it may be necessary to run the BASE24-telebanking reports manually. This can be accomplished by either executing an existing report obey file created by the End-of-Period process for the requested date or issuing a startup command from a TACL prompt.

Obey File

You can manually execute an existing report obey file by entering an Obey command on a report obey file from the Tandem TACL prompt. A sample obey file is provided in section 2. The command syntax used to execute a report obey file is provided below. An example is provided following the command syntax.

Syntax

O [BEY] [*\$location.*] TBR*mmdd*

OBEY — A keyword that directs the TACL process to execute the TACL commands contained in the following edit file in sequential order. This keyword can also be abbreviated as O.

\$location — Specifies the volume and subvolume where the report obey file resides. This variable is required if the obey file is not on the current volume and subvolume and the location of the obey file is not included in your PMSEARCHLIST.

TBR*mmdd* — The name of the report obey file to be executed. The date indicates the TLF to be used as the source for the reports.

Example

O \B24.\$DATA.PRO1DATA.TBR1231

This example executes the TBR1231 obey file. This obey file generates reports for transactions logged on December 31 to the ITLF named TLF1231.

TACL Command

The obey files generated by the BASE24-telebanking Issuer Reporting program are based on the following TACL command. Examples for the TACL command are provided following the command syntax.

Syntax

[RUN] [*\$location.*] TBRPT1 [/NAME *process-name*,] [OUT *\$printer*,]
[CPU *cpu-number*,] [PRI *priority* /] LCONF *file-name*, DATE *mmdd*

RUN — An optional keyword for the RUN command. If this keyword is included in the command, either the BASE24-telebanking Issuer Reporting program must be located on the current volume and subvolume or the location variable must be included in the command. If this keyword is not included in the command, the program must be located on a volume and subvolume that is included in your PMSEARCHLIST. The End-of-Period process includes this keyword in the report obey file it creates.

\$location — Specifies the volume and subvolume where the BASE24-telebanking Issuer Reporting program resides. This variable is required if the program is not on the current volume and subvolume and the location of the program is not included in your PMSEARCHLIST. If this variable is included in the command, the keyword RUN must also be included in the command. The End-of-Period process includes the fully qualified location in the report obey file it creates.

TBRPT1 — The name of the BASE24-telebanking Issuer Reporting program.

NAME *process-name* — Specifies the Guardian process name given to the reporting program while it executes. If you do not specify a process name, the operating system will automatically assign a process name while the program executes. The End-of-Period process uses a process name of \$RP01 in the report obey file it creates.

OUT \$printer — Specifies the spooler location where the Statistics and Errors Report is sent. The End-of-Period process uses the value of the TB-RPT-ISS-OUT-FILE assign in the LCONF in the report obey file it creates. The default value for this assign is \$\$.#TBRPT.

CPU *cpu-number* — Specifies the CPU in which the reporting program will execute. The End-of-Period process uses the value of the TB-RPT-ISS-CPU param in the LCONF in the report obey file it creates.

PRI *priority* — Specifies the priority at which the reporting program is to execute. The End-of-Period process uses the value of the TB-RPT-ISS-PRI param in the LCONF in the report obey file it creates.

LCONF *file-name* — Specifies the fully qualified location of the Logical Network Configuration File (LCONF) from which assigns and params are to be obtained (for example, \B24.\$DATA.PRO1EXEC.L1CONF) by the BASE24-telebanking Issuer Reporting program.

DATE *mmdd* — The date of the ITS Transaction Log File (ITLF) to be used as a source for this report run. The End-of-Period process subtracts one from the current business date for the value used in the report obey file it creates.

Example

**RUN \B24.\$DATA.PRO1DATA.TBRPT1/NAME \$RP01, OUT \B24.\$\$.
#TBRPT1, CPU 3, PRI 100/ LCONF \B24.\$DATA.PRO1EXEC.
L1CONF, DATE 1231**

This example uses a fully qualified program name and LCONF name. The BASE24-telebanking Issuer Reporting program will have a process name of \$RP01 while it executes in CPU 3 with an execution priority of 100. The Statistics and Errors Report will be generated in the spooler location of \$\$.#TBRPT1 and the ITS Transaction Log File (ITLF) named TLF1231 will be used as the source for the reports.

Example

```
TBRPT1/OUT \B24.$S.#TBERR, CPU 1, PRI 90/ LCONF \B24.$DATA.  
PRO1EXEC.L1CONF, DATE 1231
```

This example assumes that you first used the VOLUME command to move to the volume and subvolume where the BASE24-telebanking Issuer Reporting program resides. The BASE24-telebanking Issuer Reporting program will be named by the Guardian operating system while it executes in CPU 1 with an execution priority of 90. The Statistics and Errors Report will be generated in the spooler location of \$S.#TBERR and the ITS Transaction Log File (ITLF) named TLF1231 will be used as the source for the reports.

Scheduling BASE24-telebanking Reports

The End-of-Period process is responsible for starting the BASE24-telebanking Issuer Reporting program, which generates the BASE24-telebanking reports. It uses assigns and params specified in the Logical Network Configuration File (LCONF) to build and issue the RUN command at the proper time. It also uses the individual report production fields set in the Institution Definition File (IDF) to determine which reports are generated.

Screen 42 of the IDF displays flags that indicate which of the BASE24-telebanking reports are generated by the End-of-Period process for each institution. If the PRODUCE field for a report is set to the value Y, it is generated for the institution. If the PRODUCE field for a report is set to the value N, it is not generated for the institution. For more information on the IDF, refer to the ***BASE24 Base Files Maintenance Manual***.

The TB-RPT-ISS-RUN param in the LCONF indicates whether the End-of-Period process automatically starts the BASE24-telebanking Issuer Reporting program. This param must be set to a value of Y for the process to start the program. Otherwise, the program must be started using Tandem's NetBatch product or some other batch scheduler.

If the End-of-Period process starts the reporting program, the program is started daily at the time specified by the TB-RPT-ISS-TIM param. At this time, the process starts a TACL process and executes an obey file previously created for the current reporting date. The process also creates an obey file for the next reporting date using the values of the TB-RPT-ISS-OBEY-FILE and TB-RPT-ISS-NAME assigns, and purges old report obey files based on the value of the TB-RPT-ISS-FILE-RETENTION param.

When the BASE24-telebanking Issuer Reporting program is started, it reads additional LCONF assigns and params to determine the CPU, execution priority, spooler location, and memory requirements for each report. These assigns and params are listed in section 2 and described in the ***BASE24 Logical Network Configuration File Manual***.

Suppressing BASE24-telebanking Reports

You can suppress the automatic generation of all BASE24-telebanking reports by setting the TB-RPT-ISS-RUN param to a value of N. In this case, the End-of-Period process does not set a start reports timer, and, therefore, does not create and execute an obey file to start the reports.

You can suppress the generation of individual reports for a financial institution by setting the appropriate PRODUCE fields on screen 42 of the IDF to a value of N. A value of N for a report on this screen also prevents the BASE24-telebanking Issuer Reporting program from accumulating data for that report and institution in the Institution Periodic Reporting File (IPRF).

Producing BASE24-billpay Reports

The BASE24-billpay product uses TACL macros and routines with the SQL conversational interface (SQLCI) report writer to generate reports. Daily reports can be scheduled to run each day using a batch scheduler such as the Tandem NetBatch product or can be started manually. Annual reports and reports generated as needed should always be started manually. Either way, the following configuration information must be available before the reports can be generated:

- The defines for the BASE24-billpay environment must be set so that the define names can be resolved to the correct physical file and table locations. The ENVSET TACL macro is used to set the environment.
- TACL Process Definition commands must be available for use by all of the report routines, except for the RPCVND routine. The :UTILS:DP value is used in a TACL USE command or TACL use list to add the TACL Process Definition commands.

Each report routine can be started by running the appropriate TACL macro (for example, GORPCVND or GORPNOTE). These TACL macros include the ENVSET TACL macro and parameters for running each program. However, the TACL Process Definition commands must be available before these TACL macros are run.

Date Display Format

The format in which most dates on BASE24-billpay reports are displayed is determined by a parameter specified when each report is started. The following table provides the available formats, an example of a date using each format, and the parameter value for each format.

Format	Example	Parameter Value
MMDDYY	MAR 31 99	M3D2Y2
MMDDYYYY	MAR 31 1999	M3D2Y4
MMDDYY	03 31 99	M2D2Y2
MMDDYYYY	03 31 1999	M2D2Y4
DDMMYY	31 MAR 99	D2M3Y2

Format	Example	Parameter Value
DDMMMYYYY	31 MAR 1999	D2M3Y4
DDMMYY	31 03 99	D2M2Y2
DDMMYYYY	31 03 1999	D2M2Y4

Customer Notice Report

The Customer Notice Report can be started from a TACL prompt using the GORPNOTE macro. The spooler location for the Customer Notice Report is \$S.#BP.NOTE.

Macro Example

The following GORPNOTE macro sample assumes that the Customer/Personal ID Relation Table (CPIT) is not available and that two fractional currency unit digits are displayed in amount fields:

```
?tacl macro
envset
==                <date> <cpit> <currency> <catalog >
==                <fmt >          <digits >  < subvol >
[:bprp_subvol].rpnote M2D2Y4    N          2          $pro.prolctlg
```

TACL Command

The GORPNOTE macro is based on the following TACL command:

Syntax

RPNOTE *date-format cpit-present currency-digits sql-cat-loc*

RPNOTE — The name of the Customer Notice Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates.

cpit-present — A flag indicating whether the Customer/Personal Information Relation Table (CPIT) is supported. The value of this flag determines how Personal Information Table (PIT) row information is selected for inclusion in the report. Valid values are as follows:

Y = Yes, the CPIT is supported.

N = No, the CPIT is not supported.

When the CPIT is not supported, the PIT row used is determined by matching the customer ID in the Report Action Table with the personal ID in the PIT.

When the CPIT is supported, the PIT row used is determined by matching the customer ID in the Report Action Table with the primary account number in the CPIT, then matching the personal ID in the CPIT row with the personal ID in the PIT.

currency-digits — The number of fractional currency unit digits to be displayed in amount fields. Valid values are 0–6.

sql-cat-loc — The volume and subvolume where the BASE24-billpay SQL tables are cataloged (for example, \$DATA.PRO1CTLG).

Customer Vendor List Report

The Customer Vendor List Report can be started from a TACL prompt using the GORPCVND macro. The spooler location for the Customer Vendor List Report is \$S.#BP.CVEND.

Macro Example

The following GORPCVND macro sample assumes that the Customer/Personal ID Relation Table (CPIT) is available:

```
?tacl macro
envset
==
[ :bprp_subvol ] .rpcvnd M2D2Y4      Y      $pro.pro1ctlg
```

TACL Command

The GORPCVND macro is based on the following TACL command:

Syntax

RPCVND *date-format cpit-present sql-cat-loc*

RPCVND — The name of the Customer Vendor List Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates.

cpit-present — A flag indicating whether the Customer/Personal Information Relation Table (CPIT) is supported. The value of this flag determines how Personal Information Table (PIT) row information is selected for inclusion in the report. Valid values are as follows:

Y = Yes, the CPIT is supported.

N = No, the CPIT is not supported.

When the CPIT is not supported, the PIT row used is determined by matching the customer ID in the Report Action Table with the personal ID in the PIT.

When the CPIT is supported, the PIT row used is determined by matching the customer ID in the Report Action Table with the primary account number in the CPIT, then matching the personal ID in the CPIT row with the personal ID in the PIT.

sql-cat-loc — The volume and subvolume where the BASE24-billpay SQL tables are cataloged (for example, \$DATA.PRO1CTLG).

Customer Vendor Year-End Summary Report

The Customer Vendor Year-End Summary Report can be started from a TACL prompt using the GORPCVSM macro. The spooler location for the Customer Vendor Year-End Summary Report is \$\$.#BP.CVSUM.

Macro Example

The following GORPCVSM macro example assumes that the Customer/Personal ID Relation Table (CPIT) is available:

```
?tacl macro
envset
==                <date>    <rpt > <cpit>
==                <fmt >    <year>
[:bprp_subvol].rpcvsum  D2M3Y4    1999    Y
```

TACL Command

The GORPCVSM macro is based on the following TACL command:

Syntax

RPCVSUM *date-format report-year cpit-present*

RPCVSUM — The name of the Customer Vendor Year-End Summary Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates.

report-year — The four-digit calendar year on which to report (for example, 1999)

cpit-present — A flag indicating whether the Customer/Personal Information Relation Table (CPIT) is supported. The value of this flag determines how Personal Information Table (PIT) row information is selected for inclusion in the report. Valid values are as follows:

Y = Yes, the CPIT is supported.

N = No, the CPIT is not supported.

When the CPIT is not supported, the PIT row used is determined by matching the customer ID in the Customer Vendor Summary Table with the personal ID in the PIT.

When the CPIT is supported, the PIT row used is determined by matching the customer ID in the Customer Vendor Summary Table with the primary account number in the CPIT, then matching the personal ID in the CPIT row with the personal ID in the PIT.

Loan Application Report

The Loan Application Report can be started from a TACL prompt using the GORPLOAN macro. The spooler location for the Loan Application Report is \$\$.#BP.LOAN.

Macro Example

The following GORPLOAN macro example assumes that two fractional currency unit digits are displayed in amount fields.

```
?tacl macro
envset
==                                <currency digits>
[:bprp_subvol].rploan           2
```

TACL Command

The GORPLOAN macro is based on the following TACL command:

Syntax

RPLOAN *currency-digits*

RPLOAN — The name of the Loan Application Report TACL routine.

currency-digits — The number of fractional currency unit digits to be displayed in amount fields. Valid values are 0–6.

Master Vendor Report

The Master Vendor Report can be started from a TACL prompt using the GORPMVND macro. The spooler location for the Master Vendor Report is \$\$.#BP.MVND.

Macro Example

The following GORPMVND macro example assumes that two fractional currency unit digits are displayed in amount fields.

```
?tacl macro
envset
==
                                <date> <number decimal places for wrn_pmt_lmt>
[:bprp_subvol].rpmvnd M2D2Y4          2
```

TACL Command

The GORPMVND macro is based on the following TACL command:

Syntax

RPMVND *date-format currency-digits*

RPMVND — The name of the Master Vendor Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates.

currency-digits — The number of fractional currency unit digits to be displayed in amount fields. Valid values are 0–6.

Miscellaneous Request Report

The Miscellaneous Request Report can be started from a TACL prompt using the GORPMISC macro. The spooler location for the Miscellaneous Request Report is \$S.#BP.MISC.

Macro Example

The following GORPMISC macro example assumes a date of March 31, 1999.

```
?tacl macro
envset
==
                                <tran> <tran > <tran>
==
                                <datefmt> <year> <month> <day >
[:bprp_subvol].rpmisc M2D2Y4      1999      03      31
```

TACL Command

The GORPMISC macro is based on the following TACL command:

Syntax

RPMISC *date-format tran-year tran-month tran-date*

RPMISC — The name of the Miscellaneous Request Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates.

tran-year — Specifies the transaction year for which requests are to be included on the report.

tran-month — Specifies the transaction month for which requests are to be included on the report.

tran-date — Specifies the transaction day for which requests are to be included on the report.

New Customer Report

The New Customer Report can be started from a TACL prompt using the GORPNCST macro. The spooler location for the New Customer Report is \$S.#BP.NCST.

Macro Example

The following GORPMISC macro example assumes that the Customer/Personal ID Relation Table (CPIT) is available.

```
?tacl macro
envset
==                <date>  <cpit>
==                <fmt  >
[:bprp_subvol].rpnkst  M2D2Y4      Y
```

TACL Command

The GORPNCST macro is based on the following TACL command:

Syntax

RPNCST *date-format cpit-present*

RPNCST — The name of the New Customer Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates.

cpit-present — A flag indicating whether the Customer/Personal Information Relation Table (CPIT) is supported. The value of this flag determines how Personal Information Table (PIT) row information is selected for inclusion in the report. Valid values are as follows:

Y = Yes, the CPIT is supported.

N = No, the CPIT is not supported.

When the CPIT is not supported, the PIT row used is determined by matching the customer ID in the Report Action Table with the personal ID in the PIT.

When the CPIT is supported, the PIT row used is determined by matching the customer ID in the Report Action Table with the primary account number in the CPIT, then matching the personal ID in the CPIT row with the personal ID in the PIT.

Payment Summary Report

The Payment Summary Report can be started from a TACL prompt using the GORPPSUM macro. The spooler location for the Payment Summary Report is \$S.#BP.PSUM.

Macro Example

The following GORPPSUM macro example assumes a remittance date of March 31, 1999 and that two fractional currency unit digits are displayed in amount fields.

```
?tacl macro
envset
==                <remit> <remit> <remit> <decimal places >
==                <year > <month> < day > < for totals    >
[:bprp_subvol].rppsum 1999      03      31      2
```

TACL Command

The GORPPSUM macro is based on the following TACL command:

Syntax

RPPSUM *remit-year remit-month remit-day currency-digits*

RPPSUM — The name of the Payment Summary Report TACL routine.

remit-year — Specifies the remittance year, in YYYY format, for which payment summary information is to be included.

remit-month — Specifies the remittance month, in MM format, for which payment summary information is to be included.

remit-day — Specifies the remittance day, in DD format, for which payment summary information is to be included.

currency-digits — The number of fractional currency unit digits to be displayed in amount fields. Valid values are 0–6.

Remittance Transaction Alert Report

The Remittance Transaction Alert Report can be started from a TACL prompt using the GORPRTAR macro. The spooler location for the Remittance Transaction Alert Report is \$\$.#BP.RTAR.

Macro Example

The following GORPRTAR macro example assumes a business date of June 11, 1999.

```
?tacl macro
envset
==                <date>    <bus>  <bus>  <bus>
==                <fmt >    <year> <month> <day>
[:bprp_subvol].rpstar M2D2Y4    1999    06    11
```

TACL Command

The GORPRTAR macro is based on the following TACL command:

Syntax

RPRTAR *date-format* [*business-date*]

RPRTAR — The name of the Remittance Transaction Alert Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates. See the topic “Date Display Format” provided earlier in this section for a list of valid formats.

business-date — Specifies the business date (in YYYY MM DD format) for which remittance transaction alert information is to be included. If this date is not included, the current calendar date is used.

Scheduled Transaction Alert Report

The Scheduled Transaction Alert Report can be started from a TACL prompt using the GORPSTAR macro. The spooler location for the Remittance Transaction Alert Report is \$S.#BP.STAR.

Macro Example

The following GORPSTAR macro example assumes a business date of June 11, 1999.

```
?tacl macro
envset
==                <date>    <bus>  <bus>  <bus>
==                <fmt >    <year> <month> <day>
[:bprp_subvol].rpstar M2D2Y4    1999    06    11
```

TACL Command

The GORPSTAR macro is based on the following TACL command:

Syntax

RPSTAR *date-format* [*business-date*]

RPSTAR — The name of the Scheduled Transaction Alert Report TACL routine.

date-format — Specifies the format and number of characters or digits to be printed on the report for dates. See the topic “Date Display Format” provided earlier in this section for a list of valid formats.

business-date — Specifies the business date (in YYYY MM DD format) for which scheduled transaction alert information is to be included. If this date is not included, the current calendar date is used.

Scheduling BASE24-billpay Reports

For BASE24-billpay reports to be automatically generated on a scheduled basis, they must be scheduled to run by a batch scheduler such as Tandem’s NetBatch product. TACL macros can be created to execute the TACL RUN commands for each report automatically. These TACL macros can then be executed at scheduled times to execute the report.

The following table shows you how often each BASE24-billpay report should be generated. The first column of the table lists the name of the report. A check mark (✓) in columns two and three of the table indicates whether the report should be

scheduled to be run daily or on an as-needed basis, respectively. Refer to section 1 for a discussion of when each of the daily reports should be generated in the daily processing cycle.

Report Name	Daily	As-Needed
Customer Notice Report*	✓	
Customer Vendor List Report*	✓	
Customer Vendor Year-End Summary Report		✓
Loan Application Report	✓	
Master Vendor Report		✓
Miscellaneous Request Report	✓	
New Customer Report*	✓	
Payment Summary Report	✓	
Remittance Transaction Alert Report	✓	
Scheduled Transaction Alert Report	✓	

* Even though these reports are scheduled to be generated on a daily basis, the reports are only generated if one or more actions occurred to be included on the reports. If no appropriate actions occurred, the reports are not generated.

Suppressing BASE24-billpay Reports

You can suppress the automatic generation of individual BASE24-billpay reports by manipulating the report generation job submitted to a batch scheduler program. Using the Tandem NetBatch product, for example, you can temporarily suspend and reactivate an individual report generation job.

Regenerating Reports

You can regenerate BASE24-billpay reports as necessary. Reports are originally generated by one of two methods: from specific tables or using the Report Action Table (RPTA). The procedures for regenerating reports are different depending on the method used for original generation.

Reports Generated from Specific Tables

The following reports can be rerun for a specified date as long as cleanup or archiving activity has not removed the rows for that date.

- Customer Vendor Year-End Summary
- Miscellaneous Request
- Payment Summary
- Remittance Transaction Alert
- Scheduled Transaction Alert

The Loan Application Report can be regenerated at anytime because it includes all rows present in the Loan Table (LOAN). However, the regenerated report probably will not match the original report because cleanup activity will have added or removed rows since the original report was run.

The Master Vendor Report can be regenerated at anytime because it is produced by reading the Vendor Table (VNDR). However, the regenerated report will not match the original report if new vendors have been added since the original report was run.

Reports Generated from the Report Action Table (RPTA)

The reports generated from the RPTA (Customer Vendor List, New Customer, and Customer Notice Reports) can be regenerated, but the RPTA must first be manipulated using SQLCI commands.

When these reports are originally generated, only those rows containing a Greenwich mean time (GMT) print timestamp of January 2, 0001 are included. When the report is run, the timestamp is updated to the current timestamp to indicate that row has been reported on. Therefore, you must return the applicable rows to the original timestamp in order to regenerate the report.

In addition, if any applicable entries have been added to the RPTA since the report was originally generated, the timestamp of these new entries must be changed so they will not be included in the regenerated report.

You can use the following procedure to regenerate a report from the RPTA:

1. Determine the report (report action value) to be regenerated and the date for which it is to be rerun. The valid report action values are as follows:

CUSTVEND = Customer Vendor List Report
NOTICE = Customer Notice Report
NEWCUST = New Customer Report (customer with preloaded data activated)
NEWCUSTI = New Customer Report (customer without preloaded data added)
NEWCUSTV = New Customer Report (customer without preloaded data activated)
CSTREACT = New Customer Report (customer reactivated)

2. Using SQLCI, determine if any new entries for this report have been added to the table. For example, you could enter the following command:

```
SELECT * FROM RPTA WHERE ACTION = "CUSTVEND" AND PMT_GMT =  
TIMESTAMP "0001-01-02:00:00:00.000000";
```

3. If any returned rows are not to be included in the regenerated report, change the timestamp. For example, you could enter the following command:

```
UPDATE RPTA SET PRT_GMT = TIMESTAMP "1900-01-01:00:00:00.  
000000" WHERE ACTION = "CUSTVEND" AND PMT_GMT = TIMESTAMP  
"0001-01-02:00:00:00.000000";
```

4. Determine the rows that were part of the original report. For example, you could enter the following command:

```
SELECT * FROM RPTA WHERE ACTION = "CUSTVEND" AND PMT_GMT =  
TIMESTAMP "1999-12-02:00:00:00.000000";
```

5. Change the timestamp for the returned rows to the GMT print timestamp of January 2, 0001. For example, you could enter the following command:

```
UPDATE RPTA SET PRT_GMT = TIMESTAMP "0001-01-02:00:00:00.  
000000" WHERE ACTION = "CVND" AND PMT_GMT = TIMESTAMP "1999-  
12-02:00:00:00.000000";
```

6. Rerun the report.
7. Return the timestamp for the new entries (that you changed in step 3) to the GMT print timestamp of January 2, 0001. For example, you could enter the following command:

```
UPDATE RPTA SET PRT_GMT = TIMESTAMP "0001-01-02:00:00:00.  
000000" WHERE ACTION = "CUSTVEND" AND PMT_GMT = TIMESTAMP  
"1900-01-01:00:00:00.000000";
```

Running the ACHclear Programs

After the BASE24-billpay daily reports have been generated, the ACHclear programs should be run. These programs must be run before the Cleanup and Archive programs. The ACHclear programs are batch jobs that can be scheduled to run each day using a batch scheduler such as the Tandem NetBatch product or can be started manually. Either way, the defines for the BASE24-billpay environment must be set so that the define names can be resolved to the correct physical file and table locations prior to running the ACHclear programs. The ENVSET TACL macro is used to set the environment.

The ACHclear programs can be started by running the GOACHCL TACL macro. This macro includes the ENVSET TACL macro and the parameters for running the programs.

Each time the ACHclear programs are run, you should monitor the EMS log device for informational and error messages. After the programs have completed processing, you should check the spooler output reports to ensure that the programs completed successfully. The spooler output reports for the ACHclear programs are described in section 5.

Program Startup

The ACHclear programs can be started from a TACL prompt using the GOACHCL macro.

Macro Example

The following GOACHCL macro example assumes two partitions for the HIST.

```
?tacl macro
envset
[:bp_obj_subvol].ac /out $s.#bp.achc1, name $acl1,nowait/ [:bp_
exec_subvol].11conf ACHCLEAR1
[:bp_obj_subvol].ac /out $s.#bp.achc2, name $acl2,nowait/ [:bp_
exec_subvol].11conf ACHCLEAR2
[:bp_obj_subvol].ac /out $s.#bp.achcv, name $aclv,nowait/ [:bp_
exec_subvol].11conf ACHCLVEND
```

TACL Command

The GOACHCL macro is based on the following TACL command:

Syntax

prog-name /OUT \$*spooler* / *lconf-file-name* *sym-proc-name*

prog-name — The name of the executable ACHclear program.

\$*spooler* — The spooler location where the output report for the ACHclear program is generated.

lconf-file-name — The fully qualified name of the LCONF containing the assigns and params for the ACHclear program.

sym-proc-name — The symbolic process name assigned to the ACHclear program. This name must match the program name used for each iteration of the ACHclear program configured in the Process Name field (for example, ACHCLVEND, ACHCLEAR1, and ACHCLEAR2) for the applicable LCONF assigns and params.

Running the Archive Programs

After the ACHclear programs have completed processing, you can run the Archive programs. These programs must be run after the ACHclear programs. The Archive programs are batch jobs that can be scheduled to run each day using a batch scheduler such as the Tandem NetBatch product or can be started manually. Either way, the defines for the BASE24-billpay environment must be set so that the define names can be resolved to the correct physical file and table locations prior to running the Archive programs. The ENVSET TACL macro is used to set the environment.

The Archive programs can be started by running the GOARCHFI or GOARCHSY TACL macro. The GOARCHFI macro is used for FIID-level archiving while the GOARCHSY macro is used for system-level archiving. Both macros include the ENVSET TACL macro and the parameters for running the programs.

Each time an Archive program is run, you should monitor the EMS log device for informational and error messages. After the program has completed processing, you should check the spooler output report to ensure that the program completed successfully. The spooler output reports for the Archive program are described in section 5.

Program Startup

The Archive programs can be started from a TACL prompt using the GOARCHFI or GOARCHSY macro. Both macros are based on the same TACL command.

FIID-Level Archiving Macro Example

The following GOARCHFI macro example assumes two partitions for the HIST and two financial institution archive groups:

```
?tacl macro
envset
[:bp_obj_subvol].ar/out $s.#bp.ar11,name $ar11,nowait/ [:bp_exec_
subvol].11conf ARCHIVE1^GP1
[:bp_obj_subvol].ar/out $s.#bp.ar21,name $ar21,nowait/ [:bp_exec_
subvol].11conf ARCHIVE2^GP1
[:bp_obj_subvol].ar/out $s.#bp.ar12,name $ar12,nowait/ [:bp_exec_
subvol].11conf ARCHIVE1^GP2
[:bp_obj_subvol].ar/out $s.#bp.ar22,name $ar22,nowait/ [:bp_exec_
subvol].11conf ARCHIVE2^GP2
```

System-Level Archiving Macro Example

The following GOARCHSY macro example assumes two partitions for the HIST:

```
?tacl macro
envset
run [:bp_obj_subvol].ar /out $s.#bp.arch, name $arc1 / [:bp_exec_
subvol].l1conf ARCHIVE1
[:bp_obj_subvol].ar /out $s.#bp.arch, name $arc2 / [:bp_exec_
subvol].l1conf ARCHIVE2
```

TACL Command

The GOARCHFI and GOARCHSY macros are based on the following TACL command:

Syntax

prog-name /OUT \$*spooler* / *lconf-file-name* *sym-proc-name*

prog-name — The name of the executable Archive program.

\$spooler — The spooler location where the output report for the Archive program is generated.

lconf-file-name — The fully qualified name of the LCONF containing the assigns and params for the Archive program.

sym-proc-name — The symbolic process name assigned to the Archive program. This name must match the program name used for each iteration of the Archive program configured in the Process Name field (for example, ARCHIVE1, ARCHIVE2, ARCHIVE1^GP1, ARCHIVE1^GP2, ARCHIVE2^GP1, or ARCHIVE2^GP2) for the applicable LCONF assigns and params.

BASE24-billpay Database Cleanup Procedures

After the ACHclear programs have completed processing, you should run the daily Cleanup programs. These programs must be run after the ACHclear programs in the daily processing cycle. The daily Cleanup programs are batch jobs that can be scheduled to run each day using a batch scheduler such as the Tandem NetBatch product or can be started manually. Either way, the defines for the BASE24-billpay environment must be set so that the define names can be resolved to the correct physical file and table locations prior to running the Cleanup programs. The ENVSET TACL macro is used to set the environment.

To help avoid the accidental loss of current data, ACI recommends that the yearly Cleanup programs not be automated using a batch scheduler. They should only be run manually from a TACL prompt during year-end processing.

The Cleanup programs can be started by running the TACL macros listed in the following table. The first column of the table lists each of the macros, the second column identifies the tables cleaned by each macro, and the third column indicates whether the tables are cleaned on a daily (D) or yearly (Y) basis. All macros include the ENVSET TACL macro and the parameters for running the programs.

Macro Name	Tables Cleaned	D/Y
GOCUDCN	Context Table (CNTX)	D
GOCUDFBL*	Bank Transaction Summary Table (BKTS) Customer Billing Summary Table (CBLS)	D
GOCUDFLN	Loan Application Table (LOAN)	D
GOCUDFMR	Miscellaneous Request Table (MISC)	D
GOCUDPS	Payment Summary Table (PST)	D
GOCUDRA	Report Action Table (RPTA)	D
GOCUYCV	Customer Vendor Table (CVND)	Y
GOCUYFBL*	Billing Group Table (BLG) Billing Rate Table (RATE)	Y
GOCUYFBN	Bank Notice Table (BKNT)	Y
GOCUYVND	Vendor Table (VNDR)	Y

- * These macros are used only if the BASE24-billpay Billing Application is installed.

Each time a Cleanup program is run, you should monitor the EMS log device for informational and error messages. After the program has completed processing, you should check the spooler output report to ensure that the program completed successfully. The spooler output reports for the Cleanup program are described in section 5.

Program Startup

The Cleanup programs can be started from a TACL prompt using the appropriate TACL macro. All of the Cleanup TACL macros are based on the same TACL command.

Daily Context Table Cleanup Macro Example

The following GOCUDCN macro example starts a Cleanup program to clean the Context Table (CNTX) on a daily basis:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.dacn,name $cudcn,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYCNTX
```

Daily Billing Tables Cleanup Macro Example

The following GOCUDFBL macro starts two Cleanup programs to clean the Bank Transaction Summary Table (BKTS) and Customer Billing Summary Table (CBLS) on a daily basis by FIID:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.dab1,name $cudb1,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYBILL1
[:bp_obj_subvol].cu/out $s.#bp.dab2,name $cudb2,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYBILL2
```

Daily Loan Application Table Cleanup Macro Example

The following GOCUDFLN macro starts two Cleanup programs to clean the Loan Application Table (LOAN) on a daily basis by FIID:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.da11,name $cudl1,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYLOAN1
[:bp_obj_subvol].cu/out $s.#bp.da12,name $cudl2,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYLOAN2
```

Daily Miscellaneous Request Table Cleanup Macro Example

The following GOCUDFMR macro starts two Cleanup programs to clean the Miscellaneous Request Table (MISC) on a daily basis by FIID:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.dam1,name $cudm1,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYMISC1
[:bp_obj_subvol].cu/out $s.#bp.dam2,name $cudm2,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYMISC2
```

Daily Payment Summary Table Cleanup Macro Example

The following GOCUDPS macro starts a Cleanup program to clean the Payment Summary Table (PST) on a daily basis:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.daps,name $cudps,nowait/ [:bp_exec_
subvol].11conf CLEANUPDAYPST
```

Daily Report ActionTable Cleanup Macro Example

The following GOCUDRA macro example starts a Cleanup program to clean the Report Action Table (RPTA) on a daily basis:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.cudra,name $cudra,nowait/ [:bp_
exec_subvol].11conf CLEANUPDAYRPTA
```

Yearly Customer Vendor Table Cleanup Macro Example

The following GOCUYCV macro starts a Cleanup program to clean the Customer Vendor Table (CVND) on a yearly basis:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.yrcv,name $cuycv,nowait/ [:bp_exec_
subvol].11conf CLEANUPYRCV
```

Yearly Billing Tables Cleanup Macro Example

The following GOCUYFBL macro starts a Cleanup program to clean the Billing Group Table (BLG) and Billing Rate Table (RATE) on a yearly basis by FIID:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.yfbl,name $cuybl,nowait/ [:bp_exec_
subvol].11conf CLEANUPYRBILL
```

Yearly Bank Notice Table Cleanup Macro Example

The following GOCUYFBN macro starts a Cleanup program to clean the Bank Notice Table (BKNT) on a yearly basis by FIID:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.yfbn,name $cufbn,nowait/ [:bp_exec_
subvol].11conf CLEANUPYRBKNT
```

Yearly Vendor Table Cleanup Macro Example

The following GOCUYVND macro starts a Cleanup program to clean the Vendor Table (VNDR) on a yearly basis:

```
?tacl macro
envset
[:bp_obj_subvol].cu/out $s.#bp.yrvn,name $cuyvn,nowait/ [:bp_exec_
subvol].11conf CLEANUPYRVND
```

TACL Command

All of the Cleanup program TACL macros are based on the following TACL command:

Syntax

prog-name /OUT *\$spooler* / *lconf-file-name* *sym-proc-name*

prog-name — The name of the executable Cleanup program.

\$spooler — The spooler location where the output report for the Cleanup program is generated.

lconf-file-name — The fully qualified name of the LCONF containing the assigns and params for the Cleanup program.

sym-proc-name — The symbolic process name assigned to the Cleanup program. This name must match the program name configured in the Process Name field (for example, CLEANUPDAYCNTX, CLEANUPDAYPST, CLEANUPDAYLOAN1, or CLEANUPDAYLOAN2) for the applicable LCONF assigns and params.

Remittance File Cleanup Procedures

Periodically, remittance files that are no longer needed should be purged from the system. When the remittance file cleanup TACL macro is run, you should monitor the EMS log device for informational and error messages. A completion message indicates the total number of remittance files purged.

The remittance file cleanup macro is a batch job that can be scheduled to run periodically using a batch scheduler such as the Tandem NetBatch product or can be started manually. Either way, the defines for the BASE24-billpay environment must be set so that the define names can be resolved to the correct physical file and table locations prior to running the remittance file cleanup macro. The ENVSET TACL macro is used to set the environment.

Macro Example

The following GOCLEAN macro executes the remittance file cleanup TACL routine on a periodic basis.

```
?tacl macro
=====
====
==
==  BillPay/RemitGen/GoClean
==
==  This macro attaches the RCleanup TACL segment and executes it.
==
==  Syntax:  TACL> run goclean <#-days>
==
=====
====
#frame
#push :mysubvol
#set  :mysubvol %0%
#chardel :mysubvol [#charfindr :mysubvol 35 .] to 35
attachseg shared [:mysubvol].rcleanup :rcleanup
==
==  Default <#-days> to 7 if not specified.
==
:rcleanup [#if [#empty %1%] |then| 7 |else| %*%]
#unframe
```


Obey File

The following obey file named XGOCLEAN executes the GOCLEAN macro. You specify the number of retention days passed to the GOCLEAN macro in this file. To automate remittance file cleanup, you would schedule this obey file to be executed periodically by a batch scheduler program.

```
run goclean 7
```

An example file called GOSUB used to schedule the remittance file cleanup macro is provided at the end of this section. The GOSUB file submits the XGOCLEAN obey file as a job to Tandem's NetBatch product. The NetBatch product is a batch scheduler for programs running on a Tandem system.

TACL Command

The GOCLEAN macro is based on the following TACL command:

Syntax

macro-name retain-days

macro-name — The name of the remittance file cleanup TACL macro (for example, GOCLEAN). This macro attaches the RCLEANUP TACL routine, which performs the cleanup processing.

retain-days — The number of days remittance files are retained before they are purged. Valid values are 0 through 365. A value of 0 purges all remittance files up to and including the output for yesterday.

Archiving ITLFs

Periodically, old ITS Transaction Log Files (ITLFs) should be backed up to tape or disk for long-term safe storage and purged from the system. Both operational and procedural considerations should be taken into account when determining the number of days ITLFs are retained on your system.

The main operational consideration is for adequate system disk space. ITLFs tend to be quite large and therefore may require substantial disk space.

The main procedural consideration is how long ITLF transactions should be available for online perusal. The ITS Transaction Log File (ITLF) perusal screen allows you to view summary and detail information for transactions performed by a customer. Only those transactions resident in an ITLF on the appropriate subvolume for the date selected can be viewed from this screen. Once an ITLF is purged from the system, the transactions for that date can no longer be viewed online, unless the file is restored to this subvolume from tape or disk. For online perusal, ITLFs must reside on the subvolume specified by the TLF-group assign in the LCONF. For more information on the ITLF screen, refer to the ***BASE24 Core Files and Tables Maintenance Manual***. For more information on the TLF-group assign, refer to the ***BASE24 Logical Network Configuration File Manual***.

Note: Transactions logged to the default ITLF, specified by the TLF-DEFAULT assign in the LCONF, cannot be viewed from the ITLF screen.

Standard Tandem tape and disk facilities can be used to archive, purge, and restore ITLFs as needed.

Regenerating Payment Remittance Files

If for some reason, one or more of the payment remittance files for a particular date are lost, corrupted, or contain invalid data, you can regenerate payment remittance files by executing the Remittance Generator processes that run in redo mode. These processes have a value of Y for the BP-REDO-MODE param in the LCONF.

To regenerate a payment remittance file, perform the following:

1. Determine which payment remittance file needs to be regenerated. You can check the Remittance Transaction Alert Report to determine whether any remittances failed to be generated for a specified date.
2. Specify the date for which the payment remittance file is to be regenerated, by setting the BP-REDO-DATE param in the LCONF to the appropriate value. The date must be less than the current business date.
3. If the payment remittance file for the date to be regenerated still exists, you can either purge all the data from the file or purge the file itself. Payment remittance files exist on the volume and subvolume specified by the BP-REMIT assign in the LCONF.
 - To purge all the data from a payment remittance file, enter the following commands from the TACL prompt:


```
FUP PURGEDATA vol.subvol.remit-file-name
FUP DEALLOCATE vol.subvol.remit-file-name
```
 - To purge a payment remittance file, enter the following command from the TACL prompt:


```
PURGE vol.subvol.remit-file-name
```
4. If the Temporary Payment Summary Table (ZZPST) exists on the payment remittance file subvolume, purge all data from the table by entering the following command from an SQLCI prompt:


```
PURGEDATA vol.subvol.ZZPST
```
5. Start the appropriate *redo* Remittance Generator processes by issuing a START PROCESS command on each process from an XPNET network control facility. These processes are different from the Remittance Generator processes normally used to generate remittance. There should be one *redo* Remittance Generator process configured for each partition of the HIST and remittance type combination.

Note: You should only start the *redo* processes for the type of remittances to be recreated.

6. Monitor the EMS event message log device. After the process has reached the end-of-file for its partition of the HIST and written totals to the Temporary Payment Summary Table, it compares the temporary totals to the totals currently in the Payment Summary Table (PST) and performs one of the following:
 - If the summary totals match, the process generates a message indicating that processing is complete and that the summary totals matched.
 - If the summary totals do not match, the process generates a message indicating that processing is complete and that the summary totals are out of balance. The message lists the previous total number and amount of payments, the redo total number and amount of payments, and the difference between the two.
 - If less than 11 FIID and vendor number entries do not match, the process generates a message for each entry that did not match. Each message indicates that processing is complete, the FIID and vendor number that are out of balance, the previous total number and amount of payments for the entry, the redo total number and amount of payments entry, and the difference between the two.
7. If the summary totals matched, the remittance file can immediately be used as input to generate remittance output. If the summary totals or individual entries did not match, your organization may need to research and reconcile the differences and you may need to repeat this procedure.

Once a redo Remittance Generator process completes processing, it stops running.

NetBatch Submission File Example

NetBatch is a Tandem product that allows you to schedule batch processing on a Tandem system. The NetBatch operator interface (BATCHCOM) allows you to send commands to the NetBatch product.

The following is a sample TACL routine called GOSUB that submits a job to BATCHCOM to be executed at the same time on a daily basis. You can use this sample as a template for submitting jobs to run automatically. This example executes the XGOCLEAN obey file at 3:00 am every day. This obey file runs the GOCLEAN TACL macro, which in turn, executes the remittance cleanup TACL routine (RCLEANUP). For detailed information on scheduling jobs using NetBatch, refer to Tandem's *NetBatch Manual*.

```
=====
==
==  BillPay/RemitGen/GoSub
==
==  This routine submits the BillPay/RemitGen/RCleanup TACL
==  "program" to Tandem's NetBatch facility.
==
==  The default configuration is to run the job:
==      AT      03:00
==      EVERY 1 DAYS
==      PRI     50
==      OUT     $0
==
==  Simply change these values in the BatchCom command below
==  as desired to run the job at another time or less often.
==
==  Note:  You must change the BillPay/RemitGen/XGoClean
==         macro file to control the <#-days> parameter
==         passed to RCleanup (or copy the file and change
==         the "in" attribute below to point to your copy).
=====
envset
#frame
batchcom; delete job BP-REMITGEN-CLEANUP;&
  delete job BP-REMITGEN-CLEANUP;&
  submit job BP-REMITGEN-CLEANUP &
, volume [:bprg_subvol] &
, in [:bprg_subvol].xgoclean &
, iffails on &
, at 03:00 &
, every 1 days &
, pri 50 &
, out $0 &
; status BP-REMITGEN-CLEANUP
#unframe
```

ACI Worldwide Inc.

Appendix A

End-of-Period Process Object Design

This appendix includes the following processing information as it pertains to the object-oriented design of the BASE24-telebanking End-of-Period process. The End-of-Period Process object performs all of the main processing for the End-of-Period process. This appendix includes the following topics:

- A discussion of the ITS kernel configuration requirements for the End-of-Period process
- A description of End-of-Period Process object initialization processing
- A list of the Logical Network Configuration File (LCONF) assigns and params used by the End-of-Period Process object
- A description of Assign, LCONF, and Param Warmboot command processing for the End-of-Period Process object
- A description of server control commands the End-of-Period Process object can process

Kernel Configuration

This subsection discusses the object usage and integrated transaction services configuration requirements for the End-of-Period process.

Object Usage

Besides the End-of-Period Process object, the End-of-Period process uses the following kernel objects:

- Application Network Services
- Class
- Event
- Process Control
- Trace
- XPNET Interface

Refer to the *BASE24 ITS Kernel Objects Reference Manual* for detailed processing and configuration information on kernel objects, including the LCONF assigns and params used by each object.

Kernel File Configuration

To properly configure the End-of-Period process to the ITS kernel environment, records must be configured in the following files:

- Assign File (ASGN)
- Assign/Object Relationship File (AORF)
- Assign/Process Type Relationship File (APRF)
- Extended Memory Table File (EMT)
- Object File (OBJ)
- Process File (PRO)
- Process/Object Relationship File (PORF)
- Process Type File (PTF)

- Server Class Type File (SCT)
- Server Class Type/Process Relationship File (SPRF)

ACI provides the required End-of-Period process configuration in default records for most of the above files. Records must be configured in the following files during or after installation to complete the End-of-Period process ITS kernel configuration:

File Name	Configuration Requirements
PRO	One record is required for the End-of-Period process.
PORF	Seven records are required for the End-of-Period process, with one record for each of the kernel objects listed previously and one record for the End-of-Period Process object.
SCT	One record is required for the End-of-Period process.
SPRF	One record is required for the End-of-Period process.

End-of-Period Process Object

This subsection discusses topics related to the configuration, processing, and control of the End-of-Period Process object. This object provides the main functionality for the End-of-Period process.

Event messages generated by the End-of-Period Process object are identified with a subsystem name of ISCOEOPP and a subsystem number of 777.

Initialization Processing

The End-of-Period Process object initializes when it receives the Initialize member function request from the ANS object when the End-of-Period process is started. The End-of-Period Process object then performs as follows:

1. Sets the response type. The response length remains at its initialized value of 0.
2. Allocates space for the frame.
3. Initializes the frame.
4. Registers with the ANS object using the Register member function request.
5. Reads the assigns and params from the Logical Network Configuration File (LCONF) for the End-of-Period Process object. See the list of all configurable assigns and params provided later in this appendix.
6. Opens the IDF specified in the IDF assign from the LCONF.
7. Calculates the number of records in the IDF.
8. Determines how many different TLF assigns from the LCONF (that is, TLF-DEFAULT and TLF-*group*) are in the transaction log file extended memory table and allocates a segment for the table.
9. Allocates secondary frame space.
10. Initializes the secondary frame.
11. Loads the header table and transaction log file (TLF) table as follows:
 - a. Initializes the header table in the secondary frame.
 - b. Builds the default TLF table entry (from the TLF-DEFAULT param in the LCONF) and all other TLF table entries (from the TLF-*group* params in the LCONF).
12. Deallocates the transaction log file extended memory table.

13. Determines the current and next business dates.
14. Performs product-specific initialization processing.

For the BASE24-telebanking product, the object creates the report table in the secondary frame by retrieving the appropriate BASE24-telebanking report assigns and params from the LCONF.
15. Performs file cleanup as follows:
 - a. Purges the primary and alternate key files for any ITS Transaction Log Files (ITLFs) older than the retention period specified in the TLF-FILE-RETENTION param in the LCONF.
 - b. Purges the primary and alternate key files for any Exception Log Files (ELFs) older than the retention period specified in the ELF-FILE-RETENTION param in the LCONF.
 - c. Purges the primary and alternate key files for any report obey files older than the retention period specified in the TB-RPT-ISS-FILE-RETENTION param in the LCONF.
16. If necessary, creates the TLFs and ELFs as follows:
 - a. Creates an ELF for the current business date and the next business date, if they do not already exist.
 - b. For each entry in the TLF table, the object creates an ITLF for the previous date, current business date, and the next business date, if the files do not already exist. The object also creates a default ITLF if one does not already exist.
17. Builds the institution table as follows:
 - a. Sets the institution table address in the header table to the next available address.
 - b. For each record found in the IDF, the object verifies that the institution processing dates are current for each of the following fields. The object updates any of the following fields that are not current:
 - BEGINNING DATE (IDF screen 4)
 - NEXT BEGINNING DATE (IDF screen 4)
 - REPORT BUSINESS DATE (IDF screen 40)
 - CURRENT BUSINESS DATE (IDF screen 40)
 - CURRENT PERIODIC USAGE BEGIN DATE (IDF screen 41)
 - NEXT PERIODIC USAGE BEGIN DATE (IDF screen 41)

- CURRENT CYCLIC USAGE BEGIN DATE (IDF screen 41)
 - NEXT CYCLIC USAGE BEGIN DATE (IDF screen 41)
- c. For each IDF record, the object performs the following to load the institution table:
- 1) Increases the institution table count in the header table by one.
 - 2) Moves the FIID to the institution table.
 - 3) Indicates the products supported by the institution.
 - 4) If the BASE24-telebanking product is supported, the object checks the value of the FIELD CUTOVER field on IDF screen 3. If this field is set for midnight cutover, indicating that CSTT usages are to be cleared at midnight, the object sets a flag indicating that the midnight timer is required. This timer is required if at least one institution has this field set to clear CSTT usages at midnight.
- d. Repeat steps a through c until there are no more records in the IDF.
18. Sets cutover timers as follows:
- a. Sets the institution cutover timer for each institution, based on the value of the CUTOVER END field on IDF screen 40.
 - b. Sets the logical network cutover lead timer based on the values of the LGNT-CUTOVER and LGNT-CUTOVER-LEAD-TIME params in the LCONF.
 - c. Sets the logical network cutover timer based on the value of the LGNT-CUTOVER param.
 - d. Sets the midnight cutover timer if midnight cutover is required (see step 17c above).
19. Creates the new BASE24-telebanking report obey file and sets the start report timer based on the value of the TB-RPT-ISS-TIM param in the LCONF.

For each entry in the report table with the RUN param set to true (based on a value of Y for the TB-RPT-ISS-RUN param in the LCONF for the BASE24-telebanking product), the object creates a report obey file with the following values:

- The current business date is appended to the value of the TB-RPT-ISS-OBEY-FILE assign to create the obey file name.
- Values from the following assigns and params in the LCONF are used to build the RUN command for executing the BASE24-telebanking Issuer Reporting program.

Assigns: TB-RPT-ISS-NAME, TB-RPT-ISS-OUT-FILE

Params: TB-RPT-ISS-CPU, TB-RPT-ISS-PRI

20. Closes the IDF.
21. Responds to the Initialize request.

LCONF Assigns and Params

The End-of-Period Process object uses the following LCONF assigns and params. For detailed information on each of these assigns and params, refer to the ***BASE24 Logical Network Configuration File Manual***.

Assigns

The End-of-Period Process object uses the following LCONF assigns:

- ELF
- IDF
- TB-RPT-ISS-NAME
- TB-RPT-ISS-OBEY-FILE
- TB-RPT-ISS-OUT-FILE
- TLF-DEFAULT
- TLF-*group*
- TLFEMT

Params

The End-of-Period Process object uses the following LCONF params:

- ELF-FILE-RETENTION
- LGNT-CUTOVER
- LGNT-CUTOVER-LEAD-TIME
- TB-RPT-ISS-FILE-RETENTION
- TB-RPT-ISS-CPU
- TB-RPT-ISS-PRI

- TB-RPT-ISS-RUN
- TB-RPT-ISS-TIM
- TLF-EXTENTS
- TLF-FILE-RETENTION

Assign Warmboot Command

The Assign Warmboot command allows you to retrieve new values for the ELF and TLF-*group* assigns in the LCONF. Assign Warmboot commands are entered using the Assign Warmboot (AWB) screens. On AWB screen 1, you can select whether the ELF or TLF assigns are to be warmbooted. On AWB screen 2, you must select the End-of-Period Process object (for example, END OF PERIOD) to receive the command.

If the value of the ELF assign has changed, the End-of-Period Process object creates a new ELF for the current business date and the next business date. It then informs objects that log to the ELF of the new file location, causing them to begin logging to the new location.

If the value of the TLF-*group* assign has changed, the End-of-Period Process object creates a new ITLF for the current business date and the next business date. It then informs object that log to the ITLF of the new file location, causing them to begin logging to the new location.

Param Warmboot Command

The Param Warmboot command allows you to retrieve new values for the LGNT-CUTOVER and LGNT-CUTOVER-LEAD-TIME params in the LCONF. Param Warmboot commands are entered using the Param Warmboot (PWB) screen. On PWB screen 1, you can select the End-of-Period Process object (for example, END OF PERIOD) to receive the Param Warmboot command.

Upon receipt of this command, the object reads the LCONF for the above params. If the value for the LGNT-CUTOVER param has changed, the object resets the logical network cutover timer to the new value. If the value for the LGNT-CUTOVER-LEAD-TIME param has changed, the object resets the logical network cutover lead timer accordingly. If the value for a param has not changed, the appropriate timers are not reset.

LCONF Warmboot Command

The LCONF Warmboot command allows you to reinitialize the End-of-Period Process object. When this command is received, the object performs steps 5 through 20 of the “Initialization Processing” described earlier in this appendix. LCONF Warmboot commands are entered using the LCONF Warmboot (LWB) screen. On LWB screen 1, you can select the the End-of-Period Process object (for example, END OF PERIOD) to receive the LCONF Warmboot command.

Server Control Commands

The End-of-Period Process object allows you execute the following commands using the ITS kernel Server Control screen (SCS):

- ELF CREATE
- MIDNIGHT
- RESETIDFDATES
- RPT CREATE
- TLF CREATE

The syntax and processing performed for each of these commands are described below and on the following pages. All required and optional keywords for each command must be entered in the FUNCTION NAME field on the SCS. Command variables must be entered in the FUNCTION DATA field on the SCS. The symbolic name of the End-of-Period process (for example, P1A^EOPP1) must also be entered in the PROCESS NAME field on the SCS.

ELF CREATE Command

The ELF CREATE command allows you to manually create an Exception Log File (ELF) for a specified date.

This command may be required if the End-of-Period process was unable to automatically create a new ELF during logical network cutover lead time processing or if an ELF is accidentally purged from the system.

The syntax for this command is described below, followed by the steps performed when it is received, and an example of the command.

Syntax

ELF CREATE *mmdd*

ELF CREATE — Required keywords for this command.

mmdd — The month and day for which the ELF is to be created. This date is appended to the file name (for example, ELF1201 for December 1).

Processing

When the End-of-Period Process object receives the ELF CREATE command, it performs the following:

1. Verifies that the specified month is valid. If not, the object generates an event message and returns to normal processing without creating an ELF.
2. Verifies that the specified day is valid. If not, the object generates an event message and returns to normal processing without creating an ELF.
3. Creates the ELF for the requested date using the attributes of the template file specified for the ELF assign from the LCONF. If the file cannot be successfully created, the object generates an event error message.
4. Resumes normal processing.

Example

ELF CREATE 1201

This example creates an ELF for December 1. The file created will be named ELF1201.

MIDNIGHT Command

The MIDNIGHT command causes the End-of-Period Process object to perform midnight cutover processing, just as if the midnight cutover timer has expired.

This command may be required if you need to immediately reset the withdrawal usage period in the IDF for bad PIN tries accumulated in the Customer Table (CSTT) for institutions that calculate this usage period at midnight (that is, institutions with the FIELD CUTOVER field on IDF screen 3 set for midnight cutover), rather than waiting for midnight.

This command will cause the current bad PIN tries accumulation for the institution's customers to be reset either on the first transaction for the new withdrawal usage period or the first successful PIN try for the new withdrawal usage period, depending on the value of the PIN TRIES RESET OPTION field on IDF screen 2 for the institution.

The object begins midnight cutover processing at the time the command is received. The syntax for this command is described below, followed by the steps performed when it is received.

Syntax

MIDNIGHT

MIDNIGHT — A required keyword that indicates midnight cutover processing to the End-of-Period Process object.

Processing

When the End-of-Period Process object receives the **MIDNIGHT** command, it performs the following:

1. Performs all the steps required for midnight cutover timer processing as described under the “Midnight Cutover Timer” heading in section 2, except for resetting the midnight cutover timer.
2. Resumes normal processing.

RESETIDFDATES Command

The **RESETIDFDATES** command causes the End-of-Period Process object to perform financial institution cutover processing for all institutions, just as if the financial institution cutover timer has expired for each institution configured in the IDF.

This command may be required if the End-of-Period process has been stopped for several days and you need to reset the cyclic and periodic usage periods in the IDF for the transaction usage and amounts accumulated in the PBF or the withdrawal usage period in the IDF for bad PIN tries accumulated in the CSTT. This command only resets the withdrawal usage period if the **FIELD CUTOVER** flag on IDF screen 3 is set for logical network cutover.

This command will cause the current usage in the PBF to be reset upon entry of the first transaction entered by a customer in the new usage period. The command will cause the current bad PIN tries accumulation for the institution's customers to be

reset either on the first transaction for the new withdrawal usage period or the first successful PIN try for the new withdrawal usage period, depending on the value of the PIN TRIES RESET OPTION field on IDF screen 2 for the institution.

The object begins financial institution cutover processing at the time the command is received. The syntax for this command is described below, followed by the steps performed when it is received, and an example of the command.

Syntax

RESETIDFDATES *yymmdd*

RESETIDFDATES — A required keyword for this command.

yymmdd — The year, month, and day to be substituted for the current system date when financial institution cutover processing is performed.

Processing

When the End-of-Period Process object receives the RESETIDFDATES command, it performs the following:

1. Performs all the steps required for financial institution cutover timer processing for all institutions configured in the IDF as described under the “Financial Institution Cutover Timer” heading in section 2, with the exception of resetting the financial institution cutover timer.

The date specified in the command is substituted for the current system date in all steps.

2. Resumes normal processing.

Example

RESETIDFDATES 991201

This example executes financial institution cutover processing using December 1, 1999 instead of the current system date.

RPT CREATE Command

The RPT CREATE command causes the End-of-Period Process object to create an obey file for a specified date for each start reports timer maintained by the object. If a report obey file already exists for the specified date, that obey file is not created. If you enter this command with the optional TB keyword, an obey file will be created for the BASE24-telebanking product only.

This command may be required if the End-of-Period process is unable to automatically create and execute a reports obey file when a start reports timer expires or if a report obey file is accidentally purged from the system.

The syntax for this command is described below, followed by the steps performed when it is received, and an example of the command.

Note: The RPT CREATE command only creates report obey files; it does not execute the obey files after they are created.

Syntax

RPT CREATE [TB] *mmdd*

RPT CREATE — The required keywords for this command.

TB — An optional keyword that indicates report obey files are to be created for the BASE24-telebanking product only.

mmdd — The month and day for the obey file to be created.

Processing

When the End-of-Period Process object receives the RPT CREATE command, it performs the following:

1. Validates the month specified with the command. If the month is not valid, the object generates an event message and resumes normal processing. No obey files are created.
2. Validates the day specified with the command. If the day is not valid, the object generates an event message and resumes normal processing. No obey files are created.
3. Determines whether the appropriate obey files already exist for the specified date. If an obey file already exists, it is not created. If an obey file does not already exist, the object creates it as described under the “Start Reports Timer” heading in section 2. The only exception is that the month and day specified with the command are used to name the obey file and build the RUN command rather than using the current business date minus one day.
4. Resumes normal processing.

Example

RPT CREATE TB 1201

This example creates a report obey file to generate BASE24-telebanking reports for December 1.

TLF CREATE Command

The TLF CREATE command allows you to create ITS Transaction Log Files (ITLFs) for a specified date. One ITLF is created for the TLF-DEFAULT assign and each TLF-group assign in the LCONF.

This command may be required if the End-of-Period process was unable to automatically create a new ITLF during logical network cutover lead time processing or if an ITLF is accidentally purged from the system.

The syntax for this command is described below, followed by the steps performed when it is received, and an example of the command.

Syntax

TLF CREATE *mmdd*

TLF CREATE — Required keywords for this command.

mmdd — The month and day for which the ITLFs are to be created. This date is appended to the name of the file created (for example, TLF1201 for December 1).

Processing

When the End-of-Period Process object receives the TLF CREATE command, it performs the following:

1. Verifies that the specified month is valid. If not, the object generates an event message and returns to normal processing without creating an ITLF.
2. Verifies that the specified day is valid. If not, the object generates an event message and returns to normal processing without creating an ITLF.
3. Creates the ITLF for the requested date using the attributes of the template file specified in the TLF-DEFAULT and TLF-group assign from the LCONF. If the file for the specified date already exists or cannot be successfully created, the object generates an event error message.
4. Opens the primary file for each ITLF.

5. Allocates extents for each primary key file as specified by the TLF-EXTENTS param.
6. Opens any alternate key files created for each ITLF.
7. Allocates extents for each alternate key file as specified by the TLF-EXTENTS param.
8. Writes the first record to each ITLF, except for the default TLF. The Super Extract process requires and uses this record during its processing.
9. Resumes normal processing.

Example

TLF CREATE 1201

This example creates a new ITLF for December 1. This file will be named TLF1201.

Extended Memory Table Usage

The End-of-Period Process object uses one extended memory table—the transaction log file extended memory table. This extended memory table consists of two tables—the object table and the log configuration table.

The object table contains one entry for each acquirer object configured in the system in the Object File (OBJ). The log configuration table contains one entry for each set of ranges defined in the Log Configuration File (LCF) and the ITS Transaction Log File (ITLF) assign associated with each range.

The transaction log file extended memory table should be rebuilt by the Extended Memory Table Build utility any time an acquirer object change is made to the Object File (OBJ) or a change is made to the Log Configuration File (LCF). Once the transaction log file extended memory table is rebuilt, an LCONF Warmboot command must be sent to the End-of-Period Process object before it will start using the rebuilt table. The End-of-Period Process object does not support the EMT Warmboot command.

For more information on the OBJ and LCONF Warmboot screens, refer to the ***BASE24 ITS Kernel Files Maintenance Manual***.

For more information on the LCF, refer to the ***BASE24 Core Files and Tables Maintenance Manual***.

For more information on the Extended Memory Table Build utility, refer to the ***BASE24 ITS Kernel Configuration Manual***.

Appendix B

BASE24-telebanking Report Error Messages

This appendix documents all the possible error messages that can appear on the BASE24-telebanking Statistics and Errors report. The messages are arranged in alphabetical order by message text. Each description includes the error message text, the variables that can appear in the text, the cause of the error, the result of the error, and the action required to correct the error.

Tandem Guardian system errors and file system errors that can appear in some messages are described in Tandem's *Guardian Procedure Errors and Messages Manual*.

Disassembly Error, File = *file-name*

Where: *file-name* = the name of the Institution Definition File (IDF) on which a disassembly error occurred.

Cause: The BASE24-telebanking Issuer Reporting program was unable to disassemble a record in the Institution Definition File (IDF).

Result: Report processing was terminated.

Action: Correct the problem and restart the BASE24-telebanking Issuer Reporting program.

Disassembly Error, Telebanking Segment Missing, File = *file-name*

Where: *file-name* = the name of the Institution Definition File (IDF) in which the BASE24-telebanking segment was missing.

Cause: An error occurred while attempting to access the BASE24-telebanking segment or the segment was not present in the Institution Definition File (IDF).

Result: Report processing was terminated.

Action: Correct the problem and restart the BASE24-telebanking Issuer Reporting program.

Event Log Warmboot Error. PRI COLL = *pri-ppd*, ALT COLL = *alt-ppd*

Where: *pri-ppd* = the PPD name of the primary EMS Collector process.

alt-ppd = the PPD name of the alternate EMS Collector process.

Cause: An error occurred while attempting to warmboot the EMS facility.

Result: Report processing was terminated.

Action: Refer to the related EMS messages. Correct the problem and restart the BASE24-telebanking Issuer Reporting program.

Extended Memory Allocation Error, File = *file-name*, Error = *err*

Where: *file-name* = the file name provided by the TB-RPT-ISS-SWAPFILE assign from the LCONF.

err = the Guardian system error returned on a call to ALLOCATESEGMENT.

Cause: An unrecoverable error was encountered by the BASE24-telebanking Issuer Reporting program when it attempted to allocate extended memory.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Extended Memory Use Error, File = *file-name*, Error = *err-cde*

Where: *file-name* = the file name provided by the TB-RPT-ISS-SWAPFILE assign from the LCONF.

err-cde = the Guardian system error returned on a call to USESEGMENT.

Cause: An unrecoverable error was encountered by the BASE24-telebanking Issuer Reporting program when it attempted to use an extended memory segment.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on BEGINTRANSACTION, Error = *err-cde*

Where: *err-cde* = a file system error returned from the Transaction Monitoring Facility (TMF) on a call to BEGINTRANSACTION.

Cause: An error occurred on the call to BEGINTRANSACTION.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on call to LIB_TXN_FLD_OPS, Error = *err-cde*

Where: *err-cde* = one of the following error codes returned from the Transaction object library routine:

Code	Description
9501	An invalid action code was encountered.
9503	The field to be added already exists.
9505	An optionally logged field was not logged.
9506	An invalid field tag was encountered.
9507	The given field cannot be logged.
9509	An invalid transaction context code was encountered.

Cause: An error occurred on a call to the library procedure LIB_TXN_FLD_OPS.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on call to LIB_TXN_FLD_OPS, Error Tag = *err-tag*, Error Code = *err-cde*

Where: *err-tag* = the Internal Transaction Data (ITD) tag identifying the field within the ITS Transaction Log File (ITLF) on which the associated error occurred. ITD tags are described in the **BASE24 Remote Banking Transaction Processing Manual**.

err-cde = one of the following error codes returned from the Transaction object library routine:

Code	Description
9501	An invalid action code was encountered.
9503	The field to be added already exists.
9505	An optionally logged field was not logged.
9506	An invalid field tag was encountered.
9507	The given field cannot be logged.
9509	An invalid transaction context code was encountered.

Cause: An error occurred on a call to the library procedure LIB_TXN_FLD_OPS.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on ENDTRANSACTION, Error = *err-cde*

Where: *err-cde* = a file system error returned from the Transaction Monitoring Facility (TMF) on a call to ENDTRANSACTION.

Cause: An error occurred on the call to ENDTRANSACTION.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on Open, File = *file-name*, Error = *err*

Where: *file-name* = the name of the file that could not be opened.

err = an error returned by the Guardian operating system.

Cause: The BASE24-telebanking Issuer Reporting program was unable to open the specified file.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on Purge, File = *file-name*, Error = *err*

Where: *file-name* = the name of the file that could not be purged.

err = an error returned by the Guardian operating system.

Cause: The BASE24-telebanking Issuer Reporting program was unable to purge the specified file.

Result: None.

Action: Correct the specified error and purge the file.

Failure on Read, File = *file-name*, Error = *err*

Where: *file-name* = the name of the file that could not be read.

err = an error returned by the Guardian operating system.

Cause: The BASE24-telebanking Issuer Reporting program was unable to read the specified file.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Failure on Write, File = *file-name*, Error = *err*

Where: *file-name* = the name of the file that could not be written to.

err = an error returned by the Guardian operating system.

Cause: The BASE24-telebanking Issuer Reporting program was unable to write to the specified file.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

FASTSORT Error. Error = *err-cde*

Where: *err-cde* = an error code returned from the FastSort utility on a call to SORTMERGESTART or SORTMERGESTATISTICS. FastSort error codes are described in Tandem's ***FastSort Manual***.

Cause: An error occurred on the call to SORTMERGESTART or SORTMERGESTATISTICS.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Fatal Error - Telebanking Issuer Reporting Program Abended

Cause: An unrecoverable error was encountered by the BASE24-telebanking Issuer Reporting program

Result: Report processing was terminated.

Action: Refer to the other errors on the report for specific reasons for the failure. Correct all errors and restart the BASE24-telebanking Issuer Reporting program.

Fatal Error - Telebanking Issuer Reporting Program Stopped

Cause: An unrecoverable error occurred.

Result: Report processing was terminated.

Action: Refer to other errors printed for the specific reasons for the failure. Correct all errors and restart the BASE24-telebanking Issuer Reporting program.

File Create Error, File = *file-name*
Template = *tplt-name*, Error = *err*

Where: *file-name* = the name of a file the BASE24-telebanking Issuer Reporting program could not create.

tplt-name = the name of a template file the program attempted to use to create the file.

err = an error returned by the Guardian operating system.

Cause: The BASE24-telebanking Issuer Reporting program was unable to create the specified file using the specified template.

Result: Report processing continued. The specified file was created using default values.

Action: Correct the specified error. If default values are unacceptable, stop and restart the BASE24-telebanking Issuer Reporting program.

File is full, File = *file-name*

Where: *file-name* = the name of the file that is full.

Cause: The BASE24-telebanking Issuer Reporting program was unable to write to the specified file because it was full.

Result: Report processing is terminated.

Action: Correct the file and restart the BASE24-telebanking Issuer Reporting program.

Formatting Error on Field = *field-name*

- Where:** *field-name* = the name of the field on which a formatting error occurred.
- Cause:** An error occurred while attempting one of the following: converting the field from binary to ASCII or from ASCII to integer format, converting account numbers, converting dates, or expanding file names.
- Result:** Report processing continued.
- Action:** Determine why the data in the source field is invalid, correct the problem if possible, and restart the BASE24-telebanking Issuer Reporting program.
-

Invalid Processing Code, Value = *proc-cde*

- Where:** *proc-cde* = the transaction processing code from the ITS Transaction Log File (ITLF).
- Cause:** The BASE24-telebanking Issuer Reporting program did not recognize the processing code in the ITLF record when it was attempting to accumulate daily totals for a summary report, or the specified processing code was not present in the Processing Code Definition File (PCDF).
- Result:** Report processing continued without using the transaction record.
- Action:** If the transaction should be reflected in the summary report, stop the BASE24-telebanking Issuer Reporting program, add a corresponding record for the processing code to the Processing Code Definition File (PCDF), and restart the program.

IPRF Record Missing for Monthly Report, File = *file-name*,
FIID = *fiid*, Date = *date*

Where: *file-name* = the name of the Institution Periodic Reporting File (IPRF).

fiid = the financial institution identifier from the Institution Definition File (IDF) that is part of the primary key for the missing IPRF record.

date = the date, in YYMMDD format, that is also part of the primary key for the missing IPRF record.

Cause: The BASE24-telebanking Issuer Reporting program was unable to read the IPRF record for the specified FIID and date.

Result: Report processing continued without the monthly summary report data for the specified FIID and date.

Action: Determine why the IPRF record is not available for the specified FIID and date.

IPRF File Not Assigned but Monthly Reports (TB05/TB06) were requested.

Cause: The TB05 and TB06 monthly reports were configured to be generated on screen 42 of the Institution Definition File (IDF) for an institution, but an assign was not configured for the IPRF in the Logical Network Configuration File (LCONF).

Result: Report processing was terminated.

Action: If monthly BASE24-telebanking reports are desired, add a file assign to the LCONF for the IPRF. If monthly BASE24-telebanking reports are not desired, update screen 42 of the IDF appropriately.

LCONF Assign Invalid, Assign = *assign-name*, Filename = *file-name*

Where: *assign-name* = the name of the invalid assign in the Logical Network Configuration File (LCONF).

file-name = the name of the LCONF in which the invalid assign was found.

Cause: An assign was configured with an invalid value in the specified LCONF.

Result: Report processing was terminated.

Action: Update the specified assign with a valid value and restart the BASE24-telebanking Issuer Reporting program.

LCONF Initialization Failed, File = *file-name*, Error = *err*

Where: *file-name* = the name of the LCONF that could not be opened.

err = an error returned by the Guardian operating system.

Cause: An error occurred while attempting to open the specified LCONF.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

LCONF Optional Assign Invalid, Assign = *assign-name*, Filename = *file-name*, Default *default-value*

- Where: *assign-name* = the name of the invalid assign in the Logical Network Configuration File (LCONF).
- file-name* = the name of the LCONF in which the invalid assign was found.
- default-value* = the default value used for this assign.
- Cause: An assign was configured with an invalid value in the specified LCONF.
- Result: Report processing continued using the default value.
- Action: If the default value is unacceptable, then update the specified assign with a valid value, and stop and restart the BASE24-telebanking Issuer Reporting program.

LCONF Optional Assign Read Error, Assign = *assign-name*, Error = *err*, Default *default-value*

- Where: *assign-name* = the name of an assign in the Logical Network Configuration File (LCONF) that could not be read.
- err* = an error returned by the Guardian operating system.
- default-value* = the default value used for this assign.
- Cause: An assign could not be read from the LCONF.
- Result: Report processing continued using the default value.
- Action: If the default value is unacceptable, then correct the specified error, and stop and restart the BASE24-telebanking Issuer Reporting program.

LCONF Optional Param Invalid, Param = *param-name*, Default = *default-value*

Where: *param-name* = the name of the invalid param in the Logical Network Configuration File (LCONF).

default-value = the default value used for this param.

Cause: A param was configured with an invalid value in the specified LCONF.

Result: Report processing continued using the default value.

Action: If the default value is unacceptable, then update the specified param with a valid value, and stop and restart the BASE24-telebanking Issuer Reporting program.

LCONF Optional Param Read Error, Param = *param-name*, Error = *err*, Default = *default-value*

Where: *param-name* = the name of the param in the LCONF that could not be read.

err = an error returned by the Guardian operating system.

default-value = the default value used for this param.

Cause: The BASE24-telebanking Issuer Reporting program was unable to read the specified param from the LCONF.

Result: Report processing continued using the default value.

Action: If the default value is unacceptable, then correct the specified error, and stop and restart the BASE24-telebanking Issuer Reporting program.

LCONF Param Invalid, Param = *param-name*

Where: *param-name* = the name of the invalid param in the Logical Network Configuration File (LCONF).

Cause: A required param was configured with an invalid value in the specified LCONF.

Result: Report processing was terminated.

Action: Update the specified param with a valid value and restart the BASE24-telebanking Issuer Reporting program.

LCONF Read Error, Assign = *assign-name*, Error = *err*

Where: *assign-name* = the name of an assign that could not be read from the Logical Network Configuration File (LCONF).

err = an error returned by the Guardian operating system.

Cause: A required assign was not configured in the LCONF.

Result: Report processing was terminated.

Action: Add the specified required assign to the LCONF and restart the BASE24-telebanking Issuer Reporting program.

LCONF Read Error, Param = *param-name*, Error = *err*

Where: *param-name* = the name of a param that could not be read from the Logical Network Configuration File (LCONF).

err = an error returned by the Guardian operating system.

Cause: A required param was not configured in the LCONF.

Result: Report processing was terminated.

Action: Add the specified param to the LCONF and restart the BASE24-telebanking Issuer Reporting program.

Max extents error, File = *file-name*

Where: *file-name* = the name of a file.

Cause: An error occurred while attempting to increase the maximum extents for the specified file.

Result: Report processing was terminated.

Action: Correct the problem and restart the BASE24-telebanking Issuer Reporting program.

Maximum number of TLFs Exceeded.

Cause: More than 32 unique ITS Transaction Log File (ITLF) assigns were specified in the Log Configuration File (LCF). The BASE24-telebanking Issuer Reporting program supports a maximum of 32 ITLFs in its internal tables.

Result: Report processing was terminated.

Action: Verify the LCF assign group names. Correct any errors and restart the BASE24-telebanking Issuer Reporting program.

No Telebanking supported records in the IDF file

Cause: BASE24-telebanking is not supported for any of the FIID records in the Institution Definition File (IDF).

Result: Report processing was terminated.

Action: Determine which FIIDs require BASE24-telebanking support, update the appropriate IDF records, and restart the BASE24-telebanking Issuer Reporting program.

No Telebanking transactions in the PCDF file

Cause: No Processing Code Definition File (PCDF) records have been configured for the FIIDs that support the BASE24-telebanking product.

Result: Report processing was terminated.

Action: Determine which FIIDs require BASE24-telebanking support, verify the route profile for each of these FIIDs, and if necessary, add the required PCDF records and restart the BASE24-telebanking Issuer Reporting program.

No TLF(s) or TLF(s) are empty.

Cause: The ITLFs for the specified reporting date do not exist or all ITLFs for the specified reporting date are empty.

Result: Report processing was terminated.

Action: Verify the reporting date, LCF assign group names, and the appropriate LCONF assigns. Correct any errors and restart the BASE24-telebanking Issuer Reporting program.

Required file is empty, File = *file-name*

Where: *file-name* = the name of the file that was empty.

Cause: A file required for report processing is empty.

Result: Report processing is terminated.

Action: Verify that the appropriate LCONF assign contains the correct file name. If so, add the required records to the file and restart the BASE24-telebanking Issuer Reporting program.

sort-file Setmode Failed, Error = *err-cde*

Where: *sort-file* = the name of the sort file specified by the TB-RPT-ISS-SORTFILE assign in the LCONF.

err-cde = an error returned by the Guardian operating system.

Cause: An error occurred on the call to SETMODE.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

sort-file Setmode Not Allowed for this Device type

Where: *sort-file* = the name of the sort file specified by the TB-RPT-ISS-SORTFILE assign in the LCONF.

Cause: An error occurred on the call to SETMODE.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

Setting max extents, File = *file-name*

Where: *file-name* = the name of a file for which the maximum extents were increased.

Cause: The specified file was full when the BASE24-telebanking Issuer Reporting program attempted to write to it.

Result: The BASE24-telebanking Issuer Reporting program increased the maximum number of extents for the specified file. Report processing continued.

Action: None.

`SORTMERGESTART txt-string, File system error = err-cde, Error
source: Not Available`

Where: *txt-string* = the descriptive text string returned from a call to SORTERRORSUM after receiving an error on a call to SORTMERGESTART.

err-cde = the file system error returned on a call to SORTERRORSUM.

Cause: An error occurred on the call to SORTMERGESTART.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

`SORTMERGESTART txt-string, File system error = err-cde, Error
source: src`

Where: *txt-string* = the descriptive text string returned from a call to SORTERRORSUM after receiving an error on a call to SORTMERGESTART.

err-cde = the file system error returned on a call to SORTERRORSUM.

src = the source of the error as an input file, output file, or scratch file.

Cause: An error occurred on the call to SORTMERGESTART.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

`SORTMERGESTATISTICS txt-string, File system error = err-cde, Error source: Not Available`

Where: *txt-string* = the descriptive text string returned from a call to SORTERRORSUM after receiving an error on a call to SORTMERGESTATISTICS.

err-cde = the file system error returned on a call to SORTERRORSUM.

Cause: An error occurred on the call to SORTMERGESTATISTICS.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

`SORTMERGESTATISTICS txt-string, File system error = err-cde, Error source: src`

Where: *txt-string* = the descriptive text string returned from a call to SORTERRORSUM after receiving an error on a call to SORTMERGESTATISTICS.

err-cde = the file system error returned on a call to SORTERRORSUM.

src = the source of the error as an input file, output file, or scratch file.

Cause: An error occurred on the call to SORTMERGESTATISTICS.

Result: Report processing was terminated.

Action: Correct the specified error and restart the BASE24-telebanking Issuer Reporting program.

ACI Worldwide Inc.

Index

A

- ACHclear program
 - example LCONF configuration, [3-5](#)
 - introduction, [3-3](#)
 - LCONF assigns, [3-4](#)
 - LCONF params, [3-4](#)
 - macro example, [6-27](#)
 - operating procedures, [6-27](#)
 - spooler output reports, [5-45](#)
 - startup, [6-27](#)
 - TACL command, [6-27](#)
 - TMF processing, [3-2](#)
- Archive program
 - example FIID-level CLPT configuration, [3-16](#)
 - example FIID-level LCONF configuration, [3-14](#)
 - example system-level LCONF configuration, [3-13](#)
 - FIID-level archiving, [3-7](#)
 - FIID-level archiving configuration, [3-11](#)
 - FIID-level archiving macro example, [6-29](#)
 - introduction, [3-7](#)
 - LCONF assigns and params, [3-12](#)
 - OMF processing, [3-12](#)
 - operating procedures, [6-29](#)
 - retention day calculation, [3-11](#)
 - spooler output reports, [5-47](#)
 - startup, [6-29](#)
 - system-level archiving, [3-7](#)
 - system-level archiving configuration, [3-11](#)
 - system-level archiving macro example, [6-30](#)
 - TACL command, [6-30](#)
 - TMF processing, [3-2](#)
- Assign Warmboot command, [A-8](#)
- Assigns
 - See* Logical Network Configuration File (LCONF)
 - assigns

B

- Bank Billing Summary Table (BKBS), [3-19](#)
- Bank Notice Table (BKNT), [1-26](#)
- Bank Transaction Advice Table (BKAV), [1-26](#)
- Bank Transaction Summary Table (BKTS), [3-19](#)
- BASE24-billpay report TACL routines
 - Customer Notice Report, [3-30](#)
 - Customer Vendor List Report, [3-30](#)
 - Customer Vendor Year-End Summary Report, [3-31](#)
 - introduction, [3-30](#)
 - Loan Application Report, [3-31](#)

- Master Vendor Report, [3-31](#)
- Miscellaneous Request Report, [3-31](#)
- New Customer Report, [3-32](#)
- Payment Summary Report, [3-32](#)
- Remittance Transaction Alert Report, [3-32](#)
- Scheduled Transaction Alert Report, [3-33](#)

- BASE24-telebanking Issuer Reporting program
 - initialization processing, [2-14](#)
 - introduction, [2-11](#)
 - LCONF assigns and params, [2-17](#)
 - normal processing, [2-15](#)

- BASE24-telebanking reports
 - introduction, [4-1](#)
 - overview, [1-32](#)

- BATCHCOM, [6-41](#)

- BKAV
 - See* Bank Transaction Advice Table (BKAV)

- BKBS
 - See* Bank Billing Summary Table (BKBS)

- BKNT
 - See* Bank Notice Table (BKNT)

- BKTS
 - See* Bank Transaction Summary Table (BKTS)

- Business day
 - BASE24-billpay, [1-12](#)
 - BASE24-telebanking, [1-9](#)

C

- CBLS
 - See* Customer Billing Summary Table (CBLS)

- Cleanup Configuration Table (CLPT)
 - data archival usage, [3-7](#)
 - database cleanup usage, [3-17](#)

- Cleanup procedures
 - cleaning up remittance files, [6-36](#)
 - cleaning up the BASE24-billpay database, [6-31](#)

- Cleanup program
 - daily billing tables cleanup macro example, [6-32](#)
 - daily cleanup processing, [3-19](#)
 - daily CNTX cleanup macro example, [6-32](#)
 - daily LOAN cleanup macro example, [6-33](#)
 - daily MISC cleanup macro example, [6-33](#)
 - daily PST cleanup macro example, [6-33](#)
 - daily RPTA cleanup macro example, [6-33](#)
 - deletion year calculation, [3-22](#)
 - example CLPT configuration, [3-27](#)
 - example LCONF configuration, [3-26](#)

Cleanup program *continued*

- example process configuration, [3-24](#)
- introduction, [3-17](#)
- LCONF assigns and params, [3-24](#)
- OMF processing, [3-23](#)
- operating procedures, [6-31](#)
- retention day calculation, [3-21](#)
- spooler output reports, [5-52](#)
- startup, [6-32](#)
- TACL command, [6-35](#)
- TMF processing, [3-2](#)
- year-end cleanup processing, [3-22](#)
- yearly billing tables cleanup macro example, [6-34](#)
- yearly BKNT cleanup macro example, [6-34](#)
- yearly CVND cleanup macro example, [6-34](#)
- yearly VNDR cleanup macro example, [6-34](#)

CNTX

- See* Context Table (CNTX)

Context Table (CNTX), [3-20](#)

CPIT

- See* Customer/Personal ID Relation Table (CPIT), [1-27](#)

Customer Billing Summary Table (CBLS), [3-20](#)

Customer Notice Report

- description, [5-3](#)
- field descriptions, [5-5](#)
- macro example, [6-13](#)
- sample, [5-3](#)
- spooler location, [6-13](#)
- TACL command, [6-13](#)
- TACL routine, [3-30](#)

Customer Vendor List Report

- description, [5-9](#)
- field descriptions, [5-11](#)
- macro example, [6-14](#)
- sample, [5-9](#)
- spooler location, [6-14](#)
- TACL command, [6-15](#)
- TACL routine, [3-30](#)

Customer Vendor Summary Table (CVS), [1-27](#)Customer Vendor Table (CVND), [1-27](#)

Customer Vendor Year-End Summary Report

- description, [5-13](#)
- field descriptions, [5-15](#)
- macro example, [6-16](#)
- sample, [5-13](#)
- spooler location, [6-15](#)
- TACL command, [6-16](#)
- TACL routine, [3-31](#)

Customer/Personal ID Relation Table (CPIT), [1-27](#)

CVND

- See* Customer Vendor Table (CVND), [1-27](#)

CVS

- See* Customer Vendor Summary Table (CVS)

D

Daily Customer Activity Detail Report (TB01)

- description, [4-3](#)
- field descriptions, [4-5](#)
- obey file, [2-10](#), [6-7](#)
- sample, [4-3](#)
- spooler location, [4-3](#)

Daily Customer Activity Summary Report (TB02)

- description, [4-8](#)
- field descriptions, [4-12](#)
- obey file, [2-10](#), [6-7](#)
- sample, [4-8](#)
- spooler location, [4-8](#)

Daily Financial Activity Detail Report (TB03)

- description, [4-14](#)
- field descriptions, [4-5](#)
- obey file, [2-10](#), [6-7](#)
- sample, [4-14](#)
- spooler location, [4-14](#)

Daily Financial Activity Summary Report (TB04)

- description, [4-16](#)
- field descriptions, [4-21](#)
- obey file, [2-10](#), [6-7](#)
- sample, [4-17](#)
- spooler location, [4-16](#)

E

ECF

- See* Extract Configuration File (ECF)

ELF

- See* Exception Log File (ELF)

ELF CREATE command, [A-9](#)

End-of-Period process

- financial institution cutover processing, [2-4](#)
- introduction, [2-2](#)
- kernel file configuration, [A-2](#)
- logical network cutover lead processing, [2-5](#)
- logical network cutover processing, [2-7](#)
- midnight cutover processing, [2-8](#)
- object usage, [A-2](#)
- start reports processing, [2-9](#)
- startup and control, [2-10](#)

End-of-Period Process object

- Assign Warmboot command, [A-8](#)
- ELF CREATE command, [A-9](#)
- extended memory table usage, [A-16](#)
- initialization processing, [A-4](#)
- LCONF assigns and params, [A-7](#)
- LCONF Warmboot command, [A-9](#)
- MIDNIGHT command, [A-10](#)
- Param Warmboot command, [A-8](#)
- RESETIDFDATES command, [A-11](#)
- RPT CREATE command, [A-12](#)
- server control commands, [A-9](#)
- TLF CREATE command, [A-14](#)

End-of-Period processing

- introduction, BASE24-billpay, [3-1](#)
- introduction, BASE24-telebanking, [2-1](#)

End-of-period processing cycle
 BASE24-billpay reporting, [1-18](#)
 billing, [1-18](#)
 database cleanup and archival, [1-18](#)
 introduction to, [1-15](#)
 miscellaneous tasks, [1-19](#)
 settlement, posting, and remittance, [1-17](#)
 Event message documentation, [6-3](#)
 Event suppression, [6-2](#)
 Exception Log File (ELF), [2-7](#)
 Extract Configuration File (ECF), [6-5](#)

F

FastSort utility, [2-12](#)
 Financial institution cutover
See Institution cutover
 Financial institution cutover timer
 description, [1-29](#)
 processing of, [2-4](#)

I

IDF
See Institution Definition File (IDF)
 Institution cutover, [1-9](#)
 Institution Definition File (IDF)
 definition, [1-21](#)
 field usage, [A-5](#)
 institution cutover usage, [2-4](#)
 logical network cutover usage, [2-7](#)
 midnight cutover usage, [2-8](#)
 report generation, [6-10](#)
 reporting usage, [2-12](#)
 suppressing reports, [6-11](#)
 Institution Periodic Reporting File (IPRF)
 daily total accumulation, [2-16](#)
 daily total accumulation suppression, [6-11](#)
 definition, [1-21](#)
 IPRF
See Institution Periodic Reporting File (IPRF)
 ITLF
See ITS Transaction Log File (ITLF)
 ITLF archival, [6-38](#)
 ITS Transaction Log File (ITLF)
 archiving, [6-38](#)
 creating, [2-7](#)
 definition of, [1-22](#)
 extracting, [6-5](#)
 online screen perusal, [6-38](#)

L

Lag timer, [1-31](#)
 LCONF
See Logical Network Configuration File (LCONF)
 LCONF Warmboot command, [A-9](#)

LOAN

See Loan Application Table (LOAN), [1-27](#)

Loan Application Report
 description, [5-17](#)
 macro example, [6-17](#)
 sample, [5-17](#)
 spooler location, [6-17](#)
 TACL command, [6-17](#)
 TACL routine, [3-31](#)

Loan Application Table (LOAN)
 daily cleanup of, [3-20](#)
 definition, [1-27](#)

Logical Network Configuration File (LCONF)
 BASE24-billpay usage, [1-27](#)
 BASE24-telebanking usage, [1-26](#)

Logical Network Configuration File (LCONF) assigns

ALT-COLL, [2-17](#)
 BP-ARCHIVE, [3-8](#), [3-12](#)
 BP-REMIT, [6-4](#)
 ELF, [A-8](#)
 IDF, [2-17](#)
 IPRF, [2-17](#)
 LCF, [2-17](#)
 OMF, [3-4](#), [3-12](#), [3-24](#)
 PCDF, [2-17](#)
 PRI-COLL, [2-17](#)
 TB-RPT-ISS-FS-DIST, [2-17](#)
 TB-RPT-ISS-FS-DIST-SORTPROG, [2-17](#)
 TB-RPT-ISS-FS-DIST-SWAP, [2-17](#)
 TB-RPT-ISS-FS-SS1, [2-17](#)
 TB-RPT-ISS-FS-SS1-SORTPROG, [2-17](#)
 TB-RPT-ISS-FS-SS1-SWAP, [2-17](#)
 TB-RPT-ISS-FS-SS2, [2-17](#)
 TB-RPT-ISS-FS-SS2-SORTPROG, [2-17](#)
 TB-RPT-ISS-FS-SS2-SWAP, [2-17](#)
 TB-RPT-ISS-FS-SS3, [2-17](#)
 TB-RPT-ISS-FS-SS3-SORTPROG, [2-17](#)
 TB-RPT-ISS-FS-SS3-SWAP, [2-17](#)
 TB-RPT-ISS-FS-SS4, [2-17](#)
 TB-RPT-ISS-FS-SS4-SWAP, [2-17](#)
 TB-RPT-ISS-FS-SS5, [2-18](#)
 TB-RPT-ISS-FS-SS5-SORTPROG, [2-18](#)
 TB-RPT-ISS-FS-SS5-SWAP, [2-18](#)
 TB-RPT-ISS-FS-SS6, [2-18](#)
 TB-RPT-ISS-FS-SS6-SORTPROG, [2-18](#)
 TB-RPT-ISS-FS-SS6-SWAP, [2-18](#)
 TB-RPT-ISS-FS-SS7, [2-18](#)
 TB-RPT-ISS-FS-SS7-SORTPROG, [2-18](#)
 TB-RPT-ISS-FS-SS7-SWAP, [2-18](#)
 TB-RPT-ISS-FS-SS8, [2-18](#)
 TB-RPT-ISS-FS-SS8-SORTPROG, [2-18](#)
 TB-RPT-ISS-FS-SS8-SWAP, [2-18](#)
 TB-RPT-ISS-NAME, [6-10](#), [A-6](#)
 TB-RPT-ISS-OBEY-FILE, [2-9](#), [6-10](#), [A-6](#)
 TB-RPT-ISS-OUT-FILE, [4-37](#), [6-9](#), [A-6](#)
 TB-RPT-ISS-SORTFILE, [B-17](#)
 TB-RPT-ISS-SWAPFILE, [B-3](#)
 TB-RPT-ISS-TB01-LOC, [4-3](#)
 TB-RPT-ISS-TB02-LOC, [4-8](#)
 TB-RPT-ISS-TB03-LOC, [4-14](#)
 TB-RPT-ISS-TB04-LOC, [4-16](#)

Logical Network Configuration File (LCONF) assigns
continued

TB-RPT-ISS-TB05-LOC, 4-23

TB-RPT-ISS-TB06-LOC, 4-30

TLF-DEFAULT, 2-7, 6-38

TLF-group, 2-7, 6-38, A-8

Logical Network Configuration File (LCONF) params

ALT-TIM-LMT, 2-18

BP-ACH-PAID-DAYS, 3-3, 3-4

BP-ACH-PRENOTE-DAYS, 3-4

BP-ACH-PROCESS-VEND, 3-4

BP-ARCHIVE-BY-FIID, 3-7, 3-11, 3-12

BP-ARCHIVE-BY-SYSTEM-DAYS, 3-7, 3-11, 3-12

BP-ARCHIVE-GROUP, 3-11, 3-12

BP-CLEANUP-GROUP, 3-18, 3-24

BP-CLEANUP-YEAR, 3-17, 3-22, 3-24

BP-DATE-FORMAT, 3-4, 3-24

BP-HISTORY-PARTITION-NUM, 3-4, 3-11, 3-12

BP-NUM-HISTORY-PART-EXT, 3-4, 3-12

BP-REDO-DATE, 6-39

BP-TMF-BATCH-DURATION-TIME, 3-2, 3-4, 3-12, 3-24

BP-TMF-BATCH-SIZE, 3-2, 3-4, 3-12, 3-24

CONSOLE-PRT, 2-18

DATE-DISPLAY-TYPE, 2-18

ELF-FILE-RETENTION, 2-7, A-5

LGNT-COUNTRY-ABBR, 3-5, 3-13, 3-24

LGNT-CUTOVER, 2-5, A-6, A-8

LGNT-CUTOVER-LEAD-TIME, 2-5, A-6, A-8

LOGICAL-NET, 2-19

OMF-AUDIT, 3-5, 3-13, 3-24

PRI-TIM-LMT, 2-19

RPT-ISS-SUP-TXN-CAT-TTLS, 4-30

TB-RPT-ISS-CPU, 6-9, A-7

TB-RPT-ISS-DIST-CPU, 2-19

TB-RPT-ISS-DIST-MEM, 2-19

TB-RPT-ISS-DIST-PRI, 2-19

TB-RPT-ISS-DIST-SEG, 2-19

TB-RPT-ISS-FILE-RETENTION, 2-8, 6-10, A-5

TB-RPT-ISS-PRI, 6-9, A-7

TB-RPT-ISS-RUN, 2-9, 6-10, 6-11, A-6

TB-RPT-ISS-SS1-CPU, 2-19

TB-RPT-ISS-SS1-MEM, 2-19

TB-RPT-ISS-SS1-PRI, 2-19

TB-RPT-ISS-SS1-SEG, 2-19

TB-RPT-ISS-SS2-CPU, 2-19

TB-RPT-ISS-SS2-MEM, 2-19

TB-RPT-ISS-SS2-PRI, 2-19

TB-RPT-ISS-SS2-SEG, 2-19

TB-RPT-ISS-SS3-CPU, 2-19

TB-RPT-ISS-SS3-MEM, 2-19

TB-RPT-ISS-SS3-PRI, 2-19

TB-RPT-ISS-SS3-SEG, 2-19

TB-RPT-ISS-SS4-CPU, 2-19

TB-RPT-ISS-SS4-MEM, 2-19

TB-RPT-ISS-SS4-PRI, 2-19

TB-RPT-ISS-SS4-SEG, 2-19

TB-RPT-ISS-SS5-CPU, 2-19

TB-RPT-ISS-SS5-MEM, 2-19

TB-RPT-ISS-SS5-PRI, 2-19

TB-RPT-ISS-SS5-SEG, 2-19

TB-RPT-ISS-SS6-CPU, 2-19

TB-RPT-ISS-SS6-MEM, 2-19

TB-RPT-ISS-SS6-PRI, 2-19

TB-RPT-ISS-SS6-SEG, 2-19

TB-RPT-ISS-SS7-CPU, 2-20

TB-RPT-ISS-SS7-MEM, 2-20

TB-RPT-ISS-SS7-PRI, 2-20

TB-RPT-ISS-SS7-SEG, 2-20

TB-RPT-ISS-SS8-CPU, 2-20

TB-RPT-ISS-SS8-MEM, 2-20

TB-RPT-ISS-SS8-PRI, 2-20

TB-RPT-ISS-SS8-SEG, 2-20

TB-RPT-ISS-SUP-TXN-CAT-TTLS, 2-20, 4-8, 4-16, 4-23

TB-RPT-ISS-TIM, 2-9, 6-10, A-6

TLF-DEFAULT, 2-14, A-4

TLF-EXTENTS, 2-7

TLF-FILE-RETENTION, 2-8, A-5

TLF-group, 2-14, A-4

Logical network cutover

description of, BASE24-billpay, 1-12

description of, BASE24-telebanking, 1-9

Logical network cutover lead timer

description, 1-29

processing of, 2-5

Logical network cutover timer

description of, BASE24-billpay, 1-30

description, BASE24-telebanking, 1-29

processing of, 2-7

M

Master Vendor Report

description, 5-21

macro example, 6-18

sample, 5-21

spooler location, 6-17

TACL command, 6-18

TACL routine, 3-31

MIDNIGHT command, A-10

Midnight cutover timer

description, 1-30

processing of, 2-8

MISC

See Miscellaneous Request Table (MISC)

Miscellaneous Request Report

description, 5-23

macro example, 6-18

sample, 5-23

spooler location, 6-18

TACL command, 6-19

TACL routine, 3-31

Miscellaneous Request Table (MISC)

daily cleanup of, 3-20

definition, 1-27

Monitoring event messages, 6-2

Monthly Customer Activity Summary Report (TB05)

description, 4-23

field descriptions, 4-28

Monthly Customer Activity Summary Report (TB05)
continued
 obey file, [2-10](#), [6-7](#)
 sample, [4-24](#)
 spooler location, [4-23](#)

Monthly Financial Activity Summary Report (TB06)
 description, [4-30](#)
 field descriptions, [4-35](#)
 obey file, [2-10](#), [6-7](#)
 sample, [4-31](#)
 spooler location, [4-30](#)

N

NetBatch
 product description, [6-41](#)
 sample submission file, [6-41](#)

Network participants
 customer ID issuers, [1-6](#)
 customers, [1-6](#)
 system owner, [1-7](#)
 vendors, [1-7](#)

New Customer Report
 description, [5-25](#)
 macro example, [6-19](#)
 sample, [5-25](#)
 spooler location, [6-19](#)
 TACL command, [6-20](#)
 TACL routine, [3-32](#)

Nucleus process terminology change, [xx](#)

O

OMF
See Online Maintenance File (OMF)

Online Maintenance File (OMF)
 ACHclear program usage, [3-4](#)
 Archive program usage, [3-12](#)
 Cleanup program usage, [3-23](#)

Operations procedures
 archiving HIST data, [6-29](#)
 archiving ITLFs, [6-38](#)
 cleaning up remittance files, [6-36](#)
 cleaning up the BASE24-billpay database, [6-31](#)
 clearing ACH data, [6-27](#)
 creating a report obey file, [A-12](#)
 creating an ELF, [A-9](#)
 creating TLFs, [A-14](#)
 extracting the ITLF, [6-5](#)
 forcing institution cutover, [A-11](#)
 forcing midnight cutover, [A-10](#)
 generating remittance output, [6-4](#)
 miscellaneous, [A-9](#)
 monitoring event messages, [6-2](#)
 producing BASE24-billpay reports, [6-12](#)
 producing BASE24-telebanking reports, [6-7](#)
 refreshing the PBF, [6-6](#)
 refreshing the THF, [6-6](#)
 regenerating payment remittance output, [6-39](#)
 suppressing BASE24-billpay reports, [6-24](#)

suppressing BASE24-telebanking reports, [6-11](#)
 warmbooting assigns, [A-8](#)
 warmbooting LCONF assigns and params, [A-9](#)
 warmbooting params, [A-8](#)

P

Param Warmboot command, [A-8](#)

Params
See Logical Network Configuration File (LCONF)
 params

Payment Summary Report
 description, [5-27](#)
 field descriptions, [5-32](#)
 macro example, [6-21](#)
 sample, [5-28](#)
 spooler location, [6-20](#)
 TACL command, [6-21](#)
 TACL routine, [3-32](#)

Payment Summary Table (PST)
 daily cleanup of, [3-20](#)
 definition, [1-28](#)

PBF refresh, [6-6](#)

Personal Information Table (PIT)
 definition, [1-28](#)

PIT
See Personal Information Table (PIT)

PST
See Payment Summary Table (PST)

R

Regenerating payment remittance output, [6-39](#)

Remittance day, [1-12](#)

Remittance file cleanup
 macro example, [6-36](#)
 obey file, [6-37](#)
 TACL command, [6-37](#)

Remittance file cleanup TACL routine
 introduction, [3-29](#)

Remittance Generator process, [6-39](#)

Remittance output generation, [6-4](#)

Remittance Transaction Alert Report
 description, [5-36](#)
 macro example, [6-22](#)
 sample, [5-36](#)
 spooler location, [6-21](#)
 TACL command, [6-22](#)
 TACL routine, [3-32](#)

Remote banking products
 database, [1-21](#)
 introduction to, [1-2](#)
 role in settlement, [1-5](#)
 settlement, definition of, [1-4](#)

Report Action Table (RPTA)
 Customer Notice Report usage, [3-30](#)
 Customer Vendor List Report usage, [3-30](#)

Report Action Table (RPTA) *continued*

- daily cleanup of, [3-21](#)
- definition, [1-28](#)
- New Customer Report usage, [3-32](#)

Report obey file

- executing, [6-7](#)
- sample, [2-10](#)

Reports

- Customer Notice Report, [5-3](#)
- Customer Vendor List Report, [5-9](#)
- Customer Vendor Year-End Summary Report, [5-13](#)
- Daily Customer Activity Detail Report (TB01), [4-3](#)
- Daily Customer Activity Summary Report (TB02), [4-8](#)
- Daily Financial Activity Detail Report (TB03), [4-14](#)
- Daily Financial Activity Summary Report (TB04), [4-16](#)
- generating manually, BASE24-billpay, [6-12](#)
- generating manually, BASE24-telebanking, [6-7](#)
- Loan Application Report, [5-17](#)
- Master Vendor Report, [5-21](#)
- Miscellaneous Request Report, [5-23](#)
- Monthly Customer Activity Summary Report (TB05), [4-23](#)
- Monthly Financial Activity Summary Report (TB06), [4-30](#)
- New Customer Report, [5-25](#)
- obey file, BASE24-telebanking, [6-7](#)
- overview, BASE24-billpay, [1-33](#)
- overview, BASE24-telebanking, [1-32](#)
- Payment Summary Report, [5-27](#)
- producing, BASE24-billpay, [6-12](#)
- producing, BASE24-telebanking, [6-7](#)
- regenerating, BASE24-billpay, [6-24](#)
- Remittance Transaction Alert Report, [5-36](#)
- Scheduled Transaction Alert Report, [5-40](#)
- scheduling, BASE24-billpay, [6-23](#)
- scheduling, BASE24-telebanking, [6-10](#)
- Statistics and Errors Report, [4-37](#)
- suppressing, BASE24-billpay, [6-24](#)
- suppressing, BASE24-telebanking, [6-11](#)
- TACL command, BASE24-telebanking, [6-8](#)
- TACL routines, BASE24-billpay, [3-30](#)

RESETIDFDATES command, [A-11](#)RPT CREATE command, [A-12](#)

RPTA

- See* Report Action Table (PST)
- See* Report Action Table (RPTA)

S

Scheduled Transaction Alert Report

- description, [5-40](#)
- macro example, [6-23](#)
- sample, [5-40](#)
- spooler location, [6-22](#)
- TACL command, [6-23](#)
- TACL routine, [3-33](#)

SCS

- See* Server Control screen (SCS)

Server control commands

- ELF CREATE, [A-9](#)
- MIDNIGHT, [A-10](#)
- RESETIDFDATES, [A-11](#)
- RPT CREATE, [A-12](#)
- TLF CREATE, [A-14](#)

Server Control screen (SCS), [A-9](#)

Settlement support

- ITS Transaction Log File (ITLF), [1-25](#)

Spooler output reports

- FIID-level, Archive program, [5-49](#)
- FIID-specific table cleanup, [5-52](#)
- HIST, ACHclear program, [5-46](#)
- system-level, Archive program, [5-47](#)
- system-wide table cleanup, [5-54](#)
- VNDR and VNDB, Cleanup program, [5-56](#)
- VNDR, ACHclear program, [5-45](#)

Start reports timer

- description, [1-30](#)
- processing of, [2-9](#)

Statistics and Errors Report

- description, [4-37](#)
- error messages, [B-1](#)
- spooler location, [4-37](#), [6-9](#)

Subsystem IDs

- See* Subsystem numbers

Subsystem names, [6-2](#)Subsystem numbers, [6-2](#)**T**THF refresh, [6-6](#)

Timers

- BASE24-billpay, [1-30](#)
- BASE24-telebanking, [1-29](#)
- financial institution cutover, [1-29](#), [2-4](#)
- lag, [1-31](#)
- logical network cutover, [1-29](#), [1-30](#), [2-7](#)
- logical network cutover lead, [1-29](#), [2-5](#)
- midnight cutover, [1-30](#), [2-8](#)
- start reports, [1-30](#), [2-9](#)

TLF CREATE command, [A-14](#)Transaction log file extended memory table, [A-16](#)Transaction Monitoring Facility (TMF), [3-2](#)**V**Vendor Branch Table (VNDB), [1-28](#)Vendor Table (VNDR), [1-28](#)

VNDB

- See* Vendor Branch Table (VNDB)

VNDR

- See* Vendor Table (VNDR)

XXPNET process definition, [xx](#)