

RUN POD GPU : STEPS

1. Push your files to GITHUB

Make sure your code is finalized and the requirements file is ready. Push the code to github.

(Better to run small epochs for small batch size in local device)

2. Generate ssh key

a. Open terminal

For windows:

Generate ssh key:

➔ **ssh-keygen -t ed25519 -C "runpod"**

See your ssh keys

➔ **ls ~/.ssh**

Generate public key

➔ **cat ~/.ssh/id_ed25519.pub**

```
PS C:\Users\Lenovo Loq> ssh-keygen -t ed25519 -C "runpod"
Generating public/private ed25519 key pair.
Enter file in which to save the key (C:\Users\Lenovo Loq\.ssh/id_ed25519):
C:\Users\Lenovo Loq\.ssh/id_ed25519 already exists.
Overwrite (y/n)?
PS C:\Users\Lenovo Loq> ls ~/.ssh

Directory: C:\Users\Lenovo Loq\.ssh

Mode                LastWriteTime         Length Name
----                -
-a-----         2/12/2026  12:41 PM             308 config
-a-----         2/9/2026   12:51 PM             399 id_ed25519
-a-----         2/11/2026   8:35 PM             298 id_ed25519.ppk
-a-----         2/9/2026  12:51 PM              89 id_ed25519.pub
-a-----         2/12/2026  12:42 PM          3435 known_hosts
-a-----         2/12/2026  12:42 PM          2673 known_hosts.old

PS C:\Users\Lenovo Loq> cat ~/.ssh/id_ed25519.pub
ssh-ed25519 [REDACTED] iaGWHJwrObcSafbulFzTDvL1zcpvvdMR01_runpod
PS C:\Users\Lenovo Loq> |
```

For MAC:

Generate ssh key:

➔ **ssh-keygen**

See your ssh key:

➔ **ls ~/.ssh**

Generate public key

➔ **cat ~/.ssh/id_ed25519.pub**

***** Copy the generated key*****

3. Update public key on runpod


a. Go to :

Runpod -> Account -> settings

or


<https://console.runpod.io/user/settings>

b. Scroll down to SSH public keys, paste your generated public key and update public key.

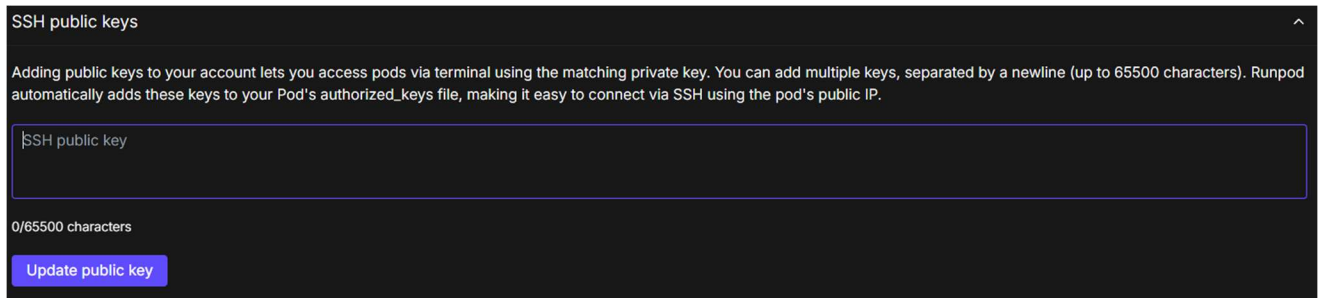The screenshot shows the 'SSH public keys' section of the Runpod console. At the top, there is a title 'SSH public keys' and a small upward arrow. Below the title is a descriptive paragraph: 'Adding public keys to your account lets you access pods via terminal using the matching private key. You can add multiple keys, separated by a newline (up to 65500 characters). Runpod automatically adds these keys to your Pod's authorized_keys file, making it easy to connect via SSH using the pod's public IP.' Underneath this text is a large, empty text input field with a placeholder label 'SSH public key'. Below the input field, the character count '0/65500 characters' is displayed. At the bottom of the section is a blue button labeled 'Update public key'.

c. You can add multiple keys, separated by a new line

4. Deploy a POD/GPU (on demand)

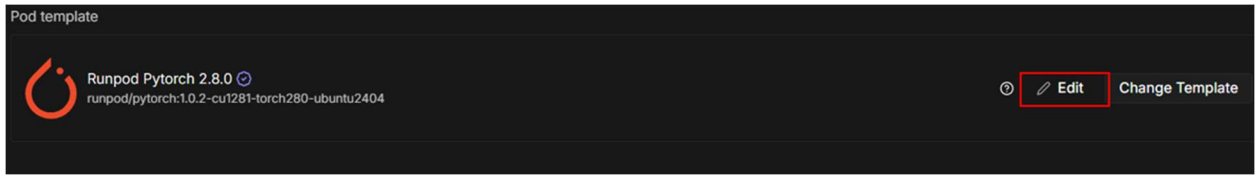

Make sure to allocate enough space for your task.

Pod Template Overrides

Container image
This can be a public image from Docker Hub or a private image from your own registry.

+ Select Registry Auth + Start Command

Container Disk
Temporary storage that will be erased when the Pod is stopped.

Volume Disk
Persistent storage mounted to /workspace that will be erased when the Pod is terminated.

Volume Mount Path

Expose HTTP Ports (Max 10)

Expose TCP Ports

Environment variables

Clear Overrides Set Overrides

After deploying the pod you will see an instance created

Name	Utilization	Memory	Disk	Compute type	Cost	
 plastic_crimson_carp h7ns3ecp9kqx0d				 RTX 2000 Ada x1	\$0.25/hr	
10 per page						
< Page 1 of 1 >						

5. Connect your device to runpod

d. Copy the ssh key of the pod



e. Open VS code

f. Ctrl + Shift + P

i. Remote-SSH: Connect to Host

ii. Add New SSH Host


iii. Paste your run pod SSH

iv. Select the path where you had your .ssh folder

g. Ctrl + Shift + P

i. Remote – SSH : Connect to Host

ii. Check IP of your runpod

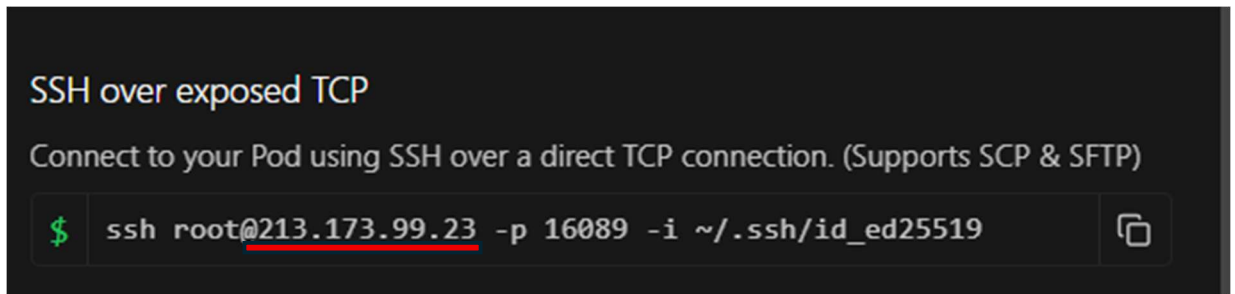


Here, the IP is 213.173.99.23, which is your SSH host.

This opens a new window. Select Linux and Continue.

6. Open terminal , Clone your GitHub repo

7. Enter your folder directory :

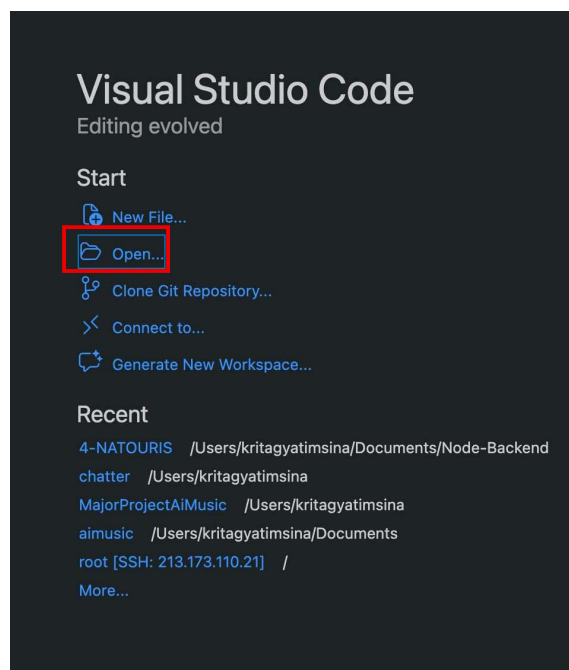

Simply click the “OPEN FOLDER” icon

8. Create virtual environment in terminal

```
python3 -m venv venv_name
```

```
source venv_name/bin/activate
```

9. Open terminal and check your GPU configuration


```
nvidia-smi
```

10. Transfer your dataset to the GPU storage

a. Through hugging face

b. Through WinSCP

i. Download WinSCP

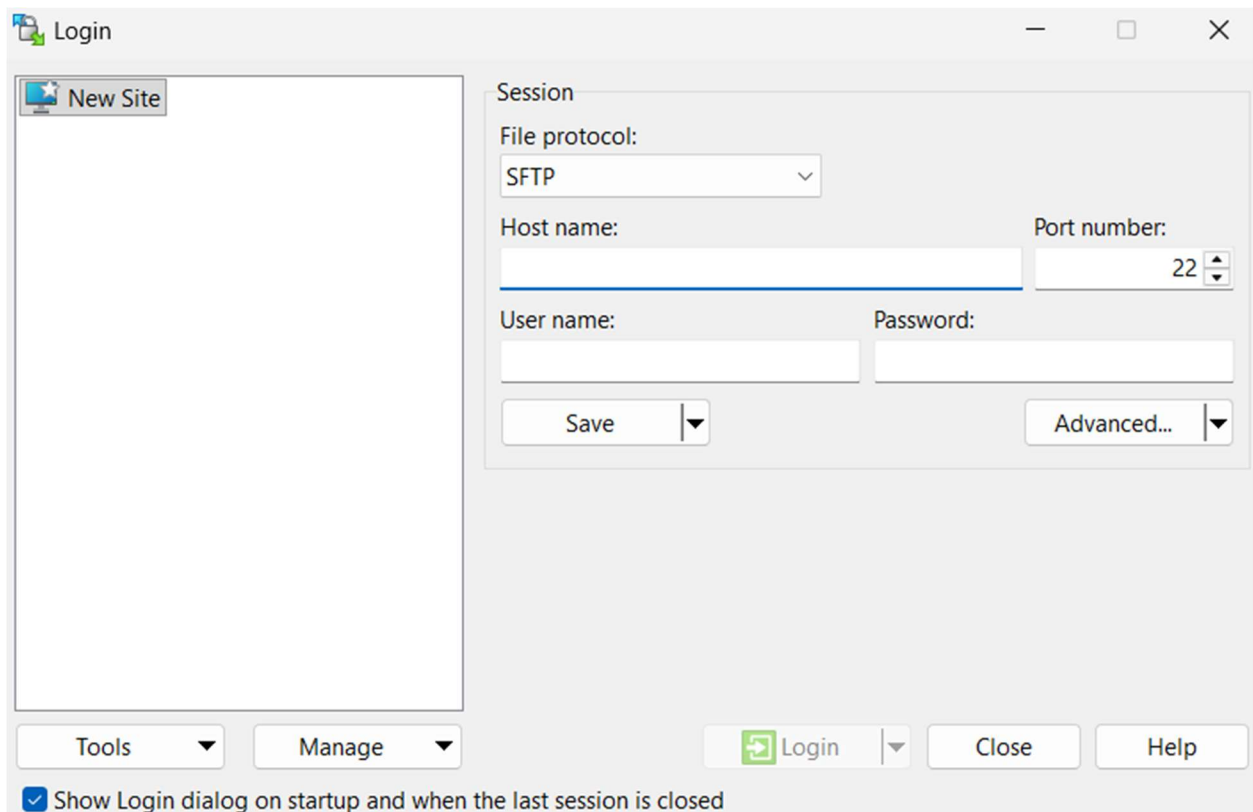

SSH over exposed TCP

Connect to your Pod using SSH over a direct TCP connection. (Supports SCP & SFTP)


```
$ ssh root@213.173.99.23 -p 16089 -i ~/.ssh/id_ed25519
```

Host name port

ii. User name = root


iii. Leave the password field blank

iv. Tools -> Run PuTTYgen

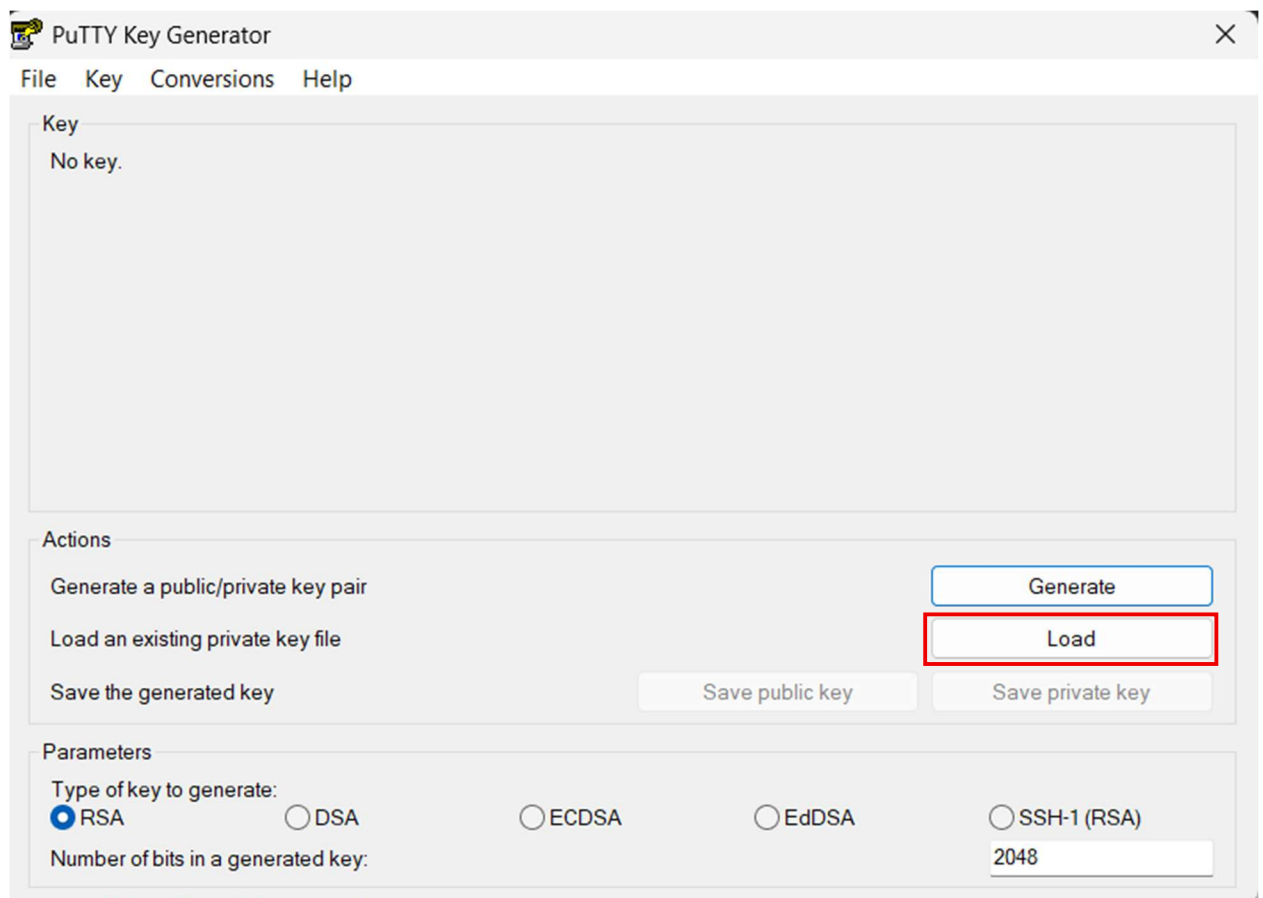



v. Load an existing private key file

- go to your .ssh folder where the generated ssh is located

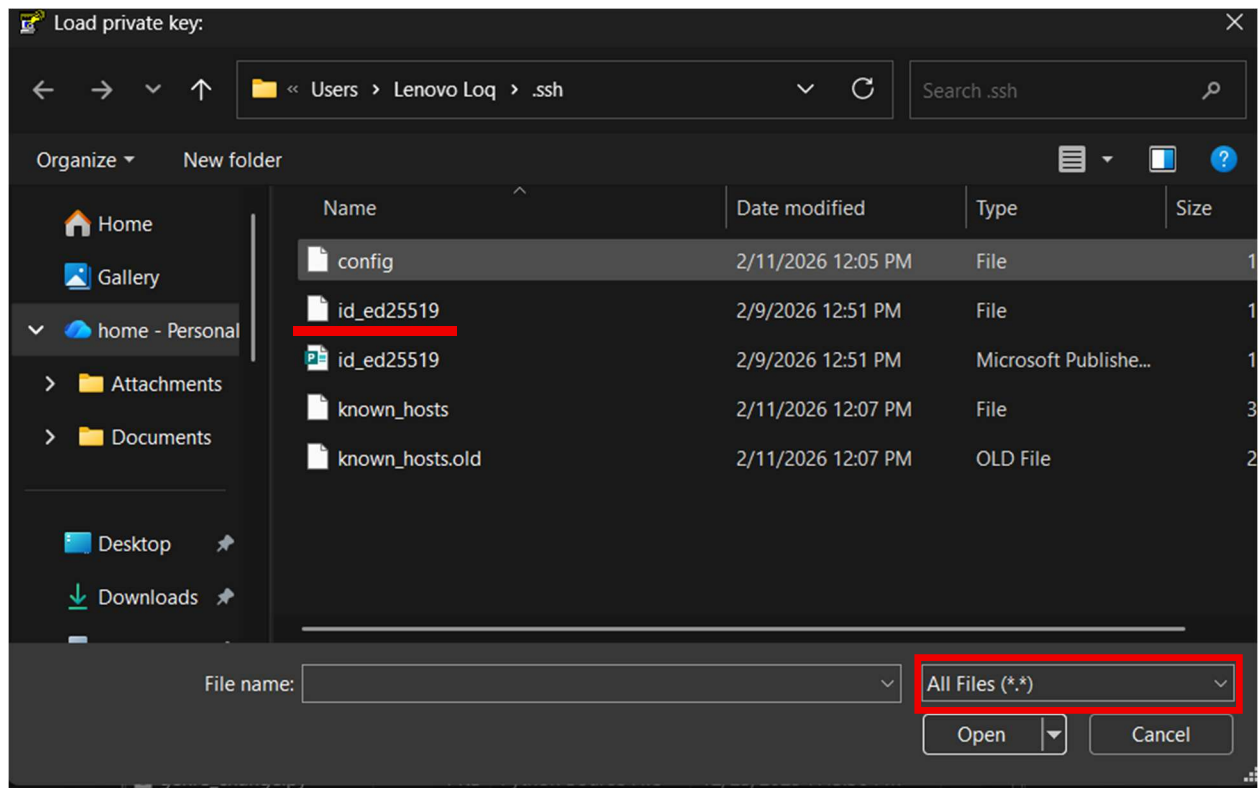


vi. Select all files

vii. Choose the ssh file

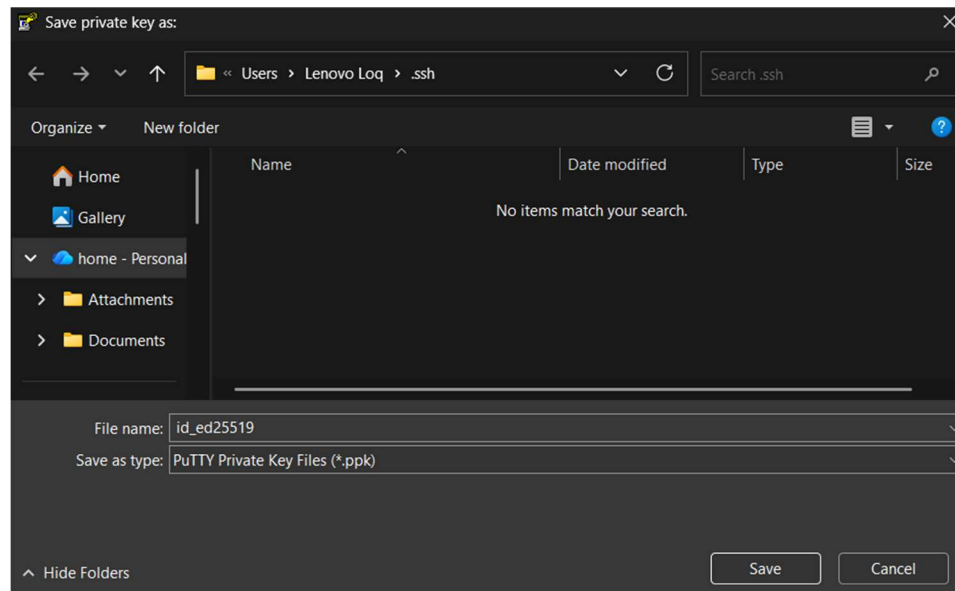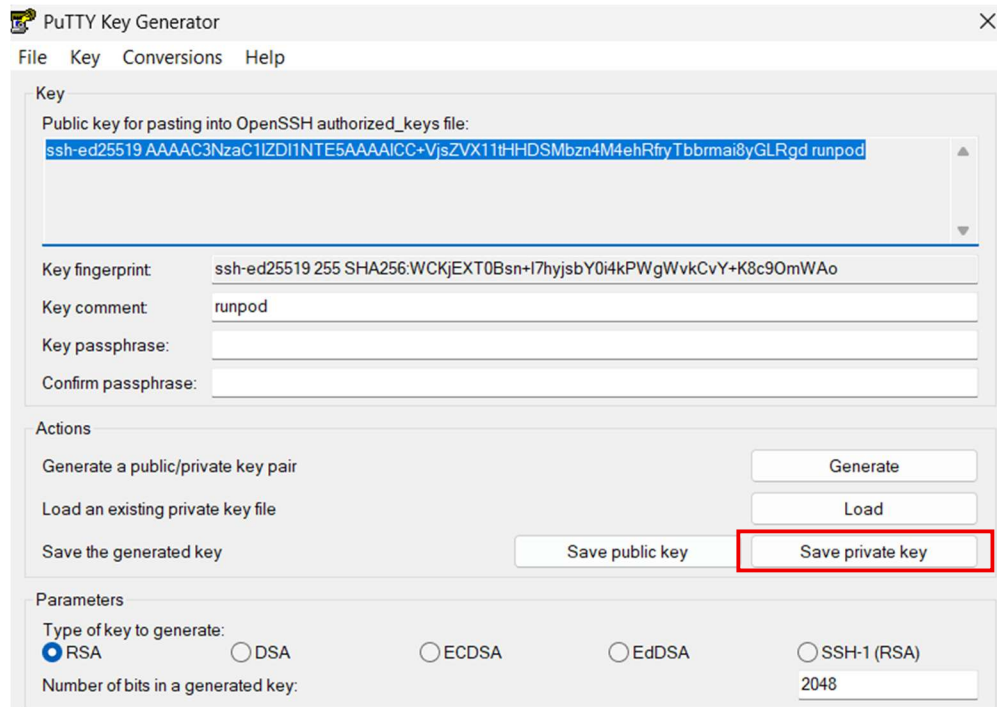


- viii. This generates the .ppk key
- ix. Save it a private key with the same name of your ssh key

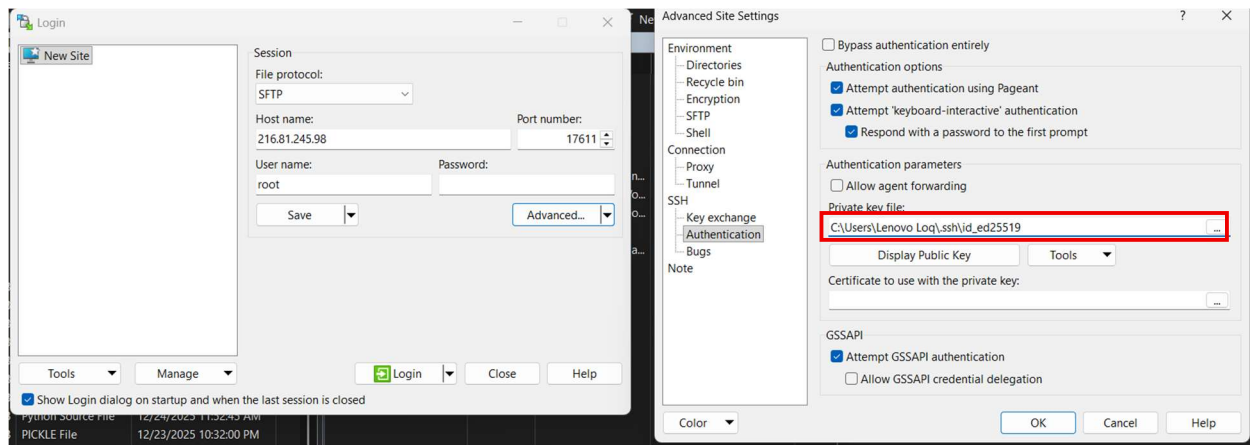


- x. Now go to advanced-> authentication, load the private key file (.ppk) and enter ok
- xi. Then log in into the server. This establishes the connection to the GPU storage.

For MAC :

- i. Install CyberDuck
- ii. Click open connection

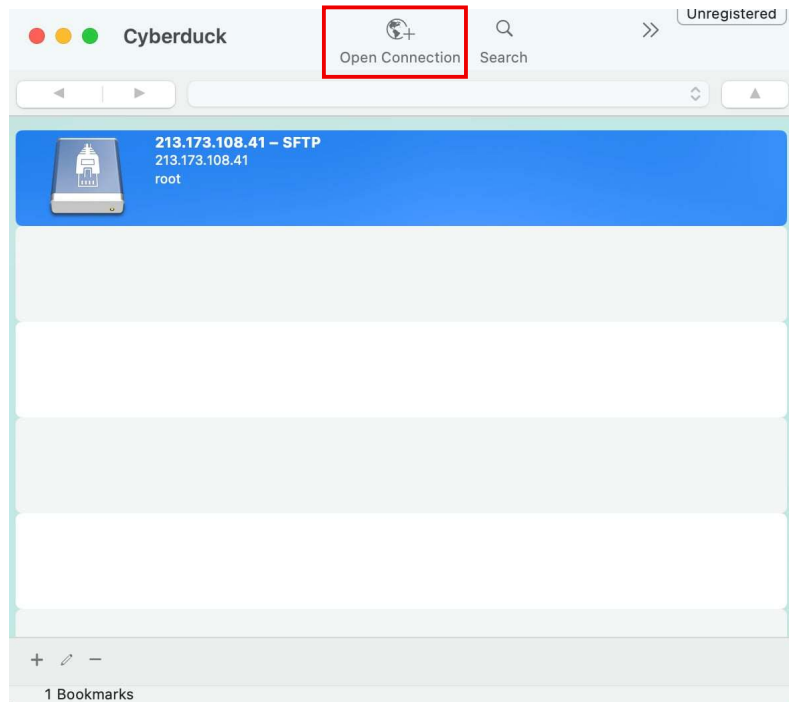

iii. Choose file mode as SFPT(SSH file transfer protocol)

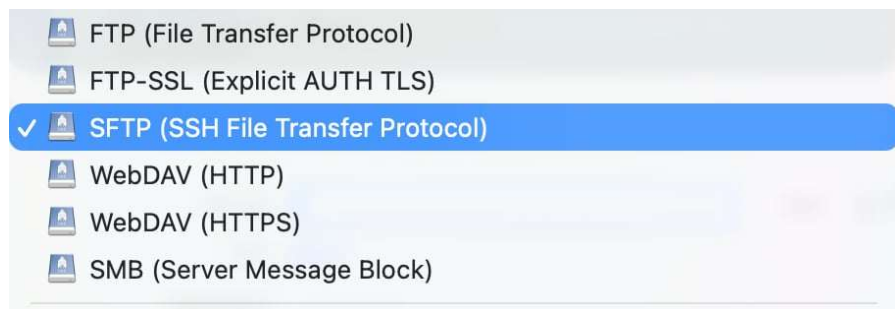

iv. Enter the server and port provided by runpod



HERE, 213.173.99.23 is server and 16089 is port


- v. Username = root
- vi. Key = your mac password
- vii. Click Connect

11. Detaching device from RUNPOD (VS CODE)

- i. Ctrl+Shift+P
- ii. remote-ssh : Close Remote Connection

12. Stop and Terminate your pods.

Make sure to terminate the instance as it charges \$0.01/hr for storage

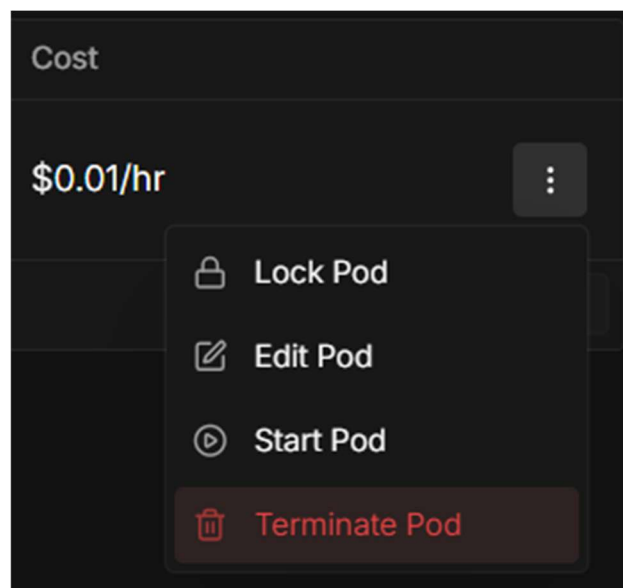

13. Tmux

This allows the GPU to run ,even when you close your device.
The process is not interrupted. Make sure you enter tmux mode first.

tmux attach -t translate

run your code, then

Ctrl+B then press D (safe detach)