

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY



NAME	Sahana.s
Roll No	241001210
BRANCH	<b>Information technology</b>
SECTION	FC

### **Definition of a Relational Database**

A relational database is a collection of relations or two-dimensional tables.

### **Terminologies Used in a Relational Database**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

---

1. A single **ROW** or table representing all data required for a particular employee. Each row should be identified by a primary key which allows no duplicate rows.
2. A **COLUMN** or attribute containing the employee number which identifies a unique employee. Here Employee number is designated as a primary key, must contain a value and must be unique.
3. A column may contain foreign key. Here Dept\_ID is a foreign key in employee table and it is a primary key in Department table.
4. A Field can be found at the intersection of a row and column. There can be only one value in it. Also it may have no value. This is called a null value.

EMP_ID	FIRST NAME	LAST NAME	EMAIL
100 101	King	Steven	Sking
102 103	John	Smith	Ismith
	Neena	Bai	Neenba
	Eex	De Haan	Ldehaan

### Relational Database Properties

#### A relational database :

- Can be accessed and modified by executing structured query language (SQL) statements.
- Contains a collection of tables with no physical pointers.
- Uses a set of operators

#### Relational Database Management Systems

RDBMS refers to relational database plus supporting software for managing users and processing SQL queries, performing backups/restores and associated tasks. (Relational Database Management System) Software for storing data using SQL (structured query language). A relational database uses SQL to store data in a series of tables that not only record existing relationships between data items, but which also permit the data to be joined in new relationships. SQL (pronounced 'sequel') is based on a system of algebra developed by E F Codd, an IBM scientist who first defined the relational model in 1970. Relational databases are optimized for storing transactional data, and the majority of modern business software applications therefore use an RDBMS as their data store. The leading RDBMS vendors are Oracle, IBM and Microsoft.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

The first commercial RDBMS was the Multics Relational Data Store, first sold in 1978. INGRES, Oracle, Sybase, Inc., Microsoft Access, and Microsoft SQL Server are well-known database products and companies. Others include PostgreSQL, SQL/DS, and RDB.

A relational database management system (RDBMS) is a program that lets you create, update, and administer a relational database. Most commercial RDBMS's use the Structured Query Language (SQL) to access the database, although SQL was invented after the development of the relational model and is not necessary for its use.

The leading RDBMS products are Oracle, IBM's DB2 and Microsoft's SQL Server. Despite repeated challenges by competing technologies, as well as the claim by some experts that no current RDBMS has fully implemented relational principles, the majority of new corporate databases are still being created and managed with an RDBMS. **SQL Statements**

1. Data Retrieval(DR)
2. Data Manipulation Language(DML)
3. Data Definition Language(DDL)
4. Data Control Language(DCL)
5. Transaction Control Language(TCL)

### TYPE STATEMENT

### DESCRIPTION

		Retrieves the data from the database
		Enter new rows, changes existing rows, removes unwanted rows from tables in the database respectively.
		Sets up, changes and removes data structures from tables.
		Manages the changes made by DML statements. Changes to the data can be grouped together into logical transactions.
		Gives or removes access rights to both the oracle database and the structures within it.
DR	SELECT	

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

DML	1.INSERT 2.UPDATE 3.DELETE 4.MERGE
DDL	1.CREATE 2.ALTER 3.DROP 4.RENAME 5.TRUNCATE
TCL	1.COMMIT 2.ROLLBACK 3.SAVEPOINT
	1.GRANT 2.REVOKE
DCL	

### DATA TYPES

#### 1. Character Data types:

- Char – fixedlength character string that can varies between 1-2000 bytes
- Varchar / Varchar2 – variable length character string, size ranges from 1-4000 bytes.it saves the disk space(only length of the entered value will be assigned as the size of column)
- Long - variable length character string, maximum size is 2 GB

#### 2. Number Data types : Can store +ve,-ve,zero,fixed point, floating point with 38

precision.

- Number – {p=38,s=0}
- Number(p) - fixed point
- 3. Number(p,s) –floating point (p=1 to 38,s= -84 to 127)
- **Date Time Data type:** used to store date and time in the table.  
DB uses its own format of storing in fixed length of 7 bytes for century, date, month,

year, hour, minutes, and seconds.

- Default data type is “dd-mon-yy”
- New Date time data types have been introduced. They are  
TIMESTAMP-Date with fractional seconds  
INTERVAL YEAR TO MONTH-stored as an interval of years and months

INTERVAL DAY TO SECOND-stored as o interval of days to hour’s minutes and seconds

#### 4. Raw Data type: used to store byte oriented data like binary data and byte string.

5.

- **Other :**

▪

CLOB–stores character object with singlebyte character.

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

BLOB—stores large binary objects such as graphics, video, sounds.

BFILE—stores file pointers to the LOB's.

## EXERCISE-1

### Creating and Managing Tables

#### OBJECTIVE

After the completion of this exercise, students should be able to do the following:

Create tables

Describing the data types that can be used when specifying column definition

Alter table definitions

Drop, rename, and truncate tables

#### NAMING RULES

Table names and column names:

- Must begin with a letter
- Must be 1-30 characters long
- Must contain only A-Z, a-z, 0-9, \_, \$, and #
- Must not duplicate the name of another object owned by the same user • Must not be an Oracle server reserved word
- 2 different tables should not have the same name.
- Should specify a unique column name.
- Should specify proper data type along with width
- Can include "not null" condition when needed. By default it is 'null'.

#### The CREATE TABLE Statement

**Table:** Basic unit of storage; composed of rows and columns

**Syntax: 1** Create table table\_name (column\_name1 data\_type (size) column\_name2 data\_type (size) ...);

**Syntax: 2** Create table table\_name (column\_name1 data\_type (size) constraints, column\_name2 data\_type constraints ...);

#### Example:

Create table employees ( employee\_id number(6), first\_name varchar2(20), ..job\_id varchar2(10), CONSTRAINT emp\_emp\_id\_pk PRIMARY KEY (employee\_id));

#### **Tables Used in this course**

---

#### **Creating a table by using a Sub query**

---

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### SYNTAX

//CREATE TABLE table\_name(column\_name type(size)...);

Create table table\_name **as** select column\_name1,column\_name2,.....column\_namen

from table\_name where  
predicate;

### AS Subquery

Subquery is the select statement that defines the set of rows to be inserted into the new table.

### Example

CREATE table dept80 as select employee\_id, last\_name, salary\*12 Annsal, hire\_date

from employees where dept\_id=80;

### The ALTER TABLE Statement

The ALTER statement is used to

- Add a new column
- Modify an existing column
- Define a default value to the new column
- Drop a column
- To include or drop integrity constraint.

### SYNTAX

ALTER TABLE table\_name ADD /MODIFY(Column\_name type(size));

ALTER TABLE table\_name DROP COLUMN (Column\_name);

*ALTER TABLE ADD CONSTRAINT Constraint\_name PRIMARY KEY (Column\_Name);*

### Example:

---

Alter table dept80 add (job\_id varchar2(9));

Alter table dept80 modify (last\_name varchar2(30));

Alter table dept80 drop column job\_id;

### NOTE:

Once the column is dropped it cannot be recovered.

### DROPPING A TABLE

- 
- All data and structure in the table is deleted.
  - Any pending transactions are committed.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- All indexes are dropped.
- Cannot roll back the drop table statement.

### Syntax: Drop table

*tablename*; Example:

Drop table dept80;

### **RENAMING A TABLE**

To rename a table or view.

### Syntax

RENAME old\_name to new\_name

**Example:**

\_\_\_\_\_

Rename dept to detail\_dept; **TRUNCATING A TABLE**

\_\_\_\_\_

Removes all rows from the table. Releases the storage space used by that table.

### Syntax

TRUNCATE TABLE *table\_name*; Example:

TRUNCATE TABLE copy\_emp;

**Find the Solution for the following:**

\_\_\_\_\_

**Create the following tables with the given structure.**

### **EMPLOYEES TABLE**

NAME	NULL?	TYPE
Employee_id	Not null	Number(6)
First_Name		Varchar(20)
Last_Name	Not null	Varchar(25)

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

Email	Not null	Varchar(25)
Phone_Number		Varchar(20)
Hire_date	Not null	Date
Job_id	Not null	Varchar(10)
Salary		Number(8,2)
Commission_pct		Number(2,2)
Manager_id		Number(6)
Department_id		Number(4)

CREATE TABLE EMPLOYEE (

Employee\_id      NUMBER(6)   NOT NULL,  
First\_Name        VARCHAR2(20),  
Last\_Name         VARCHAR2(25) NOT NULL,  
Email              VARCHAR2(25) NOT NULL,  
Phone\_Number VARCHAR2(20),  
Hire\_date         DATE        NOT NULL,  
Job\_id             VARCHAR2(10) NOT NULL,  
Salary            NUMBER(8,2),  
Commission\_pct NUMBER(2,2),  
Manager\_id        NUMBER(6),  
Department\_id NUMBER(4)  
);

### DEPARTMENT TABLE

NAME	NULL?	TYPE
Dept_id	Not null	Number(6)
Dept_name	Not null	Varchar(20)
Manager_id		Number(6)
Location_id		Number(4)

CREATE TABLE DEPARTMENT (

Dept\_id        NUMBER(6) NOT NULL,  
Dept\_name VARCHAR2(20) NOT NULL,  
Manager\_id NUMBER(6),  
Location\_id NUMBER(4)  
);

### JOB\_GRADE TABLE

NAME	NULL?	TYPE
Grade_level		Varchar(2)
Lowest_sal		Number
Highest_sal		Number

CREATE TABLE SAL\_GRADE (



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```

Grade_level VARCHAR2(2),
Lowest_sal NUMBER,
Highest_sal NUMBER
);

```

### LOCATION TABLE

NAME	NULL?	TYPE
Location_id	Not null	Number(4)
St_addr		Varchar(40)
Postal_code		Varchar(12)
City	Not null	Varchar(30)
State_province		Varchar(25)
Country_id		Char(2)

```

CRLEoAcaTtiEoTnA_iBdLELNOUCMABTEIORN(4 )(
NOT NULL,

```

```

St_addr      VARCHAR2(40),
Postal_code   VARCHAR2(12),
City          VARCHAR2(30) NOT NULL,
State_province VARCHAR2(25),
Country_id    CHAR(2)
);

```

1. Create the DEPT table based on the DEPARTMENT following the table instance chart below. Confirm that the table is created.

Column name	ID	NAME
Key Type		
Nulls/Unique		
EK table		
EK column		
Data Type	Number	Varchar2
Length	7	25

```

CREATE TABLE DEPT (ID NUMBER(7), NAME VARCHAR2(25) );

```

2. Create the EMP table based on the following instance chart. Confirm that the table is created.

Column name	ID	LAST_NAME	FIRST_NAME	DEPT_ID
Key Type				
Nulls/Unique				
EK table				
EK column				

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

Data Type	Number	Varchar2	Varchar2	Number
Length	7	25	25	7

```
CREATE TABLE EMPLOYEE_SIMPLE (  
    ID      NUMBER(7),  
    LAST_NAME  VARCHAR2(25),  
    FIRST_NAME VARCHAR2(25),  
    DEPT_ID   NUMBER(7)  
);
```

With enhancements

```
CREATE TABLE EMPLOYEE_SIMPLE (  
  
    ID      NUMBER(7) PRIMARY KEY,  
    LAST_NAME VARCHAR2(25) NOT NULL,  
    FIRST_NAME VARCHAR2(25),  
    DEPT_ID   NUMBER(7),  
    CONSTRAINT fk_dept  
        FOREIGN KEY (DEPT_ID) REFERENCES DEPT(ID)  
);
```

3.

Modify the EMP table to allow for longer employee last names. Confirm the modification.(Hint: Increase the size to 50)

```
ALTER TABLE EMP MODIFY LAST_NAME VARCHAR2(50);
```

4. Create the EMPLOYEES2 table based on the structure of EMPLOYEES table. Include Only the Employee\_id, First\_name, Last\_name, Salary and Dept\_id columns. Name the columns Id, First\_name, Last\_name, salary and Dept\_id respectively.

```
CREATE TABLE EMPLOYEES2 AS  
SELECT  
    Employee_id AS Id,  
    First_name,  
    Last_name,  
    Salary,  
    Dept_id  
FROM EMPLOYEES  
WHERE 1=0;
```

WHERE 1=0 ensures **no data is copied**, only the structure.

5. Drop the EMP table. **DROP TABLE EMP;**

6. Rename the EMPLOYEES2 table as EMP.

```
RENAME EMPLOYEES2 TO EMP;
```

7. Add a comment on DEPT and EMP tables. Confirm the modification by describing the table.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

COMMENT ON TABLE DEPT IS 'This table stores department information';

COMMENT ON TABLE EMP IS 'This table stores employee details'; 8.

Drop the First\_name column from the EMP table and confirm it.

**ALTER TABLE EMP DROP COLUMN First\_name;**

**DESC EMP;**

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## EXERCISE-2

### MANIPULATING DATA

#### OBJECTIVE

After, the completion of this exercise the students will be able to do the following

- Describe each DML statement
- Insert rows into tables
- Update rows into table
- Delete rows from table • Control Transactions

A DML statement is executed when you:

- Add new rows to a table
- Modify existing rows
- Removing existing rows

A transaction consists of a collection of DML statements that form a logical unit of work.

#### To Add a New Row

INSERT Statement

#### Syntax

INSERT INTO table\_name VALUES (column1 values, column2 values, ..., columnn values);

#### Example:

INSERT INTO department (70, 'Public relations', 100, 1700);

#### Inserting rows with null values

Implicit Method: (Omit the column)

INSERT INTO department VALUES (30, 'purchasing');

Explicit Method: (Specify NULL keyword)

INSERT INTO department VALUES (100, 'finance', NULL, NULL);

#### Inserting Special Values

#### Example:

Using SYSDATE

INSERT INTO employees VALUES (113, 'louis', 'popp', 'lpopp', '5151244567',  
'ac\_account', 6900, NULL, 205, 100); SYSDATE,

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### Inserting Specific Date Values

#### Example:

```
INSERT INTO employees VALUES ( 114,'den', 'raphealy', 'drapheal', '5151274561',  
TO_DATE('feb 3,1999','mon, dd ,yyyy'),'ac_account', 11000,100,30);
```

### To Insert Multiple Rows

& is the placeholder for the variable value

#### Example:

```
INSERT INTO department VALUES(&dept_id, &dept_name, &location);
```

### Copying Rows from another table

Using Subquery

#### Example:

```
INSERT INTO sales_reps(id, name, salary, commission_pct)  
SELECT employee_id, Last_name, salary, commission_pct  
FROM employees  
WHERE job_id LIKE '%REP');
```

### CHANGING DATA IN A TABLE

UPDATE Statement

#### Syntax1: (to update specific rows )

```
UPDATE table_name SET column=value WHERE condition;
```

#### Syntax 2: (To update all rows)

```
UPDATE table_name SET column=value;
```

### Updating columns with a subquery

---

```
UPDATE employees SET  
job_id= (SELECT job_id  
FROM employees WHERE  
employee_id=205) WHERE  
employee_id=114;
```

### REMOVING A ROW FROM A TABLE

### DELETE STATEMENT

#### Syntax

```
DELETE FROM table_name WHERE conditions;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### Example:

DELETE FROM department WHERE dept\_name='finance';

### Find the Solution for the following:

1. Create MY\_EMPLOYEE table with the following structure

NAME	NULL?	TYPE
ID	Not null	Number(4)
Last_name		Varchar(25)
First_name		Varchar(25)
Userid		Varchar(25)
Salary		Number(9,2)

CREATE TABLE STAFF ( ID

NUMBER(4) NOT NULL,

Last\_name VARCHAR2(25),

First\_name VARCHAR2(25),

Userid VARCHAR2(25),

Salary NUMBER(9,2)

);

- 2.

data.

ID	Last_name	First_name	Userid	salary
1 2 3	Patel	Ralph	rpatel	895
4 5	Dancs	Betty	bdancs	860
	Newman	Ben	bnewman	750
	Ropebur	Audrey	aropebur	1550

Add the first

and second rows data to MY\_EMPLOYEE table from the following sample

INSERT INTO MY\_EMPLOYEE (ID, Last\_name, First\_name, Userid, Salary)

VALUES (1, 'Patel', 'Ralph', 'rpatel', 895);

INSERT INTO MY\_EMPLOYEE (ID, Last\_name, First\_name, Userid, Salary)

VALUES (2, 'Dancs', 'Betty', 'bdancs', 860);

3. Display the table with values.

SELECT \* FROM MY\_EMPLOYEE;

4. Populate the next two rows of data from the sample data. Concatenate the first letter of the first\_name with the first seven characters of the last\_name to produce Userid.

INSERT INTO MY\_EMPLOYEE (ID, Last\_name, First\_name, Userid, Salary)

VALUES (

3,

'Biri',

'Ben',

SUBSTR('Ben', 1, 1) || SUBSTR('Biri', 1, 7),

1100

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
);  
INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary)  
VALUES (
```

```
4,  
'Newman',  
'Chad',  
SUBSTR('Chad', 1, 1) || SUBSTR('Newman', 1, 7),  
750
```

```
);
```

5.

Make the data additions permanent.

```
COMMIT;
```

6. Change the last name of employee 3 to Drexler.

```
UPDATE MY_EMPLOYEE  
SET Last_name = 'Drexler'  
WHERE ID = 3;
```

7. Change the salary to 1000 for all the employees with a salary less than 900.

```
UPDATE MY_EMPLOYEE  
SET Salary = 1000  
WHERE Salary < 900;
```

8. Delete Betty dances from MY\_EMPLOYEE table.

```
DELETE FROM MY_EMPLOYEE  
WHERE First_name = 'Betty' AND Last_name = 'Dances';
```

9. Empty the fourth row of the emp table.

```
UPDATE MY_EMPLOYEE SET Last_name = NULL, First_name = NULL, Userid  
= NULL, Salary = NULL WHERE ID = 4;
```

### EXERCISE-3

### INCLUDING CONSTRAINTS

#### OBJECTIVE

After the completion of this exercise the students should be able to do the following

- Describe the constraints

WhataCrere Iantete agnrndit my caoinntsatirna tihnet sc?onstraints

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- Constraints enforce rules at the table level.
- Constraints prevent the deletion of a table if there are dependencies. The

**following types of integrity constraints are valid**

a) **Domain Integrity**

✓

✓ NOT NULL  
CHECK

b) **Entity Integrity**

✓

UNIQUE

✓

PRIMARY KEY

**Referential Integrity**

c)

FOREIGN KEY

✓

**Constraints can be created in either of two ways**

1. At the same time as the table is created
2. After the table has been created.

### **Defining Constraints**

Create table table\_name (column\_name1 data\_type constraints, column\_name2 data\_type constraints...); **Example:**

Create table employees ( employee\_id number(6), first\_name varchar2(20), ..job\_id varchar2(10), CONSTRAINT emp\_emp\_id\_pk PRIMARY KEY (employee\_id));

### **Domain Integrity**

This constraint sets a range and any violations that take place will prevent the user from performing the manipulation that caused the breach. It includes:

#### **NOT NULL Constraint**

While creating tables, by default the rows can have null values. The enforcement of not null constraint in a table ensures that the table contains values.

### **Principle of null values:**



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- o Setting null value is appropriate when the actual value is unknown, or when a value would not be meaningful.
- o A null value is not equivalent to a value of zero.
- o A null value will always evaluate to null in any expression.
- o When a column name is defined as not null, that column becomes a mandatory i.e., the user has to enter data into it.
- o Not null Integrity constraint cannot be defined using the alter table command when the table contains rows. **Example** `CREATE TABLE employees (employee_id number (6), last_name varchar2(25) NOT NULL, salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL'....);` **CHECK** Check constraint can be defined to allow only a particular range of values. when the manipulation violates this constraint, the record will be rejected. Check condition cannot contain sub queries. `CREATE TABLE employees (employee_id number (6), last_name varchar2 (25) NOT NULL, salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL'..., CONSTRAINT emp_salary_mi CHECK(salary > 0));`

### Entity Integrity

Maintains uniqueness in a record. An entity represents a table and each row of a table represents an instance of that entity. To identify each row in a table uniquely we need to use this constraint. There are 2 entity constraints:

#### **a) Unique key constraint**

It is used to ensure that information in the column for each record is unique, as with telephone or driver's license numbers. It prevents the duplication of value with rows of a specified column in a set of column. A column defined with the constraint can allow null value. If unique key constraint is defined in more than one column i.e., combination of column cannot be specified. Maximum combination of columns that a composite unique key can contain is 16.

### Example:

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT NULL, email
varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date
constraint emp_hire_date_nn NOT NULL' COCONSTRAINT emp_email_uk UNIQUE(email));
```

### PRIMARY KEY CONSTRAINT

A primary key avoids duplication of rows and does not allow null values. Can be defined on one or more columns in a table and is used to uniquely identify each row in a table. These values should never be

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

changed and should never be null. A table should have only one primary key. If a primary key constraint is assigned to more than one column or combination of columns said to be composite primary key, which can contain 16 columns **Example:**

---

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT NULL, email
varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date
constraint emp_hire_date_nn NOT NULL, Constraint emp_id pk PRIMARY KEY
(employee_id), CONSTRAINT emp_email_uk UNIQUE(email));
```

**c) Referential Integrity**

It enforces relationship between tables. To establish parent-child relationship between 2 tables having a common column definition, we make use of this constraint. To implement this, we should define the column in the parent table as primary key and same column in the child table as foreign key referring to the corresponding parent entry.

### **Foreign key**

---

A column or combination of columns included in the definition of referential integrity, which would refer to a referenced key.

### **Referenced key**

It is a unique or primary key upon which is defined on a column belonging to the parent table.

Keywords:

**FOREIGN KEY:** Defines the column in the child table at the table level constraint.

**REFERENCES:** Identifies the table and column in the parent table.

**ON DELETE CASCADE:** Deletes the dependent rows in the child table when a row in the parent table is deleted.

**ON DELETE SET NULL:** converts dependent foreign key values to null when the parent value is removed.

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT
NULL, email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date
constraint emp_hire_date_nn NOT NULL, Constraint emp_id pk PRIMARY KEY
(employee_id), CONSTRAINT emp_email_uk UNIQUE(email), CONSTRAINT emp_dept_fk
FOREIGN KEY (department_id) references departments(dept_id));
```

### **ADDING A CONSTRAINT**

Use the ALTER to

- Add or Drop a constraint, but not modify the structure

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- Enable or Disable the constraints
- Add a not null constraint by using the Modify clause

### Syntax

ALTER TABLE table name ADD CONSTRAINT Cons\_name type(column name); **Example:**

---

ALTER TABLE employees ADD CONSTRAINT emp\_manager\_fk FOREIGN KEY (manager\_id) REFERENCES employees (employee\_id);

### DROPPING A CONSTRAINT

#### Example:

ALTER TABLE employees DROP CONSTRAINT emp\_manager\_fk;

#### CASCADE IN DROP

- The CASCADE option of the DROP clause causes any dependent constraints also to be dropped.

### Syntax

ALTER TABLE departments DROP PRIMARY KEY|UNIQUE (column)| CONSTRAINT constraint\_name CASCADE;

### DISABLING CONSTRAINTS

- 
- Execute the DISABLE clause of the ALTER TABLE statement to deactivate an integrity constraint
  - Apply the CASCADE option to disable dependent integrity constraints.

#### Example

ALTER TABLE employees DISABLE CONSTRAINT emp\_emp\_id\_pk CASCADE;

### ENABLING CONSTRAINTS

- Activate an integrity constraint currently disabled in the table definition by using the ENABLE clause.

#### Example

ALTER TABLE employees ENABLE CONSTRAINT emp\_emp\_id\_pk CASCADE;

#### CASCADING CONSTRAINTS

The CASCADE CONSTRAINTS clause is used along with the DROP column clause.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

It drops all referential integrity constraints that refer to the primary and unique keys defined on the dropped columns.

This clause also drops all multicolumn constraints defined on the dropped column.

### Example:

Assume table TEST1 with the following structure

---

```
CREATE TABLE test1 ( pk number PRIMARY KEY, fk number, col1 number, col2 number,
CONSTRAINT fk_constraint FOREIGN KEY(fk) references test1, CONSTRAINT ck1 CHECK
(pk>0 and col1>0), CONSTRAINT ck2 CHECK (col2>0));
```

An error is returned for the following statements

```
ALTER TABLE test1 DROP (pk);
```

```
ALTER TABLE test1 DROP (col1);
```

The above statement can be written with CASCADE CONSTRAINT

```
ALTER TABLE test 1 DROP(pk) CASCADE CONSTRAINTS;
```

(OR)

```
ALTER TABLE test 1 DROP(pk, fk, col1) CASCADE CONSTRAINTS;
```

### VIEWING CONSTRAINTS

Query the USER\_CONSTRAINTS table to view all the constraints definition and names.

### Example:

---

```
SELECT constraint_name, constraint_type, search_condition FROM user_constraints
WHERE table_name='employees';
```

Viewing the columns associated with constraints

---

```
SELECT constraint_name, constraint_type, FROM user_cons_columns
WHERE table_name='employees';
```

### Find the Solution for the following:

1. Add a table-level PRIMARY KEY constraint to the EMP table on the ID column. The constraint should be named at creation. Name the constraint my\_emp\_id\_pk.

**ALTER TABLE EMP ADD CONSTRAINT my\_emp\_id\_pk PRIMARY KEY (ID);**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

To check null and duplicates

```
SELECT * FROM EMP WHERE ID IS NULL;
```

```
SELECT ID, COUNT(*) AS count  
FROM EMP  
GROUP BY ID  
HAVING COUNT(*) > 1;
```

2. Create a PRIMARY KEY constraint to the DEPT table using the ID column. The constraint should be named at creation. Name the constraint my\_dept\_id\_pk.

```
ALTER TABLE DEPT ADD CONSTRAINT my_dept_id_pk PRIMARY KEY (ID);
```

3. Add a column DEPT\_ID to the EMP table. Add a foreign key reference on the EMP table that ensures that the employee is not assigned to nonexistent department. Name the constraint my\_emp\_dept\_id\_fk.

```
ALTER TABLE EMP ADD DEPT_ID NUMBER;
```

```
ALTER TABLE EMP  
ADD CONSTRAINT my_emp_dept_id_fk  
FOREIGN KEY (DEPT_ID)  
REFERENCES DEPT(ID);
```

4. Modify the EMP table. Add a COMMISSION column of NUMBER data type, precision 2, scale 2. Add a constraint to the commission column that ensures that a commission value is greater than zero.

```
ALTER TABLE EMP ADD COMMISSION NUMBER(2, 2);
```

```
ALTER TABLE EMP  
ADD CONSTRAINT emp_commission_check  
CHECK (COMMISSION > 0);
```

### EXERCISE-4

#### Writing Basic SQL SELECT Statements

#### OBJECTIVES

After the completion of this exercise, the students will be able to do the following:

- List the capabilities of SQL SELECT Statement

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- Execute a basic SELECT statement

## **Capabilities of SQL SELECT statement**

A SELECT statement retrieves information from the database. Using a select statement, we can perform

✓ ✓

Projection: To choose the columns in a table

✓

Selection: To choose the rows in a table

Joining: To bring together the data that is stored in different tables

## **Basic SELECT Statement**

### **Syntax**

```
SELECT * | DISTINCT Column_name | alias  
FROM table_name;
```

### **NOTE:**

DISTINCT—Suppress the duplicates.

Alias—gives selected columns different headings.

### **Example: 1**

```
SELECT * FROM departments;
```

### **Example: 2**

```
SELECT location_id, department_id FROM departments;
```

## **Writing SQL Statements**

- • • • SQL statements are not case sensitive
- SQL statements can be on one or more lines.
- Keywords cannot be abbreviated or split across lines
- Clauses are usually placed on separate lines
- Indents are used to enhance readability

## **Using Arithmetic Expressions**

Basic Arithmetic operators like \*, /, +, - can be used

### **Example: 1**

```
SELECT last_name, salary, salary+300 FROM employees;
```

### **Example: 2**

```
SELECT last_name, salary, 12*salary+100 FROM employees;
```

The statement is not same as

```
SELECT last_name, salary, 12*(salary+100) FROM employees;
```

### **Example: 3**

```
SELECT last_name, job_id, salary, commission_pct FROM employees;
```

### **Example: 4**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SELECT last_name, job_id, salary, 12*salary*commission_pct FROM employees;
```

### Using Column Alias

- To rename a column heading with or without AS keyword.

#### **Example:1**

```
SELECT last_name AS Name  
FROM employees;
```

#### **Example: 2**

```
SELECT last_name "Name" salary*12 "Annual Salary "  
FROM employees;
```

### Concatenation Operator

- Concatenates columns or character strings to other columns
- Represented by two vertical bars (||)
- Creates a resultant column that is a character expression

#### **Example:**

```
SELECT last_name || job_id AS "EMPLOYEES JOB" FROM employees;
```

### Using Literal Character String

- A literal is a character, a number, or a date included in the SELECT list.
- Date and character literal values must be enclosed within single quotation marks.

#### **Example:**

```
SELECT last_name || 'is a' || job_id AS "EMPLOYEES JOB" FROM employees;
```

### Eliminating Duplicate Rows

- Using DISTINCT keyword.

#### **Example:**

```
SELECT DISTINCT department_id FROM employees;
```

### Displaying Table Structure

- Using DESC keyword.

#### **Syntax**

```
DESC table_name;
```

#### **Example:**

```
DESC employees;
```

### Find the Solution for the following:

**True OR False** The following statement executes successfully. **alse**

**1) Identify the Errors**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SELECT employee_id, last_name sal*12  
ANNUAL SALARY  
FROM employees;
```

### Queries

```
SELECT employee_id, last_name,  
  
       salary * 12 AS annual_salary  
FROM employees;
```

2. Show the structure of departments the table. Select all the data from it.

```
DESC departments;  
SELECT * FROM departments;
```

3. Create a query to display the last name, job code, hire date, and employee number for each employee, with employee number appearing first.

```
SELECT employee_id, last_name, job_id, hire_date FROM employees;
```

4. Provide an alias STARTDATE for the hire date.

```
SELECT employee_id, last_name, job_id, hire_date AS STARTDATE FROM  
employees;
```

5. Create a query to display unique job codes from the employee table.

```
SELECT DISTINCT job_id FROM employees;
```

6. Display the last name concatenated with the job ID , separated by a comma and space, and name the column EMPLOYEE and TITLE.

```
SELECT last_name || ', ' || job_id AS "EMPLOYEE AND TITLE"  
FROM employees;
```

7. Create a query to display all the data from the employees table. Separate each column by a comma. Name the column THE\_OUTPUT. **SELECT**

```
employee_id || ', ' ||  
first_name || ', ' ||  
last_name || ', ' ||  
email || ', ' ||
```



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
phone_number || ', ' ||  
hire_date || ', ' ||  
job_id || ', ' ||  
salary || ', ' ||  
commission_pct || ', ' ||  
manager_id || ', ' ||  
department_id AS "THE_OUTPUT"  
FROM employees;
```

### EXERCISE-5

#### Restricting and Sorting data

After the completion of this exercise, the students will be able to do the following:

- Limit the rows retrieved by the queries
- Sort the rows retrieved by the queries
- 

#### Limiting the Rows selected

- Using WHERE clause
- Alias cannot be used in WHERE clause

#### Syntax

SELECT-----

FROM-----

WHERE condition;

#### **Example:**

---

```
SELECT employee_id, last_name, job_id, department_id FROM employees WHERE  
department_id=90;
```

#### **Character strings and Dates**

Character strings and date values are enclosed in single quotation marks.

---

Character values are case sensitive and date values are format sensitive.

#### **Example:**

```
SELECT employee_id, last_name, job_id, department_id FROM employees  
WHERE last_name='WHALEN';
```

#### **Comparison Conditions**

All relational operators can be used. (=, >, >=, <, <=, <>, !=)

#### **Example:**

---

```
SELECT last_name, salary  
FROM employees
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

WHERE salary <= 3000;

---

### Other comparison conditions

Operator	Meaning
BETWEEN ...AND...	Between two values
IN	Match any of a list of values
LIKE	Match a character pattern
IS NULL	Is a null values

#### Example:1

```
SELECT last_name, salary
FROM employees
WHERE salary BETWEEN 2500 AND 3500;
```

#### Example:2

```
SELECT employee_id, last_name, salary, manager_id
FROM employees
WHERE manager_id IN (101, 100, 201);
```

#### Example:3

- ● Use the LIKE condition to perform wildcard searches of valid string values.
- ▪ Two symbols can be used to construct the search string
  - % denotes zero or more characters
  - \_ denotes one character

```
SELECT first_name, salary
FROM employees
WHERE first_name LIKE '%s';
```

#### Example:4

```
SELECT last_name, salary
FROM employees
WHERE last_name LIKE '_o%';
```

#### Example:5

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

**ESCAPE option**-To have an exact match for the actual % and \_ characters  
To search for the string that contain 'SA\_'

```
SELECT employee_id, first_name, salary, job_id
FROM employees
WHERE job_id LIKE '%sa\_%' ESCAPE '\';
```

**Test for NULL** • Using IS NULL operator

### Example:

```
SELECT employee_id, last_name, salary, manager_id
FROM employees
WHERE manager_id IS NULL;
```

### **Logical Conditions**

---

All logical operators can be used. (AND, OR, NOT) **Example:1**

```
SELECT employee_id, last_name, salary, job_id
FROM employees
WHERE salary >= 10000
AND job_id LIKE '%MAN%';
```

### **Example:2**

```
SELECT employee_id, last_name, salary, job_id
FROM employees
WHERE salary >= 10000
OR job_id LIKE '%MAN%';
```

### **Example:3**

```
SELECT employee_id, last_name, salary, job_id
FROM employees
WHERE job_id NOT IN ('it_prog', 'st_clerk', 'sa_rep');
```

### **Rules of Precedence**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

---

Order Evaluated	Operator
1	Arithmetic
2	Concatenation
3	Comparison IS [NOT]
4	NULL, LIKE, [NOT] IN [NOT] BETWEEN
5	Logical NOT
6	Logical AND
7	Logical OR
8	

### **Example:1**

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE job_id ='sa_rep'
OR job_id='ad_pres'
AND salary>15000;
```

### **Example:2**

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE (job_id='sa_rep'
OR job_id='ad_pres')
AND salary>15000;
```

### **Sorting the rows**

Using ORDERBYClause

---

**ASC**-AscendingOrder,Default

**DESC**

-Descendingorder

### **Example:1**

```
SELECT last_name, salary , job_id,department_id,hire_date
FROM employees
ORDER BYhire_date;
```

### **Example:2**

```
SELECT last_name, salary , job_id,department_id,hire_date
FROM employees
ORDER BYhire_date DESC;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### Example:3

#### Sorting by column alias

---

```
SELECT last_name,salary*12 annsal , job_id,department_id,hire_date
FROM employees
ORDER BYannsal;
```

### Example:4

#### Sorting by Multiple columns

---

```
SELECT last_name,s alary,job_id,department_id,hire_date
FROM employees ORDERBYdepartment_id, salary DESC;
```

#### Find the Solution for the following:

1. Create a query to display the last name and salary of employees earning more than 12000.

```
SELECT last_name, salary
FROM employees
WHERE salary > 12000;
```

2. Create a query to display the employee last name and department number for employee number 176.

```
SELECT last_name, department_id
FROM employees
WHERE employee_id = 176;
```

3. Create a query to display the last name and salary of employees whose salary is not in the range of 5000 and 12000. (hints: not between )

```
SELECT last_name, salary
FROM employees
WHERE salary NOT BETWEEN 5000 AND 12000;
```

4. Display the employee last name, job ID, and start date of employees hired between February 20,1998 and May 1,1998.order the query in ascending order by start date.(hints:

between)

```
SELECT last_name, job_id, hire_date
FROM employees
WHERE hire_date BETWEEN TO_DATE('20-FEB-1998', 'DD-MON-YYYY')
AND TO_DATE('01-MAY-1998', 'DD-MON-YYYY')
ORDER BY hire_date ASC;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

5. Display the last name and department number of all employees in departments 20 and 50 in alphabetical order by name.(hints: in, orderby)

```
SELECT lastname, department_id  
FROM employees  
WHERE department_id IN (20, 50)  
ORDER BY lastname asc;
```

6. Display the last name and salary of all employees who earn between 5000 and 12000 and are in departments 20 and 50 in alphabetical order by name. Label the columns EMPLOYEE, MONTHLY SALARY respectively.(hints: between, in)

```
SELECT last_name AS "EMPLOYEE", salary AS "MONTHLY SALARY"  
FROM employees  
WHERE salary BETWEEN 5000 AND 12000  
AND department_id IN (20, 50) ORDER BY last_name ASC;
```

7. Display the last name and hire date of every employee who was hired in 1994.(hints: like)

```
SELECT last_name, hire_date  
FROM employees  
WHERE hire_date LIKE '1994%'; or  
SELECT last_name, hire_date  
FROM employees  
WHERE TO_CHAR(hire_date, 'YYYY') LIKE '1994';
```

8. Display the last name and job title of all employees who do not have a manager.(hints: is null)

```
SELECT last_name, job_title  
FROM employees  
WHERE manager_id IS NULL;
```

9. Display the last name, salary, and commission for all employees who earn commissions. Sort data in descending order of salary and commissions.(hints: is not nul,orderby)

```
SELECT last_name, salary, commission_pct  
FROM employees  
WHERE commission_pct IS NOT NULL  
ORDER BY salary DESC, commission_pct DESC;
```

10. Display the last name of all employees where the third letter of the name is a.(hints:like)

```
SELECT last_name  
FROM employees  
WHERE last_name LIKE '__a%';
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

11. Display the last name of all employees who have an *a* and an *e* in their last name.(hints: like) **SELECT last\_name**  
**FROM employees**  
**WHERE last\_name LIKE '%a%'**  
**AND last\_name LIKE '%e%';**
12. Display the last name and job and salary for all employees whose job is sales representative or stock clerk and whose salary is not equal to 2500 ,3500 or 7000.(hints:in,not in)  
**SELECT last\_name, job\_id, salary**  
**FROM employees**  
**WHERE job\_id IN ('SA\_REP', 'ST\_CLERK')**  
**AND salary NOT IN (2500, 3500, 7000);**
13. Display the last name, salary, and commission for all employees whose commission amount is 20%.(hints:use predicate logic)  
**SELECT last\_name, salary, commission\_pct**  
**FROM employees**  
**WHERE commission\_pct = 0.20;**

### EXERCISE-6

#### Single Row Functions

##### Objective

After the completion of this exercise, the students will be able to do the following:

- Describe various types of functions available in SQL.
- Use character, number and date functions in SELECT statement.
- Describe the use of conversion functions.

##### Single row functions:

Manipulate data items. Accept arguments and return one value. Act on each row returned. Return one result per row. May modify the datatype. Can be nested. Accept arguments which can be a column or an expression

**Syntax** Function\_name(arg1,...argn) An argument can be one of the following


✓      ✓ ✓

User-supplied constant

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

Variable value

Expression

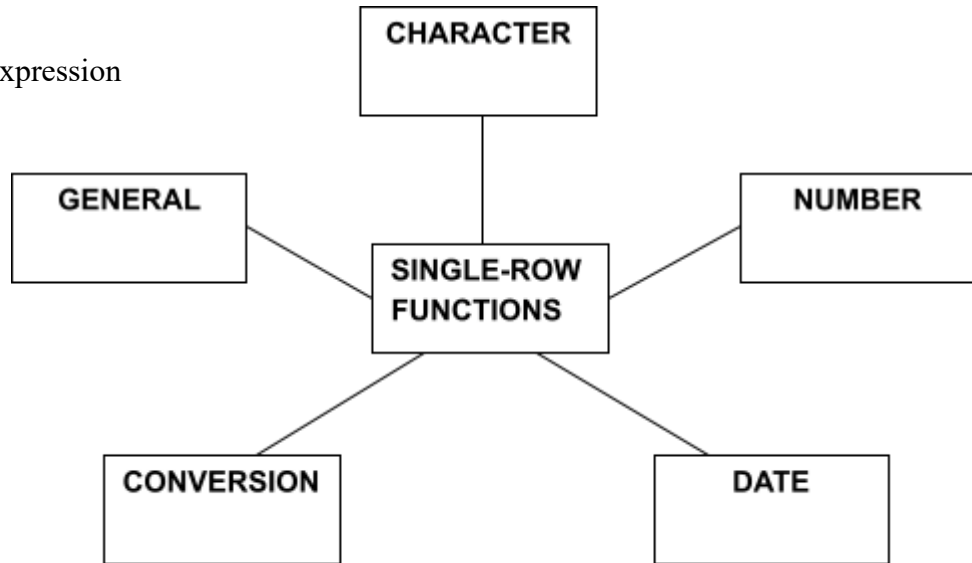

- ✓ Column name
- Character Functions: Accept character input and can return both character and number values.
- Number functions: Accept numeric input and return numeric values.
- Date Functions: Operate on values of the DATE data type.
- Conversion Functions: Convert a value from one type to another.

### Character Functions

CharacterFunctions

Case-manipulation functions	Character-manipulation functions	Function Purpose
1. Lower	1. Concat	
2. Upper	2. Substr	
3. Initcap	3. Length	
	4.Instr	
	5.Lpad/Rpad	
	6.Trim	
	7.Repalce	
lower(column/expr)		
Convertsalphacharactervalues to lowercase	upper(column/expr)	Convertsalphacharactervalues to uppercase
initcap(column/expr)		Convertsalphacharactervalues the to uppercase for the firstletterofeachword,all other letters in lowercase
		Concatenates thefirstcharacter to the second character
concat(column1/expr1, column2/expr2)		Returnsspecifiedcharactersfrom character value startingatcharacterpositionm, n characters long
substr(column/expr,m,n)		Returnsthenumberofcharacters in the expression
		Returnsthenumericpositionof a named string



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

`length(column/expr)` Pads the character value right-justified to a total width

`instr(column/expr,'string',m,n)` of n character positions

`lpad(column/expr, n,'string')` Pads the character value left-justified to a total width of n character positions

`rpadd(column/expr,'string',m,n)` Enables you to trim heading or string. trailing or both from a character

`trim(leading/trailing/both,  
trim_character FROM trim_source)`

<code>replace(text, search_string, replacement_string)</code>	
---	--

**Example:** `lower('SQL  
Course')`

`SsqQl Lco CuOrsUeRSE`

`upper('SQL Course')`

`initcap('SQL Course')` Sql Course

`SELECT 'The job id for' || upper(last_name || 'is') || lower(job_id) AS "EMPLOYEE DETAILS"`

`FROM employees;`

`SELECT employee_id, last_name, department_id`

`FROM employees`

`WHERE LOWER(last_name)='higgins';`

**Function**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

	Result
CONCAT('hello', 'world')	helloworld
Substr('helloworld',1,5)	Hello 10 6
Length('helloworld')	*****24000
Instr('helloworld','w')	24000*****
Lpad(salary,10,'*')	elloworld
Rpad(salary,10,'*')	
Trim('h' FROM 'helloworld')	

Command	Query	Output
initcap(char);	<i>select initcap("hello") from dual;</i>	Hello
lower (char); upper (char);	<i>select lower ('HELLO') from dual;</i> <i>select upper ('hello') from dual;</i>	Hello HELLO
ltrim (char,[set]);	<i>select ltrim ('cseit', 'cse') from dual;</i>	IT
rtrim (char,[set]);	<i>select rtrim ('cseit', 'it') from dual;</i>	CSE
replace (char,search string, replace string);	<i>select replace ('jack and jue', 'j', 'bl') from dual;</i>	black and blue
substr (char,m,n);	<i>select substr ('information', 3, 4) from dual;</i>	form

### Example:

SELECT Employee\_id, CONCAT (first\_name,last\_name) NAME , job\_id,LENGTH(last\_name),  
INSTR(last\_name,'a') "contains'a?"  
FROM employees WHERE SUBSTR(job\_id,4)='ERP';

### NUMBER FUNCTIONS

Function	Purpose
round(column/expr,n)	Roundsthevalue to specified decimal
trunc(column/expr,n)	Truncatesvalue to specified decimal
mod(m,n)	Returnsremainder of division

**Example**

Function	Result
round(45.926,2)	45.93
trunc(45.926,2)	45.92
mod(1600,300)	100

SELECT ROUND(45.923,2), ROUND(45.923,0),ROUND(45.923,-1) FROM dual;

**NOTE:** Dual is a dummy table you can use to view results from functions and calculations.

SELECT TRUNC(45.923,2), TRUNC(45.923), TRUNC(45.923,-2) FROM dual;

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SELECT last_name,salary,MOD(salary,5000) FROM employees WHERE job_id='sa_rep';
```

### **Working with Dates**

The Oracle database stores dates in an internal numeric format: century, year, month, day, hours, minutes, and seconds.

- The default date display format is DD-MON-RR.
  - Enables you to store 21st-century dates in the 20th century by specifying only the last

two digits of the year

- Enables you to store 20th-century dates in the 21st century in the same way **Example**
- ```
SELECT last_name,hire_date FROM employees WHERE hire_date < '01-FEB-88;
```

### **Working with Dates**

`SYSDATE` is a function that returns:

- Date
- Time

### **Example**

**Display the current date using the DUAL table.**

```
SELECT SYSDATE FROM DUAL;
```

### **Arithmetic with Dates**

- Add or subtract a number to or from a date for a resultant date value.
- Subtract two dates to find the number of days between those dates.
- Add hours to a date by dividing the number of hours by 24.

### **Arithmetic with Dates**

Because the database stores dates as numbers, you can perform calculations using arithmetic Operators such as addition and subtraction. You can add and subtract number constants as well as dates.

You can perform the following operations:

| Operation                                          | Result        | Description                            |
|----------------------------------------------------|---------------|----------------------------------------|
| date + number                                      | date – number | date + number/24                       |
| date – number                                      | date + number | Adds a number of days to a date        |
| date / 24                                          | date – date   | Subtracts a number of days from a date |
| Example                                            | Date          | one date from another                  |
| SELECT last_name, (SYSDATE – hire_date)/7 AS weeks |               | Adds a number of hours to a date       |
| FROM employees WHERE department_id = 90;           |               |                                        |

### **Date Functions**

---

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY




### Date Functions

Date functions operate on Oracle dates. All date functions return a value of DATE data type except MONTHS\_BETWEEN, which returns a numeric value.

- MONTHS\_BETWEEN(date1, date2):: Finds the number of months between date1 and date2. The result can be positive or negative. If date1 is later than date2, the result is positive; if date1 is earlier than date2, the result is negative. The noninteger part of the result represents a portion of the month.
- ADD\_MONTHS(date, n):: Adds n number of calendar months to date. The value of n must be an integer and can be negative.
- NEXT\_DAY(date, 'char'):: Finds the date of the next specified day of the week ('char') following date. The value of char may be a number representing a day or a character string.
- LAST\_DAY(date):: Finds the date of the last day of the month that contains date
- ROUND(date[, 'fmt']):: Returns date rounded to the unit that is specified by the format model fmt. If the format model fmt is omitted, date is rounded to the nearest day.
- TRUNC(date[, 'fmt']):: Returns date with the time portion of the day truncated to the unit that is specified by the format model fmt. If the format model fmt is omitted, date is truncated to the nearest day.

### Using Date Functions

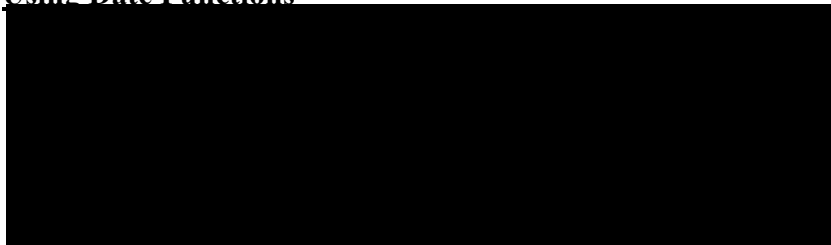

### Example

Display the employee number, hire date, number of months employed, six-month review date, first Friday after hire date, and last day of the hire month for all employees who have been employed for fewer than 70 months.

```
SELECT Employee_id, hire_date, MONTHS_BETWEEN (SYSDATE, hire_date)
TENURE, ADD_MONTHS (hire_date, 6) REVIEW, NEXT_DAY (hire_date, 'FRIDAY'),
LAST_DAY(hire_date)
```


## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

FROM employees  
WHERE MONTHS\_BETWEEN (SYSDATE, hire\_date) < 70;

### Conversion Functions

This covers the following topics:

- Writing a query that displays the current date
- Creating queries that require the use of numeric, character, and date functions
- Performing calculations of years and months of service for an employee




### Implicit Data Type Conversion


For assignments, the Oracle server can automatically convert the following:

For example, the expression `hire_date > '01-JAN-90'` results in the implicit conversion from the string '01-JAN-90' to a date.

For expression evaluation, the Oracle Server can automatically convert the following:



### Explicit Data Type Conversion

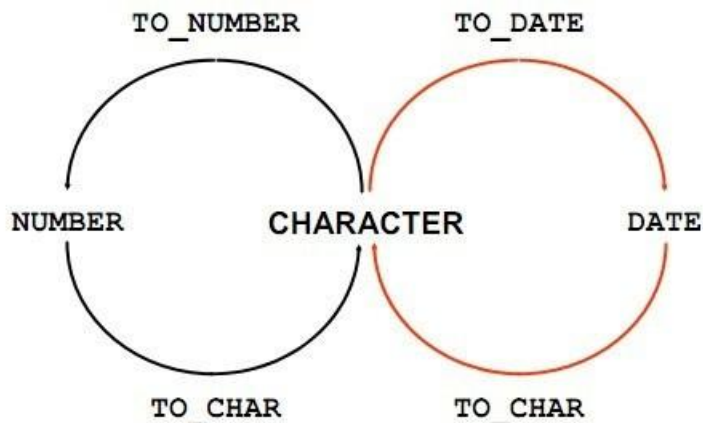

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

SQL provides three functions to convert a value from one data type to another:

### Example:

Using the TO\_CHAR Function with Dates


TO\_CHAR(date, 'format\_model')

**The format model:**

- Must be enclosed by single quotation marks
- Is case-sensitive
- Can include any valid date format element
- Has an fm element to remove padded blanks or suppress leading zeros
- Is separated from the date value by a comma

```
SELECT employee_id, TO_CHAR(hire_date, 'MM/YY') Month_Hired  
FROM employees WHERE last_name = 'Higgins';
```

### Elements of the Date Format Model



### Sample Format Elements of Valid Date

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| Element                      | Description                                                      |
|------------------------------|------------------------------------------------------------------|
| SCC or CC                    | Century; server prefixes B.C. date with -                        |
| Years in dates YYYY or SYYYY | Year; server prefixes B.C. date with -                           |
| YYY or YY or Y               | Last three, two, or one digits of year                           |
| Y,YYY                        | Year with comma in this position                                 |
| IYYY, IYY, IY, I             | Four-, three-, two-, or one-digit year based on the ISO standard |
| SYEAR or YEAR                | Year spelled out; server prefixes B.C. date with -               |
| BC or AD                     | Indicates B.C. or A.D. year                                      |
| B.C. or A.D.                 | Indicates B.C. or A.D. year using periods                        |
| Q                            | Quarter of year                                                  |
| MM                           | Month: two-digit value                                           |
| MONTH                        | Name of month padded with blanks to length of nine characters    |
| MON                          | Name of month, three-letter abbreviation                         |
| RM                           | Roman numeral month                                              |
| WW or W                      | Week of year or month                                            |
| DDD or DD or D               | Day of year, month, or week                                      |
| DAY                          | Name of day padded with blanks to a length of nine characters    |
| DY                           | Name of day; three-letter abbreviation                           |
| J                            | Julian day; the number of days since December 31, 4713 B.C.      |

### Date Format Elements: Time Formats

Use the formats that are listed in the following tables to display time information and literals and to change numerals to spelled numbers.

| Element            | Description                                 |
|--------------------|---------------------------------------------|
| AM or PM           | Meridian indicator                          |
| A.M. or P.M.       | Meridian indicator with periods             |
| HH or HH12 or HH24 | Hour of day, or hour (1–12), or hour (0–23) |
| MI                 | Minute (0–59)                               |
| SS                 | Second (0–59)                               |
| SSSSS              | Seconds past midnight (0–86399)             |

### Other Formats

| Element  | Description                                |
|----------|--------------------------------------------|
| / . ,    | Punctuation is reproduced in the result.   |
| “of the” | Quoted string is reproduced in the result. |

### Specifying Suffixes to Influence Number Display

| Element      | Description                                                  |
|--------------|--------------------------------------------------------------|
| TH           | Ordinal number (for example, DDTH for 4TH)                   |
| SP           | Spelled-out number (for example, DDSP for FOUR)              |
| SPTH or THSP | Spelled-out ordinal numbers (for example, DDSPTH for FOURTH) |

### Example

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY


```
SELECT last_name,  
       TO_CHAR(hire_date, 'fmDD Month YYYY') AS HIREDATE  
FROM employees;  
Modify example to display the dates in a format that appears as "Seventeenth of June 1987  
12:00:00AM."  
SELECT last_name,  
       TO_CHAR(hire_date, 'fmDdspth "of" Month YYYY fmHH:MI:SS AM') HIREDATE
```

FROM employees;

### Using the TO\_CHAR Function with Numbers

TO\_CHAR(number, 'format\_model')

These are some of the format elements that you can use with the TO\_CHAR function to display a number value as a character:



### **Number Format Elements**

If you are converting a number to the character data type, you can use the following format elements:



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| Element | Description                                                                                                                | Example    | Result         |
|---------|----------------------------------------------------------------------------------------------------------------------------|------------|----------------|
| 9       | Numeric position (number of 9s determine display width)                                                                    | 999999     | 1234           |
| 0       | Display leading zeros                                                                                                      | 099999     | 001234         |
| \$      | Floating dollar sign                                                                                                       | \$999999   | \$1234         |
| L       | Floating local currency symbol                                                                                             | L999999    | FF1234         |
| D       | Returns in the specified position the decimal character. The default is a period (.).                                      | 99D99      | 99.99          |
| .       | Decimal point in position specified                                                                                        | 999999.99  | 1234.00        |
| G       | Returns the group separator in the specified position. You can specify multiple group separators in a number format model. | 9,999      | 9G999          |
| ,       | Comma in position specified                                                                                                | 999,999    | 1,234          |
| MI      | Minus signs to right (negative values)                                                                                     | 999999MI   | 1234-          |
| PR      | Parenthesize negative numbers                                                                                              | 999999PR   | <1234>         |
| EEEE    | Scientific notation (format must specify four Es)                                                                          | 99.999EEEE | 1.234E+03      |
| U       | Returns in the specified position the "Euro" (or other) dual currency                                                      | U9999      | €1234          |
| V       | Multiply by 10 <i>n</i> times ( <i>n</i> = number of 9s after V)                                                           | 9999V99    | 123400         |
| S       | Returns the negative or positive value                                                                                     | S9999      | -1234 or +1234 |
| B       | Display zero values as blank, not 0                                                                                        | B9999.99   | 1234.00        |

```
SELECT TO_CHAR(salary, '$99,999.00') SALARY
FROM employees
WHERE last_name = 'Ernst';
```

### Using the TO\_NUMBER and TO\_DATE Functions

- Convert a character string to a number format using the TO\_NUMBER function:

TO\_NUMBER(char[, 'format\_model']

- Convert a character string to a date format using the TO\_DATE function:

TO\_DATE(char[, 'format\_model']

- These functions have an fx modifier. This modifier specifies the exact matching for the character

argument and date format model of a TO\_DATE function.

The fx modifier specifies exact matching for the character argument and date format model of a TO\_DATE function:

- Punctuation and quoted text in the character argument must exactly match (except for case) the corresponding parts of the format model.
- The character argument cannot have extra blanks. Without fx, Oracle ignores extra blanks.
- Numeric data in the character argument must have the same number of digits as the corresponding element in the format model. Without fx, numbers in the character argument can omit leading zeros.

```
SELECT last_name, hire_date
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

FROM employees

WHERE hire\_date = TO\_DATE('May24, 1999', 'fxMonth DD, YYYY'); Find

the Solution for the following:

- 
1. Write a query to display the current date. Label the column Date. **SELECT SYSDATE AS "Date" FROM dual;**
  2. The HR department needs a report to display the employee number, last name, salary, and increased by 15.5% (expressed as a whole number) for each employee. Label the column New Salary.

**SELECT employee\_id,  
last\_name,  
salary,  
ROUND(salary \* 1.155) AS "New Salary" FROM  
employees;**

3. Modify your query lab\_03\_02.sql to add a column that subtracts the old salary from the new salary. Label the column Increase.

**SELECT employee\_id, last\_name, salary,  
  
ROUND(salary \* 1.155) AS "New Salary",  
ROUND(salary \* 1.155) - salary AS Increase FROM employees;**

4. Write a query that displays the last name (with the first letter uppercase and all other letters lowercase) and the length of the last name for all employees whose name starts with the letters J, A, or M. Give each column an appropriate label. Sort the results by the employees' last names.

**SELECT  
  
INITCAP(last\_name) AS "Last Name",  
LENGTH(last\_name) AS "Name Length"  
FROM employees  
WHERE UPPER(SUBSTR(last\_name, 1, 1)) IN ('J', 'A', 'M')  
ORDER BY last\_name;**

5. Rewrite the query so that the user is prompted to enter a letter that starts the last name. For example, if the user enters H when prompted for a letter, then the output should show all employees whose last name starts with the letter H.

**SELECT last\_name,  
  
LENGTH(last\_name) AS "Name Length"**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

**FROM employees**  
**WHERE UPPER(SUBSTR(last\_name, 1, 1)) = UPPER('&start\_letter')**  
**ORDER BY last\_name;**

6. The HR department wants to find the length of employment for each employee. For each employee, display the last name and calculate the number of months between today and the date on which the employee was hired. Label the column MONTHS\_WORKED. Order your results by the number of months employed. Round the number of months up to the closest whole number.

**Note:** Your results will differ.

**SELECT last\_name,**  
**CEIL(MONTHS\_BETWEEN(SYSDATE, hire\_date)) AS MONTHS\_WORKED**  
**FROM employees**  
**ORDER BY MONTHS\_WORKED;**

7. Create a report that produces the following for each employee:  
<employee last name> earns <salary> monthly but wants <3 times salary>. Label the column Dream Salaries.

**SELECT last\_name || ' earns ' || TO\_CHAR(salary) || ' monthlybutwants ' ||**  
**TO\_CHAR(salary \* 3) AS "Dream Salaries" FROM employees;**

8. Create a query to display the last name and salary for all employees. Format the salary to be 15 characters long, left-padded with the \$ symbol. Label the column SALARY.

**SELECT last\_name,**  
**LPAD('\$' || TO\_CHAR(salary), 15, '\$') AS SALARY**  
**FROM employees;**

9. Display each employee's last name, hire date, and salary review date, which is the first Monday after six months of service. Label the column REVIEW. Format the dates to appear in the format similar to "Monday, the Thirty-First of July, 2000."

**SELECT last\_name,**  
**TO\_CHAR(hire\_date, 'fmDay, "the" fmDDth "of" Month, YYYY') AS hire\_date,**  
**TO\_CHAR(**  
**NEXT\_DAY(ADD\_MONTHS(hire\_date, 6) - 1, 'MONDAY'),**  
**'fmDay, "the" fmDDth "of" Month, YYYY'**  
**) AS REVIEW**  
**FROM employees;**

10. Display the last name, hire date, and day of the week on which the employee started. Label the column DAY. Order the results by the day of the week, starting with Monday.

**SELECT last\_name, hire\_date,**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
TO_CHAR(hire_date, 'fmDay') AS DAY
FROM employees ORDER BY
CASE TO_CHAR(hire_date, 'DY', 'NLS_DATE_LANGUAGE=ENGLISH')
  WHEN 'MON' THEN 1
  WHEN 'TUE' THEN 2
  WHEN 'WED' THEN 3
  WHEN 'THU' THEN 4
  WHEN 'FRI' THEN 5
  WHEN 'SAT' THEN 6
  WHEN 'SUN' THEN 7
END;
```

### EXERCISE-7

#### Displaying data from multiple tables

able to do**Objective** the following: After the completion of this exercise, the students will be

- Write SELECT statements to access data from more than one table using equality and nonequality joins
  - View data that generally does not meet a join condition by using outer joins
  - Join a table to itself by using a self join
- Sometimes you need to use data from more than one table.

#### **Cartesian Products**

- A Cartesian product is formed when: – A join condition is omitted – A join condition is invalid – All rows in the first table are joined to all rows in the second table
- To avoid a Cartesian product, always include a valid join condition in a WHERE clause. A Cartesian product tends to generate a large number of rows, and the result is rarely useful. You should always include a valid join condition in a WHERE clause, unless you have a specific need to combine all rows from all tables. Cartesian products are useful for some tests when you need to generate a large number of rows to simulate a reasonable amount of data.

#### **Example:**

To display employee last name and department name from the EMPLOYEES and DEPARTMENT tables.

```
SELECT last_name, department_name dept_name FROM
employees, departments;
```

---

#### Types of Joins

- **Equi join**
- **Non-equi join**
- **Outer join**
- **Self join**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- Cross joins
- Natural joins
- Using clause
- Full or two sided outer joins
- Arbitrary join conditions for outer joins

### Joining Tables Using Oracle Syntax

```
SELECT table1.column, table2.column
```

```
FROM table1, table2
```

```
WHERE table1.column1 = table2.column2;
```

Write the join condition in the WHERE clause.

- Prefix the column name with the table name when the same column name appears in more than one table.

### Guidelines

•When writing a SELECT statement that joins tables, precede the column name with the table name for clarity and to enhance database access. •If the same column name appears in more than one table, the column name must be prefixed with the table name. •To join n tables together, you need a minimum of n-1 join conditions. For example, to join four tables, a minimum of three joins is required. This rule may not apply if your table has a concatenated primary key, in which case more than one column is required to uniquely identify each row. **What is an Equijoin?** To determine an employee's department name, you compare the value in the DEPARTMENT\_ID column in the EMPLOYEES table with the DEPARTMENT\_ID values in the DEPARTMENTS table. The relationship between the EMPLOYEES and DEPARTMENTS tables is an equijoin—that is, values in the DEPARTMENT\_ID column on both tables must be equal. Frequently, this type of join involves primary and foreign key complements. Note: Equijoins are also called simple joins or inner joins

```
SELECT employees.employee_id, employees.last_name, employees.department_id,  
       departments.department_id, departments.location_id  
FROM employees, departments  
WHERE employees.department_id = departments.department_id;
```

### Additional Search Conditions

#### Using the AND Operator

#### Example:

To display employee Matos' department number and department name, you need an additional condition in the WHERE clause.

```
SELECT last_name, employees.department_id,  
       department_name
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

FROM employees, departments

WHERE employees.department\_id = departments.department\_id AND last\_name = 'Matos';

### **Qualifying Ambiguous**

#### **Column Names**

- Use table prefixes to qualify column names that are in multiple tables.
- Improve performance by using table prefixes.
- Distinguish columns that have identical names but reside in different tables by using column aliases.

### **Using Table Aliases**

- Simplify queries by using table aliases.
- Improve performance by using table prefixes

#### **Example:**

```
SELECT e.employee_id, e.last_name, e.department_id,  
       d.department_id, d.location_id FROM employees e ,  
       departments d  
WHERE e.department_id = d.department_id;
```

### **Joining More than Two Tables**

To join tables together, you need a minimum of n-1 join conditions. For example, to join three tables, a minimum of two joins is required.

#### **Example:**

To display the last name, the department name, and the city for each employee, you have to join the EMPLOYEES, DEPARTMENTS, and LOCATIONS tables. SELECT e.last\_name, d.department\_name, l.city FROM employees e, departments d, locations l WHERE e.department\_id = d.department\_id AND d.location\_id = l.location\_id;

### **Non-Equi Joins**

A non-equi join is a join condition containing something other than an equality operator. The relationship between the EMPLOYEES table and the JOB\_GRADES table has an example of a non-equi join. A relationship between the two tables is that the SALARY column in the EMPLOYEES table must be between the values in the LOWEST\_SALARY and HIGHEST\_SALARY columns of the JOB\_GRADES table. The relationship is obtained using an operator other than equals (=). **Example:**

---

```
SELECT e.last_name, e.salary, j.grade_level  
FROM employees e, job_grades j  
WHERE e.salary  
BETWEEN j.lowest_sal AND j.highest_sal;
```

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## Outer Joins

---

### Syntax

- You use an outer join to also see rows that do not meet the join condition.
- The outer join operator is the plus sign (+).

```
SELECT table1.column, table2.column
```

```
FROM table1, table2
```

```
WHERE table1.column(+) = table2.column;
```

```
SELECT table1.column, table2.column
```

```
FROM table1, table2
```

```
WHERE table1.column = table2.column(+);
```

The missing rows can be returned if an outer join operator is used in the join condition. The operator

is a plus sign enclosed in parentheses (+), and it is placed on the “side” of the join that is deficient in

information. This operator has the effect of creating one or more null rows, to which one or more rows from the nondeficient table can be joined.

### Example:

---

```
SELECT e.last_name, e.department_id, d.department_name
```

```
FROM employees e, departments d
```

```
WHERE e.department_id(+) = d.department_id ;
```

### Outer Join Restrictions

- The outer join operator can appear on only one side of the expression—the side that has information missing. It returns those rows from one table that have no direct match in the other table.
- A condition involving an outer join cannot use the IN operator or be linked to another condition by the OR operator

### Self Join

Sometimes you need to join a table to itself.

### Example:

To find the name of each employee's manager, you need to join the EMPLOYEES table to itself, or perform a self join.

```
SELECT worker.last_name || ' works for '
```

```
|| manager.last_name
```

```
FROM employees worker, employees manager
```

```
WHERE worker.manager_id = manager.employee_id ;
```

### Use a join to query data from more than one table.

```
SELECT table1.column, table2.column
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

FROM table1  
[CROSS JOIN table2] |  
[NATURAL JOIN table2] |  
[JOIN table2 USING (column\_name)] |  
[JOIN table2  
ON(table1.column\_name = table2.column\_name)] |  
[LEFT|RIGHT|FULL OUTER JOIN table2 ON (table1.column\_name =  
table2.column\_name)]; In the syntax: table1.column Denotes the table  
and column from which data is retrieved

CROSS JOIN Returns a Cartesian product from the two tables

NATURAL JOIN Joins two tables based on the same column name

JOIN table USING column\_name Performs an equijoin based on the column name

JOIN table ON table1.column\_name Performs an equijoin based on the condition in the ON  
clause

=table2.column\_name

### **LEFT/RIGHT/FULL OUTER**

#### **Creating Cross Joins**

- The CROSS JOIN clause produces the crossproduct of two tables.
- This is the same as a Cartesian product between the two tables.

#### **Example:**

```
SELECT last_name, department_name
FROM employees
CROSS JOIN departments ;
SELECT last_name, department_name
FROM employees, departments;
```

#### **Creating Natural Joins**

- 
- The NATURAL JOIN clause is based on all columns in the two tables that have the same name.
  - It selects rows from the two tables that have equal values in all matched columns.
  - If the columns having the same names have different data types, an error is returned.

#### **Example:**

```
SELECT department_id, department_name,
location_id, city
FROM departments
```

NATURAL JOIN locations ; The LOCATIONS table is joined to the DEPARTMENT table by the LOCATION\_ID column, which is the only column of the same name in both tables. If other common columns were present, the join would have used them all. **Example:** SELECT department\_id, department\_name, location\_id, city FROM departments NATURAL JOIN locations WHERE department\_id IN (20, 50);



# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## Creating Joins with the USING Clause

- 
- If several columns have the same names but the data types do not match, the NATURAL JOIN clause can be modified with the USING clause to specify the columns that should be used for an equijoin.
  - Use the USING clause to match only one column when more than one column matches.
  - Do not use a table name or alias in the referenced columns.
  - The NATURAL JOIN and USING clauses are mutually exclusive.

### **Example:**

---

```
SELECT l.city, d.department_name
FROM locations l JOIN departments d USING (location_id)
WHERE location_id = 1400;
EXAMPLE:
```

```
SELECT e.employee_id, e.last_name, d.location_id
FROM employees e JOIN departments d
USING (department_id);
```

## Creating Joins with the ON Clause

- The join condition for the natural join is basically an equijoin of all columns with the same name.
- To specify arbitrary conditions or specify columns to join, the ON clause is used.
- The join condition is separated from other search conditions.
- The ON clause makes code easy to understand.

### **Example:**

---

```
SELECT e.employee_id, e.last_name, e.department_id,
d.department_id, d.location_id
FROM employees e JOIN departments d
ON (e.department_id =
d.department_id);
EXAMPLE:
```

```
SELECT e.last_name emp, m.last_name mgr
FROM employees e JOIN employees m
ON (e.manager_id = m.employee_id);
INNER Versus OUTER Joins
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- A join between two tables that returns the results of the inner join as well as unmatched rows left (or right) table is a left (or right) outer join.
- A join between two tables that returns the results of an inner join as well as the results of a left and right join is a full outer join.

### **LEFT OUTER JOIN Example:**

---

---

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
LEFT OUTER JOIN departments d
ON (e.department_id = d.department_id) ;
```

Example of LEFT OUTER JOIN

This query retrieves all rows in the EMPLOYEES table, which is the left table even if there is no match in the DEPARTMENTS table.

This query was completed in earlier releases as follows:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE d.department_id (+) = e.department_id;
```

### **RIGHT OUTER JOIN**

#### **Example:**

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
RIGHT OUTER JOIN departments d
ON (e.department_id = d.department_id) ;
```

This query retrieves all rows in the DEPARTMENTS table, which is the right table even if there is no match in the EMPLOYEES table.

This query was completed in earlier releases as follows:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE d.department_id = e.department_id (+);
```

### **FULL OUTER JOIN**

#### **Example:**

```
SELECT e.last_name, e.department_id, d.department_name
```

---

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

FROM employees e

---

FULL OUTER JOIN departments d

ON (e.department\_id = d.department\_id) ;

This query retrieves all rows in the EMPLOYEES table, even if there is no match in the DEPARTMENTS table. It also retrieves all rows in the DEPARTMENTS table, even if there is no match in the EMPLOYEES table.

**Find the Solution for the following:**

- 
1. Write a query to display the last name, department number, and department name for all employees.

**SELECT**

**e.last\_name,  
e.department\_id,  
d.department\_name**

**FROM**

**employees e**

**JOIN departments d ON e.department\_id =  
d.department\_id;**

2. Create a unique listing of all jobs that are in department 80. Include the location of the department in the output.

**SELECT DISTINCT**

**E.job\_id, l.location\_name FROM employees e  
JOIN departments d ON e.department\_id =  
d.department\_id  
JOIN locations l ON d.location\_id = l.location\_id WHERE e.department\_id  
= 80;**

3. Write a query to display the employee last name, department name, location ID, and city of all employees who earn a commission

**SELECT**

**e.last\_name,  
d.department\_name,  
l.location\_id,  
l.city**

**FROM**

**employees e**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
JOIN departments d ON e.department_id =  
    d.department_id  
JOIN  
    locations l ON d.location_id = l.location_id  
WHERE  
    e.commission_pct IS NOT NULL;
```

4. Display the employee last name and department name for all employees who have ana(lowercase) in their last names. P

```
SELECT  
  
    e.last_name,  
    d.department_name  
FROM  
    employees e  
JOIN departments d ON e.department_id =  
    d.department_id  
WHERE  
    e.last_name LIKE '%a%';
```

5. Write a query to display the last name, job, department number, and department name for allemployees who work in Toronto.

```
SELECT  
  
    e.last_name, j.job_title, d.department_id, d.department_name  
FROM employees e  
JOIN  
    jobs j ON e.job_id = j.job_id  
JOIN departments d ON e.department_id =  
    d.department_id  
JOIN  
    locations l ON d.location_id = l.location_id  
WHERE  
    l.city = 'Toronto';
```

6. Display the employee last name and employee number along with their manager's last name and manager number. Label the columns Employee, Emp#, Manager, and Mgr#, Respectively

```
SELECT  
  
    e.last_name AS Employee,  
    e.employee_id AS "Emp#",  
    m.last_name AS Manager,  
    m.employee_id AS "Mgr#"
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
FROM
  employees e
LEFT JOIN employees m ON e.manager_id =
  m.employee_id;
```

7. Modify lab4\_6.sql to display all employees including King, who has no manager. Order the results by the employee number.

```
SELECT
  e.last_name AS Employee,
  e.employee_id AS "Emp#",
  m.last_name AS Manager,
  m.employee_id AS "Mgr#"
FROM
  employees e
LEFT JOIN employees m ON e.manager_id =
  m.employee_id
ORDER BY
  e.employee_id;
```

8. Create a query that displays employee last names, department numbers, and all the employees who work in the same department as a given employee. Give each column an appropriate label

```
SELECT
  e1.last_name AS "Employee",
  e1.department_id AS "Department Number",
  e2.last_name AS "Colleague"
FROM
  employees e1
JOIN employees e2 ON e1.department_id =
  e2.department_id
ORDER BY
  e1.last_name, e2.last_name;
```

9. Show the structure of the JOB\_GRADES table. Create a query that displays the name, job, department name, salary, and grade for all employees

```
DESC JOB_GRADES;
SELECT
  e.last_name AS "Name",
  j.job_title AS "Job",
  d.department_name AS "Department Name",
  e.salary AS "Salary",
  g.grade AS "Grade"
FROM
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
employees e
JOIN
  jobs j ON e.job_id = j.job_id
JOIN departments d ON e.department_id =
  d.department_id
JOIN job_grades g ON e.salary BETWEEN g.low_salary AND
  g.high_salary;
```

10. Create a query to display the name and hire date of any employee hired after employee Davies.

```
SELECT
  last_name AS Name, hire_date AS "Hire Date" FROM employees
WHERE
  hire_date > (
    SELECT hire_date
    FROM employees
    WHERE last_name = 'Davies'
    FETCH FIRST 1 ROW ONLY --it may require if multipl values for daves
  );
```

11. Display the names and hire dates for all employees who were hired before their managers, along with their manager's names and hire dates. Label the columns Employee, Emp Hired, Manager, and Mgr Hired, respectively.

```
SELECT
  e.last_name AS Employee, e.hire_date AS "Emp Hired",
  m.last_name AS Manager, m.hire_date AS "Mgr Hired"
FROM employees e
JOIN employees m ON e.manager_id =
  m.employee_id
WHERE
  e.hire_date < m.hire_date;
```

### EXERCISE-8

#### Aggregating Data Using Group Functions

##### Objectives

After the completion of this exercise, the students will be able to do the following:

- Identify the available group functions
- Describe the use of group functions
- Group data by using the GROUP BY clause
- Include or exclude grouped rows by using the HAVING clause

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### What Are Group Functions?

Group functions operate on sets of rows to give one result per group

### Types of Group Functions

- AVG
- COUNT
- MAX
- MIN
- STDDEV
- SUM
- VARIANCE

Each of the functions accepts an argument. The following table identifies the options that you can use in the syntax:

| Function                                               | Description                                                                                                                                          |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVG ( [DISTINCT   <u>ALL</u> ] <i>n</i> )              | Average value of <i>n</i> , ignoring null values                                                                                                     |
| COUNT ( { *   [DISTINCT   <u>ALL</u> ] <i>expr</i> } ) | Number of rows, where <i>expr</i> evaluates to something other than null (count all selected rows using *, including duplicates and rows with nulls) |
| MAX ( [DISTINCT   <u>ALL</u> ] <i>expr</i> )           | Maximum value of <i>expr</i> , ignoring null values                                                                                                  |
| MIN ( [DISTINCT   <u>ALL</u> ] <i>expr</i> )           | Minimum value of <i>expr</i> , ignoring null values                                                                                                  |
| STDDEV ( [DISTINCT   <u>ALL</u> ] <i>x</i> )           | Standard deviation of <i>n</i> , ignoring null values                                                                                                |
| SUM ( [DISTINCT   <u>ALL</u> ] <i>n</i> )              | Sum values of <i>n</i> , ignoring null values                                                                                                        |
| VARIANCE ( [DISTINCT   <u>ALL</u> ] <i>x</i> )         | Variance of <i>n</i> , ignoring null values                                                                                                          |

### Group Functions: Syntax

SELECT [*column*,] *group\_function*(*column*), ...

FROM *table*

[WHERE *condition*]

[GROUP BY *column*]

[ORDER BY *column*];

### Guidelines for Using Group Functions

- DISTINCT makes the function consider only nonduplicate values; ALL makes it consider every value, including duplicates. The default is ALL and therefore does not need to be specified.
- The data types for the functions with an *expr* argument may be CHAR, VARCHAR2, NUMBER, or DATE.
- All group functions ignore null values.

### Using the AVG and SUM Functions

---

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

You can use AVG and SUM for numeric data.

```
SELECT AVG(salary), MAX(salary),  
MIN(salary), SUM(salary)  
FROM employees  
WHERE job_id LIKE '%REP%';
```

### Using the MIN and MAX Functions

You can use MIN and MAX for numeric, character, and date data types.

```
SELECT MIN(hire_date), MAX(hire_date)  
FROM employees;
```

You can use the MAX and MIN functions for numeric, character, and date data types.  
example displays the most junior and most senior employees.

The following example displays the employee last name that is first and the employee last name that is last in an alphabetized list of all employees:

```
SELECT MIN(last_name), MAX(last_name)  
FROM employees;
```

**Note:** The AVG, SUM, VARIANCE, and STDDEV functions can be used only with numeric data types. MAX and MIN cannot be used with LOB or LONG data types.

### Using the COUNT Function

COUNT(\*) returns the number of rows in a table:

---

---

```
SELECT COUNT(*)  
FROM employees  
WHERE department_id = 50;  
COUNT(expr) returns the number of rows with nonnull  
values for the expr:  
SELECT COUNT(commission_pct)  
FROM employees  
WHERE department_id = 80;
```

### Using the DISTINCT Keyword

- COUNT(DISTINCT expr) returns the number of distinct non-null values of the *expr*.

- To display the number of distinct department values in the EMPLOYEES table:

```
SELECT COUNT(DISTINCT department_id) FROM employees;
```

Use the DISTINCT keyword to suppress the counting of any duplicate values in a column.

### Group Functions and Null Values

Group functions ignore null values in the column:

```
SELECT AVG(commission_pct)
```



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

FROM employees;

The NVL function forces group functions to include null values:

SELECT AVG(NVL(commission\_pct, 0))

FROM employees;

### Creating Groups of Data

To divide the table of information into smaller groups. This can be done by using the GROUP BY clause.

### GROUP BY Clause Syntax

---

SELECT *column*, *group\_function(column)*

FROM *table*

[WHERE *condition*]

[GROUP BY *group\_by\_expression*]

[ORDER BY *column*];

**In the syntax:** *group\_by\_expression* specifies columns whose values determine the basis for grouping rows

### Guidelines

- If you include a group function in a SELECT clause, you cannot select individual results as well, *unless* the individual column appears in the GROUP BY clause. You receive an error message if you fail to include the column list in the GROUP BY clause.
- Using a WHERE clause, you can exclude rows before dividing them into groups.
- You must include the *columns* in the GROUP BY clause.
- You cannot use a column alias in the GROUP BY clause.

### Using the GROUP BY Clause

All columns in the SELECT list that are not in group functions must be in the GROUP BY clause.

SELECT department\_id, AVG(salary)

FROM employees

~~GROUP BY department\_id ;~~

The GROUP BY column does not have to be in the SELECT list.

SELECT AVG(salary) FROM employees GROUP BY department\_id ;

You can use the group function in the ORDER BY clause:

SELECT department\_id, AVG(salary) FROM employees GROUP BY department\_id ORDER BY AVG(salary);

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### Grouping by More Than One Column

```
SELECT department_id dept_id, job_id, SUM(salary) FROM employees  
GROUP BY department_id, job_id ;
```

### Illegal Queries Using Group Functions

Any column or expression in the SELECT list that is not an aggregate function must be in the GROUP

**BY clause:**

---

---

```
SELECT department_id, COUNT(last_name) FROM employees;
```

You can correct the error by adding the GROUP BY clause:

```
SELECT department_id, count(last_name) FROM employees GROUP BY department_id;
```

You cannot use the WHERE clause to restrict groups.

- You use the HAVING clause to restrict groups.
- You cannot use group functions in the WHERE clause.

```
SELECT department_id, AVG(salary) FROM employees WHERE AVG(salary) > 8000  
GROUP BY department_id;
```

You can correct the error in the example by using the HAVING clause to restrict groups:

```
SELECT department_id, AVG(salary) FROM employees  
HAVING AVG(salary) > 8000 GROUP BY department_id;
```

### Restricting Group Results

With the HAVING Clause .When you use the HAVING clause, the Oracle server restricts groups as follows:

1. Rows are grouped.
2. The group function is applied.
3. Groups matching the HAVING clause are displayed.

### Using the HAVING Clause

```
SELECT department_id, MAX(salary) FROM employees  
GROUP BY department_id HAVING MAX(salary) > 10000 ;
```

The following example displays the department numbers and average salaries for those departments with a maximum salary that is greater than \$10,000:

```
SELECT department_id, AVG(salary) FROM employees GROUP BY department_id  
HAVING max(salary) > 10000;
```

Example displays the job ID and total monthly salary for each job that has a total payroll exceeding \$13,000. The example excludes sales representatives and sorts the list by the total monthly salary.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SELECT job_id, SUM(salary) PAYROLL FROM employees WHERE job_id NOT LIKE  
'%REP%'  
GROUP BY job_id HAVING SUM(salary) > 13000 ORDER BY SUM(salary);
```

### Nesting Group Functions

---

#### Display the maximum average salary:

Group functions can be nested to a depth of two. The slide example displays the maximum average salary.

```
SELECT MAX(AVG(salary)) FROM employees GROUP BY department_id;
```

#### Summary

In this exercise, students should have learned how to:

- Use the group functions COUNT, MAX, MIN, and AVG
- Write queries that use the GROUP BY clause
- Write queries that use the HAVING clause

```
SELECT column, group_function  
FROM table
```

```
[WHERE condition]
```

```
[GROUP BY group_by_expression]
```

```
[HAVING group_condition]
```

```
[ORDER BY column];
```

#### Find the Solution for the following:

---

Determine the validity of the following three statements. Circle either True or False.

1. Group functions work across many rows to produce one result per group.

**True**/False

2. Group functions include nulls in calculations.

True/**False**

3. The WHERE clause restricts rows prior to inclusion in a group calculation.

**True**/False

#### The HR department needs the following reports:

4. Find the highest, lowest, sum, and average salary of all employees. Label the columns Maximum, Minimum, Sum, and Average, respectively. Round your results to the nearest whole number **SELECT**

**ROUND(MAX(salary)) AS Maximum,**

**ROUND(MIN(salary)) AS Minimum,**

**ROUND(SUM(salary)) AS Sum,**

**ROUND(AVG(salary)) AS Average**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

**FROM employees;**

5. Modify the above query to display the minimum, maximum, sum, and average salary for each job type.

**SELECT**

**job\_type,  
ROUND(MIN(salary)) AS Minimum,  
ROUND(MAX(salary)) AS Maximum,  
ROUND(SUM(salary)) AS Sum,  
ROUND(AVG(salary)) AS Average**

**FROM employees**

**GROUP BY job\_type;**

6. Write a query to display the number of people with the same job. Generalize the query so that the user in the HR department is prompted for a job title. **SELECT job\_type,**

**COUNT(\*) AS Number\_of\_People FROM employees WHERE job\_type = ?**

**GROUP BY job\_type;**

7. Determine the number of managers without listing them. Label the column Number of Managers. *Hint: Use the MANAGER\_ID column to determine the number of managers.*

**SELECT COUNT(DISTINCT MANAGER\_ID) AS "Number of Managers"**

**FROM employees**

**WHERE MANAGER\_ID IS NOT NULL;**

8. Find the difference between the highest and lowest salaries. Label the column DIFFERENCE.

**SELECT**

**ROUND(MAX(salary) - MIN(salary)) AS DIFFERENCE**

**FROM employees;**

9. Create a report to display the manager number and the salary of the lowest-paid employee for that manager. Exclude anyone whose manager is not known. Exclude any groups where the minimum salary is \$6,000 or less. Sort the output in descending order of salary.

**SELECT**

**MANAGER\_ID AS Manager\_Number,  
MIN(salary) AS Lowest\_Salary**

**FROM employees**

**WHERE MANAGER\_ID IS NOT NULL**

**GROUP BY MANAGER\_ID**

**HAVING MIN(salary) > 6000**

**ORDER BY Lowest\_Salary DESC;**

10. Create a query to display the total number of employees and, of that total, the number of employees hired in 1995, 1996, 1997, and 1998. Create appropriate column headings.

**SELECT**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
COUNT(*) AS Total_Employees,  
COUNT(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1995 THEN 1 END) AS Hired_1995,  
COUNT(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1996 THEN 1 END) AS Hired_1996,  
COUNT(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1997 THEN 1 END) AS Hired_1997,  
COUNT(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1998 THEN 1 END) AS Hired_1998 FROM  
employees;
```

11. Create a matrix query to display the job, the salary for that job based on department number, and the total salary for that job, for departments 20, 50, 80, and 90, giving each column an appropriate heading.

```
SELECT  
job,  
SUM(CASE WHEN department_id = 20 THEN salary ELSE 0 END) AS Salary_Dept_20,  
SUM(CASE WHEN department_id = 50 THEN salary ELSE 0 END) AS Salary_Dept_50,  
SUM(CASE WHEN department_id = 80 THEN salary ELSE 0 END) AS Salary_Dept_80,  
SUM(CASE WHEN department_id = 90 THEN salary ELSE 0 END) AS Salary_Dept_90,  
SUM(salary) AS Total_Salary  
FROM employees  
WHERE department_id IN (20, 50, 80, 90)  
GROUP BY job  
ORDER BY job;
```

12. Write a query to display each department's name, location, number of employees, and the average salary for all the employees in that department. Label the column name-Location, Number of people, and salary respectively. Round the average salary to two decimal places.

```
SELECT  
  
d.department_name || '-' || d.location AS "name-Location",  
COUNT(e.employee_id) AS "Number of people",  
ROUND(AVG(e.salary), 2) AS salary  
FROM departments d  
LEFT JOIN employees e ON d.department_id = e.department_id  
GROUP BY d.department_name, d.location  
ORDER BY d.department_name;
```

### EXERCISE-9

#### Sub queries

#### Objectives

After completing this lesson, you should be able to do the following:

- Define subqueries
- Describe the types of problems that subqueries can solve
- List the types of subqueries
- Write single-row and multiple-row subqueries

#### **Using a Subquery to Solve a Problem**

Who has a salary greater than Abel's?

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### Main query:

Which employees have salaries greater than Abel's salary?

### Subquery:

What is Abel's salary?

### Subquery Syntax

SELECT *select\_list* FROM *table* WHERE *expr operator* (SELECT *select\_list* FROM *table*); • The subquery (inner query) executes once before the main query (outer query). • The result of the

---

subquery is used by the main query. A subquery is a SELECT statement that is embedded in a clause of another SELECT statement. You can build powerful statements out of simple ones by using subqueries. They can be very useful when you need to select rows from a table with a condition that depends on the data in the table itself. You can place the subquery in a number of SQL clauses, including the following: • WHERE clause • HAVING clause • FROM clause **In the syntax:**

---

*operator* includes a comparison condition such as >, =, or IN

**Note:** Comparison conditions fall into two classes: single-row operators (>, =, >=, <, <=) and multiple-row operators (IN, ANY, ALL). statement. The subquery generally executes first, and its output is used to complete the query condition for the main (or outer) query

### Using a Subquery

SELECT last\_name FROM employees WHERE salary > (SELECT salary FROM employees WHERE last\_name = 'Abel');

The inner query determines the salary of employee Abel. The outer query takes the result of the inner query and uses this result to display all the employees who earn more than this amount.

### Guidelines for Using Subqueries

- 
- Enclose subqueries in parentheses.
  - Place subqueries on the right side of the comparison condition.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- The ORDER BY clause in the subquery is not needed unless you are performing Top-N analysis.
- Use single-row operators with single-row subqueries, and use multiple-row operators with multiple-row subqueries.


### Types of Subqueries

- Single-row subqueries: Queries that return only one row from the inner SELECT statement.
- Multiple-row subqueries: Queries that return more than one row from the inner SELECT statement.

### Single-Row Subqueries

---

- 
- Return only one row
  - Use single-row comparison operators



### Example

Display the employees whose job ID is the same as that of employee 141:

```
SELECT last_name, job_id FROM employees WHERE job_id = (SELECT job_id FROM employees WHERE employee_id = 141);
```

Display employees whose job ID is the same as that of employee 141 and whose salary is greater than that of employee 143.

```
SELECT last_name, job_id, salary FROM employees WHERE job_id = (SELECT job_id FROM employees WHERE employee_id = 141) AND salary > (SELECT salary FROM employees WHERE employee_id = 143);
```

### Using Group Functions in a Subquery

Displays the employee last name, job ID, and salary of all employees whose salary is equal to the minimum salary. The MIN group function returns a single value (2500) to the outer query.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SELECT last_name, job_id, salary FROM employees WHERE salary = (SELECT MIN(salary)
FROM employees);
```

### The HAVING Clause with Subqueries

- The Oracle server executes subqueries first.
- The Oracle server returns results into the HAVING clause of the main query.

Displays all the departments that have a minimum salary greater than that of department 50.

```
SELECT department_id, MIN(salary)
FROM employees
```

---

```
GROUP BY department_id HAVING MIN(salary) > (SELECT MIN(salary) FROM employees
WHERE department_id = 50);
```

### **Example Find the job with the lowest average salary.**

```
SELECT job_id, AVG(salary) FROM employees GROUP BY job_id HAVING AVG(salary)
= (SELECT MIN(AVG(salary)) FROM employees GROUP BY job_id); What Is Wrong in
this Statements?
```

---

```
SELECT
= employee_id, last_name FROM employees WHERE salary
(SELECT MIN(salary) FROM employees GROUP BY department_id); Will This
Statement Return Rows? SELECT last_name, job_id FROM employees WHERE job_id =
(SELECT job_id FROM employees WHERE last_name = 'Haas');
```

### **Multiple-Row Subqueries**

- Return more than one row
  - Use multiple-row comparison operators
-



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY



### Example

Find the employees who earn the same salary as the minimum salary for each department.

```
SELECT last_name, salary, department_id FROM employees WHERE salary IN (SELECT MIN(salary)
```

```
FROM employees GROUP BY department_id);
```

Using the ANY Operator in Multiple-Row Subqueries

```
SELECT employee_id, last_name, job_id, salary FROM employees WHERE salary < ANY (SELECT salary FROM employees WHERE job_id = 'IT_PROG') AND job_id <> 'IT_PROG';
```

Displays employees who are not IT programmers and whose salary is less than that of any IT programmer. The maximum salary that a programmer earns is \$9,000.

<ANY means less than the maximum. >ANY means more than the minimum. =ANY is equivalent to IN.

### **Using the ALL Operator in Multiple-Row Subqueries**

---

```
SELECT employee_id, last_name, job_id, salary
```

```
FROM employees
```

```
WHERE salary < ALL (SELECT salary FROM employees WHERE job_id = 'IT_PROG') AND job_id <> 'IT_PROG';
```

Displays employees whose salary is less than the salary of all employees with a job ID of IT\_PROG and whose job is not IT\_PROG.

ALL means more than the maximum, and <ALL means less than the minimum.

The NOT operator can be used with IN, ANY, and ALL operators.

### **Null Values in a Subquery**

```
SELECT emp.last_name FROM employees emp
```

```
WHERE emp.employee_id NOT IN (SELECT mgr.manager_id FROM employees mgr);
```

Notice that the null value as part of the results set of a subquery is not a problem if you use the IN operator. The IN operator is equivalent to =ANY. For example, to display the employees who have subordinates, use the following SQL statement:

```
SELECT emp.last_name
```

```
FROM employees emp
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

WHERE emp.employee\_id IN (SELECT mgr.manager\_id FROM employees mgr);

Display all employees who do not have any subordinates:

SELECT last\_name FROM employees

WHERE employee\_id NOT IN (SELECT manager\_id FROM employees WHERE manager\_id IS NOT NULL);

### **Find the Solution for the following:**

1. The HR department needs a query that prompts the user for an employee last name. The query then displays the last name and hire date of any employee in the same department as the employee whose name they supply (excluding that employee). For example, if the user enters Zlotkey, find all employees who work with Zlotkey (excluding Zlotkey).

**SELECT last\_name, hire\_date**

**FROM employees**

**WHERE department\_id = (**

**SELECT department\_id**

**FROM employees**

**WHERE last\_name = ?**

**)**

**AND last\_name <> ?**

**ORDER BY last\_name;**

2. Create a report that displays the employee number, last name, and salary of all employees who earn more than the average salary. Sort the results in order of ascending salary.

**SELECT employee\_id, last\_name, salary**

**FROM employees**

**WHERE salary > (SELECT AVG(salary) FROM employees)**

**ORDER BY salary ASC;**

3. Write a query that displays the employee number and last name of all employees who work in a department with any employee whose last name contains a u.

**SELECT employee\_id, last\_name**

**FROM employees**

**WHERE department\_id IN (**

**SELECT DISTINCT department\_id**

**FROM employees**

**WHERE last\_name LIKE '%u%'**

**)**

**ORDER BY employee\_id;**

4. The HR department needs a report that displays the last name, department number, and job ID of all employees whose department location ID is 1700.

**SELECT e.last\_name, e.department\_id, e.job\_id**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
FROM employees e
JOIN departments d ON e.department_id = d.department_id
WHERE d.location_id = 1700
ORDER BY e.last_name;
```

5. Create a report for HR that displays the last name and salary of every employee who reports to King.

```
SELECT e.last_name, e.salary
FROM employees e
JOIN employees m ON e.manager_id = m.employee_id
WHERE m.last_name = 'King'
ORDER BY e.last_name;
```

6. Create a report for HR that displays the department number, last name, and job ID for every employee in the Executive department.

```
SELECT e.department_id, e.last_name, e.job_id
FROM employees e
JOIN departments d ON e.department_id = d.department_id
WHERE d.department_name = 'Executive'
ORDER BY e.last_name;
```

7. Modify the query 3 to display the employee number, last name, and salary of all employees who earn more than the average salary and who work in a department with any employee whose last name contains a *u*.

```
SELECT employee_id, last_name, salary
FROM employees
WHERE salary > (SELECT AVG(salary) FROM employees)

AND department_id IN (
    SELECT DISTINCT department_id
    FROM employees
    WHERE last_name LIKE '%u%'
)
ORDER BY salary ASC;
```

### EXERCISE-10

#### USING THE SET OPERATORS

##### Objectives

After the completion this exercise, the students should be able to do the following:

- Describes set operators
- Use a set operator to combine multiple queries into a single query
- Control the order of rows returned

The set operators combine the results of two or more component queries into one result.

Queries containing set operators are called *compound queries*.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| Operator  | Returns                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| UNION     | All distinct rows selected by either query                                                                        |
| UNION ALL | All rows selected by either query, including all duplicates                                                       |
| INTERSECT | All distinct rows selected by both queries                                                                        |
| MINUS     | All distinct rows that are selected by the first SELECT statement and not selected in the second SELECT statement |

### **The tables used in this lesson are:**

- EMPLOYEES:Provides details regarding all current employees
- JOB\_HISTORY: Records the details of the start date and end date of the former job, and the job identification number and department when an employee switches jobs

### **UNION Operator Guidelines**

- The number of columns and the data types of the columns being selected must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- UNION operates over all of the columns being selected.
- NULL values are not ignored during duplicate checking.
- The IN operator has a higher precedence than the UNION operator.
- By default, the output is sorted in ascending order of the first column of the SELECT clause.

#### **Example:**

Display the current and previous job details of all employees. Display each employee only once.  
SELECT employee\_id, job\_id FROM employees UNION SELECT employee\_id, job\_id  
FROM job\_history;

#### **Example:**

```
SELECT employee_id, job_id, department_id
FROM employees
UNION
SELECT employee_id, job_id, department_id
FROM job_history;
```

### **UNION ALL Operator**

#### **Guidelines**

The guidelines for UNION and UNION ALL are the same, with the following two exceptions that pertain to UNION ALL:

- Unlike UNION, duplicate rows are not eliminated and the output is not sorted by default.
- The DISTINCT keyword cannot be used.

#### **Example:**

Display the current and previous departments of all employees.  
SELECT employee\_id, job\_id, department\_id

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
FROM employees  
UNION ALL  
SELECT employee_id, job_id, department_id  
FROM job_history  
ORDER BY employee_id;
```

### **INTERSECT Operator**

#### **Guidelines**

- The number of columns and the data types of the columns being selected by the SELECT statements in the queries must be identical in all the SELECT statements used in the query. The ~~names of the columns~~ need not be identical.
- Reversing the order of the intersected tables does not alter the result.
- ~~INTERSECT~~ does not ignore NULL values.

#### **Example:**

Display the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired (that is, they changed jobs but have now gone back to doing their original job).

```
SELECT employee_id, job_id FROM employees  
INTERSECT  
SELECT employee_id, job_id  
FROM job_history;
```

#### **Example**

```
SELECT employee_id, job_id, department_id  
  
_____  
FROM employees  
INTERSECT  
SELECT employee_id, job_id, department_id  
FROM job_history;
```

### **MINUS Operator**

#### **Guidelines**

- The number of columns and the data types of the columns being selected by the SELECT statements in the queries must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- All of the columns in the WHERE clause must be in the SELECT clause for the MINUS operator to work.

#### **Example:**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

Display the employee IDs of those employees who have not changed their jobs even once.

```
SELECT employee_id, job_id
FROM employees
MINUS
SELECT employee_id, job_id
FROM job_history;
```

**Find the Solution for the following:**

---

1. The HR department needs a list of department IDs for departments that do not contain the job ID ST\_CLERK. Use set operators to create this report.
2. The HR department needs a list of countries that have no departments located in them. Display the country ID and the name of the countries. Use set operators to create this report.
3. Produce a list of jobs for departments 10, 50, and 20, in that order. Display job ID and department ID using set operators.
4. Create a report that lists the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired by the company (that is, they changed jobs but have now gone back to doing their original job).
5. The HR department needs a report with the following specifications: -Last name and department ID of all the employees from the EMPLOYEES table, regardless of whether or not they belong to a department. -Department ID and department name of all the departments from the DEPARTMENTS table, regardless of whether or not they have employees working in them Write a compound query to accomplish this.

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## EXERCISE-11

### CREATING VIEWS

After the completion of this exercise, students will be able to do the following:

- Describe a view
- Create, alter the definition of, and drop a view
- Retrieve data through a view
- Insert, update, and delete data through a view
- Create and use an inline view

### View

A view is a logical table based on a table or another view. A view contains no data but is like a window through which data from tables can be viewed or changed. The tables on which a view is based are called base tables.

### Advantages of Views

- 
- To restrict data access
  - To make complex queries easy
  - To provide data independence
  - To present different views of the same data

### Classification of views

1. Simple view
2. Complex view

Feature

| No. of tables               | Simple | Complex     |
|-----------------------------|--------|-------------|
| Contains functions          | One    | One or more |
| Contains groups of data     | No     | Yes Yes Not |
| DML operations through view | No     | always      |
|                             | Yes    |             |

### Creating a view

#### Syntax

CREATE OR REPLACE FORCE/NOFORCE VIEW view\_name AS Subquery WITH CHECK OPTION CONSTRAINT constraint WITH READ ONLY CONSTRAINT constraint;

**FORCE** - Creates the view regardless of whether or not the base tables exist.

**NOFORCE** - Creates the view only if the base table exists.

WITH CHECK OPTION CONSTRAINT - specifies that only rows accessible to the view can be inserted or updated.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

WITH READ ONLY CONSTRAINT-ensures that no DML operations can be performed on the view.

(Without using Column aliases)

### Example: 1

Create a view EMPVU80 that contains details of employees in department80.

### Example 2:

---

```
CREATE VIEW empvu80 AS SELECT employee_id, last_name, salary FROM employees
WHERE department_id=80;
```

### Example:1 (Using column aliases)

CREATE VIEW salvu50

```
AS SELECT employee_id, id_number, last_name NAME, salary *12 ANN_SALARY
FROM employees
WHERE department_id=50; Retrieving
```

### data from a view

#### Example:

```
SELECT * from salvu50;
```

### Modifying a view

---

A view can be altered without dropping, re-creating.

### Example:(Simple view)

Modify the EMPVU80 view by using CREATE OR REPLACE.

```
CREATE OR REPLACE VIEW empvu80 (id_number, name, sal, department_id)
```

```
AS SELECT employee_id, first_name, last_name, salary, department_id
FROM employees
WHERE department_id=80;
```

### Example: (complex view)

CREATE VIEW dept\_sum\_vu (name, minsal, maxsal, avgsal)

```
AS SELECT d.department_name, MIN(e.salary), MAX(e.salary), AVG(e.salary)
FROM employees e, department d
WHERE e.department_id=d.department_id
GROUP BY d.department_name;
```

### Rules for performing DML operations on view



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- Can perform operations on simple views
- Cannot remove a row if the view contains the following:
  - Group functions
- Group By clause
- Distinct keyword
- Cannot modify data in a view if it contains
  - Group functions
  - Group By clause
  - Distinct keyword
  - Columns contain by expressions
- Cannot add data through a view if it contains
  - Group functions
  - Group By clause
  - Distinct keyword
  - Columns contain by expressions
  - NOT NULL columns in the base table that are not selected by the view

### **Example: (Using the WITH CHECK OPTION clause)**

```
CREATE OR REPLACE VIEW empvu20
```

```
AS SELECT *
FROM employees
WHERE department_id=20
WITH CHECK OPTION CONSTRAINT empvu20_ck;
```

**Note:** Any attempt to change the department number for any row in the view fails because it violates the WITH CHECK OPTION constraint.

### **Example** – (Execute this and note the error)

```
UPDATE empvu20 SET department_id=10 WHERE employee_id=201;
```

### **Denying DML operations**

Use of WITH READ ONLY option.

Any attempt to perform a DML on any row in the view results in an Oracle server error.

### **Try this code:**

```
CREATE OR REPLACE VIEW empvu10(employee_number, employee_name, job_title)
AS SELECT employee_id, last_name, job_id
FROM employees
WHERE department_id=10
WITH READ ONLY;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### **Find the Solution for the following:**

1. Create a view called EMPLOYEE\_VU based on the employee numbers, employee names and department numbers from the EMPLOYEES table. Change the heading for the employee name to EMPLOYEE.
2. Display the contents of the EMPLOYEES\_VU view.
3. Select the view name and text from the USER\_VIEWS data dictionary views.
4. Using your EMPLOYEES\_VU view, enter a query to display all employees names and department.
5. Create a view named DEPT50 that contains the employee number, employee last names and department numbers for all employees in department 50. Label the view columns EMPNO, EMPLOYEE and DEPTNO. Do not allow an employee to be reassigned to another department through the view.
6. Display the structure and contents of the DEPT50 view.
7. Attempt to reassign Matos to department 80.
8. Create a view called SALARY\_VU based on the employee last names, department names, salaries, and salary grades for all employees. Use the Employees, DEPARTMENTS and JOB\_GRADE tables. Label the column Employee, Department, salary, and Grade respectively.

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## PL/SQL

### Control Structures

In addition to SQL commands, PL/SQL can also process data using flow of statements. The flow of control statements are classified into the following categories.

- Conditional control-Branching
- Iterative control-looping
- Sequential control

#### **BRANCHING in PL/SQL:**

Sequence of statements can be executed on satisfying certain condition .

If statements are being used and different forms of if are:

1. Simple IF

2. ELSIF

3. ELSE IF

#### ***SIMPLE IF:***

---

#### **Syntax:**

IF condition THEN

    statement1;

    statement2;

END IF;

#### ***IF-THEN-ELSE STATEMENT:***

---

#### **Syntax:**

IF condition THEN statement1;

ELSE

    statement2;

END IF;

#### ***ELSIF STATEMENTS:***

---

#### **Syntax:**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
IF condition1 THEN statement1;

ELSIF condition2 THEN statement2;

ELSIF condition3 THEN statement3;

ELSE

    statementn;

END IF;
```

***NESTED IF :***

---

### **Syntax:**

```
IF condition THEN statement1;

ELSE

    IF condition THEN statement2;

    ELSE

        statement3;

    END IF;

END IF;

ELSE

    statement3;

END IF;
```

### **SELECTION IN PL/SQL(Sequential Controls)**

***SIMPLE CASE***

---

### **Syntax:**

```
CASE SELECTOR

    WHEN Expr1 THEN statement1;

    WHEN Expr2 THEN statement2;

    :

ELSE
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

Statement n;

END CASE;

***SEARCHED CASE:***

---

CASE

WHEN searchcondition1 THEN statement1;

WHEN searchcondition2 THEN statement2;

: : ELSE

statementn;

END CASE;

### **ITERATIONS IN PL/SQL**

Sequence of statements can be executed any number of times using loop construct.

It is broadly classified into:

- Simple Loop
- For Loop
- While Loop

#### **SIMPLE LOOP**

**Syntax:** LOOP

statement1;

EXIT [ WHEN Condition];

END LOOP;

#### **WHILE LOOP**

**Syntax:**

~~WHILE~~ condition LOOP

statement1;

statement2;

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

END LOOP;

### **FOR LOOP**

**Syntax:**

FOR counter IN [REVERSE]

LowerBound..UpperBound

LOOP

statement1;

statement2;END LOOP;

### **EXERCISE-12**

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## **~~PROCEDURES AND FUNCTIONS~~**

### **~~PROCEDURES~~**

#### **~~DEFINITION~~**

A procedure or function is a logically grouped set of SQL and PL/SQL statements that perform a specific task. They are essentially sub-programs. Procedures and functions are made up of,

- • • Declarative part
- Executable part
- Optional exception handling part

These procedures and functions do not show the errors.

#### **~~KEYWORDS AND THEIR PURPOSES~~**

**REPLACE:** It recreates the procedure if it already exists.

**PROCEDURE:** ARGUMENT: of the procedure to be created.

argument are in. is. IN: It is the datatype of the argument. OUT: It is the datatype of the argument. INOUT: It is the datatype of the argument.

Specifies that the procedure passes a value for this argument back to its calling environment after execution i.e. used to return values to a caller of the sub-program. **INOUT:** Specifies that a value for the argument must be specified when calling the procedure and that procedure passes a value for this argument back to its calling environment after execution. **RETURN:** It is the datatype of the function's return value because every function must return a value, this clause is required.

### **~~PROCEDURES — SYNTAX —~~**

```
create or replace procedure <procedure name> (argument {in,out,inout} datatype ) {is,as}
variable declaration;
constant declaration;
begin
PL/SQL subprogram body;
exception
exception PL/SQL block;
end;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### ~~FUNCTIONS—SYNTAX~~

```
create or replace function<function name> (argument in datatype,.....) return datatype {is,as}
variable declaration;
constant declaration;
begin
PL/SQL subprogram body;
exception
exception PL/SQL block;
end;
```

### ~~CREATING THE TABLE 'ITITEMS' AND DISPLAYING THE CONTENTS~~

```
SQL> createtableititems(itemidnumber(3),actualpricenumber(5),ordidnumber(4),prodid
number(4));
Table created.
SQL> insert into ititems values(101, 2000, 500, 201);
1 row created.
SQL> insert into ititems values(102, 3000, 1600, 202);
1 row created.
SQL> insert into ititems values(103, 4000, 600, 202);
1 row created.
SQL> select * from ititems;
ITEMID ACTUALPRICE
```

|       |       | ORDID PRODID |       |
|-------|-------|--------------|-------|
| ----- | ----- | -----        | ----- |
| 101   | 2000  | 500          | 201   |
| 102   | 3000  | 1600         | 202   |
| 103   | 4000  | 600          | 202   |

**PROGRAM FOR GENERAL PROCEDURE – SELECTED RECORD'S PRICE IS INCREMENTED BY 500 , EXECUTING THE PROCEDURE CREATED DISPLAYING THE UPDATED TABLE** to SQL> create procedure itsum(identity number, number) is price number;

```
2 null_price exception;
3 begin
4 select actualprice into price from ititems where itemid=identity;
5 if price is null then
```

**AND**



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
6raisenull_price;
7 else
8updateititems set actualprice=actualprice+total where itemid=identity;
9 endif;
10 exception
11whennull_price then
12dbms_output.put_line('price is null');
13 end;
14/
```

Procedurecreated.

SQL>execitsum(101, 500);

PL/SQLprocedure successfully completed.

SQL>select\*from ititems;

| ITEMID | ACTUALPRICE | ORDID | PRODID |
|--------|-------------|-------|--------|
| 101    | 2500        | 500   | 201    |
| 102    | 3000        | 1600  | 202    |
| 103    | 4000        | 600   | 202    |

### **~~PROCEDURE FOR 'IN' PARAMETER – CREATION, EXECUTION~~**

SQL>setserveroutput on;

SQL>createprocedure yyy (a IN number) is price number;

```
2 begin
3selectactualprice into price from ititems where itemid=a;
4dbms_output.put_line('Actual price is ' || price);
5ifpriceisnull then
6dbms_output.put_line('price is null');
7 endif;
8 end;
9/
```

Procedurecreated.

SQL>execyyy(103);

Actualpriceis4000

PL/SQLprocedure successfully completed.

### **~~PROCEDUREFOR'OUT'PARAMETER–CREATION, EXECUTION~~**

SQL> set serveroutput on;

---

SQL> create procedure zzz (a in number, b out number) is identity number;

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
2 begin
3 select ordid into identity from ititems where itemid=a;
4 if identity<1000 then
5 b:=100;
6 end if;
7 end;
8 /
```

Procedure created.

SQL> declare

```
2 a number;
3 b number;
4 begin
5 zzz(101,b);
6 dbms_output.put_line('The value of b is '|| b);
7 end;
8 /
```

The value of b is 100

PL/SQL procedure successfully completed.

### **PROCEDUREFOR‘INOUT’PARAMETER–CREATION, EXECUTION**

---

SQL> create procedure itit ( a in out number) is

```
2 begin
3 a:=a+1;
4 end;
5 /
Procedure created.
```

SQL> declare

```
2 a number:=7;
3 begin
4 itit(a);
5 dbms_output.put_line('The updated value is '||a);
6 end;
7 /
```

The updated value is 8

PL/SQL procedure successfully completed.

### **CREATETHE‘ITTRAIN’TOBEUSEDFORFUNCTIONS**

---

SQL>create table ittrain ( tno number(10), tfare number(10));

Table created.

SQL>insert into ittrain values (1001, 550);

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

1 row created.

```
SQL>insertintoittrainvalues (1002, 600);
```

1 row created.

```
SQL>select * from ittrain;
```

| TNO  | TFARE |
|------|-------|
| 1001 | 550   |
| 1002 | 600   |

### ~~PROGRAMFORFUNCTION AND IT'S EXECUTION~~

```
SQL>createfunctionaaa(trainnumber number) return number is
2trainfunctionittrain.tfare % type;
3 begin
4selecttfareintotrainfunction from ittrain where tno=trainnumber;
5 return(trainfunction);
6 end;
7/
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 total number;
3 begin
4 total:=aaa (1001);
5dbms_output.put_line('Train fare is Rs. '||total);
6 end;
7/
```

Train fare is Rs.550

PL/SQLproceduresuccessfully completed.

### **FACTORIALOFANUMBERUSINGFUNCTION — PROGRAM AND EXECUTION**

---

```
SQL>createfunctionitfact (a number) return number is
2 factnumber:=1;
3 bnumber;
4 begin
5 b:=a;
6 whileb>0
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
7 loop
8 fact:=fact*b;
9 b:=b-1;
10 end loop;
11 return(fact);
12 end;
13 /
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
2 a number:=7;
3 f number(10);
4 begin
5 f:=itfact(a);
6 dbms_output.put_line('The factorial of the given number is'||f);
7 end;
8 /
```

The factorial of the given number is 5040

PL/SQL procedure successfully completed.

### EXERCISE-13

## TRIGGER

### DEFINITION

A trigger is a statement that is executed automatically by the system as a side effect of a modification to the database. The parts of a trigger are,

- **Trigger statement:** Specifies the DML statements and fires the trigger body. It also specifies the table to which the trigger is associated.
- **Trigger body or trigger action:** It is a PL/SQL block that is executed when the triggering statement is used.
- **Trigger restriction:** Restrictions on the trigger can be achieved

The different uses of triggers are as follows,

- *To generate data automatically*
- *To enforce complex integrity constraints*
- *To customize complex securing authorizations*
- *To maintain the replicated table*
- To audit data modifications

### TYPES OF TRIGGERS

The various types of triggers are as follows,

- **Before:** It fires the trigger before executing the trigger statement.
- **After:** It fires the trigger after executing the trigger statement
- .
- **For each row:** It specifies that the trigger fires once per row
- .
- **For each statement:** This is the default trigger that is invoked. It specifies that the trigger fires once per statement.

### VARIABLES USED IN TRIGGERS

- :new
- :old

These two variables retain the new and old values of the column updated in the database. The values in these variables can be used in the database triggers for data manipulation

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### SYNTAX

```
create orreplace trigger triggername [before/after] {DML statements}
on [tablename] [foreach row/statement] begin -----
-----
```

```
exception
end;
```

### USER DEFINED ERROR MESSAGE

The package "raise\_application\_error" is used to issue the user defined error messages

**Syntax:** raise\_application\_error(error number, 'error message');

The error number can lie between -20000 and -20999.

The error message should be a character string.

### TO CREATE THE TABLE 'ITEMPLS'

```
SQL> create table itempls (ename varchar2(10), eid number(5), salary number(10));
```

Table created.

```
SQL> insert into itempls values('xxx', 11, 10000);
```

1 row created.

```
SQL> insert into itempls values('yyy', 12, 10500);
```

1 row created.

```
SQL> insert into itempls values('zzz', 13, 15500);
```

1 row created.

```
SQL> select * from itempls;
```

| ENAME | EID | SALARY |
|-------|-----|--------|
|-------|-----|--------|

|       |    |       |
|-------|----|-------|
| ----- |    |       |
| xx    | 1  | 10000 |
| x     | 1  | 10500 |
| yy    | 13 | 15500 |
| y     | 2  |       |

**TO CREATE A SIMPLE TRIGGER THAT DOES NOT ALLOW INSERT UPDATE AND DELETE OPERATIONS ON THE TABLE**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> create trigger ittrigg before insert or update or delete on itempls for each row
2 begin
3 raise_application_error(-20010,'You cannot do manipulation');
4 end;
5
6 /
```

Trigger created.

```
SQL> insert into itempls values('aaa',14,34000);
insert into itempls values('aaa',14,34000)
```

\*

ERROR at line 1:

ORA-20010: You cannot do manipulation

ORA-06512: at "STUDENT.ITTRIGG", line 2

ORA-04088: error during execution of trigger 'STUDENT.ITTRIGG'

```
SQL> delete from itempls where ename='xxx';
```

```
delete from itempls where ename='xxx'
```

\*

ERROR at line 1:

ORA-20010: You cannot do manipulation

ORA-06512: at "STUDENT.ITTRIGG", line 2

ORA-04088: error during execution of trigger 'STUDENT.ITTRIGG'

```
SQL> update itempls set eid=15 where ename='yyy';
```

```
update itempls set eid=15 where ename='yyy'
```

\*

ERROR at line 1:

ORA-20010: You cannot do manipulation

ORA-06512: at "STUDENT.ITTRIGG", line 2

ORA-04088: error during execution of trigger 'STUDENT.ITTRIGG'

### **TO DROP THE CREATED TRIGGER**

```
SQL> drop trigger ittrigg;
```

Trigger dropped.

### **TO CREATE A TRIGGER THAT RAISES AN USER DEFINED ERROR MESSAGE AND DOES NOT ALLOW UPDATION AND INSERTION**

```
SQL> create trigger ittriggs before insert or update of salary on itempls for each row
```

```
2 declare
3 triggsal itempls.salary%type;
4 begin
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
5 select salary into triggsal from itempls where eid=12;
6 if(:new.salary>triggsal or :new.salary<triggsal) then
7 raise_application_error(-20100,'Salary has not been changed');
8 end if;
9 end;
10 /
```

Trigger created.

```
SQL> insert into itempls values ('bbb',16,45000);
insert into itempls values ('bbb',16,45000)
```

\*

ERROR at line 1:

ORA-04098: trigger 'STUDENT.ITTRIGGS' is invalid and failed re-validation

```
SQL> update itempls set eid=18 where ename='zzz';
```

```
update itempls set eid=18 where ename='zzz'
```

\*

ERROR at line 1:

ORA-04298: trigger 'STUDENT.ITTRIGGS' is invalid and failed re-validation

Cursor for loop

Explicit cursor

Implicit cursor

### **TOCREATE THE TABLE 'SSEMP'**

```
SQL> create table ssempp( eid number(10), ename varchar2(20), job varchar2(20), sal number
(10),dnnumber(5));
```

Table created.

```
SQL> insert into ssempp values(1,'nala','lecturer',34000,11);
```

1 row created.

```
SQL> insert into ssempp values(2,'kala','seniorlecturer',20000,12);
```

1 row created.

```
SQL> insert into ssempp values(5,'ajay','lecturer',30000,11);
```

1 row created.

```
SQL> insert into ssempp values(6,'vijay','lecturer',18000,11);
```

1 row created.

```
SQL> insert into ssempp values(3,'nila','professor',60000,12);
```

1 row created.



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> select * from ssemp;
```

| EID | ENAME | JOB            | SAL   | DNO |
|-----|-------|----------------|-------|-----|
| 1   | nala  | lecturer       | 34000 | 11  |
| 2   | kala  | seniorlecturer | 20000 | 12  |
| 5   | ajay  | lecturer       | 30000 | 11  |
| 6   | vijay | lecturer       | 18000 | 11  |
| 3   | nila  | professor      | 60000 | 12  |

### EXTRA PROGRAMS

**TOWRITE A PL/SQL BLOCK TO DISPLAY THE EMPLOYEE ID AND EMPLOYEE NAME USING CURSOR FOR LOOP**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 begin
```

```
3 for emy in (select eid,ename from ssemp)
```

```
4 loop
```

```
5 dbms_output.put_line('Employee id and employee name are '|| emy.eid || 'and' || emy.ename);
```

```
6 end loop;
```

```
7 end;
```

```
8 /
```

Employee id and employee name are 1 and nala Employee id and employee name are 2 and kala

Employee id and employee name are 5 and ajay Employee id and employee name are 6 and vijay

**TO WRITE A PL/SQL BLOCK TO UPDATE THE SALARY OF ALL EMPLOYEES WHERE**

**DEPARTMENT NO IS 11 BY 5000 USING CURSOR FOR LOOP AND TO DISPLAY THE UPDATED TABLE**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 cursor cem is select eid,ename,sal,dno from ssemp where dno=11;
```

```
3 begin
```

```
4 --open cem;
```

```
5 for rem in cem
```

```
6 loop
```

```
7 update ssemp set sal=rem.sal+5000 where eid=rem.eid;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
8 endloop;
9 --closecem;
10 end;
11/
```

PL/SQL procedures successfully completed.

SQL> select \* from ssemp;

| EID | ENAME | JOB            | SAL   | DNO |
|-----|-------|----------------|-------|-----|
| 1   | nala  | lecturer       | 39000 | 11  |
| 2   | kala  | seniorlecturer | 20000 | 12  |
| 5   | ajay  | lecturer       | 35000 | 11  |
| 6   | vijay | lecturer       | 23000 | 11  |
| 3   | nila  | professor      | 60000 | 12  |

**TO WRITE A PL/SQL BLOCK TO DISPLAY THE EMPLOYEE ID AND EMPLOYEE NAME WHERE DEPARTMENT NUMBER IS 11 USING EXPLICIT CURSORS**

```
1 declare
2 cursor cenl is select eid,sal from ssemp where dno=11;
3 ecode ssemp.eid%type;
4 esal emp.sal%type;
5 begin
6 open cenl;
7 loop
8 fetch cenl into ecode,esal;
9 exit when cenl%notfound;
10 dbms_output.put_line(' Employee code and employee salary are' || ecode 'and' || esal);
11 end loop;
12 close cenl;
13* end;
```

SQL> / Employee code and employee salary are 1 and 39000 Employee code and employee salary are 5 and 35000 Employee code and employee salary are 6 and 23000 PL/SQL procedure successfully completed.

**TO WRITE A PL/SQL BLOCK TO UPDATE THE SALARY BY 5000 WHERE THE JOB IS LECTURER, TO CHECK IF UPDATES ARE MADE USING IMPLICIT CURSORS AND TO DISPLAY THE UPDATED TABLE**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> declare
2 countynumber;
3 begin
4 updatesemppsetsal=sal+10000wherejob='lecturer';
5 county:=sql%rowcount;
6 if county > 0 then
7 dbms_output.put_line('Thenumberofrowsare '|| county);
8 endif;
9 ifsql%foundthen
10 dbms_output.put_line('Employee record modification successful'); 11
elseifsql%notfoundthen 12 dbms_output.put_line('Employee record is not
found'); 13 end if; 14 end if; 15 end; 16/
```

The number of rows are 3  
Employee record modification successful  
PL/SQL procedure successfully completed.  
SQL> select \* from ssempp;

| EIDNAME | JOB            | SAL   | DNO   |
|---------|----------------|-------|-------|
| -----   | -----          | ----- | ----- |
| nalal1  | lecturer       | 44000 | 11    |
| kala2   | seniorlecturer | 20000 | 12    |
| ajay5   | lecturer       | 40000 | 11    |
| vijay6  | lecturer       | 28000 | 11    |
| nila 3  | professor      | 60000 | 12    |

### PROGRAMS

#### TO DISPLAY HELLO MESSAGE

```
SQL> set serveroutput on;
SQL> declare
2 a varchar2(20);
3 begin
4 a:='Hello';
5 dbms_output.put_line(a);
6 end;
7 /
Hello
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

PL/SQL procedure successfully completed.

### **TO INPUT A VALUE FROM THE USER AND DISPLAY IT**

SQL> set serveroutput on;

SQL> declare

```
2 a varchar2(20);
3 begin
4 a:=&a;
5 dbms_output.put_line(a);
6 end;
7/
```

Enter value for a: 5

old 4:a:=&a;

new 4:a:=5;

5

PL/SQL procedure successfully completed.

### **GREATEST OF TWO NUMBERS**

SQL> set serveroutput on;

SQL> declare

```
2 a number(7); 3 b number(7); 4 begin 5 a:=&a; 6
b:=&b; 7 if(a>b) then 8 dbms_output.put_line (' The
grerater of the two is'|| a); 9 else
```

```
10 dbms_output.put_line (' The grerater of the two is'|| b);
11 end if;
12 end;
13/
```

Enter value for a: 5

old 5:a:=&a;

new 5:a:=5;

Enter value for b: 9

old 6:b:=&b;

new 6:b:=9;

The grerater of the two is 9

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

PL/SQL procedure successfully completed.

### **GREATEST OF THREE NUMBERS**

SQL> set serveroutput on;

SQL> declare

```
2 a number(7);
3 b number(7);
4 c number(7);
5 begin
6 a:=&a;
7 b:=&b;
8 c:=&c;
9 if(a>b and a>c) then
10 dbms_output.put_line (' The greatest of the three is ' || a);
11 else if (b>c) then 12 dbms_output.put_line (' The greatest
of the three is ' || b); 13 else 14 dbms_output.put_line (' The
greatest of the three is ' || c); 15 end if; 16 end if; 17 end; 18 /
```

Enter value for a: 5

old 6: a:=&a;

new 6: a:=5;

Enter value for b: 7

old 7: b:=&b;

new 7: b:=7;

Enter value for c: 1

old 8: c:=&c;

new 8: c:=1;

The greatest of the three is 7

PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 5 USING SIMPLE LOOP**

SQL> set serveroutput on;

SQL> declare

```
2 a number:=1;
```

```
3 begin
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
4 loop
5 dbms_output.put_line (a);
6 a:=a+1;
7 exitwhen a>5;
8 endloop;
9 end;
10/
1 2 3 4 5 PL/SQL procedure successfully
completed.
```

### ~~PRINTNUMBERS FROM 1 TO 4 USING WHILE LOOP~~

```
SQL>setserveroutput on;
SQL>declare
```

```
2 number:=1;
3 begin
4 while(a<5)
5 loop
6 dbms_output.put_line (a);
7 a:=a+1;
8 endloop;
9 end;
10/
1 2 3 4 PL/SQL procedure successfully completed.
PRINTNUMBERSFROM1TO5USINGFORLOOP
```

```
SQL>setserveroutput on; SQL>declare
```

---

```
2 number:=1;
3 begin
4 forain1..5
5 loop
6 dbms_output.put_line (a);
7 endloop;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
8 end;
9 /
1 2 3 4 5 PL/SQL procedure successfully completed. PRINT NUMBERS FROM 1
TO 5 IN REVERSE ORDER USING FOR LOOP SQL> set serveroutput on;
SQL> declare
```

---

```
2 a number:=1;
3 begin
4 for a in reverse 1..5
5 loop
6 dbms_output.put_line (a);
7 end loop;
8 end;
9 /
5 4 3 2 1 PL/SQL procedure successfully
completed. TO CALCULATE AREA OF
CIRCLE SQL> set serveroutput on; SQL>
declare
```

---

```
2 pi constant number(4,2):=3.14;
3 a number(20);
4 r number(20);
5 begin
6 r:=&r;
7 a:= pi* power(r,2);
8 dbms_output.put_line (' The area of circle is ' || a);
9 end;
10 /
Enter value for r: 2
old 6: r:=&r;
new 6: r:=2;
The area of circle is 13
PL/SQL procedure successfully completed.
TO CREATE SACCOUNT TABLE
SQL> create table saccount ( accno number(5), name varchar2(20), bal number(10));
Table created.
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> insert into saccount values ( 1,'mala',20000);
```

1 row created.

```
SQL> insert into saccount values (2,'kala',30000);
```

1 row created.

```
SQL> select * from saccount;
```

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 20000 |
| 2     | kala | 30000 |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a_bal number(7);
```

```
3 a_no varchar2(20);
```

```
4 debit number(7):=2000;
```

```
5 minamt number(7):=500;
```

```
6 begin
```

```
7 a_no:=&a_no;
```

```
8 select bal into a_bal from saccount where accno= a_no;
```

```
9 a_bal:= a_bal-debit;
```

```
10 if (a_bal > minamt) then
```

```
11 update saccount set bal=bal-debit where accno=a_no;
```

```
12 end if;
```

```
13 end;
```

```
14
```

```
15 /
```

Enter value for a\_no: 1

old 7: a\_no:=&a\_no;

new 7: a\_no:=1;

PL/SQL procedure successfully completed.

```
SQL> select * from saccount;
```

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 18000 |
| 2     | kala | 30000 |

### **TO CREATE TABLE SROUTES**

```
SQL> create table sroutes ( rno number(5), origin varchar2(20), destination varchar2(20), fare
```

numbe

```
r(10), distance number(10));
```

Table created.

```
SQL> insert into sroutes values ( 2, 'chennai', 'dindugal', 400,230);
```

1 row created.

```
SQL> insert into sroutes values ( 3, 'chennai', 'madurai', 250,300);
```

1 row created.



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> insertintosroutesvalues(6,'thanjavur','palani', 350,370);
```

```
1 row created.
```

```
SQL> select * from sroutes;
```

| RNO | ORIGIN    | DESTINATION | FARE | DISTANCE |
|-----|-----------|-------------|------|----------|
| 2   | chennai   | dindugal    | 400  | 230      |
| 3   | chennai   | madurai     | 250  | 300      |
| 6   | thanjavur | palani      | 350  | 370      |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 route sroutes.rno % type;
```

```
3 fares sroutes.fare % type;
```

```
4 dist sroutes.distance % type;
```

```
5 begin
```

```
6 route:=&route;
```

```
7selectfare,distanceintofares,distfromsrouteswhere rno=route;
```

```
8 if (dist < 250) then
```

```
9 update sroutes set fare=300 where rno=route;
```

```
10 else if dist between 250 and 370 then 11
```

```
update sroutes set fare=400 where rno=route; 12
```

```
else if (dist > 400) then
```

```
dbms_output.put_line('Sorry'); 14 end if; 15 end
```

```
if; 16 end if; 17 end; 18/
```

```
Enter value for route: 3
```

```
old 6:route:=&route;
```

```
new 6: route:=3;
```

```
PL/SQL procedure successfully completed.
```

```
SQL> select * from sroutes;
```

| RNO | ORIGIN    | DESTINATION | FARE | DISTANCE |
|-----|-----------|-------------|------|----------|
| 2   | chennai   | dindugal    | 400  | 230      |
| 3   | chennai   | madurai     | 400  | 300      |
| 6   | thanjavur | palani      | 350  | 370      |

**TO CREATE SCALCULATE TABLE**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL>createtablescale(radiusnumber(3), area number(5,2));
```

Table created.

```
SQL>desc scale;
```

Null? Type

| -----  |             |
|--------|-------------|
| RADIUS | NUMBER(3)   |
| AREA   | NUMBER(5,2) |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 pi constant number(4,2):=3.14;  
3 radius:=3; 4  
4 area:=0;  
5 begin 6 radius:=3; 7  
8 while (radius <=7) 8 loop 9  
9 area:=pi*power(radius,2);
```

```
10 insert into scale values (radius,area);
```

```
11 radius:=radius+1;
```

```
12 endloop;
```

```
13 end;
```

```
14/
```

PL/SQL procedure successfully completed.

```
SQL> select * from scale;
```

| RADIUS | AREA   |
|--------|--------|
| -----  |        |
| 3      | 28.26  |
| 4      | 50.24  |
| 5      | 78.5   |
| 6      | 113.04 |
| 7      | 153.86 |

~~TOTAL CALCULATE FACTORIAL OF A GIVEN NUMBER~~

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 f number(4):=1;
```

```
3 i number(4);
```

```
4 begin
```

```
5 i:=&i;
```

```
6 while(i>=1)
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
7 loop
8  f:=f*i;
9  i:=i-1;
10 end loop;
11 dbms_output.put_line('The value is ' || f);
12 end;
13 /
```

Enter value for i: 5

old 5: i:=&i;

new 5: i:=5;

The value is 120

PL/SQL procedure successfully completed.

### **EXERCISE-14**

#### **OTHER DATABASE OBJECTS**

##### **Objectives**


After the completion of this exercise, the students will be able to do the following:

- Create, maintain, and use sequences
- Create and maintain indexes

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## Database Objects

Many applications require the use of unique numbers as primary key values. You can either build code into the application to handle this requirement or use a sequence to generate unique numbers. If you want to improve the performance of some queries, you should consider creating an index. You can also use indexes to enforce uniqueness on a column or a collection of columns. You can provide alternative names for objects by using synonyms.



## What Is a Sequence?

A sequence:

- Automatically generates unique numbers
- Is a sharable object
- Is typically used to create a primary key value
- Replaces application code
- Speeds up the efficiency of accessing sequence values when cached in memory

## The CREATE SEQUENCE Statement Syntax

Define a sequence to generate sequential numbers automatically:

```
CREATE SEQUENCE sequence
[INCREMENT BY n]
[START WITH n]
[{MAXVALUE n | NOMAXVALUE}]
[{MINVALUE n | NOMINVALUE}]
[{CYCLE | NOCYCLE}]
[{CACHE n | NOCACHE}];
```

### In the syntax:

*sequence* is the name of the sequence generator

INCREMENT BY *n* specifies the interval between sequence numbers where *n* is an integer (If this clause is omitted, the sequence increments by 1.)

START WITH *n* specifies the first sequence number to be generated (If this clause is omitted, the sequence starts with 1.)

MAXVALUE *n* specifies the maximum value the sequence can generate

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

NOMAXVALUE specifies a maximum value of  $10^{27}$  for an ascending sequence and  $-1$  for a descending sequence (This is the default option.)

MINVALUE  $n$  specifies the minimum sequence value

NOMINVALUE specifies a minimum value of 1 for an ascending sequence and  $-(10^{26})$  for a descending sequence (This is the default option.)

CYCLE | NOCYCLE specifies whether the sequence continues to generate values after reaching its maximum or minimum value (NOCYCLE is the default option.)

CACHE  $n$  | NOCACHE specifies how many values the Oracle server preallocates and keep in memory (By default, the Oracle server caches 20 values.)

### Creating a Sequence

- Create a sequence named DEPT\_DEPTID\_SEQ to be used for the primary key of the DEPARTMENTS table.
- Do not use the CYCLE option.

#### **EXAMPLE:**

---

```
CREATE SEQUENCE dept_deptid_seq  
INCREMENT BY 10  
START WITH 120  
MAXVALUE 9999  
NOCACHE  
NOCYCLE;
```

### **Confirming Sequences**

- Verify your sequence values in the USER\_SEQUENCES data dictionary table.
- The LAST\_NUMBER column displays the next available sequence number if NOCACHE is specified.

#### **EXAMPLE:**

```
SELECT sequence_name, min_value, max_value, increment_by, last_number
```

### **NEXTVAL and CURRVAL Pseudocolumns**

- NEXTVAL returns the next available sequence value. It returns a unique value every time it is referenced, even for different users.
- CURRVAL obtains the current sequence value.
- NEXTVAL must be issued for that sequence before CURRVAL contains a value.

### **Rules for Using NEXTVAL and CURRVAL**

You can use NEXTVAL and CURRVAL in the following contexts:

- The SELECT list of a SELECT statement that is not part of a subquery
- The SELECT list of a subquery in an INSERT statement
- The VALUES clause of an INSERT statement
- The SET clause of an UPDATE statement

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

~~You cannot use NEXTVAL and CURRVAL in the following contexts:~~

- The SELECT list of a view
  - A SELECT statement with the DISTINCT keyword
  - A SELECT statement with GROUP BY, HAVING, or ORDER BY clauses
  - A subquery in a SELECT, DELETE, or UPDATE statement
  - The DEFAULT expression in a CREATE TABLE or ALTER TABLE statement
- Using a Sequence**

- Insert a new department named “Support” in location ID 2500.

- View the current value for the DEPT\_DEPTID\_SEQ sequence.

### EXAMPLE:

```
INSERT INTO departments(department_id, department_name, location_id)
VALUES (dept_deptid_seq.NEXTVAL, 'Support', 2500);
SELECT dept_deptid_seq.CURRVAL FROM dual;
```

The example inserts a new department in the DEPARTMENTS table. It uses the DEPT\_DEPTID\_SEQ sequence for generating a new department number as follows:

---

---

uses the

You can view the current value of the sequence:

```
SELECT dept_deptid_seq.CURRVAL FROM dual;
```

### Removing a Sequence

- Remove a sequence from the data dictionary by using the DROP SEQUENCE statement.
- Once removed, the sequence can no longer be referenced.

### EXAMPLE:

---

```
DROP SEQUENCE dept_deptid_seq;
```

### What is an Index?

An index:

- Is a schema object
- Is used by the Oracle server to speed up the retrieval of rows by using a pointer
- Can reduce disk I/O by using a rapid path access method to locate data quickly

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- Is independent of the table it indexes
- Is used and maintained automatically by the Oracle server

### How Are Indexes Created?

- Automatically: A unique index is created automatically when you define a PRIMARY KEY or UNIQUE constraint in a table definition.
- Manually: Users can create nonunique indexes on columns to speed up access to the rows.

### Types of Indexes

Two types of indexes can be created. One type is a unique index: the Oracle server automatically creates this index when you define a column in a table to have a PRIMARY KEY or a UNIQUE key constraint. The name of the index is the name given to the constraint.

The other type of index is a nonunique index, which a user can create. For example, you can create a

FOREIGN KEY column index for a join in a query to improve retrieval speed.

### Creating an Index

- Create an index on one or more columns.
- Improve the speed of query access to the LAST\_NAME column in the EMPLOYEES table.

CREATE INDEX *index*

ON *table* (*column* [, *column*] ...);

---

### EXAMPLE:

CREATE INDEX emp\_last\_name\_idx

ON employees(last\_name); **In the**

**syntax:**

*index* is the name of the index *table*

is the name of the table *column*

is the name of the column in the table to be indexed

### When to Create an Index

You should create an index if:

- A column contains a wide range of values
- A column contains a large number of null values
- One or more columns are frequently used together in a WHERE clause or a join condition
- The table is large and most queries are expected to retrieve less than 2 to 4 percent of the rows

### ~~When Not to Create an Index~~

It is usually not worth creating an index if:

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- The table is small
- The columns are not often used as a condition in the query
- Most queries are expected to retrieve more than 2 to 4 percent of the rows in the table
- The table is updated frequently
- The indexed columns are referenced as part of an Expression

### Confirming Indexes

- The USER\_INDEXES data dictionary view contains the name of the index and its uniqueness.
- The USER\_IND\_COLUMNS view contains the index name, the table name, and the column name.

### EXAMPLE:

```
SELECT ic.index_name, ic.column_name, ic.column_position col_pos, ix.uniqueness
FROM user_indexes ix, user_ind_columns ic
WHERE ic.index_name = ix.index_name
AND ic.table_name = 'EMPLOYEES';
```

### Removing an Index

- Remove an index from the data dictionary by using the DROP INDEX command.
- Remove the UPPER\_LAST\_NAME\_IDX index from the data dictionary.
- To drop an index, you must be the owner of the index or have the DROP ANY INDEX privilege.

```
DROP INDEX upper_last_name_idx;
DROP INDEX index;
```

### Find the Solution for the following:

1. Create a sequence to be used with the primary key column of the DEPT table. The sequence should start at 200 and have a maximum value of 1000. Have your sequence increment by ten numbers. Name the sequence DEPT\_ID\_SEQ. 2. Write a query in a script to display the following information about your sequences: sequence name, maximum value, increment size, and last number 3. Write a script to insert two rows into the DEPT table. Name your script lab12\_3.sql. Be sure to use the sequence that you created for the ID column. Add two departments named Education and Administration. Confirm your additions. Run the commands in your script. 4. Create a nonunique index on the foreign key column (DEPT\_ID) in the EMP table. 5. Display the indexes and uniqueness that exist in the data dictionary for the EMP table.



## EXERCISE-15


### Controlling User Access

#### Objectives

After the completion of this exercise, the students will be able to do the following:

- Create users
- Create roles to ease setup and maintenance of the security model
- Use the GRANT and REVOKE statements to grant and revoke object privileges
- Create and access database links

### **Controlling User Access**

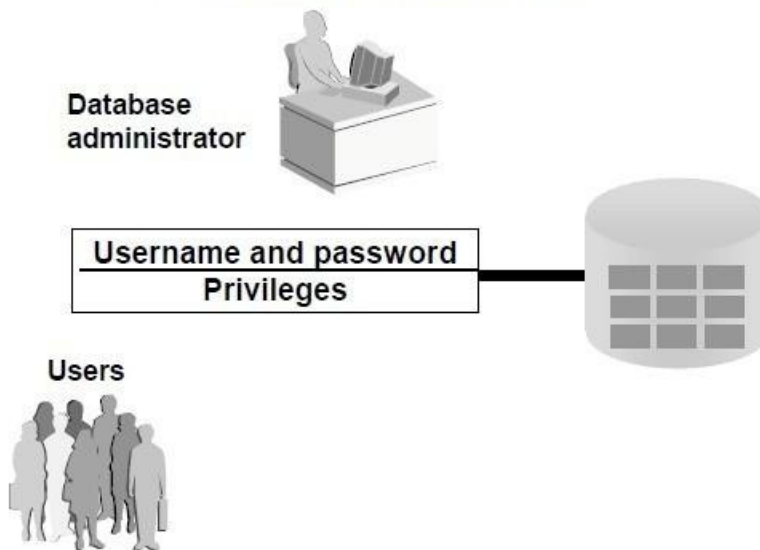

### Controlling User Access

In a multiple-user environment, you want to maintain security of the database access and use. With Oracle server database security, you can do the following:

- Control database access
- Give access to specific objects in the database
- Confirm given and received *privileges* with the Oracle data dictionary
- Create synonyms for database objects

#### **Privileges**

- Database security:

– System security

– Data security

- System privileges: Gaining access to the database

- Object privileges: Manipulating the content of the database objects

- Schemas: Collections of objects, such as tables, views, and sequences

#### **System Privileges**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- 
- More than 100 privileges are available.
  - The database administrator has high-level system privileges for tasks such as:
    - Creating new users
    - Removing users
    - Removing tables
    - Backing up tables

### Typical DBA Privileges

| System Privilege | Operations Authorized                                                        |
|------------------|------------------------------------------------------------------------------|
| CREATE USER      | Grantee can create other Oracle users (a privilege required for a DBA role). |
| DROP USER        | Grantee can drop another user.                                               |
| DROP ANY TABLE   | Grantee can drop a table in any schema.                                      |
| BACKUP ANY TABLE | Grantee can back up any table in any schema with the export utility.         |
| SELECT ANY TABLE | Grantee can query tables, views, or snapshots in any schema.                 |
| CREATE ANY TABLE | Grantee can create tables in any schema.                                     |

### Creating Users

The DBA creates users by using the CREATE USER statement.

#### **EXAMPLE:**

```
CREATE USER scott IDENTIFIED BY tiger;
```

### User System Privileges

- Once a user is created, the DBA can grant specific system privileges to a user.
- An application developer, for example, may have the following system privileges:
  - CREATE SESSION
  - CREATE TABLE
  - CREATE SEQUENCE
  - CREATE VIEW
  - CREATE PROCEDURE

GRANT *privilege* [, *privilege*...]

TO *user* [, *user*| *role*, PUBLIC...];

### Typical User Privileges

| System Privilege | Operations Authorized                                                |
|------------------|----------------------------------------------------------------------|
| CREATE SESSION   | Connect to the database                                              |
| CREATE TABLE     | Create tables in the user's schema                                   |
| CREATE SEQUENCE  | Create a sequence in the user's schema                               |
| CREATE VIEW      | Create a view in the user's schema                                   |
| CREATE PROCEDURE | Create a stored procedure, function, or package in the user's schema |

# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

## In the syntax:

*privilege* is the system privilege to be granted

*user|role|PUBLIC* is the name of the user, the name of the role, or PUBLIC designates that every user is granted the privilege

**Note:** Current system privileges can be found in the dictionary view SESSION\_PRIVS.

## Granting System Privileges

The DBA can grant a user specific system privileges.

GRANT create session, create table, create sequence, create view TO scott;

## What is a Role?

A role is a named group of related privileges that can be granted to the user. This method makes it easier to revoke and maintain privileges.

A user can have access to several roles, and several users can be assigned the same role. Roles are typically created for a database application.

## **Creating and Assigning a Role**

First, the DBA must create the role. Then the DBA can assign privileges to the role and users to the role.

---

## Syntax

CREATE ROLE *role*;

In the syntax:

*role* is the name of the role to be created

Now that the role is created, the DBA can use the GRANT statement to assign users to the role as well as assign privileges to the role.

## **Creating and Granting Privileges to a Role**

~~CREATE ROLE manager;~~

Role created.

GRANT create table, create view TO manager;

Grant succeeded.

GRANT manager TO DEHAAN, KOCHHAR;

Grant succeeded.

- Create a role
- Grant privileges to a role
- Grant a role to users

## **Changing Your Password**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

- The DBA creates youruseraccount and initializes your password.
- You can change yourpassword by using the ALTER USER statement.

ALTER USER scott

IDENTIFIED BY lion;

User altered.

### Object Privileges

| Object Privilege | Table | View | Sequence | Procedure |
|------------------|-------|------|----------|-----------|
| ALTER            | √     |      | √        |           |
| DELETE           | √     | √    |          |           |
| EXECUTE          |       |      |          | √         |
| INDEX            | √     |      |          |           |
| INSERT           | √     | √    |          |           |
| REFERENCES       | √     | √    |          |           |
| SELECT           | √     | √    | √        |           |
| UPDATE           | √     | √    |          |           |

### Object Privileges

- Object privilegesvary from object to object.
- An owner has allthe privileges on the object.

- An owner can give specific privileges on that owner's object.

GRANT *object\_priv* [(*column* ON *object* )] TO { *user*|*role*|PUBLIC } [WITH GRANT OPTION]; **In the syntax:** *object\_priv* is an object privilege to be granted ALL specifiesall object privileges *columns* specifies the column from a table or view on which privileges are granted ON *object* is the object on which the privileges are granted TO identifies to whom the privilege is granted PUBLIC grants object privileges to all users WITH GRANT OPTION allows the grantee to grant the object privileges to other users and roles

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### Granting Object Privileges

•Grant query privileges on the EMPLOYEES table. •Grant privileges to update specific columns to users and roles. GRANT select ON employees TO sue, rich; GRANT update (department\_name, location\_id) ON departments TO scott, manager; **Using the WITH GRANT OPTION and PUBLIC Keywords** •Give a user authority to pass along privileges. •Allow all users on the system to query data from Alice's DEPARTMENTS table. GRANT select, insert ON departments TO scott

---

WITH GRANT OPTION;

.  
GRANT select  
ON alice.departments  
TO PUBLIC;

### How to Revoke Object Privileges

•You use the REVOKE statement to revoke privileges granted to other users.  
•Privileges granted to others through the WITH GRANT OPTION clause are also revoked.  
REVOKE {privilege [, privilege...]} ALL  
ON object  
FROM {user[,user...]}|role|PUBLIC}  
[CASCADE CONSTRAINTS];

**In the syntax:**

CASCADE is

required to remove any referential integrity constraints made to the  
CONSTRAINTS object by means of the REFERENCES privilege

### Revoking Object Privileges

As user Alice, revoke the SELECT and INSERT privileges given to user Scott on the  
DEPARTMENTS  
table.

REVOKE select, insert  
ON departments  
FROM scott;

**Find the Solution for the following:**

- 
1. What privilege should a user be given to log on to the Oracle Server? Is this a system or an object privilege?
-

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

2. What privilege should a user be given to create tables?

---

3. If you create a table, who can pass along privileges to other users on your table?

4. You are the DBA. You are creating many users who require the same system privileges. What should you use to make your job easier?

---

5. What command do you use to change your password?

---

6. Grant another user access to your DEPARTMENTS table. Have the user grant you query access to his or her DEPARTMENTS table.
7. Query all the rows in your DEPARTMENTS table.
8. Add a new row to your DEPARTMENTS table. Team 1 should add Education as department number 500. Team 2 should add Human Resources department number 510. Query the other team's table.
9. Query the USER\_TABLES data dictionary to see information about the tables that you own.
10. Revoke the SELECT privilege on your table from the other team.
11. Remove the row you inserted into the DEPARTMENTS table in step 8 and save the changes.

**-----END-----**

**[ ANSWERS FOR ABOVE PROBLEMS – STUDENTS WILL NOT TAKE PRINTOUT OF THE BELOW PAGES ]**

**EXNO:                                      CREATING AND MANAGING TABLES**

**AIM:**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

To create tables, to describe the data types that can be used when specifying column definition, to alter table definitions, to drop, rename, and truncate tables.

### SAMPLE TABLES: EMPLOYEE TABLE:

```
SQL> create table employeetable (employee_id number(6) NOT NULL,first_name
varchar2(20),last_name varchar2(25) NOT NULL,email varchar2(25) NOT
NULL,phone_number varchar2(20),hire_date date NOT NULL,job_id varchar2(10) NOT
NULL,salary number(8,2),commision number(2,2),manager_id number(6),department_id
number(4)); Table created.
```

```
SQL> desc employeetable;
```

| Name           | Null?    | Type         |
|----------------|----------|--------------|
| EMPLOYEE_ID    | NOT NULL | NUMBER(6)    |
| FIRST_NAME     |          | VARCHAR2(20) |
| LAST_NAME      |          | VARCHAR2(25) |
| EMAIL          | NOT NULL | VARCHAR2(25) |
| PHONE_NUMBER   | NOT NULL | DATE         |
| HIRE_DATE      | NOT NULL | DATE         |
| JOB_ID         |          | NUMBER(10)   |
| SALARY         |          | NUMBER(8,2)  |
| COMMISSION_PCT |          | NUMBER(2,2)  |
| MANAGER_ID     |          | NUMBER(6)    |
| DEPARTMENT_ID  |          | NUMBER(4)    |

```
SQL>select * from employeetable;
```

| EMPLOYEE_ID | FIRST_NAME | LAST_NAME |
|-------------|------------|-----------|
| 1           | SCOTT      | TJ        |
| 2           | ADAMS      | J         |
| 3           | SMITH      | J         |
| 4           | POWERS     | AL        |
| 5           | TURNER     | AL        |
| 6           | WARD       | AL        |
| 7           | ALLEN      | AL        |
| 8           | WARD       | AL        |
| 9           | WARD       | AL        |
| 10          | WARD       | AL        |
| 11          | WARD       | AL        |
| 12          | WARD       | AL        |
| 13          | WARD       | AL        |
| 14          | WARD       | AL        |
| 15          | WARD       | AL        |
| 16          | WARD       | AL        |
| 17          | WARD       | AL        |
| 18          | WARD       | AL        |
| 19          | WARD       | AL        |
| 20          | WARD       | AL        |
| 21          | WARD       | AL        |
| 22          | WARD       | AL        |
| 23          | WARD       | AL        |
| 24          | WARD       | AL        |
| 25          | WARD       | AL        |
| 26          | WARD       | AL        |
| 27          | WARD       | AL        |
| 28          | WARD       | AL        |
| 29          | WARD       | AL        |
| 30          | WARD       | AL        |
| 31          | WARD       | AL        |
| 32          | WARD       | AL        |
| 33          | WARD       | AL        |
| 34          | WARD       | AL        |
| 35          | WARD       | AL        |
| 36          | WARD       | AL        |
| 37          | WARD       | AL        |
| 38          | WARD       | AL        |
| 39          | WARD       | AL        |
| 40          | WARD       | AL        |
| 41          | WARD       | AL        |
| 42          | WARD       | AL        |
| 43          | WARD       | AL        |
| 44          | WARD       | AL        |
| 45          | WARD       | AL        |
| 46          | WARD       | AL        |
| 47          | WARD       | AL        |
| 48          | WARD       | AL        |
| 49          | WARD       | AL        |
| 50          | WARD       | AL        |
| 51          | WARD       | AL        |
| 52          | WARD       | AL        |
| 53          | WARD       | AL        |
| 54          | WARD       | AL        |
| 55          | WARD       | AL        |
| 56          | WARD       | AL        |
| 57          | WARD       | AL        |
| 58          | WARD       | AL        |
| 59          | WARD       | AL        |
| 60          | WARD       | AL        |
| 61          | WARD       | AL        |
| 62          | WARD       | AL        |
| 63          | WARD       | AL        |
| 64          | WARD       | AL        |
| 65          | WARD       | AL        |
| 66          | WARD       | AL        |
| 67          | WARD       | AL        |
| 68          | WARD       | AL        |
| 69          | WARD       | AL        |
| 70          | WARD       | AL        |
| 71          | WARD       | AL        |
| 72          | WARD       | AL        |
| 73          | WARD       | AL        |
| 74          | WARD       | AL        |
| 75          | WARD       | AL        |
| 76          | WARD       | AL        |
| 77          | WARD       | AL        |
| 78          | WARD       | AL        |
| 79          | WARD       | AL        |
| 80          | WARD       | AL        |
| 81          | WARD       | AL        |
| 82          | WARD       | AL        |
| 83          | WARD       | AL        |
| 84          | WARD       | AL        |
| 85          | WARD       | AL        |
| 86          | WARD       | AL        |
| 87          | WARD       | AL        |
| 88          | WARD       | AL        |
| 89          | WARD       | AL        |
| 90          | WARD       | AL        |
| 91          | WARD       | AL        |
| 92          | WARD       | AL        |
| 93          | WARD       | AL        |
| 94          | WARD       | AL        |
| 95          | WARD       | AL        |
| 96          | WARD       | AL        |
| 97          | WARD       | AL        |
| 98          | WARD       | AL        |
| 99          | WARD       | AL        |
| 100         | WARD       | AL        |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```

-----
sking 515.123.4567 ad_pres 24000      17-JUN-87      100 stevan      king
101 neena      kochhar      90
nkochhar      515.123.4568      21-SEP-89
ad_vp      17000      100      90
  
```

```

EMPLOYEE_ID FIRST_NAME      LAST_NAME
-----
  
```

```

EMAIL      PHONE_NUMBER      HIRE_DATE
-----
  
```

```

JOB_ID      SALARY COMMISSION_PCT MANAGER_ID DEPARTMENT_ID
-----
  
```

```

-----
102 lex      dehaan
ldehaan      515.123.4569      13-JAN-93
ad_vp      17000      100      90
103 alexandar      hunold      ahunold 590.423.4567 03-JAN-93
  
```

```

EMPLOYEE_ID FIRST_NAME      LAST_NAME
-----
  
```

```

EMAIL      PHONE_NUMBER      HIRE_DATE
-----
  
```

```

JOB_ID      SALARY COMMISSION_PCTMANAGER_ID      DEPARTMENT_ID
-----
  
```

```

it_prog      9000 ernst      102      60
104 bruce
bernst      590.423.4568
it_prog      6000      21-MAY-91
103      60
107 diana      lorentz
  
```



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

EMPLOYEE\_ID FIRST\_NAME LAST\_NAME

-----

EMAIL PHONE\_NUMBER HIRE\_DATE

-----

JOB\_ID SALARY COMMISSION\_PCT MANAGER\_ID DEPARTMENT\_ID

-----

dlorentz 590.423.4568 07-FEB-99

it\_prog  
124 kevin 4200 mourgas 103 60

kmourgas  
st\_man 650.123.5234

5800 16-NOV-99

100 50

EMPLOYEE\_ID FIRST\_NAME LAST\_NAME

-----

EMAIL PHONE\_NUMBER HIRE\_DATE

-----

JOB\_ID SALARY COMMISSION\_PCT MANAGER\_ID DEPARTMENT\_ID -----

----- 141 trenna rajs

trajs 650.121.8009 17-OCT-95

st\_clerk 3500 124 50

142 curtis davies

cdavies 650.121.2994 29-JAN-97

st\_clerk 3100 124 50

EMPLOYEE\_ID FIRST\_NAME LAST\_NAME

-----

EMAIL PHONE\_NUMBER HIRE\_DATE

-----

JOB\_ID SALARY COMMISSION\_PCT MANAGER\_ID DEPARTMENT\_ID

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

143 randall matos rmatos

650.121.2874 st\_clerk 2600

15-MAR-98

pvargas 650.121.2004

124 50

09-JUL-98

144 peter

vargas

EMPLOYEE\_ID FIRST\_NAME LAST\_NAME

-----

EMAIL PHONE\_NUMBER HIRE\_DATE

-----

JOB\_ID SALARY COMMISSION\_PCT MANAGER\_ID DEPARTMENT\_ID

-----

st\_clerk 2500 124 50  
149 eleni

zlotkey

ezlotkey 011.44.1344.429018 29-JAN-00

sa\_man 10500 .2 100 80

174 ellen abel

EMPLOYEE\_ID FIRST\_NAME LAST\_NAME

-----

EMAIL PHONE\_NUMBER HIRE\_DATE

-----

JOB\_ID SALARY COMMISSION\_PCT MANAGER\_ID DEPARTMENT\_ID

-----

eabel 011.44.1644.429267 11-MAY-96

sa\_rep 11000 .3 149 80

176 jonathan taylor jtaylor 011.44.1644.429265 24-

MAR-98

sa\_rep 8600 .2 149 80

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| EMPLOYEE_ID | FIRST_NAME | LAST_NAME | EMAIL  | PHONE_NUMBER       | HIRE_DATE | JOB_ID | SALARY | COMMISSION_PCT | MANAGER_ID | DEPARTMENT_ID |
|-------------|------------|-----------|--------|--------------------|-----------|--------|--------|----------------|------------|---------------|
| 178         | kimberly   | grant     | kgrant | 011.44.1644.429263 | 24-MAY-99 |        |        |                |            |               |
| sa_rep      |            |           |        | 7000               | .15       | 149    |        |                |            |               |

|     |           |        |         |              |         |      |           |  |    |  |
|-----|-----------|--------|---------|--------------|---------|------|-----------|--|----|--|
| 200 | jennifer] | whalen | jwhalen | 515.123.4444 | ad_asst | 4400 | 17-SEP-87 |  |    |  |
|     |           |        |         |              |         |      | 101       |  | 10 |  |

| EMPLOYEE_ID | FIRST_NAME | LAST_NAME | EMAIL      | PHONE_NUMBER | HIRE_DATE | JOB_ID | SALARY | COMMISSION_PCT | MANAGER_ID | DEPARTMENT_ID |
|-------------|------------|-----------|------------|--------------|-----------|--------|--------|----------------|------------|---------------|
| 201         | micheal    | hartstein | mhartstein | 515.123.5555 | 17-FEB-96 |        |        |                |            |               |
| mk_man      |            |           |            | 13000        |           | 100    | 20     |                |            |               |

|     |     |     |      |              |           |  |  |  |  |  |
|-----|-----|-----|------|--------------|-----------|--|--|--|--|--|
| 202 | pat | fay | pfay | 606.123.6666 | 17-AUG-97 |  |  |  |  |  |
|-----|-----|-----|------|--------------|-----------|--|--|--|--|--|

| EMPLOYEE_ID | FIRST_NAME | LAST_NAME |
|-------------|------------|-----------|
|-------------|------------|-----------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
-----  
EMAIL          PHONE_NUMBER      HIRE_DATE
```

```
-----  
JOB_ID   SALARY COMMISSION_PCTMANAGER_IDDEPARTMENT_ID
```

```
-----  
mk_rep          6000          201          20
```

```
205  shelley  higgins  shiggins
```

```
515.123.8080          07-JUN-94
```

```
ac_mgr          12000          101          110
```

```
EMPLOYEE_ID FIRST_NAME      LAST_NAME
```

```
-----  
EMAIL          PHONE_NUMBER      HIRE_DATE
```

```
-----  
JOB_ID          SALARY COMMISSION_PCTMANAGER_IDDEPARTMENT_ID
```

```
-----  
wgeitz          515.123.8181          07-JUN-94
```

```
ac_account          8300          205          110
```

20 rows selected.

### DEPARTMENT TABLE:

```
SQL>createtabledepartment(department_id number(6) NOT NULL,dept_name varchar2(20)  
NOTNULL,manager_idnumber(6),location_id number(4)); Table created.
```

```
SQL> desc department
```

```
Name          Null?      Type  
-----  
DEPARTMENT_ID          NOTNULL      NUMBER(6)  
DEPT_NAME          NOTNULL      VARCHAR2(20)  
MANAGER_ID NUMBER(6) LOCATION_ID NUMBER(4)
```

```
SQL> select * from department;
```

```
DEPARTMENT_IDDEPARTMENT_NAME          MANAGER_ID LOCATION_ID
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
-----
10administration      200      1700
20marketing           201      1800
50shipping            124      1500
60it                  103      1400
80sales              149      2500
90executive           100      1700
110accounting         205      1700
190contracting        0       1700
```

8rowsselected.

### **JOB\_GRADE TABLE:**

SQL>createtablejob\_grade(grade\_levelvarchar2(2),lowest\_sal number,highest\_sal number);

Table created.

SQL> desc job\_grade

| Name        | Null? | Type        |
|-------------|-------|-------------|
| GRADE_LEVEL |       | VARCHAR2(2) |
| LOWEST_SAL  |       | NUMBER      |
| HIGHEST_SAL |       | NUMBER      |

SQL> select \* from locations;

| LOCATION_ID | STREET_ADDRESS | POSTAL_CODE |
|-------------|----------------|-------------|
| CITY        | STATE_PROVINCE | CO          |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|                                              |                |             |
|----------------------------------------------|----------------|-------------|
| 1400 2014 jabberwocky rd                     | 26192          |             |
| southlake                                    | texas          | us          |
| 1500 2011 interior blvd south                | 99236          |             |
| san francisco                                | california     | us          |
| 1700 2004 charade rd                         | 98199          |             |
| seattle                                      | washington     | us          |
| LOCATION_ID                                  | STREET_ADDRESS | POSTAL_CODE |
| -----                                        |                |             |
| CITY                                         | STATE_PROVINCE | CO          |
| -----                                        |                |             |
| 1800 460 bloor st                            | on m5s 1xb     |             |
| toronto                                      | ontario        | ca          |
| 2500 magdalen centre,the oxford science park | on99zb         |             |
| oxford                                       | oxford         | uk          |

### LOCATION TABLE:

```
SQL> create table location(location_id number(4) not null,street_address
varchar2(40),postal_code varchar2(12),city varchar2(30) not
null,state_province varchar2(25),country_id char(2)); Table created.
```

```
SQL> desc location;
```

| Name           | Null?    | Type         |
|----------------|----------|--------------|
| LOCATION_ID    | NOT NULL | NUMBER(4)    |
| STREET_ADDRESS |          | VARCHAR2(40) |
| POSTAL_CODE    |          | VARCHAR2(12) |
| CITY           | NOT NULL | VARCHAR2(30) |
| STATE_PROVINCE |          | VARCHAR2(25) |
| COUNTRY_ID     |          | CHAR(2)      |

```
SQL>select * from job_grades;
```

| GRA | LOWEST_SAL | HIGHEST_SAL |
|-----|------------|-------------|
|-----|------------|-------------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
-----
a  1000  b  2999
3000 c 6000
d  10000 e   5999
15000    f   9999
25000
          14999
          24999
          40000
6rowsselected.
```

SQL>select \* from job\_history;

| EMPLOYEE_ID | START_DATE | END_DATE | JOB_ID | DEPARTMENT_ID |
|-------------|------------|----------|--------|---------------|
|-------------|------------|----------|--------|---------------|

```
-----
103 13-JAN-93 24-JUL-98 it_prog      60
101 21-SEP-89 27-OCT-93 ac_account   110
101 28-OCT-89 15-MAR-97 ac_mgr       110
201 17-FEB-96 19-DEC-99 mk_rep 114   20
24-MAR-98 31-DEC-99 mk_rep 122      50
01-JAN-99 31-DEC-98 st_clerk 200 17- 50
SEP-87 17-JUN-93 ad_asst 176 24-    90
MAR-98 31-DEC-98 sa_rep 176 01-     80
JAN-99 31-DEC-99 sa_man 200 01-     80
JUL-94 31-DEC-98 ac_account          90
10rows selected.
```

SQL> spool off;

### SOLUTION FOR THE EXERCISES

9. 1. Create the DEPT table based on the following table instance chart. Confirm that the

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

table is created.

|                     |        |          |
|---------------------|--------|----------|
| <b>Column name</b>  | ID     | NAME     |
| <b>Key Type</b>     |        |          |
| <b>Nulls/Unique</b> |        |          |
| <b>FK table</b>     |        |          |
| <b>FK column</b>    |        |          |
| <b>Data Type</b>    | Number | Varchar2 |
| <b>Length</b>       | 7      | 25       |

```
create table dept(id number(7),name varchar(25));
```

Table created.

```
SQL> desc dept;
```

| Name | Null? | Type         |
|------|-------|--------------|
| ID   |       | NUMBER(7)    |
| NAME |       | VARCHAR2(25) |

10. Populate the DEPT table with data from the DEPARTMENT table. Include only the columns that are needed.

```
SQL> alter table dept add(manager_id number(10),location_id number(10));
```

Table altered.

```
SQL> desc dept;
```

| Name        | Null? | Type       |
|-------------|-------|------------|
| ID          |       | NUMBER(7)  |
| NAME        |       |            |
| MANAGER_ID  |       | NUMBER(10) |
| LOCATION_ID |       | NUMBER(10) |

11. Create the EMP table based on the following instance chart. Confirm that the table is



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

created.

| Column name  | ID     | LAST_NAME | FIRST_NAME | DEPT_ID |
|--------------|--------|-----------|------------|---------|
| Key Type     |        |           |            |         |
| Nulls/Unique |        |           |            |         |
| FK table     |        |           |            |         |
| FK column    |        |           |            |         |
| Data Type    | Number | Varchar2  | Varchar2   | Number  |
| Length       | 7      | 25        | 25         | 7       |

SQL> create table empdb(id number(7),firstname varchar(25),lastname varchar(25),dept\_id number(25));  
Table created.

SQL> desc empdb

```

Name                                Null? Type
-----
ID                                NUMBER(7)
FIRSTNAME                        VARCHAR2(25)
LASTNAME                        VARCHAR2(25)
DEPT_ID                          NUMBER(25)

```

12. Modify the EMP table to allow for longer employee last names. Confirm the modification.(Hint: Increase the size to 50)

SQL> alter table empdb modify(lastname varchar(50)); Table altered.

SQL> desc empdb;

```

Name                                Null? Type
-----
ID                                NUMBER(7)
FIRSTNAME                        VARCHAR2(25)
LASTNAME                        VARCHAR2(50)
DEPT_ID                          NUMBER(25)

```

13. Create the EMPLOYEES2 table based on the structure of EMPLOYEES table. Include Only the Employee\_id, First\_name, Last\_name, Salary and Dept\_id coloumns. Name the columns Id, First\_name, Last\_name, salary and Dept\_id respectively.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> create table employee2(id number(10),firstname varchar(10),lastname varchar(10),salary
number(8,2),deptid number(10));
```

Table created.

```
SQL> desc employee2;
```

| Name      | Null? Type   |
|-----------|--------------|
| -----     |              |
| ID        | NUMBER(10)   |
| FIRSTNAME | VARCHAR2(10) |
| LASTNAME  | VARCHAR2(10) |
| SALARY    | NUMBER(8,2)  |
| DEPTID    | NUMBER(10)   |

14. Drop the EMP table. SQL> drop table empdb; Table dropped.

15. Rename the EMPLOYEES2 table as EMP. SQL> rename employee2 to employee3;  
Table renamed.

16. Add a comment on DEPT and EMP tables. Confirm the modification by describing the  
table.

```
SQL> comment on table dept is'this is department database..';
```

Comment created.

```
SQL> select * from user_tab_comments;
```

| TABLE_NAME | TABLE_TYPE |
|------------|------------|
|------------|------------|

-----

COMMENTS

-----

|         |       |
|---------|-------|
| STUDENT | TABLE |
|---------|-------|

|          |       |
|----------|-------|
| EMPLOYEE | TABLE |
|----------|-------|

|                 |       |
|-----------------|-------|
| EMPLOYEE_DETAIL | TABLE |
|-----------------|-------|

| TABLE_NAME | TABLE_TYPE |
|------------|------------|
|------------|------------|

-----

COMMENTS

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

-----EMPLOYEES                      TABLE

EMP                      TABLE

this is a employee database..

BIN\$JYmxGC1pS7KBH/ciI85irw==\$0 TABLE

| TABLE_NAME | TABLE_TYPE |
|------------|------------|
|------------|------------|

-----

COMMENTS

-----

DEPT                      TABLE

this is department database..

EMPLOYEE3                      TABLE

rows selected.

17.     Drop the First\_name column from the EMP table and confirm it. SQL>

alter table employee3 drop column firstname; Table altered.

SQL> desc employee3;

| Name | Null? | Type |
|------|-------|------|
|------|-------|------|

-----

|    |  |            |
|----|--|------------|
| ID |  | NUMBER(10) |
|----|--|------------|

|          |  |              |
|----------|--|--------------|
| LASTNAME |  | VARCHAR2(10) |
|----------|--|--------------|

|        |  |             |
|--------|--|-------------|
| SALARY |  | NUMBER(8,2) |
|--------|--|-------------|

|        |  |            |
|--------|--|------------|
| DEPTID |  | NUMBER(10) |
|--------|--|------------|

18.     In the DEPT table mark the column Dept\_id as UNUSED and confirm

it. SQL> alter table employee3 set unused(deptid);

Table altered.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

SQL> desc employee3;

| Name | Null? Type |
|------|------------|
|------|------------|

|          |              |
|----------|--------------|
| -----    |              |
| ID       | NUMBER(10)   |
| LASTNAME | VARCHAR2(10) |
| SALARY   | NUMBER(8,2)  |

11.Drop all the UNUSED columns from the EMP table and Confirm the modification

SQL> drop table employee3;

Table dropped.

### EXNO:2 MANIPULATING DATA

#### AIM:

To describe each DML statement, to insert rows into tables, to update rows into tables, to delete rows from tables, to execute control transactions,

#### SOLUTION FOR THE EXERCISES

10. Create MY\_EMPLOYEE table with the following structure

| NAME       | NULL?    | TYPE        |
|------------|----------|-------------|
| ID         | Not null | Number(4)   |
| Last_name  |          | Varchar(25) |
| First_name |          | Varchar(25) |
| Userid     |          | Varchar(25) |
| Salary     |          | Number(9,2) |

create table emp(id number(4) not null, firstname varchar(10),lastname varchar(10),userid number(10), salary number(9,2));

Table created.

SQL> desc emp;

| Name | Null? Type |
|------|------------|
|------|------------|

|           |                  |
|-----------|------------------|
| -----     |                  |
| ID        | NOTNULLNUMBER(4) |
| FIRSTNAME | VARCHAR2(10)     |
| LASTNAME  | VARCHAR2(10)     |
| USERID    | NUMBER(10)       |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

SALARY

NUMBER(9,2)

11.

data.

| ID | Last_name | First_name | Userid   | salary |
|----|-----------|------------|----------|--------|
| 1  | Patel     | Ralph      | rpatel   | 895    |
| 2  | Dancs     | Betty      | bdancs   | 860    |
| 3  | Biri      | Ben        | bbiri    | 1100   |
| 4  | Newman    | Chad       | Cnewman  | 750    |
| 5  | Ropebur   | Audrey     | aropebur | 1550   |

Add the first

and second rows data to MY\_EMPLOYEE table from the following sample

```
SQL> insert into my_employee values(1,'patel','ralph','rpatel',895);
```

1 row created.

```
SQL> insert into my_employee values(2,'dancs','betty','bdancs',860);
```

1 row created.

```
SQL> select * from my_employeeIDLAST_NAME FIRST_NAME
```

-----

USER\_ID SALARY

-----

1patel ralph

rpatel 895

2dancs betty

bdancs 860

12. Display the table with values.

```
SQL> select * from my_employee;
```

ID LAST\_NAME FIRST\_NAME USER\_ID SALARY

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|         |       |         |     |
|---------|-------|---------|-----|
| 1patel  | ralph | rpatel  | 895 |
| 2dances | betty | bdances | 860 |

13. Populate the next two rows of data from the sample data. Concatenate the first letter of the first\_name with the first seven characters of the last\_name to produce Userid.

```
SQL> insert into my_employee
values(&id,&last_name,&first_name,lower(substr('&first_name',1,1)||substr('&last_name',1,7))
,&salary);
```

Enter value for id: 3

Enter value for last\_name: biri

Enter value for first\_name: ben

Enter value for first\_name: ben Enter value for last\_name: biri Enter value for salary: 1100 old 1:

```
insert into my_employee
values(&id,&last_name,&first_name,lower(substr('&first_name',1,1)||substr('&last_name',1,7))
,&salary) new 1: insert into my_employee
values(3,'biri','ben',lower(substr('ben',1,1)||substr('biri',1,7)),1100)
1 row created.
```

```
SQL> /
```

Enter value for id: 4

Enter value for last\_name: newman

Enter value for first\_name: chad

Enter value for first\_name: chad

Enter value for last\_name: newman

Enter value for salary: 750

```
old 1: insert into my_employee
values(&id,&last_name,&first_name,lower(substr('&first_name',1,1)||substr('&last_name',1,7))
,&salary) new 1: insert into my_employee
values(4,'newman','chad',lower(substr('chad',1,1)||substr('newman',1,7)),750)
1 row created.
```

```
SQL> select * from my_employee;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| ID | LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|----|-----------|------------|---------|--------|
| 1  | patel     | ralph      | rpatel  | 895    |
| 2  | dancs     | betty      | bdancs  | 860    |
| 3  | biri      | ben        | bbiri   | 1100   |

| LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|-----------|------------|---------|--------|
|-----------|------------|---------|--------|

|   |        |      |         |     |
|---|--------|------|---------|-----|
| 4 | newman | chad | cnewman | 750 |
|---|--------|------|---------|-----|

14. Make the data additions permanent. SQL>  
commit;

Commit complete.

Change the last name of employee 3 to Drexler

SQL> update my\_employee set last\_name='drexler'where id=3;

1 row updated.

SQL> select \* from my\_employee;

| ID | LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|----|-----------|------------|---------|--------|
|----|-----------|------------|---------|--------|

|   |       |       |        |     |
|---|-------|-------|--------|-----|
| 1 | patel | ralph | rpatel | 895 |
|---|-------|-------|--------|-----|

|   |       |       |        |     |
|---|-------|-------|--------|-----|
| 2 | dancs | betty | bdancs | 860 |
|---|-------|-------|--------|-----|

|   |         |     |       |      |
|---|---------|-----|-------|------|
| 3 | drexler | ben | bbiri | 1100 |
|---|---------|-----|-------|------|

| LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|-----------|------------|---------|--------|
|-----------|------------|---------|--------|

|   |        |      |         |     |
|---|--------|------|---------|-----|
| 4 | newman | chad | cnewman | 750 |
|---|--------|------|---------|-----|

7.Change the salary to 1000 for all the employees with a salary less than 900.

Update my\_employee set salary=1000 where salary<900;

SQL> select \* from my\_employee;

| ID | LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|----|-----------|------------|---------|--------|
|----|-----------|------------|---------|--------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

----- 1 patel ralph rpatel 895

3 drexler ben bbiri 1000

4 newman chad cnewman 750

8. Verify the changes to the table

SQL> select \* from my\_employee;

| ID | LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|----|-----------|------------|---------|--------|
|----|-----------|------------|---------|--------|

-----

|   |       |       |        |     |
|---|-------|-------|--------|-----|
| 1 | patel | ralph | rpatel | 895 |
|---|-------|-------|--------|-----|

|   |         |     |       |      |
|---|---------|-----|-------|------|
| 3 | drexler | ben | bbiri | 1100 |
|---|---------|-----|-------|------|

|   |        |      |         |     |
|---|--------|------|---------|-----|
| 4 | newman | chad | cnewman | 750 |
|---|--------|------|---------|-----|

| ID | LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|----|-----------|------------|---------|--------|
|----|-----------|------------|---------|--------|

-----

|   |         |        |          |      |
|---|---------|--------|----------|------|
| 5 | ropebur | audrey | aropebur | 1550 |
|---|---------|--------|----------|------|

9. Delete Betty dancs from MY\_EMPLOYEE table. SQL>

delete from my\_employee where last\_name='dancs';

1 row deleted.

10. Confirm the changes.

SQL> select \* from my\_employee;

| ID | LAST_NAME | FIRST_NAME | USER_ID | SALARY |
|----|-----------|------------|---------|--------|
|----|-----------|------------|---------|--------|

-----

|   |       |       |        |     |
|---|-------|-------|--------|-----|
| 1 | patel | ralph | rpatel | 895 |
|---|-------|-------|--------|-----|

|   |         |     |       |      |
|---|---------|-----|-------|------|
| 3 | drexler | ben | bbiri | 1100 |
|---|---------|-----|-------|------|

|   |        |      |         |     |
|---|--------|------|---------|-----|
| 4 | newman | chad | cnewman | 750 |
|---|--------|------|---------|-----|

Commit the changes. Commit; 12) Populate the last row of sample data as by



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

Q:4 SQL> insert into my\_employee  
values(&id,&last\_name,&first\_name,lower(substr('&first\_name',1,1)||  
substr('&last\_name',1,7)),&salary);

Enter value for id: 5

Enter value for last\_name: Ropebur

Enter value for first\_name: Audrey

Enter value for first\_name: Audrey

Enter value for last\_name: Ropebur

Enter value for salary: 1550

old 1: insert into my\_employee  
values(&id,&last\_name,&first\_name,lower(substr('&first\_name',1, new 1:  
insert into my\_employee  
values(5,'Ropebur','Audrey',lower(substr('Audrey',1,1)||substr('Ropebur',1,7))  
, 1 row created.

13) Confirm the table.

SQL> select \* from my\_employee;

| ID | LAST_NAME | FIRST_NAME | USERID | SALARY |
|----|-----------|------------|--------|--------|
|----|-----------|------------|--------|--------|

-----

|   |       |       |        |      |
|---|-------|-------|--------|------|
| 1 | Patel | Ralph | rpatel | 1000 |
|---|-------|-------|--------|------|

|   |         |     |       |      |
|---|---------|-----|-------|------|
| 3 | drexler | Ben | bbiri | 1100 |
|---|---------|-----|-------|------|

|   |        |      |         |      |
|---|--------|------|---------|------|
| 4 | Newman | Chad | cnewman | 1000 |
|---|--------|------|---------|------|

|   |         |        |          |      |
|---|---------|--------|----------|------|
| 5 | Ropebur | Audrey | aropebur | 1550 |
|---|---------|--------|----------|------|

14) Mark an intermediate point in the processing of the transaction.

SQL> savepoint q14;

Savepoint created.

15) Empty the fourth row of the emp table

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

SQL> truncate table my\_employee;

Table truncated.

16) Confirm the table is empty. SQL> select \* from my\_employee; no rows selected

17) Discard the most recent DELETE operation without discarding the earlier INSERT operation.  
Rollback Q14;

SQL> rollback;

18) Confirm that the new row is still intact.

SQL> select \* from my\_employee;

| ID | LAST_NAME | FIRST_NAME | USERID   | SALARY |
|----|-----------|------------|----------|--------|
| 1  | Patel     | Ralph      | rpatel   | 1000   |
| 3  | drexler   | Ben        | bbiri    | 1100   |
| 4  | Newman    | Chad       | cnewman  | 1000   |
| 5  | Ropebur   | Audrey     | aropebur | 1550   |

### EXNO:3 INCLUDING CONSTRAINTS AIM:

To describe the constraints, and to create and maintain constraints

#### SOLUTION FOR THE EXERCISES

5. Add a table-level PRIMARY KEY constraint to the EMP table on the ID column. The constraint should be named at creation. Name the constraint my\_emp\_id\_pk. SQL> alter table dept add constraint my\_dept\_id\_pk primary key(id); Table altered.
6. Create a PRIMARY KEY constraint to the DEPT table using the ID column. The constraint should be named at creation. Name the constraint my\_dept\_id\_pk. Alter table dept add constraint my\_dept\_id\_pk primary key(id);

SQL> alter table emp add(dept\_id number(7));

Table altered.

7. Add a column DEPT\_ID to the EMP table. Add a foreign key reference on the EMP table that ensures that the employee is not assigned to nonexistent department. Name the constraint my\_emp\_dept\_id\_fk.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> alter table emp add constraint my_emp_dept_id_fk foreign key(dept_id) references dept(id);
```

Table altered.

8. Modify the EMP table. Add a COMMISSION column of NUMBER data type, precision 2, scale 2. Add a constraint to the commission column that ensures that a commission value is greater than zero.

```
SQL> alter table emp add commission float constraints ck check(commission>=0);
```

Table altered.

5. Confirm that the constraints were added by querying the USER\_CONSTRAINTS view.

```
SQL> select constraint_name,constraint_type from user_constraints where table_name in('emp','dept'); No rows selected.
```

### EXNO:4 WRITING BASIC SQL SELECT STATEMENTS

#### AIM:

To list the capabilities of SQL SELECT statement and to execute a basic SELECT statement.

#### SOLUTIONS FOR THE EXERCISES:

1. Show the structure of departments table. Select all the data from it.

```
SQL> desc department;
```

| Name            | Null? Type         |
|-----------------|--------------------|
| DEPARTMENT_ID   | NOT NULL NUMBER(4) |
| DEPARTMENT_NAME | VARCHAR2(30)       |
| MANAGER_ID      | NUMBER(6)          |
| LOCATION_ID     | NUMBER(4)          |

```
SQL> select * from department;
```

| DEPARTMENT_ID | DEPARTMENT_NAME | MANAGER_ID | LOCATION_ID |
|---------------|-----------------|------------|-------------|
|---------------|-----------------|------------|-------------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|                   |     |      |
|-------------------|-----|------|
| 10 administration | 200 | 1700 |
| 20 marketing      | 201 | 1800 |
| 50 shipping       | 124 | 1500 |
| 60 it             | 103 | 1400 |
| 80 sales          | 149 | 2500 |
| 90 executive      | 100 | 1700 |
| 110 accounting    | 205 | 1700 |
| 190 contracting   | 0   | 1700 |

8 rows selected.

2. Show the structure of the employees table. Create a query to display the last name, job code, hire date, and employee number for each employee, with employee number appearing first

| DEPARTMENT_ID | DEPARTMENT_NAME  | MANAGER_ID | LOCATION_ID |
|---------------|------------------|------------|-------------|
| 10            | admin            | 200        | 1700        |
| 20            | Marketing        | 201        | 1800        |
| 50            | shipping         | 124        | 1500        |
| 60            | IT               | 103        | 1400        |
| 80            | sales            | 149        | 2500        |
| 90            | executive        | 100        | 1700        |
| 110           | accounting       | 205        | 1700        |
| 190           | contracting      |            | 1700        |
| 70            | public relations | 100        | 1700        |
| 70            | public relations |            |             |

3. Provide an alias STARTDATE for the hire date

SQL> select employee\_id, last\_name, job\_id, hire\_date start\_date from employee table;

| EMPLOYEE_ID | LAST_NAME   | JOB_ID   | START_DATE |
|-------------|-------------|----------|------------|
| 100         | king        | ad_pres  |            |
| 17-JUN-87   | 101 kochhar | ad_vp    | 21-SEP-89  |
| 102 dehaan  | ad_vp       |          |            |
| 13-JAN-93   | 103 hunold  | it_prog  | 03-JAN-93  |
| 104 ernst   | it_prog     |          |            |
| 21-MAY-91   | 107 lorentz | it_prog  | 07-FEB-99  |
| 124 mourgas | st_man      |          |            |
| 16-NOV-99   | 141 rajs    | st_clerk |            |
| 17-OCT-95   |             |          |            |
| 142 davies  | st_clerk    |          |            |
| 29-JAN-97   |             |          |            |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
                st_clerk      15-MAR-98
143 matos
144 vargas      st_clerk
09-JUL-98
```

```
EMPLOYEE_ID LAST_NAME JOB_ID          START_DAT
-----
-----
149 zlotkey      sa_man
29-JAN-00 174 abel sa_rep      11-MAY-96
176 taylor sa_rep 24-MAR-98
178 grant sa_rep 24-MAY-99
200 whalen ad_asst
17-SEP-87
201 hartstein   mk_man    17-FEB-96  202 fay      mk_rep
17-AUG-97
205 higgins   ac_mgr07-JUN-94
206 gietz     ac_account 07-JUN-94
20 rowsselected.
```

4.Create a query to display unique job codes from the employee table.

```
SQL> select distinct job_id from employeetable;
```

```
JOB_ID
```

```
-----
```

```
sa_rep
```

```
mk_rep
```

```
ad_pres
```

```
ad_vp
```

```
it_prog
```

```
st_man
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

ac\_account

sa\_man

ad\_asst

ac\_mgr

st\_clerk

JOB\_ID

-----

mk\_man

12 rows selected.

5. Display the last name concatenated with the job ID , separated by a comma and space, and name the column EMPLOYEE and TITLE.

SQL> select last\_name||','||job\_id"employee and title" from employee;

employee and title

-----

king,ad\_pres

kochhar,ad\_vp

dehaan,ad\_vp

hunold,it\_prog

ernst,it\_prog

lorentz,it\_prog

mourgas,st\_man

rajs,st\_clerk

davies,st\_clerk

matos,st\_clerk

vargas,st\_clerk

employee and title

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

zlotkey,sa\_man

abel,sa\_rep

taylor,sa\_rep

grant,sa\_rep

whalen,ad\_asst

hartstein,mk\_man

fay,mk\_rep

higgins,ac\_mgr

gietz,ac\_account

20 rows selected.

6.Create a query to display all the data from the employees table. Separate each column by a comma. Name the column THE\_OUTPUT. SQL> select

employee\_id||','||first\_name||','||last\_name||','||email||','||phone\_number||','||job\_id||','||manager\_id||','||hire\_date||','||salary||','||commission\_pct||','||department\_id the\_output from employeetable;

THE\_OUTPUT

-----100,stevan,king,sking,515.123.4567,ad\_pres,,1  
7-JUN-87,24000,,90

101,neena,kochhar,nkochhar,515.123.4568,ad\_vp,100,21-SEP-89,17000,,90

102,lex,dehaan,ldehaan,515.123.4569,ad\_vp,100,13-JAN-93,17000,,90

103,alexandar,hunold,ahunold,590.423.4567,it\_prog,102,03-JAN-93,9000,,60

104,bruce,ernst,bernst,590.423.4568,it\_prog,103,21-MAY-91,6000,,60

107,diana,lorentz,dlorentz,590.423.4568,it\_prog,103,07-FEB-99,4200,,60

124,kevin,mourgas,kmourgas,650.123.5234,st\_man,100,16-NOV-99,5800,,50

141,trenna,rajs,trajs,650.121.8009,st\_clerk,124,17-OCT-95,3500,,50

142,curtis,davies,cdavies,650.121.2994,st\_clerk,124,29-JAN-97,3100,,50

143,randall,matos,rmatos,650.121.2874,st\_clerk,124,15-MAR-98,2600,,50

144,peter,vargas,pvargas,650.121.2004,st\_clerk,124,09-JUL-98,2500,,50

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

THE\_OUTPUT

```
-----  
149,eleni,zlotkey,ezlotkey,011.44.1344.429018,sa_man,100,29-JAN-00,10500,,2,80  
174,ellen,abel,eabel,011.44.1644.429267,sa_rep,149,11-MAY-96,11000,,3,80  
  
176,jonathan,taylor,jtaylor,011.44.1644.429265,sa_rep,149,24-MAR-98,8600,,2,80  
178,kimberly,grant,kgrant,011.44.1644.429263,sa_rep,149,24-MAY-99,7000,,15,  
200,jennifer],whalen,jwhalen,515.123.4444,ad_asst,101,17-SEP-87,4400,,10  
201,micheal,hartstein,mhartstein,515.123.5555,mk_man,100,17-FEB-96,13000,,20  
202,pat,fay,pfay,606.123.6666,mk_rep,201,17-AUG-97,6000,,20  
205,sheliey,higgins,shiggins,515.123.8080,ac_mgr,101,07-JUN-94,12000,,110  
206,william,gietz,wgeitz,515.123.8181,ac_account,205,07-JUN-94,8300,,110
```

20 rows selected.

**EXNO:5**

**RESTRICTING AND SORTING DATA**

**AIM:**

To limit the rows retrieved by the queries, and to sort the rows retrived by the queries.



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### SOLUTIONS FOR THE EXERCISES:

14. Create a query to display the last name and salary of employees earning more than 12000.

SQL> select last\_name,salary from employeetable where salary>12000;

| LAST_NAME | SALARY |
|-----------|--------|
|-----------|--------|

|              |       |
|--------------|-------|
| king kochhar | 24000 |
|--------------|-------|

|        |       |
|--------|-------|
| dehaan | 17000 |
|--------|-------|

|           |       |
|-----------|-------|
| hartstein | 17000 |
|-----------|-------|

|  |       |
|--|-------|
|  | 13000 |
|--|-------|

15. Create a query to display the employee last name and department number for employee number 176.

SQL> select last\_name,department\_id from employeetable where employee\_id=176;

| LAST_NAME | DEPARTMENT_ID |
|-----------|---------------|
|-----------|---------------|

|        |    |
|--------|----|
| taylor | 80 |
|--------|----|

16. Create a query to display the last name and salary of employees whose salary is not in the range of 5000 and 12000. (hints: not between )

SQL> select last\_name,salary from employeetable where salary not between 5000 and 12000;

| LAST_NAME | SALARY |
|-----------|--------|
|-----------|--------|

|      |       |
|------|-------|
| king | 24000 |
|------|-------|

|         |       |
|---------|-------|
| kochhar | 17000 |
|---------|-------|

|        |       |
|--------|-------|
| dehaan | 17000 |
|--------|-------|

|         |      |
|---------|------|
| lorentz | 4200 |
|---------|------|

|             |      |
|-------------|------|
| rajs davies | 3500 |
|-------------|------|

|  |      |
|--|------|
|  | 3100 |
|--|------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|           |       |
|-----------|-------|
| matos     | 2600  |
| vargas    | 2500  |
| whalen    | 4400  |
| hartstein | 13000 |

10 rows selected.

17. Display the employee last name, job ID, and start date of employees hired between February 20,1998 and May 1,1998.order the query in ascending order by start date.  
SQL> select last\_name,job\_id,hire\_date from employeetable where hire\_date between '20-feb-98' and '1-may-98';

| LAST_NAME | JOB_ID   | HIRE_DATE |
|-----------|----------|-----------|
| matos     | st_clerk | 15-MAR-98 |
| taylor    | sa_rep   | 24-MAR-98 |

18. Display the last name and department number of all employees in departments 20 and 50 in alphabetical order by name.  
SQL> select last\_name,department\_id from employeetable where department\_id in(20,50) order by last\_name;

| LAST_NAME | DEPARTMENT_ID |
|-----------|---------------|
| davies    | 50            |
| fay       |               |
| hartstein | 20            |
| matos     | 20            |
|           | 50            |
| mourgas   | 50            |
|           |               |
| rajs      | 50            |
|           |               |
| vargas    | 50            |

7 rows selected.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

19. Display the last name and salary of all employees who earn between 5000 and 12000 and are in departments 20 and 50 in alphabetical order by name. Label the columns EMPLOYEE, MONTHLY SALARY respectively.

```
SQL> select last_name,department_id from employeetable where department_id in(20,50) order
by last_name;
```

```
SQL> select last_name employee,salary monthly_salary from employeetable where salary
between 5000 and 12000 and department_id in(20,50) order by last_name;
```

| EMPLOYEE | MONTHLY_SALARY |
|----------|----------------|
|----------|----------------|

|         |      |
|---------|------|
| fay     | 6000 |
| mourgas | 5800 |

20. Display the last name and hire date of every employee who was hired in 1994.

```
SQL> select last_name,hire_date from employeetable where hire_date between '1-jan-94' and
'31-dec-94';
```

| LAST_NAME | HIRE_DATE |
|-----------|-----------|
|-----------|-----------|

|         |           |
|---------|-----------|
| higgins | 07-JUN-94 |
| gietz   | 07-JUN-94 |

- 8.Display the last name and job title of all employees who do not have a manager

```
SQL> select last_name,job_id from employeetable where manager_id is NULL;
```

| LAST_NAME | JOB_ID |
|-----------|--------|
|-----------|--------|

|      |         |
|------|---------|
| king | ad_pres |
|------|---------|

- 9.Display the last name, salary, and commission for all employees who earn commissions. Sort data in descending order of salary and commissions.

```
SQL> select last_name,salary,commission_pct from employeetable where commission_pct is not
null;
```

| LAST_NAME | SALARY | COMMISSION_PCT |
|-----------|--------|----------------|
|-----------|--------|----------------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
-----
zlotkey          10500      .2
abel taylor
grant            11000      .3
                8600       .2
                7000      .15
```

10. Display the last name of all employees where the third letter of the name is *a*.

```
SQL> select last_name from employeetable where last_name like '__a%';
```

```
LAST_NAME
```

```
-----
```

```
grant whalen
```

11. Display the last name of all employees who have an *a* and an *e* in their last name

```
SQL> select last_name from employeetable where last_name like '%a%e%';
```

```
LAST_NAME
```

```
-----
```

```
davies
```

```
abel
```

```
whalen
```

```
hartstein
```

12. Display the last name and job and salary for all employees whose job is sales representative or stock clerk and whose salary is not equal to 2500, 3500 or 7000

```
SQL> select last_name, job_id, salary from employeetable where job_id in('sa_rep', 'st_clerk') and salary not in(2500, 3500, 7000);
```

```
LAST_NAME          JOB_ID          SALARY
```

```
-----
```

```
davies            st_clerk 3100 st_clerk
```

```
matos             2600 sa_rep 11000 sa_rep
```

```
abel              8600
```

taylor Display the last name, salary, and commission for all employees whose commission

19.

amount is 20%.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> select last_name ,salary,commission_pct from employee table where commission_pct=.2;
```

| LAST_NAME | SALARY | COMMISSION_PCT |
|-----------|--------|----------------|
|-----------|--------|----------------|

|         |       |    |
|---------|-------|----|
| zlotkey | 10500 | .2 |
| taylor  | 8600  | .2 |

### EXNO:6 SINGLE ROW FUNCTIONS

#### AIM:

To describe the various types of functions available in SQL, and to use character, number and date functions in SELECT statement and to describe the use of conversion functions.

#### SOLUTION FOR THE EXERCISES:

1) Write a query to display the current date. Label the column Date.

```
SQL> select sysdate "date" from dual; date
```

-----

13-FEB-12

1 row selected.

2) The HR department needs a report to display the employee number, last name, salary, and increased by 15.5% (expressed as a whole number) for each employee. Label the column New Salary.

```
SQL> select employee_id,last_name,salary,round(salary*1.15,0)"new salary" from employees;
```

| EMPLOYEE_ID | LAST_NAME | SALARY | new salary |
|-------------|-----------|--------|------------|
|-------------|-----------|--------|------------|

|     |         |     |       |       |
|-----|---------|-----|-------|-------|
| 100 | King    | 101 | 24000 | 27600 |
|     | Kochar  | 102 | 17000 | 19550 |
|     | Dehaan  | 103 | 17000 | 19550 |
|     | Hunold  | 104 | 9000  | 10350 |
|     | Ernst   | 107 | 6000  | 6900  |
|     | Lorentz | 124 | 4200  | 4830  |
|     | Mourgos | 141 | 5800  | 6670  |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|              |     |       |       |
|--------------|-----|-------|-------|
| Rajs         | 142 | 3500  | 4025  |
| Davies       | 143 | 3100  | 3565  |
| Matos        |     | 2600  | 2990  |
| 144 Vargas   |     | 2500  | 2875  |
| 149 Zlotkey  |     | 10500 | 12075 |
| 174 Abel     |     | 11000 | 12650 |
| 176 taylor   |     | 8600  | 9890  |
| 178 grant    |     | 7000  | 8050  |
| 200 whalen   |     | 4400  | 5060  |
| 201 harstein |     | 13000 | 14950 |
| 202 fay      |     | 6000  | 6900  |
| 205 higgins  |     | 12000 | 13800 |
| 206 Gietz    |     | 8300  | 9545  |
| 113 popp     |     | 6900  | 7935  |

21 rows selected.

3) Modify your query lab\_03\_02.sql to add a column that subtracts the old salary from the new salary.

Label the column Increase.

```
SQL> select employee_id,last_name,salary,round(salary*1.15,0)"new
salary",round(salary*1.15,0)-salary "Increase" from employees;
```

| EMPLOYEE_ID | LAST_NAME | SALARY | new salary | Increase |
|-------------|-----------|--------|------------|----------|
|-------------|-----------|--------|------------|----------|

|     |         |       |       |      |
|-----|---------|-------|-------|------|
| 100 | King    | 24000 | 27600 | 3600 |
| 101 | Kocher  | 17000 | 19550 | 2550 |
| 102 | Dehaan  | 17000 | 19550 | 2550 |
| 103 | Hunold  | 9000  | 10350 | 1350 |
| 104 | Ernst   | 6000  | 6900  | 900  |
| 107 | Lorentz | 4200  | 4830  | 630  |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|              |       |       |      |
|--------------|-------|-------|------|
| 124 Mourgos  | 5800  | 6670  | 870  |
| 141 Rajs     | 3500  | 4025  | 525  |
| 142 Davies   | 3100  | 3565  | 465  |
| 143 Matos    | 2600  | 2990  | 390  |
| 144 Vargas   | 2500  | 2875  | 375  |
| 149 Zlotkey  | 10500 | 12075 | 1575 |
| 174 Abel     | 11000 | 12650 | 1650 |
| 176 taylor   | 8600  | 9890  | 1290 |
| 178 grant    | 7000  | 8050  | 1050 |
| 200 whalen   | 4400  | 5060  | 660  |
| 201 harstein | 13000 | 14950 | 1950 |
| 202 fay      | 6000  | 6900  | 900  |
| 205 higgins  | 12000 | 13800 | 1800 |
| 206 Gietz    | 8300  | 9545  | 1245 |
| 113 popp     | 6900  | 7935  | 1035 |

21rows selected.

4)Write a query that displays the last name (with the first letter uppercase and all other letters lowercase) and the length of the last name for all employees whose name starts with the letters J, A,orM. Give each column an appropriate label. Sort the results by the employees' last names

```
SQL>select initcap(last_name)"Name",length(last_name)"Length" from employees where  
last_name like 'j%' or last_name like 'M%' or last_name like 'A%' order by last_name;
```

| Name            | Length |
|-----------------|--------|
| Abel            | 4      |
| Matos 5 Mourgos | 7      |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

3 rows selected.

5)The HR department wants to find the length of employment for each employee. For each employee,display the last name and calculate the number of months between today and the date on which the employee was hired. Label the column MONTHS\_WORKED. Order your results by the number of months employed. Round the number of months up to the closest whole number.

```
SQL> select last_name,round(MONTHS_BETWEEN(SYSDATE,hire_date))
MONTHS_WORKED from employees order by MONTHS_BETWEEN(SYSDATE,hire_date);
```

| LAST_NAME | MONTHS_WORKED |
|-----------|---------------|
|-----------|---------------|

-----

|      |   |
|------|---|
| popp | 0 |
|------|---|

|         |     |
|---------|-----|
| Zlotkey | 145 |
|---------|-----|

|         |     |
|---------|-----|
| Mourgos | 147 |
|---------|-----|

|       |     |
|-------|-----|
| grant | 153 |
|-------|-----|

|         |     |
|---------|-----|
| Lorentz | 156 |
|---------|-----|

|        |     |
|--------|-----|
| Vargas | 163 |
|--------|-----|

|        |     |
|--------|-----|
| taylor | 167 |
|--------|-----|

|       |     |
|-------|-----|
| Matos | 167 |
|-------|-----|

|     |     |
|-----|-----|
| fay | 174 |
|-----|-----|

|        |     |
|--------|-----|
| Davies | 181 |
|--------|-----|

|      |     |
|------|-----|
| Abel | 189 |
|------|-----|

|          |  |
|----------|--|
| harstein |  |
|----------|--|

|  |     |
|--|-----|
|  | 192 |
|--|-----|

|      |       |     |
|------|-------|-----|
| Rajs | Gietz | 196 |
|------|-------|-----|

|         |        |     |
|---------|--------|-----|
| higgins | Dehaan | 212 |
|---------|--------|-----|

|       |        |     |
|-------|--------|-----|
| Ernst | Hunold | 212 |
|-------|--------|-----|

|        |        |     |
|--------|--------|-----|
| Kochar | whalen | 229 |
|--------|--------|-----|

|      |    |     |
|------|----|-----|
| King | 21 | 249 |
|------|----|-----|

|               |  |     |
|---------------|--|-----|
| rowsselected. |  | 265 |
|---------------|--|-----|

269

293



7) Create a query to display the last name and salary for all employees. Format the salary to be 15 characters long, left-padded with the \$ symbol. Label the column SALARY.

SQL> select last\_name, lpad(salary, 15, '\$') salary from employees;

| LAST_NAME | SALARY                  |
|-----------|-------------------------|
| King      | \$\$\$\$\$\$\$\$\$24000 |
| Kochar    | \$\$\$\$\$\$\$\$\$17000 |
| Dehaan    | \$\$\$\$\$\$\$\$\$17000 |
| Hunold    | \$\$\$\$\$\$\$\$\$9000  |
| Ernst     | \$\$\$\$\$\$\$\$\$6000  |
| Lorentz   | \$\$\$\$\$\$\$\$\$4200  |
| Mourgos   | \$\$\$\$\$\$\$\$\$5800  |
| Rajs      | \$\$\$\$\$\$\$\$\$3500  |
| Davies    | \$\$\$\$\$\$\$\$\$3100  |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|          |                             |
|----------|-----------------------------|
| Matos    | \$\$\$\$\$\$\$\$\$\$\$2600  |
| Vargas   | \$\$\$\$\$\$\$\$\$\$\$2500  |
| Zlotkey  | \$\$\$\$\$\$\$\$\$\$\$10500 |
| Abel     | \$\$\$\$\$\$\$\$\$\$\$11000 |
| taylor   | \$\$\$\$\$\$\$\$\$\$\$8600  |
| grant    | \$\$\$\$\$\$\$\$\$\$\$7000  |
| whalen   | \$\$\$\$\$\$\$\$\$\$\$4400  |
| harstein | \$\$\$\$\$\$\$\$\$\$\$13000 |
| fay      |                             |
| higgins  | \$\$\$\$\$\$\$\$\$\$\$6000  |
| Gietz    |                             |
| popp     | \$\$\$\$\$\$\$\$\$\$\$12000 |
|          | \$\$\$\$\$\$\$\$\$\$\$8300  |
|          | \$\$\$\$\$\$\$\$\$\$\$6900  |

21 rows selected.

8) Display each employee's last name, hire date, and salary review date, which is the first Monday after six months of service. Label the column REVIEW. Format the dates to appear in the format similar to

```
SQL> select last_name, hire_date, to_char(next_day(Add_months(hire_date, 6),
'monday'), 'fmday"the" ddspt" of" month, YYYY') review from employees;
```

| LAST_NAME | HIRE_DATE | REVIEW |
|-----------|-----------|--------|
|-----------|-----------|--------|

|        |           |                                           |
|--------|-----------|-------------------------------------------|
| King   | 17-JUN-87 | monday the twenty-first of december, 1987 |
| Kochar | 21-SEP-89 | monday the twenty-sixth of march, 1990    |
| Dehaan | 13-JAN-93 | monday the nineteenth of july, 1993       |
| Hunold | 03-JAN-90 | monday the ninth of july, 1990            |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|         |           |                                        |
|---------|-----------|----------------------------------------|
| Ernst   | 21-MAY-91 | mondaythetwenty-fifthof november,1991  |
| Lorentz | 07-FEB-99 | mondaytheninthof august,1999           |
| Mourgos | 16-NOV-99 | mondaythetwenty-secondof may,2000      |
| Rajs    | 17-OCT-95 | mondaythetwenty-secondof april,1996    |
| Davies  | 29-JAN-97 | mondaythefourthof august,1997          |
| Matos   | 15-MAR-98 | mondaythetwenty-firstof september,1998 |
| Vargas  |           |                                        |
| Zlotkey | 09-JUL-98 | mondaytheeleventhof january,1999       |
|         | 29-JAN-00 | mondaythethirty-firstof july,2000      |

21 rows selected.

9) Display the last name, hire date, and day of the week on which the employee started. Label the column DAY. Order the results by the day of the week, starting with Monday.

```
SQL> select last_name,hire_date,to_char(hire_date,'DAY')DAY from employees order by  
to_char(hire_date-1,'d');
```

| LAST_NAME | HIRE_DATE DAY        |
|-----------|----------------------|
| grant     | 24-MAY-99 MONDAY     |
| popp      | 30-JAN-12 MONDAY     |
| taylor    | 24-MAR-98 TUESDAY    |
| Gietz     | 07-JUN-94 TUESDAY    |
| higgins   | 07-JUN-94 TUESDAY    |
| Rajs      | 17-OCT-95 TUESDAY    |
| Mourgos   | 16-NOV-99<br>TUESDAY |
| Ernst     | 21-MAY-91 TUESDAY    |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|          |                     |
|----------|---------------------|
| Davies   | 29-JAN-97           |
| Dehaan   | WEDNESDAY           |
| King     | 13-JAN-93           |
|          | WEDNESDAY           |
| Hunold   | 17-JUN-87 WEDNESDAY |
| Vargas   | 03-JAN-90           |
| Kochar   | WEDNESDAY           |
| whalen   | 09-JUL-98 THURSDAY  |
| harstein | 21-SEP-89 THURSDAY  |
| Zlotkey  | 17-SEP-87 THURSDAY  |
| Abel     | 17-FEB-96 SATURDAY  |
| Lorentz  | 29-JAN-00 SATURDAY  |
| fay      | 11-MAY-96 SATURDAY  |
| Matos    | 07-FEB-99 SUNDAY    |
|          | 17-AUG-97 SUNDAY    |
|          | 15-MAR-98 SUNDAY    |

21 rows selected.

**EXNO:7**

### DISPLAYING DATA FROM MULTIPLE TABLE

**AIM:**

To write SELECT statement to access data from more than one table using equality and nonequality joins, and to view data that generally does not meet a join condition by using outer joins and to join a table to itself by using a self join.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

### SOLUTIONS FOR THE EXERCISES:

1. Write a query to display the last name, department number, and department name for all employees.

```
SQL> select e.last_name,e.department_id,d.department_name from employee e,department d
where e.department_id=d.department_id;
```

| LAST_NAME | DEPARTMENT_ID | DEPARTMENT_NAME |
|-----------|---------------|-----------------|
|-----------|---------------|-----------------|

-----

|      |    |           |         |    |
|------|----|-----------|---------|----|
| king | 90 | executive | kochhar | 90 |
|------|----|-----------|---------|----|

|           |        |    |           |        |
|-----------|--------|----|-----------|--------|
| executive | dehaan | 90 | executive | hunold |
|-----------|--------|----|-----------|--------|

|    |    |       |    |    |         |    |    |
|----|----|-------|----|----|---------|----|----|
| 60 | it | ernst | 60 | it | lorentz | 60 | it |
|----|----|-------|----|----|---------|----|----|

|         |    |          |      |    |
|---------|----|----------|------|----|
| mourgas | 50 | shipping | rajs | 50 |
|---------|----|----------|------|----|

|          |        |    |          |       |
|----------|--------|----|----------|-------|
| shipping | davies | 50 | shipping | matos |
|----------|--------|----|----------|-------|

|    |          |
|----|----------|
| 50 | shipping |
|----|----------|

|        |    |          |
|--------|----|----------|
| vargas | 50 | shipping |
|--------|----|----------|

| LAST_NAME | DEPARTMENT_ID | DEPARTMENT_NAME |
|-----------|---------------|-----------------|
|-----------|---------------|-----------------|

-----

|         |    |       |      |    |       |
|---------|----|-------|------|----|-------|
| zlotkey | 80 | sales | abel | 80 | sales |
|---------|----|-------|------|----|-------|

|        |    |       |
|--------|----|-------|
| taylor | 80 | sales |
|--------|----|-------|

|        |    |                |           |    |           |
|--------|----|----------------|-----------|----|-----------|
| whalen | 10 | administration | hartstein | 20 | marketing |
|--------|----|----------------|-----------|----|-----------|

|     |    |           |
|-----|----|-----------|
| fay | 20 | marketing |
|-----|----|-----------|

|         |     |            |       |     |            |
|---------|-----|------------|-------|-----|------------|
| higgins | 110 | accounting | gietz | 110 | accounting |
|---------|-----|------------|-------|-----|------------|

19 rows selected.

2. Create a unique listing of all jobs that are in department 80. Include the location of the department in the output

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

SQL> select distinct job\_id,location\_id from employeetable,department where  
employeetable.department\_id=department.department\_id and employeetable.department\_id=80;

| JOB_ID | LOCATION_ID |
|--------|-------------|
|--------|-------------|

-----

|        |      |
|--------|------|
| sa_man | 2500 |
| sa_rep | 2500 |

3. Write a query to display the employee last name, department name, location ID, and city of all employees who earn a commission

SQL> select e.last\_name,d.department\_name ,d.location\_id ,l.city from employeetable  
e,department d,locations l where e.department\_id=d.department\_id and  
d.location\_id=l.location\_id and e.commission\_pct is not null;

| LAST_NAME | DEPARTMENT_NAME | LOCATION_ID | CITY |
|-----------|-----------------|-------------|------|
|-----------|-----------------|-------------|------|

-----

|           |            |      |        |
|-----------|------------|------|--------|
| lotkey    | sales      | 2500 | oxford |
|           | sale sales |      | oxford |
| abel      |            | 2500 |        |
| tayoxford |            | 2500 |        |

4. Display the employee last name and  
department name for all employees who have a(n) (lowercase) in their last names

SQL> select last\_name,department\_name from employeetable,department where  
employeetable.department\_id=department.department\_id and last\_name like '%a%';

| LAST_NAME | DEPARTMENT_NAME |
|-----------|-----------------|
|-----------|-----------------|

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|           |                 |
|-----------|-----------------|
| whalen    | administration  |
| fay       | marketing       |
| hartstein | marketing       |
|           | shipping        |
| vargas    | shipping        |
|           | shipping        |
| matos     | shipping sales  |
| davies    | sales executive |
| rajs      |                 |
| mourgas   |                 |
| taylor    |                 |
| abel      |                 |
| dehaan    |                 |
| kochhar   |                 |

executive

12 rows selected.

5.rite a query to display the last name, job, department number, and department name for all employees who work in Toronto no rows selected

6. Display the employee last name and employee number along with their manager's last name and manager number. Label the columns Employee, Emp#, Manager, and Mgr#, Respectively

```
SQL> select w.last_name "employee",w.employee_id "emp#",m.last_name  
"manager",m.employee_id from employeetable w join employeetable m on  
(w.manager_id=m.employee_id);
```

| emplo | emp# manager | EMPLOYEE_ID |
|-------|--------------|-------------|
|-------|--------------|-------------|

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|           |                 |             |
|-----------|-----------------|-------------|
| hartstein | 201 king        | 100         |
| zlotkey   | 149 king        | 100         |
| mourgas   | 124 king        | 100         |
| dehaan    | 102 king        | 100         |
| kochhar   | 101 king        | 100         |
| higgins   | 205 kochhar     | 101         |
| whalen    | 200 kochhar     | 101         |
| hunold    | 103 dehaan      | 102         |
| lorentz   | 107 hunold      | 103         |
| ernst     | 104 hunold      | 103         |
| vargas    | 144 mourgas     | 124         |
| matos     | 143 mourgas 142 | 124         |
| davies    | mourgas         | 124         |
| rajs      | 141 mourgas     | 124         |
| grant     | 178 zlotkey     | 149         |
|           | emp# manager    | EMPLOYEE_ID |

employee

|        |     |                 |     |
|--------|-----|-----------------|-----|
| taylor | 176 | zlotkey zlotkey | 149 |
| abel   |     | hartstein       |     |
| fay    | 174 | higgins         | 149 |
| gietz  | 202 |                 | 201 |
|        | 206 |                 | 205 |

19 rows selected.

7. Modify lab4\_6.sql to display all employees including King, who has no manager. Order the results by the employee number.

```
SQL> select w.last_name"employee",w.employee_id"emp#",m.last_name
"manager",m.employee_id "mgr#" from employeeetable w left outer join employeeetable m
on(w.manager_id=m.employee_id);
```

| employee | emp# | manager | mgr# |
|----------|------|---------|------|
|----------|------|---------|------|



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|           |      |           |      |
|-----------|------|-----------|------|
| -----     |      |           |      |
| hartstein | 201  | king      | 100  |
| zlotkey   | 149  | king      | 100  |
| mourgas   | 124  | king      | 100  |
| dehaan    | 102  | king      | 100  |
| kochhar   | 101  | king      | 100  |
| higgins   | 205  | kochhar   | 101  |
| whalen    | 200  | kochhar   | 101  |
| hunold    | 103  | dehaan    | 102  |
| lorentz   | 107  | hunold    | 103  |
| ernst     |      |           |      |
|           | 104  | hunold    | 103  |
| vargas    |      |           |      |
|           | 144  | mourgas   | 124  |
| employee  | emp# | manager   | mgr# |
| -----     |      |           |      |
| matos     | 143  | mourgas   | 124  |
| davies    | 142  | mourgas   | 24   |
| rajs      | 141  | mourgas   | 124  |
| grant     | 178  | zlotkey   | 149  |
| taylor    | 176  | zlotkey   | 149  |
| abel      | 174  | zlotkey   | 149  |
| fay       | 202  | hartstein | 201  |
| gietz     | 206  | higgins   | 205  |
| king      | 100  |           |      |

20 rows selected.

8. Create a query that displays employee last names, department numbers, and all the employees who work in the same department as a given employee. Give each column an appropriate label

```
SQL> select e.department_id department,e.last_name employee,c.last_name colleague from
employee e join employee c on(e.department_id=c.department_id)where
e.employee_id<>c.employee_id order by e.department_id ,e.last_name,c.last_name;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

DEPARTMENT EMPLOYEE

COLLEAGUE

-----

20 fay hartstein

20 hartstein fay

50 davies matos

DEPARTMENT EMPLOYEE

COLLEAGUE

-----

50 davies mourgas

50 davies rajs

50 davies vargas

50 matos davies

50 matos mourgas

50 matos rajs

50 matos vargas

50 mourgas davies

50 mourgas matos

50 mourgas rajs

50 mourgas vargas 50

rajs 50 davies rajs 50 rajs

matos 50 rajs 50

mourgas vargas 50

vargas vargas 50

davies vargas 50

matos vargas 60

mourgas ernst 60 rajs

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```

ernst    60
          hunold
hunold   60
          lorentz
          hunold ernst lorentz
DEPARTMENTEMPLOY
EE      COLLEAGUE

```

```

-----
60lorentz      ernst
60lorentz      hunold
80abel         taylor
80abel         zlotkey
80taylor       abel
80taylor       zlotkey
80zlotkey      abel
80zlotkey      taylor
90dehaan       king
90dehaan       kochhar
90king         dehaan
90king         kochhar
90kochhar      dehaan
90kochhar      king
90kochhar      higgins
110gietz       gietz
110higgins

```

42 rows selected.

9. Show the structure of the JOB\_GRADE table. Create a query that displays the name, job, department name, salary, and grade for all employees SQL> desc job\_grades;

| Name | Null? Type |
|------|------------|
|------|------------|

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

GRADE\_LEVEL                      VARCHAR2(3)

LOWEST\_SAL                        NUMBER(10)

HIGHEST\_SAL                      NUMBER

SQL> select \* from job\_grades;

GRADE LOWEST\_SAL HIGHEST\_SAL

-----

a        1000        2999

b    3000    c        5999  
         6000

d   10000    e        9999

15000       f  
25000                14999

24999

40000

6 rows selected.

9.        Create a query to display the name and hire date of any employee hired after employee Davies.

SQL> select e.last\_name,e.hire\_date from employeetable e,employeetable davies where  
davies.last\_name='davies' and davies.hire\_date<e.hire\_date;

LAST\_NAME                      HIRE\_DATE

-----  
lorentz                      07-FEB-99

mourgas  
matos vargas                      16-NOV-99

zlotkey                      15-MAR-98

taylor  
                                 09-JUL-98

29-JAN-00

24-MAR-98

grant fay 8 rows s2e4le-cMteAdY. 1-919. Display the names and hire dates for all employees who were hired

before their mana1g7er-sA, UG-97

along with their manager's names and hire dates. Label the columns Employee, Emp Hired,  
Manager, and Mgr Hired, respectively.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> select w.last_name,w.hire_date,m.last_name,m.hire_date from employeetable
w,employeetable m where w.manager_id=m.employee_id and w.hire_date <m.hire_date;
```

| LAST_NAME | HIRE_DATE | LAST_NAME | HIRE_DATE |
|-----------|-----------|-----------|-----------|
|-----------|-----------|-----------|-----------|

|            |           |         |           |
|------------|-----------|---------|-----------|
| whalen     | 17-SEP-87 | kochhar | 21-SEP-89 |
| hunold     |           |         |           |
| ernst      | 03-JAN-93 | dehaan  | 13-JAN-93 |
| vargas     |           |         |           |
| matos      | 21-MAY-91 | hunold  | 03-JAN-93 |
| davies     | 09-JUL-98 | mourgas | 16-NOV-99 |
| rajs grant |           |         |           |
| taylor     | 15-MAR-98 | mourgas | 16-NOV-99 |
| abel       |           |         |           |
|            | 29-JAN-97 | mourgas | 16-NOV-99 |
|            |           |         |           |
|            | 17-OCT-95 | mourgas | 16-NOV-99 |
|            |           |         |           |
|            | 24-MAY-99 | zlotkey | 29-JAN-00 |
|            |           |         |           |
|            | 24-MAR-98 | zlotkey | 29-JAN-00 |
|            |           |         |           |
|            | 11-MAY-96 | zlotkey | 29-JAN-00 |

10 rows selected.

### EXNO:8 AGGREGATING DATA USING GROUP FUNCTIONS

**AIM:** To identify the available group functions, to describe the use of group functions, to group data by using the GROUP BY clause, to include or exclude grouped rows by using the HAVING clause.

### SOLUTION FOR THE EXERCISE:

1. Find the highest, lowest, sum, and average salary of all employees. Label the columns

Maximum, Minimum, Sum, and Average, respectively. Round your results to the nearest whole number

```
SQL> select
round(max(salary),0)"maximum",round(min(salary),0)"minimum",round(sum(salary),0)"sum",ro
und(avg(salary),0)"average" from employeetable;
```

| maximum | minimum | sum | average |
|---------|---------|-----|---------|
|---------|---------|-----|---------|

|           |      |        |  |
|-----------|------|--------|--|
| 877254000 | 2500 | 175500 |  |
|-----------|------|--------|--|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

2. Modify the above query to display the minimum, maximum, sum, and average salary for each job type.

```
SQL>Select round(max(salary),0)"maximum",round(min(salary),0)
"minimum",round(sum(salary),0)"sum",round(avg(salary),0)"average"    from    employeetable
group by job_id;
```

| maximum | minimum | sum     | average      |
|---------|---------|---------|--------------|
| 11000   | 7000    | 26600   | 8867         |
| 6000    | 6000    | 6000    | 6000         |
| 24000   | 24000   | 24000   | 24000        |
| 17000   | 17000   | 34000   | 17000        |
| 9000    | 4200    | 19200   | 6400         |
| 5800    | 5800    | 5800    | 5800         |
| 8300    | 8300    | 8300    | 8300         |
| 10500   | 10500   | 10500   | 10500        |
| 4400    | 4400    | 4400    | 4400 maximum |
| minimum | sum     | average |              |

|       |       |       |       |
|-------|-------|-------|-------|
| 12000 | 12000 | 12000 | 12000 |
| 3500  | 2500  | 11700 | 2925  |
| 13000 | 13000 | 13000 | 13000 |

12 rows selected.

3. Write a query to display the number of people with the same job. Generalize the query so that the user in the HR department is prompted for a job title. SQL> select job\_id,count(\*) from employeetable group by job\_id;

| JOB_ID | COUNT(*) |
|--------|----------|
|--------|----------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|            |   |
|------------|---|
| sa_rep     | 3 |
| mk_rep     | 1 |
| ad_pres    | 1 |
| ad_vp      | 2 |
| it_prog    | 3 |
| st_man     | 1 |
| ac_account | 1 |
| sa_man     | 1 |
| ad_asst    | 1 |
| ac_mgr     | 1 |
| st_clerk   | 4 |
| mk_man     | 1 |

12 rowsselected.

4.Determine the number of managers without listing them. Label the column Number of Managers.

```
SQL> select count(distinct manager_id)"number of managers" from employeetable;  
number of managers
```

-----

8

5. Find the difference between the highest and lowest salaries. Label the column DIFFERENCE.

```
SQL> select max(salary)-min(salary)"difference" from employeetable; difference
```

-----

21500

6. Create a report to display the manager number and the salary of the lowest-paid employee for that manager. Exclude anyone whose manager is not known. Exclude any groups where the minimum salary is \$6,000 or less. Sort the output in descending order of salary.

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

SQL> select manager\_id,min(salary)from employeetable where manager\_id is not null group by manager\_id having min(salary)>6000 order by min(salary)desc;

MANAGER\_ID MIN(SALARY)

-----

90001 02

2 05

1 49

8300

7000

7. Create a query to display the total number of employees and, of that total, the number of employees hired in 1995, 1996, 1997, and 1998. Create appropriate column headings

SQL> select  
count(\*)"total",sum(decode(to\_char(hire\_date,'YYYY'),1995,1,0))"1995",sum(decode(to\_char(hire\_date,'YYYY'),1996,1,0))"1996",sum(decode(to\_char(hire\_date,'YYYY'),1997,1,0))"1997",sum(decode(to\_char(hire\_date,'YYYY'),1998,1,0))"1998" from employeetable;

| total | 1995 | 1996 | 1997 | 1998 |
|-------|------|------|------|------|
|-------|------|------|------|------|

-----

|    |   |   |   |   |
|----|---|---|---|---|
| 20 | 1 | 2 | 2 | 3 |
|----|---|---|---|---|

8. Create a matrix query to display the job, the salary for that job based on department number, and the total salary for that job, for departments 20, 50, 80, and 90, giving each column an appropriate heading.

SQL>

Select job\_id"job",sum(decode(department\_id,20,salary))"department20",sum(decode(department\_id,50,salary))"department50",sum(decode(department\_id,80,salary))"department80",sum(decode(department\_id,90,salary))"department90",sum(salary)"total" from employeetable group by job\_id;

job department20 department50 department80 department90 total

2s6a6\_0re0p

19600

mk\_rep

6000 6000

ad\_pres

24000 24000

ad\_vp



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
          34000          4000
it_prog 19200
st_man   5800   5800
ac_account 8300
sa_man    10500    10500
ad_asst   4400
ac_mgr     12000 st_clerk
          11700 11700 mk_man
13000 13000
```

12 rows selected.

9. Write a query to display each department's name, location, number of employees, and the average salary for all the employees in that department. Label the column name-Location, Number of people, and salary respectively. Round the average salary to two decimal places.

```
SQL> select d.department_name "name",d.location_id "location",count(*)"no of
people",round(avg(salary),2)"salary" from employeetable e,department d where e.department_id
=d.department_id group by d.department_name,d.location_id;
```

| name | location | no of people | salary |
|------|----------|--------------|--------|
|------|----------|--------------|--------|

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|                |      |   |          |
|----------------|------|---|----------|
| it             | 1400 | 3 | 6400     |
| shipping       | 1500 | 5 | 3500     |
| administration | 1700 | 1 | 4400     |
| marketing      | 1800 | 2 | 9500     |
| executive      | 1700 | 3 | 19333.33 |
| sales          | 2500 | 3 | 10033.33 |
| accounting     | 1700 | 2 | 10150    |

7rows selected.

### EXNO:9 SUB QUERIES

#### AIM:

To define subqueries, to describe the types of problems that sub queries can solve, to list the types of subqueries, and to write single row and multiple row subqueries.

#### SOLUTIONS FOR THE EXERCISES

1. The HR department needs a query that prompts the user for an employee last name.

The query then displays the last name and hire date of any employee in the same department as the employee whose name they supply (excluding that employee). For example, if the user enters Zlotkey, find all employees who work with Zlotkey (excluding Zlotkey).

```
SQL> select last_name,hire_date from employeetable where department_id=(select
department_id from employeetable where last_name='zlotkey')and last_name<>'zlotkey';
```

| LAST_NAME | HIRE_DATE |
|-----------|-----------|
|-----------|-----------|

-----

zlotkey 29-JAN-00   abel 11-

MAY-96   taylor 24-MAR-98

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

2. Create a report that displays the employee number, last name, and salary of all employees who earn more than the average salary. Sort the results in order of ascending salary

```
SQL> select employee_id,last_name,salary from employeetable where salary>(select avg(salary)
from employeetable)order by salary;
```

| EMPLOYEE_ID | LAST_NAME | SALARY |
|-------------|-----------|--------|
|-------------|-----------|--------|

|     |           |       |
|-----|-----------|-------|
| 103 | hunold    | 9000  |
| 149 | zlotkey   | 10500 |
| 174 | abel      | 11000 |
| 205 | higgins   | 12000 |
| 201 | hartstein | 13000 |
| 101 | kochhar   | 17000 |
| 102 | dehaan    | 17000 |
| 100 | king      | 24000 |

8 rows selected.

3. Write a query that displays the employee number and last name of all employees who work in a department with any employee whose last name contains a *u*.

```
SQL> select last_name,hire_date from employeetable where department_id in(select
department_id from employeetable where last_name like '%u%');
```

| LAST_NAME | HIRE_DATE |
|-----------|-----------|
|-----------|-----------|

|             |           |
|-------------|-----------|
| lorentz     | 07-FEB-99 |
| ernst       | 21-MAY-91 |
| hunold      | 03-JAN-93 |
| vargas      | 09-JUL-98 |
| matos       | 15-MAR-98 |
| davies rajs | 29-JAN-97 |
| mourgas     | 17-OCT-95 |
|             | 16-NOV-99 |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

8 rows selected.

4. The HR department needs a report that displays the last name, department number, and job ID of all employees whose department location ID is 1700.

```
SQL> select last_name ,department_id,job_id from employeetable where department_id in(select
department_id from department where location_id=1700);
```

| LAST_NAME | DEPARTMENT_ID | JOB_ID |
|-----------|---------------|--------|
|-----------|---------------|--------|

-----

whalen dehaan kochhar ki1n0g agdie\_tazs shtiggins 6 rows selected. 5. Create a report for HR that displays

the last name and salary of9 e0v aedry\_ vepm ployee who reports to King.

```
SQL> select last_name,sala9ry0 fardo_mv pemployeetable where manager_id=(select employee_id from
employeetable where last9_0n aamd_e=pr'keisn g');
```

110 ac\_account

110 ac\_mgr

| LAST_NAME | SALARY |
|-----------|--------|
|-----------|--------|

-----

|         |       |
|---------|-------|
| kochhar | 17000 |
|---------|-------|

|        |  |
|--------|--|
| dehaan |  |
|--------|--|

|         |       |
|---------|-------|
| mourgas | 17000 |
|---------|-------|

|         |      |
|---------|------|
| zlotkey | 5800 |
|---------|------|

|           |  |
|-----------|--|
| hartstein |  |
|-----------|--|

10500

13000

6. Create a report for HR that displays the department number, last name, and job ID for everyemployee in the Executive department.

```
SQL> select last_name,department_id,job_id from employeetable where department_id in(select
department_id from department where department_name='executive');
```

| LAST_NAME | DEPARTMENT_ID | JOB_ID |
|-----------|---------------|--------|
|-----------|---------------|--------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

-----  
dehaan                      90 ad\_vp  
kochhar                    90  
king                        ad\_vp  
  
                             90 ad\_pres

7.        Modify the query 3 to display the employee number, last name, and salary of all employees who earn more than the average salary and who work in a department with any employee whose last name contains a *u*.

SQL> select employee\_id,last\_name,salary from employeetable where department\_id in(select department\_id from employeetable where last\_name like '%u%') and salary>(select avg(salary) from employeetable);

| EMPLOYEE_ID | LAST_NAME | SALARY |
|-------------|-----------|--------|
|-------------|-----------|--------|

-----  

|     |        |      |
|-----|--------|------|
| 103 | hunold | 9000 |
|-----|--------|------|

EXNO:10

USING THE SET OPERATORS

AIM:

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

To describe these operators, to use a set operator to combine multiple queries into a single query, and to control the order of rows returned.

### FIND THE SOLUTIONS:

1. The HR department needs a list of department IDs for departments that do not contain the job ID ST\_CLERK. Use set operators to create this report.

```
select department_id from department minus select department_id from employee table where
job_id='ST_CLERK'; DEPARTMENT_ID
```

-----

10 20 50 60 80 90

110

190

8 rows selected.

2. The HR department needs a list of countries that have no departments located in them.

Display the country ID and the name of the countries. Use set operators to create this report.

```
SQL> select country_id, country_name from countries minus select l.country_id, c.country_name
from locations l, countries c where l.country_id=c.country_id;
```

CO COUNTRY\_NAME

-- -----

de germany

3. Produce a list of jobs for departments 10, 50, and 20, in that order. Display job ID

and department ID using set operators.

```
SQL> select job_id, department_id from employee table where department_id=10 union select
job_id, department_id from employee table where department_id=50 union select
job_id, department_id from employee table where department_id=20;
```

JOB\_ID            DEPARTMENT\_ID

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|          |    |
|----------|----|
| ad_asst  | 10 |
| mk_man   | 20 |
| mk_rep   | 20 |
| st_clerk | 50 |
| st_man   | 50 |

4. Create a report that lists the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired by the company (that is, they changed jobs but have now gone back to doing their original job).

```
SQL> select employee_id,job_id from employeetable intersect select employee_id,job_id from job_history;
```

| EMPLOYEE_ID | JOB_ID |
|-------------|--------|
|-------------|--------|

-----

|     |         |
|-----|---------|
| 103 | it_prog |
|-----|---------|

|     |        |
|-----|--------|
| 176 | sa_rep |
|-----|--------|

|     |         |
|-----|---------|
| 200 | ad_asst |
|-----|---------|

5. The HR department needs a report with the following specifications:

- Last name and department ID of all the employees from the EMPLOYEES table, regardless of whether or not they belong to a department.
- Department ID and department name of all the departments from the DEPARTMENTS table, regardless of whether or not they have employees working in them Write a compound query to accomplish this.

```
SQL> select last_name,department_id,to_char(null) from employeetable union select to_char(null),department_id,department_name from department;
```

| LAST_NAME | DEPARTMENT_ID | TO_CHAR(NULL) |
|-----------|---------------|---------------|
|-----------|---------------|---------------|

-----

|      |    |  |
|------|----|--|
| abel | 80 |  |
|------|----|--|

|        |    |        |    |
|--------|----|--------|----|
| davies | 50 | dehaan | 90 |
|--------|----|--------|----|

|       |    |
|-------|----|
| ernst | 60 |
|-------|----|

|     |    |
|-----|----|
| fay | 20 |
|-----|----|

|       |     |
|-------|-----|
| gietz | 110 |
|-------|-----|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

grant

hartstein

20

higgins

110

hunold

60

king

90

kochhar

90 lorentz 60

matos

50

DEPARTMENT\_ID TO\_CHAR(NULL) LAST\_NAME

----- mourgas

50

rajs taylor

50 vargas whalen

50

zlotkey

80 administration

10

80

10

8 rows selected.



# CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

EXNO:11

## CREATING VIEWS

### AIM:

To describe a view, to create, alter the definition of, and drop a view, to retrieve the data through a view, to insert, update, and delete data through a view, to create and use an inline view.

### SOLUTIONS:

- 1) Create a view called EMPLOYEE\_VU based on the employee numbers, employee names and department numbers from the EMPLOYEES table. Change the heading for the employee name to EMPLOYEE.

SQL> create view employee\_VU as select employee\_id, last\_name "employee", department\_id from employees; View created.

- 2) Display the contents of the EMPLOYEE\_VU view.

SQL> select \* from employee\_VU;

| EMPLOYEE_ID | EMPLOYEE     | DEPARTMENT_ID |
|-------------|--------------|---------------|
| 1           | king kocchar | 90            |
| 101         | dehaan       | 90            |
| 102         | hunold       | 90            |
| 103         | ernst        | 60            |
| 104         | lorentz      | 60            |
| 107         | mourgos      | 4200          |
| 124         | rajs         | 50            |
| 141         | matos        | 50            |
| 143         |              | 50            |

9 rows selected.

- 3) Select the view name and text from the USER\_VIEWS data dictionary views.

SQL> select \* from tab; TNAME ----- STUDENT EMP DEPT

EMPLOYEES JOB TDAEBPATYRPTM ENT CMLYU\_SETMERPILO  
YEEEMPLOYEES1

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

DEPARTMENT1 JOB-\_\_G--R--A--D--E-LOCATION  
JOBS

MY\_EMPLOYEES

COUNTRIES LOCATIONTAS BELMEP LOYEE\_VU 16 rows selected. SQL> select

view\_name,text from uTsAerB\_vLiEew s;

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

TABLE

VIEW

VIEW\_NAME

TEXT

EMPLOYEE\_VU

-----

4) using your EMPLOYEES\_VU view, enter a query to display all employees names and department.

SQL> select employee\_id,department\_id from employee\_VU;

EMPLOYEE\_ID

DEPARTMENT\_ID

-----

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|     |      |
|-----|------|
| 1   | 90   |
| 101 | 90   |
| 102 | 90   |
| 103 | 60   |
| 104 | 60   |
| 107 | 4200 |
| 124 | 50   |
| 141 | 50   |
| 143 | 50   |

9 rows selected.

- 5) Create a view named DEPT50 that contains the employee number, employee last names and department numbers for all employees in department 50. Label the view columns EMPNO, EMPLOYEE and DEPTNO. Do not allow an employee to be reassigned to another department through the view.

```
SQL> create view dept50 as select
employee_id"empno",last_name"employees",department_id"deptno" from employees where
department_id=50 with check option constraints emp_department_50;
```

View created.

- 6) Display the structure and contents of the DEPT50 view.

```
SQL> desc dept50;
```

| Name      | Null?    | Type         |
|-----------|----------|--------------|
| emp no    | NOT NULL | NUMBER(6)    |
| employees | NOT NULL | VARCHAR2(25) |
| dept no   |          | NUMBER(4)    |

```
SQL> select *from dept50;
```

| emp no | employees | dept no |
|--------|-----------|---------|
| 124    | mourgos   | 50      |
| 141    | rajs      | 50      |

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

143            matos            50

7) Attempt to reassign Matos to department 80.

SQL> update dept50 set deptno=80 where employee='matos';

1 row updated.

SQL> select \*from dept50;

| emp no | employees | dept no |
|--------|-----------|---------|
| -----  | -----     | -----   |
| 124    | mourgos   | 50      |
| 141    | rajs      | 50      |
| 143    | matos     | 80      |

8) Create a view called SALARY\_VU based on the employee last names, department names, salaries, and salary grades for all employees. Use the Employees, DEPARTMENTS and JOB\_GRADE tables. Label the column Employee, Department, salary, and Grade respectively.

SQL> create view salary\_VU as select  
e.last\_name"employee",d.dept\_name"dept",e.salary"salary",j.grade\_level"grades" from  
employees e,department d,job j where e.department\_id=d.dept\_id and e.salarybetween  
j.lowest\_sal and j.highest\_sal; View created.

### **EXNO:12 AIM:                      PROCEDURES AND FUNCTIONS**

To implement the concept of procedures and functions which is a logically grouped set of SQL and  
**PROGRAM FOR GENERAL PROCEDURE** –L/SQL statements that perform a  
specific task.

**SELECTED RECORD'S PRICE IS INCREMENTED BY 500 , EXECUTING THE  
PROCEDURE CREATED AND DISPLAYING THE UPDATED TABLE**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
2 null_price exception;
3 begin
4 select actualprice into price from ititems where itemid=identity;
5 if price is null then
6 raise null_price;
7 else
8 update ititems set actualprice=actualprice+total where itemid=identity;
9 end if;
10 exception
11 when null_price then
12 dbms_output.put_line('price is null');
13 end;
14 /
```

Procedure created.

```
SQL> exec itsum(101, 500);
```

PL/SQL procedure successfully completed.

```
SQL> select * from ititems;
```

```
SQL> create procedure itsum(identity number, total number) is price number;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| ITEMID | ACTUALPRICE | ORDID | PRODID |
|--------|-------------|-------|--------|
| -----  | -----       | ----- | -----  |
| 101    | 2500        | 500   | 201    |
| 102    | 3000        | 1600  | 202    |
| 103    | 4000        | 600   | 202    |

### CREATE THE TABLE 'ITTRAIN' TO BE USED FOR FUNCTIONS

SQL>create table ittrain (tno number(10), tfare number(10));

Table created.

SQL>insert into ittrain values (1001, 550);

1 row created.

SQL>insert into ittrain values (1002, 600);

1 row created.

SQL>select \* from ittrain;

| TNO   | TFARE |
|-------|-------|
| ----- | ----- |
| 1001  | 550   |
| 1002  | 600   |

### PROGRAM FOR FUNCTION AND IT'S EXECUTION

SQL> create function aaa (trainnumber number) return number is

2 trainfunction ittrain.tfare % type;

3 begin

4 select tfare into trainfunction from ittrain where tno=trainnumber;

5 return(trainfunction);

6 end;

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

7 /

Function created.

SQL> set serveroutput on;

SQL> declare

2 total number;

3 begin

4 total:=aaa (1001);

5 dbms\_output.put\_line('Train fare is Rs. '||total);

6 end;

7 /

Train fare is Rs.550

PL/SQL procedure successfully completed.

### FACTORIAL OF A NUMBER USING FUNCTION — PROGRAM AND EXECUTION

SQL> create function itfact (a number) return number is

2 fact number:=1;

3 b number;

4 begin

5 b:=a;

6 while b>0

7 loop

8 fact:=fact\*b;

9 b:=b-1;

10 end loop;

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
11 return(fact);
```

```
12 end;
```

```
13 /
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=7;
```

```
3 f number(10);
```

```
4 begin
```

```
5 f:=itfact(a);
```

```
6 dbms_output.put_line('The factorial of the given number is'||f);
```

```
7 end;
```

```
8 /
```

The factorial of the given number is 5040

PL/SQL procedure successfully completed.

### PROGRAMS

#### TO DISPLAY HELLO MESSAGE

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a varchar2(20);
```

```
3 begin
```

```
4 a:='Hello';
```

```
5 dbms_output.put_line(a);
```

```
6 end;
```



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

7 /

Hello

PL/SQL procedure successfully completed.

### **TO INPUT A VALUE FROM THE USER AND DISPLAY IT**

SQL> set serveroutput on;

SQL> declare

2 a varchar2(20);

3 begin

4 a:=&a;

5 dbms\_output.put\_line(a);

6 end;

7 /

Enter value for a: 5

old 4: a:=&a;

new 4: a:=5;

5

PL/SQL procedure successfully completed.

### **GREATEST OF TWO NUMBERS**

SQL> set serveroutput on;

SQL> declare

2 a number(7);

3 b number(7);

4     begin     5

a:=&a;

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
6 b:=&b;
7 if(a>b) then
8 dbms_output.put_line (' The grerater of the two is'|| a);
9 else
10 dbms_output.put_line (' The grerater of the two is'|| b);
11 end if;
12 end;
13 /
```

Enter value for a: 5

old 5: a:=&a;

new 5: a:=5;

Enter value for b: 9

old 6: b:=&b;

new 6: b:=9;

The grerater of the two is9

PL/SQL procedure successfully completed.

### **GREATEST OF THREE NUMBERS**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number(7);
```

```
3 b number(7);
```

```
4 c number(7);
```

```
5   begin      6
```

```
a:=&a;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
7 b:=&b;
8 c:=&c;
9 if(a>b and a>c) then
10 dbms_output.put_line (' The greatest of the three is ' || a);
11 else if (b>c) then 12 dbms_output.put_line (' The greatest
of the three is ' || b); 13 else 14 dbms_output.put_line (' The
greatest of the three is ' || c); 15 end if; 16 end if; 17 end; 18 /
```

Enter value for a: 5

old 6: a:=&a;

new 6: a:=5;

Enter value for b: 7

old 7: b:=&b;

new 7: b:=7;

Enter value for c: 1

old 8: c:=&c;

new 8: c:=1;

The greatest of the three is 7

PL/SQL procedure successfully completed.

**PRINT NUMBERS FROM 1 TO 5 USING SIMPLE LOOP**

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=1;
```

```
3 begin
```

```
4 loop
```

```
5 dbms_output.put_line (a);
```

```
6 a:=a+1;
```

```
7 exit when a>5;
```

```
8 end loop;
```

```
9 end;
```

```
10 /
```

```
1 2 3 4 5 PL/SQL procedure successfully  
completed.
```

### PRINT NUMBERS FROM 1 TO 4 USING WHILE LOOP

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=1;
```

```
3 begin
```

```
4 while(a<5)
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
5 loop
6 dbms_output.put_line (a);
7 a:=a+1;
8 end loop;
9 end;
10 /
```

1 2 3 4 PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 5 USING FOR LOOP**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=1;
3 begin
4 for a in 1..5
5 loop
6 dbms_output.put_line (a);
7 end loop;
8 end;
9 /
```

1

2

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

3 4 5 PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 5 IN REVERSE ORDER USING FOR LOOP**

SQL> set serveroutput on; SQL> declare

2 a number:=1;

3 begin

4 for a in reverse 1..5

5 loop

6 dbms\_output.put\_line (a);

7 end loop;

8 end;

9 /

5 4 3 2 1 PL/SQL procedure successfully  
completed.

### **TO CALCULATE AREA OF CIRCLE**

SQL> set serveroutput on;

SQL> declare

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
2 pi constant number(4,2):=3.14;  
3 a number(20);  
4 r number(20);  
5 begin  
6 r:=&r;  
7 a:= pi* power(r,2);  
8 dbms_output.put_line (' The area of circle is ' || a);  
9 end;  
10 /
```

Enter value for r: 2

old 6: r:=&r;

new 6: r:=2;

The area of circle is 13

PL/SQL procedure successfully completed.

### TO CREATE SACCOUNT TABLE

```
SQL> create table saccount ( accno number(5), name varchar2(20), bal number(10));
```

Table created.

```
SQL> insert into saccount values ( 1,'mala',20000);
```

1 row created.

```
SQL> insert into saccount values (2,'kala',30000);
```

1row created.

```
SQL> select * from saccount;
```

| ACCNO | NAME | BAL |
|-------|------|-----|
|-------|------|-----|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

-----  
1 mala                    20000

2 kala                    30000

SQL> set serveroutput on;

SQL> declare

2 a\_bal number(7);

3 a\_no varchar2(20);

4 debit number(7):=2000;

5 minamt number(7):=500;

6 begin

7 a\_no:=&a\_no;

8 select bal into a\_bal from saccount where accno= a\_no;

9 a\_bal:= a\_bal-debit;

10 if (a\_bal > minamt) then

11 update saccount set bal=bal-debit where accno=a\_no;

12 end if;

13 end;

14

15 /

Enter value for a\_no: 1

old 7: a\_no:=&a\_no;

new 7: a\_no:=1;

PL/SQL procedure successfully completed.

SQL> select \* from saccount;



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

| ACCNO | NAME  | BAL   |
|-------|-------|-------|
| ----- | ----- | ----- |
| 1     | mala  | 18000 |
| 2     | kala  | 30000 |

### TO CREATE TABLE SROUTES

```
SQL> create table sroutes ( rno number(5), origin varchar2(20), destination varchar2(20), fare number(10), distance number(10));
```

Table created.

```
SQL> insert into sroutes values ( 2, 'chennai', 'dindugal', 400,230);
```

1 row created.

```
SQL> insert into sroutes values ( 3, 'chennai', 'madurai', 250,300);
```

1 row created.

```
SQL> insert into sroutes values ( 6, 'thanjavur', 'palani', 350,370);
```

1 row created.

```
SQL> select * from sroutes;
```

| RNO   | ORIGIN    | DESTINATION | FARE  | DISTANCE |
|-------|-----------|-------------|-------|----------|
| ----- | -----     | -----       | ----- | -----    |
| 2     | chennai   | dindugal    | 400   | 230      |
| 3     | chennai   | madurai     | 250   | 300      |
| 6     | thanjavur | palani      | 350   | 370      |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 route sroutes.rno % type;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
3 fares sroutes.fare % type;
4 dist sroutes.distance % type;
5 begin
6 route:=&route;
7 select fare, distance into fares , dist from sroutes where rno=route;
8 if (dist < 250) then
9 update sroutes set fare=300 where rno=route;
10 else if dist between 250 and 370 then 11
update sroutes set fare=400 where rno=route; 12
13 else if (dist > 400) then
dbms_output.put_line('Sorry'); 14 end if; 15 end
if; 16 end if; 17 end; 18 /
```

Enter value for route: 3

old 6: route:=&route;

new 6: route:=3;

PL/SQL procedure successfully completed.

SQL> select \* from sroutes;

| RNO | ORIGIN | DESTINATION | FARE | DISTANCE |
|-----|--------|-------------|------|----------|
|-----|--------|-------------|------|----------|

-----

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

|             |          |     |     |
|-------------|----------|-----|-----|
| 2 chennai   | dindugal | 400 | 230 |
| 3 chennai   | madurai  | 400 | 300 |
| 6 thanjavur | palani   | 350 | 370 |

### TO CREATE SCALCULATE TABLE

```
SQL> create table scalculate ( radius number(3), area number(5,2));
```

Table created.

```
SQL> desc scalculate;
```

| Name   | ? Type      |
|--------|-------------|
| -----  |             |
| RADIUS | NUMBER(3)   |
| AREA   | NUMBER(5,2) |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 pi constant number(4,2):=3.14; 3
```

```
radius radius number(5,2); 4
```

```
number(3); 5 begin 6 radius:=3; 7
```

```
while (radius <=7) 8 loop 9 area:=
```

```
pi* power(radius,2);
```

```
10 insert into scalculate values (radius,area);
```

```
11 radius:=radius+1;
```

```
12 end loop;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
13 end;
```

```
14 /
```

PL/SQL procedure successfully completed.

```
SQL> select * from scalculate;
```

| RADIUS | AREA |
|--------|------|
|--------|------|

|   |        |
|---|--------|
| 3 | 28.26  |
| 4 | 50.24  |
| 5 | 78.5   |
| 6 | 113.04 |
| 7 | 153.86 |

### TO CALCULATE FACTORIAL OF A GIVEN NUMBER

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 f number(4):=1;
```

```
3 i number(4); 4
```

```
begin 5 i:=&i; 6
```

```
while(i>=1) 7 loop
```

```
8 f:=f*i; 9 i:=i-1;
```

```
10 end loop;
```

```
11 dbms_output.put_line('The value is ' || f);
```

```
12 end;
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

13 / Enter value for i: 5 old 5: i:=&i; new 5:

i:=5;

The value is 120

PL/SQL procedure successfully completed.

### Ex No:13

#### TRIGGERS

#### TO CREATE THE TABLE 'ITEMPLS'

```
SQL> create table itempls (ename varchar2(10), eid number(5), salary number(10));
```

Table created.

```
SQL> insert into itempls values('xxx',11,10000);
```

1 row created.

```
SQL> insert into itempls values('yyy',12,10500);
```

1 row created.

```
SQL> insert into itempls values('zzz',13,15500);
```

1 row created.

```
SQL> select * from itempls;
```

| ENAME | EID | SALARY |
|-------|-----|--------|
|-------|-----|--------|

|       |  |  |
|-------|--|--|
| ----- |  |  |
|-------|--|--|

|     |    |       |
|-----|----|-------|
| xxx | 11 | 10000 |
|-----|----|-------|

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

yyy            12    10500

zzz            13    15500

### **TO CREATE A SIMPLE TRIGGER THAT DOES NOT ALLOW INSERT UPDATE AND DELETE OPERATIONS ON THE TABLE**

SQL> create trigger ittrigg before insert or update or delete on itempls for each row

2 begin

3 raise\_application\_error(-20010,'You cannot do manipulation');

4 end;

5

6 /

Trigger created.

SQL> insert into itempls values('aaa',14,34000);

insert into itempls values('aaa',14,34000)

\*

ERROR at line 1:

ORA-20010: You cannot do manipulation

ORA-06512: at "STUDENT.ITTRIGG", line 2

ORA-04088: error during execution of trigger 'STUDENT.ITTRIGG'

SQL> delete from itempls where ename='xxx';

delete from itempls where ename='xxx'

\*

ERROR at line 1:

ORA-20010: You cannot do manipulation

ORA-06512: at "STUDENT.ITTRIGG", line 2

ORA-04088: error during execution of trigger 'STUDENT.ITTRIGG'

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
SQL> update itempls set eid=15 where ename='yyy';
```

```
update itempls set eid=15 where ename='yyy'
```

```
*
```

ERROR at line 1:

ORA-20010: You cannot do manipulation

ORA-06512: at "STUDENT.ITTRIGG", line 2

ORA-04088: error during execution of trigger 'STUDENT.ITTRIGG' **TO DROP THE  
~~CREATED TRIGGER~~**

---

```
SQL> drop trigger ittrigg;
```

Trigger dropped.

**TO CREATE A TRIGGER THAT RAISES AN USER DEFINED ERROR MESSAGE  
AND DOES NOT ALLOW UPDATION AND INSERTION**

```
SQL> create trigger ittriggs before insert or update of salary on itempls for each row
```

```
2 declare
```

```
3 triggsal itempls.salary%type;
```

```
4 begin
```

```
5 select salary into triggsal from itempls where eid=12;
```

```
6 if(:new.salary>triggsal or :new.salary<triggsal) then
```

```
7 raise_application_error(-20100,'Salary has not been changed');
```

```
8 end if;
```

```
9 end;
```

```
10 /
```

Trigger created.

```
SQL> insert into itempls values ('bbb',16,45000);
```

```
insert into itempls values ('bbb',16,45000)
```

## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

\*

ERROR at line 1:

ORA-04098: trigger 'STUDENT.ITTRIGGS' is invalid and failed re-validation

SQL> update itempls set eid=18 where ename='zzz';

update itempls set eid=18 where ename='zzz'

\*

ERROR at line 1:

ORA-04298: trigger 'STUDENT.ITTRIGGS' is invalid and failed re-validation

### 13/8/2025 Function Example:

**DECLARE**

**a INT;**

**b FLOAT;**

**myexp EXCEPTION;**

**FUNCTION sqroot(x INT)**

**RETURN FLOAT**

**AS**

**answer FLOAT;**

**BEGIN**

**IF x < 0 THEN**

**RAISE myexp;**



## CS23332 DATABASE MANAGEMENT SYSTEM LABORATORY

```
ELSE

    answer := SQRT(x);

END IF;

RETURN answer;

EXCEPTION

    WHEN myexp THEN

        DBMS_OUTPUT.PUT_LINE('Square root of a negative number is not allowed, so
returning the same number');

        RETURN x;

END;

BEGIN

b := sqroot(4);

DBMS_OUTPUT.PUT_LINE('The value is ' || b);

END;
```