

Unit-1: Network Software Architecture and its Layers and Protocols


CSE306



Network Software

- Protocol Hierarchies
- Design Issues for the Layers
- Connection-Oriented and Connectionless Services
- Service Primitives

Protocol Hierarchies

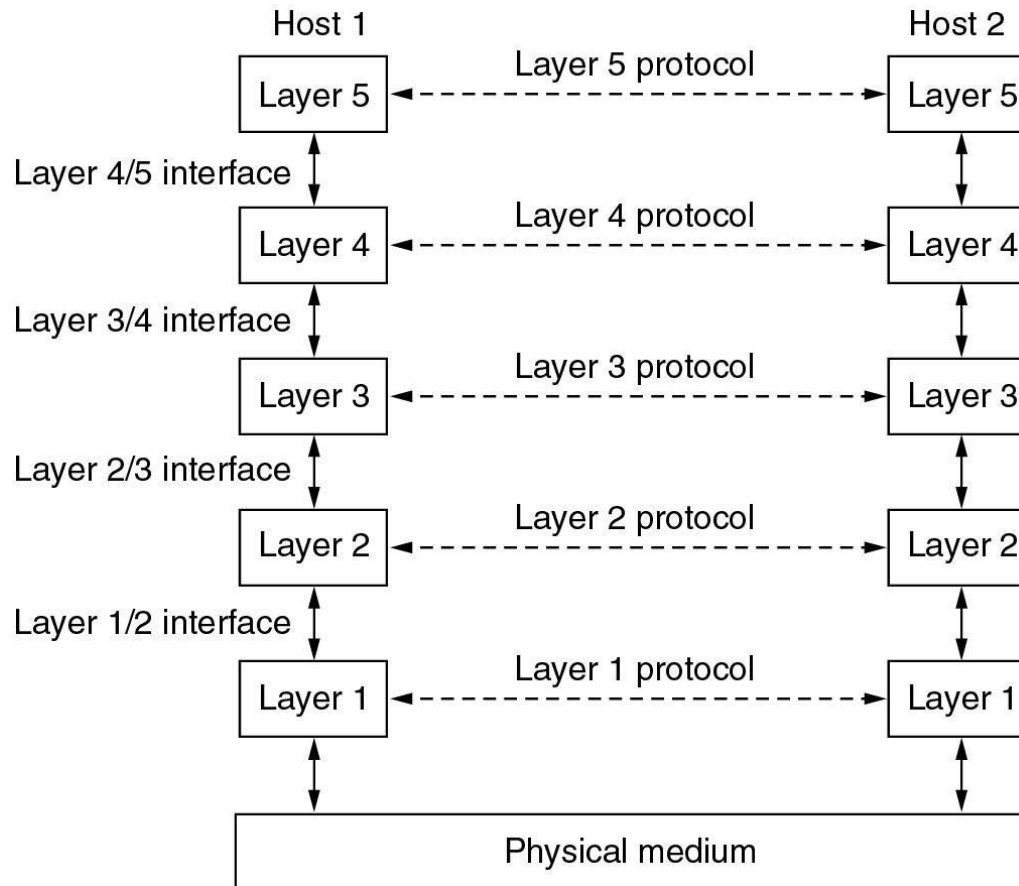

- Layers, protocols, and interfaces- **Network Architecture**

- A **protocol** is an agreement between the communicating parties on how communication is to proceed.
- The entities comprising the corresponding layers on different machines are called **peers**. The peers may be software processes, hardware devices, or even human beings. In other words, it is the peers that communicate by using the protocol to talk to each other.
- A list of the protocols used by a certain system, one protocol per layer, is called a **protocol stack**.

Pools

A layer of the one system communicates with the ____ layer of its peer system.

- A) above
- B) below
- C) same
- D) None


Polls

The transmission media like ____ are part of the Physical layer.

- A) Copper cables
- B) OFC - Optical Fiber Cables
- C) RF - Radio Frequency waves including Microwaves
- D) All the above


Protocol Hierarchies (2)

- The philosopher-translator-secretary architecture.

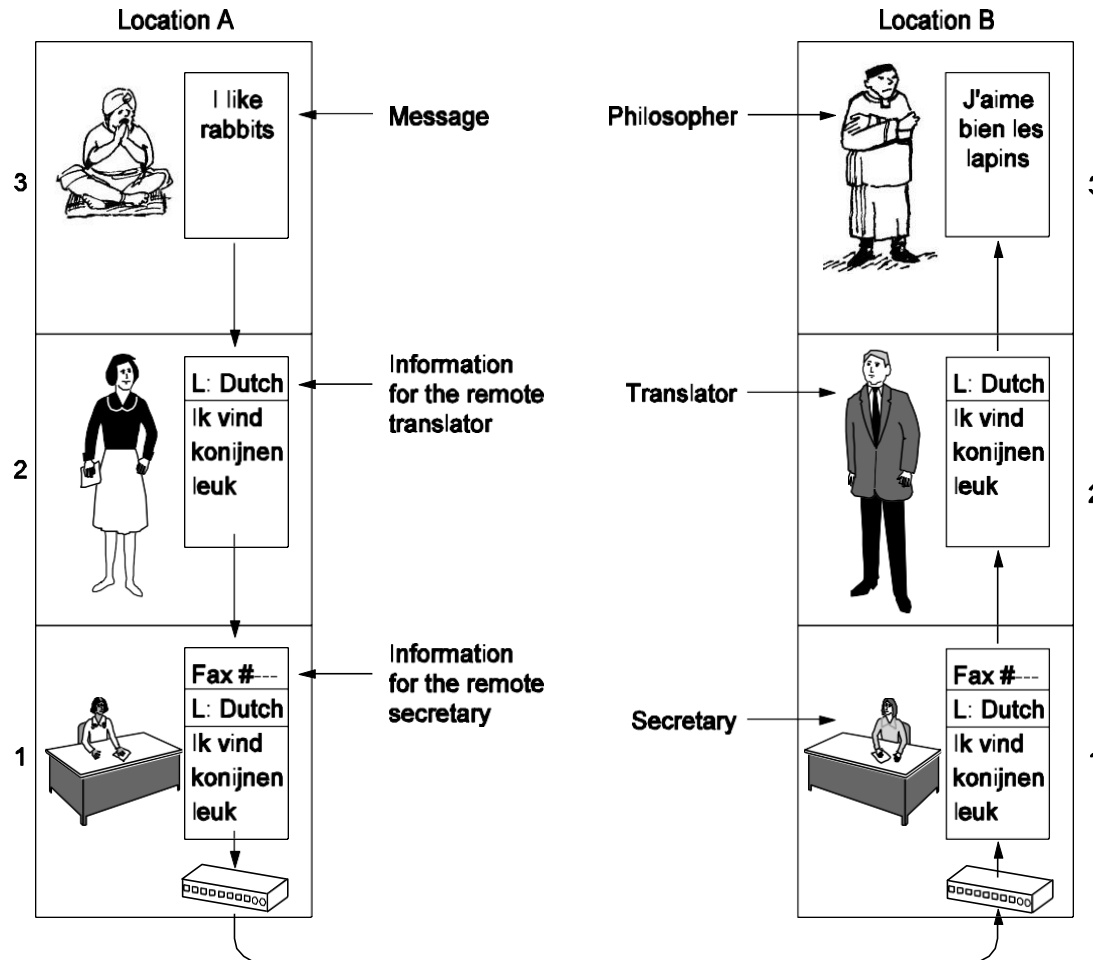

Protocol Hierarchies (3)

- Example information flow supporting virtual communication in layer 5.

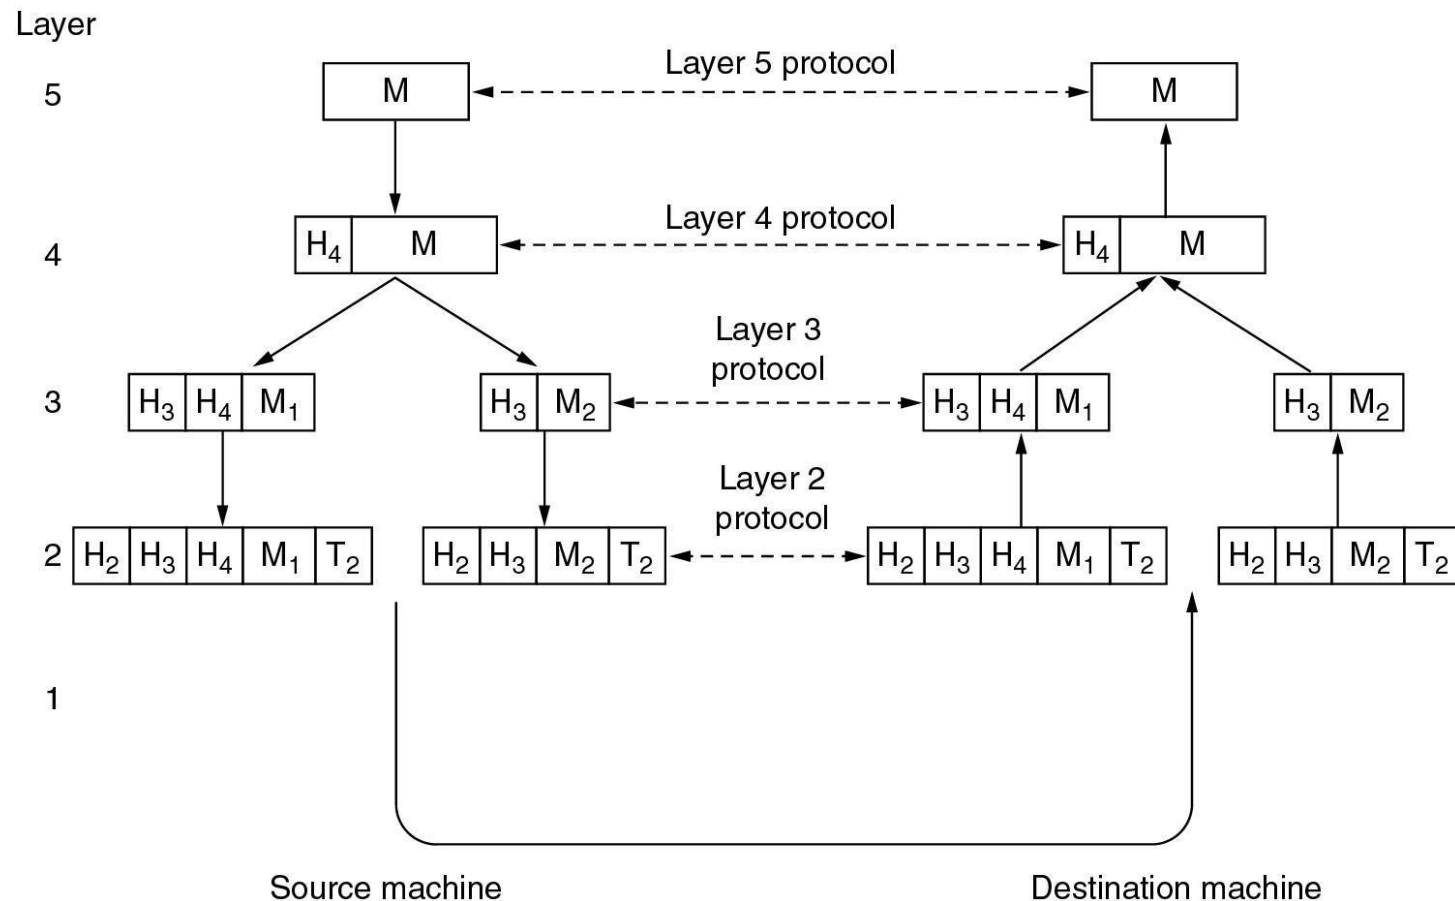

Design Issues for the Layers

- **Reliability**- Error detection and correction , routing
- **Evolution of network** - Addressing or naming, Scalable
- **Resource allocation**- Statistical Multiplexing, QoS (*real time deliverly*)
- **Network Security**
- **Direction of transmission**

Polls

Which one is /are the essential parameter for the designing of network layer.

- (a) Security
- (b) Scale
- (c) Resource allocation
- (d) All the above

Connection-Oriented and Connectionless Services

- A **circuit** is another name for a connection with associated **resources**, such as a fixed bandwidth.
- This dates from the telephone network in which a circuit was a path over copper wire that carried a phone conversation.
- In contrast to connection-oriented service, **connectionless service is modeled** after the postal system.
- Each message (letter) carries the full destination address, and each one is routed through the intermediate nodes inside the system independent of all the subsequent messages.
- **Store or forward switching**
- **Cut through switching**

- **Each kind of service can further be characterized** by its reliability. Some services are reliable in the sense that they never lose data.
- Usually, a reliable service is implemented by having the receiver acknowledge the receipt of each message so the sender is sure that it arrived.
- Reliable connection-oriented service has two minor variations: **message sequences and byte streams**.
- The acknowledgement process introduces overhead and delays, which are often worth it but are sometimes undesirable.
- One such application is digitized voice traffic for voice over IP.
- Unreliable (meaning not acknowledged) connectionless service is often called **datagram service**.



Polls

Which one true for Voice over IP services.

- (a) reliable
- (b) unreliable service
- (c) Both
- (d) None

Connection-Oriented and Connectionless Services

- Six different types of service.


		Service	Example
Connection-oriented	{	Reliable message stream	Sequence of pages
		Reliable byte stream	Remote login
		Unreliable connection	Digitized voice
Connection-less	{	Unreliable datagram	Electronic junk mail
		Acknowledged datagram	Registered mail
		Request-reply	Database query

Service Primitives

Primitive	Meaning
LISTEN	Block waiting for an incoming connection
CONNECT	Establish a connection with a waiting peer
RECEIVE	Block waiting for an incoming message
SEND	Send a message to the peer
DISCONNECT	Terminate a connection

- Five service primitives for implementing a simple connection-oriented service.

Service Primitives (2)

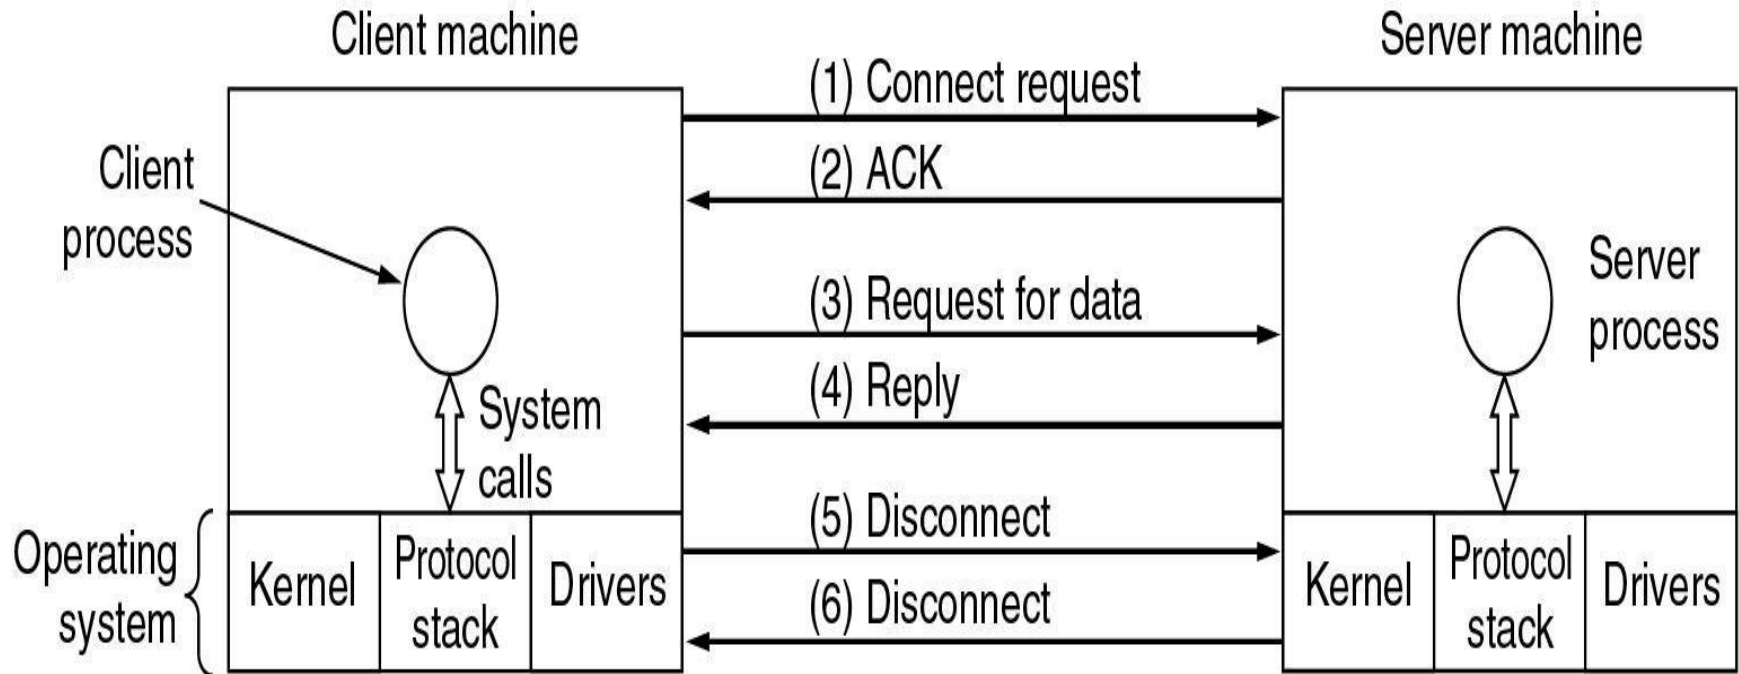

- Packets sent in a simple client-server interaction on a connection-oriented network.

Services to Protocols Relationship

- The relationship between a service and a protocol.

