

Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (Bsc.IT Semester III)
Scala for D.S Practical

Practical - 25


Roll No. : S025	Name: Abhishek Pal
Class : SY-Bsc.IT	Batch : 00
Date of Assignment : 01-09-2026	Date/Time of Submission : 01-09-2026

1. Handle missing values in a dataset. Replace missing values with the column mean.

CODE :

```
build.sbt  Demo25.scala x
1  ▶ object Demo extends App {
2
3      val sales: List[java.lang.Double] = List(100.0, 200.0, null, 300.0, null)
4
5      val v = sales.filter(_ != null)
6
7      val mean = v.map(_.toDouble).sum / v.length
8      println("Mean Sales: " + mean)
9
10     val n = sales.map { value =>
11         if (value == null) mean
12         else value
13     }
14     println("Original Data:")
15     println(sales.mkString(", "))
16     println("After Replacing Missing Values:")
17     println(n.mkString(", "))
18
19     println("Abhishek pal S025")
20 }
21
```

OUTPUT :

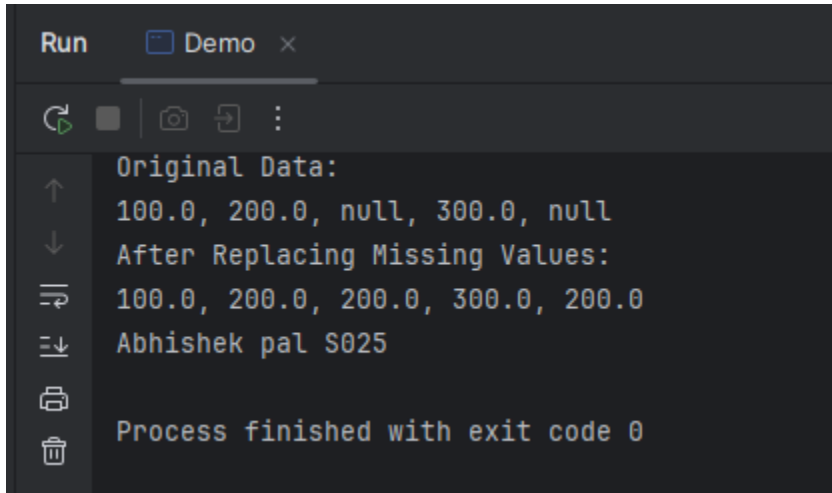

The screenshot shows a terminal window titled "Run" with a sub-tab "Demo". The terminal output is as follows:

```
Original Data:
100.0, 200.0, null, 300.0, null
After Replacing Missing Values:
100.0, 200.0, 200.0, 300.0, 200.0
Abhishek pal S025

Process finished with exit code 0
```

The terminal interface includes a left sidebar with icons for navigation (up, down, search, etc.) and a top bar with a "Run" button and a "Demo" tab.