

# Learning JavaScript Design Patterns


A book by **Addy Osmani**

Was this helpful?

Volume 1.7.0

Copyright © Addy Osmani 2017.

*Learning JavaScript Design Patterns* is released under a [Creative Commons Attribution-Noncommercial-No Derivative Works 3.0 unported license](#). It is available for purchase via [O'Reilly Media](#) but will remain available for both free online and as a physical (or eBook) purchase for readers wishing to support the project.

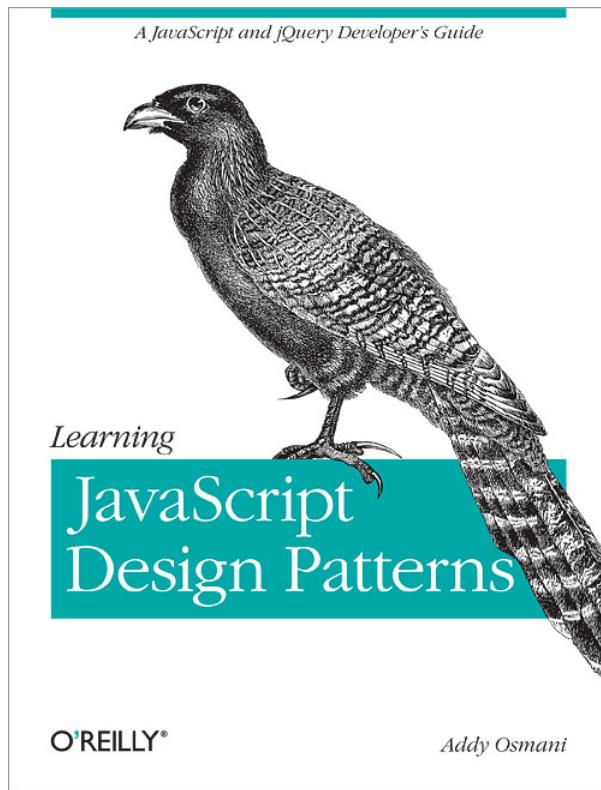

## Preface

[go back to the code.](#)[close.](#)

are both exciting and a fascinating topic to explore in any programming language.

One reason for this is that they help us build upon the combined experience of many developers that came before us and ensure we structure our code in an optimized way, meeting the needs of problems we're attempting to solve.

Design patterns also provide us a common vocabulary to describe solutions. This can be significantly simpler than describing syntax and semantics when we're attempting to convey a way of structuring a solution in code form to others.

In this book we will explore applying both classical and modern design patterns to the JavaScript programming language.

## Target Audience

This book is targeted at professional developers wishing to improve their knowledge of design patterns and how they can be applied to the JavaScript programming language.

Some of the concepts covered (closures, prototypal inheritance) will assume a level of basic prior knowledge and understanding. If you find yourself needing to read further about these topics, a list of suggested titles is provided for convenience.

If you would like to learn how to write beautiful, structured and organized code, I believe this is the book for you.

## Acknowledgments

I will always be grateful for the talented technical reviewers who helped review and improve this book, including those from the community at large. The knowledge and enthusiasm they brought to the project was simply amazing. The official technical reviewers tweets and blogs are also a regular source of both ideas and inspiration and I wholeheartedly recommend checking them out.

- Nicholas Zakas (<http://nczonline.net>, [@slicknet](#))
- Andrée Hansson (<http://andreehansson.se>, [@peolanha](#))

- Luke Smith (<http://lucassmith.name>, [@ls\\_n](#))
- Eric Ferraiuolo (<http://ericf.me/>, [@ericf](#))
- Peter Michaux (<http://michaux.ca>, [@petermichaux](#))
- Alex Sexton (<http://alexsexton.com>, [@slexaxton](#))

I would also like to thank Rebecca Murphey (<http://rmurphey.com>, [@rmurphey](#)) for providing the inspiration to write this book and more importantly, continue to make it both available on GitHub and via O'Reilly.

Finally, I would like to thank my wonderful wife Ellie, for all of her support while I was putting together this publication.

## Credits

Whilst some of the patterns covered in this book were implemented based on personal experience, many of them have been previously identified by the JavaScript community. This work is as such the production of the combined experience of a number of developers. Similar to Stoyan Stefanov's logical approach to preventing interruption of the narrative with credits (in *JavaScript Patterns*), I have listed credits and suggested reading for any content covered in the references section.

If any articles or links have been missed in the list of references, please accept my heartfelt apologies. If you contact me I'll be sure to update them to include you on the list.

## Reading

Whilst this book is targeted at both beginners and intermediate developers, a basic understanding of JavaScript fundamentals is assumed. Should you wish to learn more about the language, I am happy to recommend the following titles:

- *JavaScript: The Definitive Guide* by David Flanagan
- *Eloquent JavaScript* by Marijn Haverbeke
- *JavaScript Patterns* by Stoyan Stefanov
- *Writing Maintainable JavaScript* by Nicholas Zakas
- *JavaScript: The Good Parts* by Douglas Crockford

# Table Of Contents

- Introduction
- What is a Pattern?
- "Pattern"-ity Testing, Proto-Patterns & The Rule Of Three
- The Structure Of A Design Pattern
- Writing Design Patterns
- Anti-Patterns
- Categories Of Design Pattern
- Summary Table Of Design Pattern Categorization
- JavaScript Design Patterns
  - Constructor Pattern
  - Module Pattern
  - Revealing Module Pattern
  - Singleton Pattern
  - Observer Pattern
  - Mediator Pattern
  - Prototype Pattern
  - Command Pattern
  - Facade Pattern
  - Factory Pattern
  - Mixin Pattern
  - Decorator Pattern
  - Flyweight Pattern
- JavaScript MV\* Patterns
  - MVC Pattern
  - MVP Pattern
  - MVVM Pattern
- Modern Modular JavaScript Design Patterns
  - AMD
  - CommonJS
  - ES Harmony
- Design Patterns In jQuery
  - Composite Pattern
  - Adapter Pattern
  - Facade Pattern
  - Observer Pattern
  - Iterator Pattern
  - Lazy Initialization Pattern

- [Proxy Pattern](#)
- [Builder Pattern](#)
- [jQuery Plugin Design Patterns](#)
- [JavaScript Namespacing Patterns](#)
- [Conclusions](#)
- [References](#)

# Introduction

One of the most important aspects of writing maintainable code is being able to notice the recurring themes in that code and optimize them. This is an area where knowledge of design patterns can prove invaluable.

In the first part of this book, we will explore the history and importance of design patterns which can really be applied to any programming language. If you're already sold on or are familiar with this history, feel free to skip to the chapter "[What is a Pattern?](#)" to continue reading.

Design patterns can be traced back to the early work of an architect named [Christopher Alexander](#). He would often write publications about his experience in solving design issues and how they related to buildings and towns. One day, it occurred to Alexander that when used time and time again, certain design constructs lead to a desired optimal effect.

In collaboration with Sara Ishikawa and Murray Silverstein, Alexander produced a pattern language that would help empower anyone wishing to design and build at any scale. This was published back in 1977 in a paper titled "A Pattern Language", which was later released as a complete hardcover [book](#).

Some 30 years ago, software engineers began to incorporate the principles Alexander had written about into the first documentation about design patterns, which was to be a guide for novice developers looking to improve their coding skills. It's important to note that the concepts behind design patterns have actually been around in the programming industry since its inception, albeit in a less formalized form.

One of the first and arguably most iconic formal works published on design patterns in software engineering was a book in 1995 called *Design Patterns: Elements Of Reusable Object-Oriented*

*Software*. This was written by **Erich Gamma, Richard Helm, Ralph Johnson and John Vlissides** - a group that became known as the Gang of Four (or GoF for short).

The GoF's publication is considered quite instrumental to pushing the concept of design patterns further in our field as it describes a number of development techniques and pitfalls as well as providing twenty-three core Object-Oriented design patterns frequently used around the world today. We will be covering these patterns in more detail in the section "Categories of Design Patterns".

In this book, we will take a look at a number of popular JavaScript design patterns and explore why certain patterns may be more suitable for your projects than others. Remember that patterns can be applied not just to vanilla JavaScript (i.e standard JavaScript code), but also to abstracted libraries such as **jQuery** or **dojo** as well. Before we begin, let's look at the exact definition of a "pattern" in software design.

# What is a Pattern?

A pattern is a reusable solution that can be applied to commonly occurring problems in software design - in our case - in writing JavaScript web applications. Another way of looking at patterns are as templates for how we solve problems - ones which can be used in quite a few different situations.

So, why is it important to understand patterns and be familiar with them? Design patterns have three main benefits:

- 1. Patterns are proven solutions:** They provide solid approaches to solving issues in software development using proven techniques that reflect the experience and insights the developers that helped define them bring to the pattern.
- 2. Patterns can be easily reused:** A pattern usually reflects an out of the box solution that can be adapted to suit our own needs. This feature makes them quite robust.
- 3. Patterns can be expressive:** When we look at a pattern there's generally a set structure and *vocabulary* to the solution presented that can help express rather large solutions quite elegantly.

Patterns are **not** an exact solution. It's important that we remember the role of a pattern is merely to provide us with a solution scheme. Patterns don't solve all design problems nor do they replace good software designers, however, they **do** support them. Next we'll take a look at some of the other advantages patterns have to offer.

- **Reusing patterns assists in preventing minor issues that can cause major problems in the application development process.** What this means is when code is built on proven patterns, we can afford to spend less time worrying about the structure of our code and more time focusing on the quality of our overall solution. This is because patterns can encourage us to code in a more structured and organized fashion avoiding the need to refactor it for cleanliness purposes in the future.
- **Patterns can provide generalized solutions which are documented in a fashion that doesn't require them to be tied to a specific problem.** This generalized approach means that regardless of the application (and in many cases the programming language) we are working with, design patterns can be applied to improve the structure of our code.
- **Certain patterns can actually decrease the overall file-size footprint of our code by avoiding repetition.** By encouraging developers to look more closely at their solutions for areas where instant reductions in repetition can be made, e.g. reducing the number of functions performing similar processes in favor of a single generalized function, the overall size of our codebase can be decreased. This is also known as making code more *DRY*.
- **Patterns add to a developer's vocabulary, which makes communication faster.**
- **Patterns that are frequently used can be improved over time by harnessing the collective experiences other developers using those patterns contribute back to the design pattern community.** In some cases this leads to the creation of entirely new design patterns whilst in others it can lead to the provision of improved guidelines on how specific patterns can be best used. This can ensure that pattern-based solutions continue to become more robust than ad-hoc solutions may be.

## We already use patterns everyday

---

To understand how useful patterns can be, let's review a very simple element selection problem that the jQuery library solves for us.

Imagine that we have a script where for each DOM element found on a page with class "foo" we wish to increment a counter. What's the most efficient way to query for this collection of elements? Well, there are a few different ways this problem could be tackled:

1. Select all of the elements in the page and then store references to them. Next, filter this collection and use regular expressions (or another means) to only store those with the class "foo".
2. Use a modern native browser feature such as `querySelectorAll()` to select all of the elements with the class "foo".
3. Use a native feature such as `getElementsByClassName()` to similarly get back the desired collection.

So, which of these options is the fastest? It's actually option 3. by a factor of 8-10 times the **alternatives**. In a real-world application however, 3. will not work in versions of Internet Explorer below 9 and thus it's necessary to use 1. where both 2. and 3. aren't supported.

Developers using jQuery don't have to worry about this problem however, as it's luckily abstracted away for us using the *Facade* pattern. As we'll review in more detail later, this pattern provides a simple set of abstracted interfaces (e.g `$el.css()`, `$el.animate()`) to several more complex underlying bodies of code. As we've seen, this means less time having to be concerned about implementation level details.

Behind the scenes, the library simply opts for the most optimal approach to selecting elements depending on what our current browser supports and we just consume the abstraction layer.

We're probably all also familiar with jQuery's `$(“selector”)`. This is significantly more easy to use for selecting HTML elements on a page versus having to manually opt for `getElementById()`, `getElementsByClassName()`, `getElementsByTagName()` and so on.

Although we know that `querySelectorAll()` attempts to solve this problem, compare the effort involved in using jQuery's Facade interfaces vs. selecting the most optimal selection paths ourselves. There's no contest! Abstractions using patterns can offer real-world value.

We'll be looking at this and more design patterns later on in the book.

# "Pattern"-ity Testing, Proto-Patterns & The Rule Of Three

Remember that not every algorithm, best practice or solution represents what might be considered a complete pattern. There may be a few key ingredients here that are missing and the

pattern community is generally wary of something claiming to be one unless it has been heavily vetted. Even if something is presented to us which **appears** to meet the criteria for a pattern, it should not be considered one until it has undergone suitable periods of scrutiny and testing by others.

Looking back upon the work by Alexander once more, he claims that a pattern should both be a process and a "thing". This definition is obtuse on purpose as he follows by saying that it is the process which should create the "thing". This is a reason why patterns generally focus on addressing a visually identifiable structure i.e we should be able to visually depict (or draw) a picture representing the structure that placing the pattern into practice results in.

In studying design patterns, it's not irregular to come across the term "proto-pattern". What is this? Well, a pattern that has not yet been known to pass the "pattern"-ity tests is usually referred to as a proto-pattern. Proto-patterns may result from the work of someone that has established a particular solution that is worthy of sharing with the community, but may not have yet had the opportunity to have been vetted heavily due to its very young age.

Alternatively, the individual(s) sharing the pattern may not have the time or interest of going through the "pattern"-ity process and might release a short description of their proto-pattern instead. Brief descriptions or snippets of this type of pattern are known as patlets.

The work involved in fully documenting a qualified pattern can be quite daunting. Looking back at some of the earliest work in the field of design patterns, a pattern may be considered "good" if it does the following:

- **Solves a particular problem:** Patterns are not supposed to just capture principles or strategies. They need to capture solutions. This is one of the most essential ingredients for a good pattern.
- **The solution to this problem cannot be obvious:** We can find that problem-solving techniques often attempt to derive from well-known first principles. The best design patterns usually provide solutions to problems indirectly - this is considered a necessary approach for the most challenging problems related to design.
- **The concept described must have been proven:** Design patterns require proof that they function as described and without this proof the design cannot be seriously considered. If a pattern is highly speculative in nature, only the brave may attempt to use it.
- **It must describe a relationship:** In some cases it may appear that a pattern describes a type of module. Although an implementation may appear this way, the official description of the pattern must describe much deeper system structures and mechanisms that explain its relationship to code.

We would be forgiven for thinking that a proto-pattern which fails to meet guidelines isn't worth learning from, however, this is far from the truth. Many proto-patterns are actually quite good. I'm not saying that all proto-patterns are worth looking at, but there are quite a few useful ones in the wild that could assist us with future projects. Use best judgment with the above list in mind and you'll be fine in your selection process.

One of the additional requirements for a pattern to be valid is that they display some recurring phenomenon. This is often something that can be qualified in at least three key areas, referred to as the *rule of three*. To show recurrence using this rule, one must demonstrate:

1. **Fitness of purpose** - how is the pattern considered successful?
2. **Usefulness** - why is the pattern considered successful?
3. **Applicability** - is the design worthy of being a pattern because it has wider applicability? If so, this needs to be explained. When reviewing or defining a pattern, it is important to keep the above in mind.

# The Structure Of A Design Pattern

You may be curious about how a pattern author might approach outlining structure, implementation and purpose of a new pattern. A pattern is initially presented in the form of a **rule** that establishes a relationship between:

- A **context**
- A system of **forces** that arises in that context and
- A **configuration** that allows these forces to resolve themselves in context

With this in mind, let's now take a look at a summary of the component elements for a design pattern. A design pattern should have a:

- **Pattern name** and a **description**
- **Context outline** – the contexts in which the pattern is effective in responding to the users needs.
- **Problem statement** – a statement of the problem being addressed so we can understand the intent of the pattern.

- **Solution** – a description of how the user's problem is being solved in an understandable list of steps and perceptions.
- **Design** – a description of the pattern's design and in particular, the user's behavior in interacting with it
- **Implementation** – a guide to how the pattern would be implemented
- **Illustrations** – a visual representation of classes in the pattern (e.g. a diagram)
- **Examples** – an implementation of the pattern in a minimal form
- **Co-requisites** – what other patterns may be needed to support use of the pattern being described?
- **Relations** – what patterns does this pattern resemble? does it closely mimic any others?
- **Known usage** – is the pattern being used in the *wild*? If so, where and how?
- **Discussions** – the team or author's thoughts on the exciting benefits of the pattern

Design patterns are quite a powerful approach to getting all of the developers in an organization or team on the same page when creating or maintaining solutions. If considering working on a pattern of your own, remember that although they may have a heavy initial cost in the planning and write-up phases, the value returned from that investment can be quite worth it. Always research thoroughly before working on new patterns however, as you may find it more beneficial to use or build on top of existing proven patterns than starting afresh.

# Writing Design Patterns

Although this book is aimed at those new to design patterns, a fundamental understanding of how a design pattern is written can offer a number of useful benefits. For starters, we can gain a deeper appreciation for the reasoning behind why a pattern is needed. We can also learn how to tell if a pattern (or proto-pattern) is up to scratch when reviewing it for our own needs.

Writing good patterns is a challenging task. Patterns not only need to (ideally) provide a substantial quantity of reference material for end-users, but they also need to be able to defend why they are necessary.

Having read the previous section on *what* a pattern is, we may think that this in itself is enough to help us identify patterns we see in the wild. This is actually not completely true. It's not always clear if a piece of code we're looking at is following a set pattern or just accidentally happens to appear like it does.

When we're looking at a body of code we think may be using a pattern, we should consider writing down some of the aspects of the code that we believe falls under a particular existing pattern or set of patterns.

In many cases of pattern-analysis we can find that we're just looking at code that follows good principles and design practices that could happen to overlap with the rules for a pattern by accident. Remember - solutions in which neither interactions nor defined rules appear are *not* patterns.

If interested in venturing down the path of writing your own design patterns I recommend learning from others who have already been through the process and done it well. Spend time absorbing the information from a number of different design pattern descriptions and take in what's meaningful to you.

Explore structure and semantics - this can be done by examining the interactions and context of the patterns you are interested in so you can identify the principles that assist in organizing those patterns together in useful configurations.

Once we've exposed ourselves to a wealth of information on pattern literature, we may wish to begin writing our pattern using an *existing* format and see if we can brainstorm new ideas for improving it or integrating our ideas in there.

An example of a developer that did this is in recent years is Christian Heilmann, who took the existing *Module* pattern and made some fundamentally useful changes to it to create the *Revealing Module* pattern (this is one of the patterns covered later in this book).

The following are tips I would suggest if interested in creating a new design pattern:

- **How practical is the pattern?**: Ensure the pattern describes proven solutions to recurring problems rather than just speculative solutions which haven't been qualified.
- **Keep best practices in mind**: The design decisions we make should be based on principles we derive from an understanding of best practices.
- **Our design patterns should be transparent to the user**: Design patterns should be entirely transparent to any type of user-experience. They are primarily there to serve the developers using them and should not force changes to behavior in the user-experience that would not be incurred without the use of a pattern.
- **Remember that originality is *not* key in pattern design**: When writing a pattern, we do not need to be the original discoverer of the solutions being documented nor do you have to worry about our design overlapping with minor pieces of other patterns.

If the approach is strong enough to have broad useful applicability, it has a chance of being recognized as a valid pattern.

- **Patterns need a strong set of examples:** A good pattern description needs to be followed by an equally strong set of examples demonstrating the successful application of our pattern. To show broad usage, examples that exhibit good design principles are ideal.

Pattern writing is a careful balance between creating a design that is general, specific and above all, useful. Try to ensure that if writing a pattern you cover the widest possible areas of application and you should be fine. I hope that this brief introduction to writing patterns has given you some insights that will assist your learning process for the next sections of this book.

# Anti-Patterns

If we consider that a pattern represents a best practice, an anti-pattern represents a lesson that has been learned. The term anti-patterns was coined in 1995 by Andrew Koenig in the November C++ Report that year, inspired by the GoF's book *Design Patterns*. In Koenig's report, there are two notions of anti-patterns that are presented. Anti-Patterns:

- Describe a *bad* solution to a particular problem which resulted in a bad situation occurring
- Describe *how* to get out of said situation and how to go from there to a good solution

On this topic, Alexander writes about the difficulties in achieving a good balance between good design structure and good context:

*"These notes are about the process of design; the process of inventing physical things which display a new physical order, organization, form, in response to function....every design problem begins with an effort to achieve fitness between two entities: the form in question and its context. The form is the solution to the problem; the context defines the problem".*

While it's quite important to be aware of design patterns, it can be equally important to understand anti-patterns. Let us qualify the reason behind this. When creating an application, a project's life-cycle begins with construction however once you've got the initial release done, it needs to be maintained. The quality of a final solution will either be *good* or *bad*, depending on the level of skill and time the team have invested in it. Here *good* and *bad* are considered in context - a 'perfect' design may qualify as an anti-pattern if applied in the wrong context.

The bigger challenges happen after an application has hit production and is ready to go into maintenance mode. A developer working on such a system who hasn't worked on the application before may introduce a *bad* design into the project by accident. If said *bad* practices are created as anti-patterns, they allow developers a means to recognize these in advance so that they can avoid common mistakes that can occur - this is parallel to the way in which design patterns provide us with a way to recognize common techniques that are *useful*.

To summarize, an anti-pattern is a bad design that is worthy of documenting. Examples of anti-patterns in JavaScript are the following:

- Polluting the global namespace by defining a large number of variables in the global context
- Passing strings rather than functions to either setTimeout or setInterval as this triggers the use of `eval()` internally.
- Modifying the `Object` class prototype (this is a particularly bad anti-pattern)
- Using JavaScript in an inline form as this is inflexible
- The use of `document.write` where native DOM alternatives such as `document.createElement` are more appropriate. `document.write` has been grossly misused over the years and has quite a few disadvantages including that if it's executed after the page has been loaded it can actually overwrite the page we're on, whilst `document.createElement` does not. We can see [here](#) for a live example of this in action. It also doesn't work with XHTML which is another reason opting for more DOM-friendly methods such as `document.createElement` is favorable.

Knowledge of anti-patterns is critical for success. Once we are able to recognize such anti-patterns, we're able to refactor our code to negate them so that the overall quality of our solutions improves instantly.

# Categories Of Design Pattern

A glossary from the well-known design book, *Domain-Driven Terms*, rightly states that:

*"A design pattern names, abstracts, and identifies the key aspects of a common design structure that make it useful for creating a reusable object-oriented design. The design pattern identifies the participating classes and their instances, their roles and collaborations, and the distribution of responsibilities.*

*Each design pattern focuses on a particular object-oriented design problem or issue. It describes when it applies, whether or not it can be applied in view of other design constraints, and the consequences and trade-offs of its use. Since we must eventually implement our designs, a design pattern also provides sample ... code to illustrate an implementation.*

*Although design patterns describe object-oriented designs, they are based on practical solutions that have been implemented in mainstream object-oriented programming languages ...."*

Design patterns can be broken down into a number of different categories. In this section we'll review three of these categories and briefly mention a few examples of the patterns that fall into these categories before exploring specific ones in more detail.

## Creational Design Patterns

Creational design patterns focus on handling object creation mechanisms where objects are created in a manner suitable for the situation we're working in. The basic approach to object creation might otherwise lead to added complexity in a project whilst these patterns aim to solve this problem by *controlling* the creation process.

Some of the patterns that fall under this category are: Constructor, Factory, Abstract, Prototype, Singleton and Builder.

## Structural Design Patterns

Structural patterns are concerned with object composition and typically identify simple ways to realize relationships between different objects. They help ensure that when one part of a system changes, the entire structure of the system doesn't need to do the same. They also assist in recasting parts of the system which don't fit a particular purpose into those that do.

Patterns that fall under this category include: Decorator, Facade, Flyweight, Adapter and Proxy.

## Behavioral Design Patterns

Behavioral patterns focus on improving or streamlining the communication between disparate objects in a system.

Some behavioral patterns include: Iterator, Mediator, Observer and Visitor.

# Design Pattern Categorization

In my early experiences of learning about design patterns, I personally found the following table a very useful reminder of what a number of patterns has to offer - it covers the 23 Design Patterns mentioned by the GoF. The original table was summarized by Elyse Nielsen back in 2004 and I've modified it where necessary to suit our discussion in this section of the book.

I recommend using this table as reference, but do remember that there are a number of additional patterns that are not mentioned here but will be discussed later in the book.

## A brief note on classes

---

**Note:** ES2015 introduced native support for classes to JavaScript, however, they are primarily syntactical sugar over JavaScript's existing prototype-based inheritance model. We will not be covering ES2015 classes in this book, but [MDN](#) has an excellent introduction to them.

Keep in mind that there will be patterns in this table that reference the concept of "classes". In ES5, JavaScript is a class-less language, however classes can be simulated using functions.

The most common approach to achieving this is by defining a JavaScript function where we then create an object using the `new` keyword. `this` can be used to help define new properties and methods for the object as follows:

```
1 // A car "class"
2 function Car( model ) {
3
4     this.model = model;
5     this.color = "silver";
6     this.year = "2012";
7
8     this.getInfo = function () {
9         return this.model + " " + this.year;
10    };
11
12 }
```

?

We can then instantiate the object using the Car constructor we defined above like this:

```

1 var myCar = new Car("ford");
2 myCar.year = "2010";
3 console.log( myCar.getInfo() );

```

For more ways to define "classes" using JavaScript, see Stoyan Stefanov's useful [post](#) on them.

Let us now proceed to review the table.

<b>Creational</b>	Based on the concept of creating an object.
<i>Class</i>	
<i>Factory Method</i>	This makes an instance of several derived classes based on interfaced data or events.
<i>Object</i>	
<i>Abstract Factory</i>	Creates an instance of several families of classes without detailing concrete classes.
<i>Builder</i>	Separates object construction from its representation, always creates the same type of object.
<i>Prototype</i>	A fully initialized instance used for copying or cloning.
<i>Singleton</i>	A class with only a single instance with global access points.
<b>Structural</b>	Based on the idea of building blocks of objects.
<i>Class</i>	
<i>Adapter</i>	Match interfaces of different classes therefore classes can work together despite incompatible interfaces.
<i>Object</i>	
<i>Adapter</i>	Match interfaces of different classes therefore classes can work together despite incompatible interfaces.
<i>Bridge</i>	Separates an object's interface from its implementation so the two can vary independently.
<i>Composite</i>	A structure of simple and composite objects which makes the total object more than just the sum of its parts.
<i>Decorator</i>	Dynamically add alternate processing to objects.
<i>Facade</i>	A single class that hides the complexity of an entire subsystem.

<i>Flyweight</i>	A fine-grained instance used for efficient sharing of information that is contained elsewhere.
<i>Proxy</i>	A place holder object representing the true object.
<b>Behavioral</b>	Based on the way objects play and work together.
<b>Class</b>	
<i>Interpreter</i>	A way to include language elements in an application to match the grammar of the intended language.
<i>Template Method</i>	Creates the shell of an algorithm in a method, then defer the exact steps to a subclass.
<b>Object</b>	
<i>Chain of Responsibility</i>	A way of passing a request between a chain of objects to find the object that can handle the request.
<i>Command</i>	Encapsulate a command request as an object to enable, logging and/or queuing of requests, and provides error-handling for unhandled requests.
<i>Iterator</i>	Sequentially access the elements of a collection without knowing the inner workings of the collection.
<i>Mediator</i>	Defines simplified communication between classes to prevent a group of classes from referring explicitly to each other.
<i>Memento</i>	Capture an object's internal state to be able to restore it later.
<i>Observer</i>	A way of notifying change to a number of classes to ensure consistency between the classes.
<i>State</i>	Alter an object's behavior when its state changes.
<i>Strategy</i>	Encapsulates an algorithm inside a class separating the selection from the implementation.
<i>Visitor</i>	Adds a new operation to a class without changing the class.

# JavaScript Design Patterns

In this section, we will explore JavaScript implementations of a number of both classic and modern design patterns.

Developers commonly wonder whether there is an *ideal* pattern or set of patterns they should be using in their workflow. There isn't a true single answer to this question; each script and web application we work on is likely to have its own individual needs and we need to think about where we feel a pattern can offer real value to an implementation.

For example, some projects may benefit from the decoupling benefits offered by the Observer pattern (which reduces how dependent parts of an application are on one another) whilst others may simply be too small for decoupling to be a concern at all.

That said, once we have a firm grasp of design patterns and the specific problems they are best suited to, it becomes much easier to integrate them into our application architectures.

**The patterns we will be exploring in this section are the:**

- Constructor Pattern
- Module Pattern
- Revealing Module Pattern
- Singleton Pattern
- Observer Pattern
- Mediator Pattern
- Prototype Pattern
- Command Pattern
- Facade Pattern
- Factory Pattern
- Mixin Pattern
- Decorator Pattern
- Flyweight Pattern

# The Constructor Pattern

In classical object-oriented programming languages, a constructor is a special method used to initialize a newly created object once memory has been allocated for it. In JavaScript, as almost everything is an object, we're most often interested in *object* constructors.

Object constructors are used to create specific types of objects - both preparing the object for use and accepting arguments which a constructor can use to set the values of member properties and methods when the object is first created.

## Object Creation

---

The three common ways to create new objects in JavaScript are as follows:

```
1 // Each of the following options will create a new empty object:  
2  
3 var newObject = {};  
4  
5 // or  
6 var newObject = Object.create( Object.prototype );  
7  
8 // or  
9 var newObject = new Object();
```

Where the "Object" constructor in the final example creates an object wrapper for a specific value, or where no value is passed, it will create an empty object and return it.

There are then four ways in which keys and values can then be assigned to an object:

```
1 // ECMAScript 3 compatible approaches  
2  
3 // 1. Dot syntax  
4  
5 // Set properties  
6 newObject.someKey = "Hello World";  
7  
8 // Get properties  
9 var value = newObject.someKey;  
10  
11  
12 // 2. Square bracket syntax  
13  
14 // Set properties  
15 newObject["someKey"] = "Hello World";  
16  
17 // Get properties  
18 var value = newObject["someKey"];
```

```
21
22
23 // ECMAScript 5 only compatible approaches
24 // For more information see: http://kangax.github.com/es5-compat-table/
25
26 // 3. Object.defineProperty
27
28 // Set properties
29 Object.defineProperty( newObject, "someKey", {
30     value: "for more control of the property's behavior",
31     writable: true,
32     enumerable: true,
33     configurable: true
34 });
35
36 // If the above feels a little difficult to read, a short-hand could
37 // be written as follows:
38
39 var defineProp = function ( obj, key, value ){
40     var config = {
41         value: value,
42         writable: true,
43         enumerable: true,
44         configurable: true
45     };
46     Object.defineProperty( obj, key, config );
47 };
48
49 // To use, we then create a new empty "person" object
50 var person = Object.create( Object.prototype );
51
52 // Populate the object with properties
53 defineProp( person, "car", "Delorean" );
54 defineProp( person, "dateOfBirth", "1981" );
55 defineProp( person, "hasBeard", false );
56
57 console.log(person);
58 // Outputs: Object {car: "Delorean", dateOfBirth: "1981", hasBeard: fals
59
60
61 // 4. Object.defineProperties
62
63 // Set properties
64 Object.defineProperties( newObject, {
65     "someKey": {
66         value: "Hello World",
67         writable: true
68     },
69
70     "anotherKey": {
71         value: "Foo bar",
72         writable: false
73     }
74
75 });
76
77 );
```

```
78 // Getting properties for 3. and 4. can be done using any of the
79 // options in 1. and 2.
```

As we will see a little later in the book, these methods can even be used for inheritance, as follows:

```
1 // Usage:
2
3 // Create a race car driver that inherits from the person object
4 var driver = Object.create( person );
5
6 // Set some properties for the driver
7 defineProp(driver, "topSpeed", "100mph");
8
9 // Get an inherited property (1981)
10 console.log( driver.dateOfBirth );
11
12 // Get the property we set (100mph)
13 console.log( driver.topSpeed );
```

## Basic Constructors

---

As we saw earlier, JavaScript doesn't support the concept of classes but it does support special constructor functions that work with objects. By simply prefixing a call to a constructor function with the keyword "new", we can tell JavaScript we would like the function to behave like a constructor and instantiate a new object with the members defined by that function.

Inside a constructor, the keyword *this* references the new object that's being created. Revisiting object creation, a basic constructor may look as follows:

```
1 function Car( model, year, miles ) {
2
3     this.model = model;
4     this.year = year;
5     this.miles = miles;
6
7     this.toString = function () {
8         return this.model + " has done " + this.miles + " miles";
9     };
10 }
11
12 // Usage:
13
14 // We can create new instances of the car
15 var civic = new Car( "Honda Civic", 2009, 20000 );
16 var mondeo = new Car( "Ford Mondeo", 2010, 5000 );
```

```

17 // and then open our browser console to view the
18 // output of the toString() method being called on
19 // these objects
20 console.log( civic.toString() );
21 console.log( mondeo.toString() );

```

The above is a simple version of the constructor pattern but it does suffer from some problems. One is that it makes inheritance difficult and the other is that functions such as `toString()` are redefined for each of the new objects created using the Car constructor. This isn't very optimal as the function should ideally be shared between all of the instances of the Car type.

Thankfully as there are a number of both ES3 and ES5-compatible alternatives to constructing objects, it's trivial to work around this limitation.

## Constructors With Prototypes

---

Functions, like almost all objects in JavaScript, contain a "prototype" object. When we call a JavaScript constructor to create an object, all the properties of the constructor's prototype are then made available to the new object. In this fashion, multiple Car objects can be created which access the same prototype. We can thus extend the original example as follows:

```

?
1 function Car( model, year, miles ) {
2   this.model = model;
3   this.year = year;
4   this.miles = miles;
5
6 }
7
8
9
10 // Note here that we are using Object.prototype.newMethod rather than
11 // Object.prototype so as to avoid redefining the prototype object
12 Car.prototype.toString = function () {
13   return this.model + " has done " + this.miles + " miles";
14 };
15
16 // Usage:
17
18 var civic = new Car( "Honda Civic", 2009, 20000 );
19 var mondeo = new Car( "Ford Mondeo", 2010, 5000 );
20
21 console.log( civic.toString() );
22 console.log( mondeo.toString() );

```

Above, a single instance of `toString()` will now be shared between all of the `Car` objects.

# The Module Pattern

## Modules

Modules are an integral piece of any robust application's architecture and typically help in keeping the units of code for a project both cleanly separated and organized.

In JavaScript, there are several options for implementing modules. These include:

- The Module pattern
- Object literal notation
- AMD modules
- CommonJS modules
- ECMAScript Harmony modules

We will be exploring the latter three of these options later on in the book in the section *Modern Modular JavaScript Design Patterns*.

The Module pattern is based in part on object literals and so it makes sense to refresh our knowledge of them first.

## Object Literals

---

In object literal notation, an object is described as a set of comma-separated name/value pairs enclosed in curly braces (`{ }` ). Names inside the object may be either strings or identifiers that are followed by a colon. There should be no comma used after the final name/value pair in the object as this may result in errors.

```
1  var myObjectLiteral = {  
2      variableKey: variableValue,  
3      functionKey: function () {  
4          // ...  
5      }  
6  };  
7  
8  ?
```

Object literals don't require instantiation using the `new` operator but shouldn't be used at the start of a statement as the opening `{` may be interpreted as the beginning of a block. Outside of an object, new members may be added to it using assignment as follows `myModule.property = "someValue";`

Below we can see a more complete example of a module defined using object literal notation:

```
1 var myModule = {  
2     myProperty: "someValue",  
3     // object literals can contain properties and methods.  
4     // e.g we can define a further object for module configuration:  
5     myConfig: {  
6         useCaching: true,  
7         language: "en"  
8     },  
9     // a very basic method  
10    saySomething: function () {  
11        console.log( "Where in the world is Paul Irish today?" );  
12    },  
13    // output a value based on the current configuration  
14    reportMyConfig: function () {  
15        console.log( "Caching is: " + ( this.myConfig.useCaching ? "enabled" : "disabled" ) );  
16    },  
17    // override the current configuration  
18    updateMyConfig: function( newConfig ) {  
19        if ( typeof newConfig === "object" ) {  
20            this.myConfig = newConfig;  
21            console.log( this.myConfig.language );  
22        }  
23    };  
24 };  
25 // Outputs: Where in the world is Paul Irish today?  
26 myModule.saySomething();  
27 // Outputs: Caching is: enabled  
28 myModule.reportMyConfig();  
29 // Outputs: fr  
30 myModule.updateMyConfig({  
31     language: "fr",  
32     useCaching: false  
33 });  
34 // Outputs: Caching is: disabled  
35 myModule.reportMyConfig();
```

Using object literals can assist in encapsulating and organizing your code and Rebecca Murphrey has previously written about this topic in [depth](#) should you wish to read into object literals further.

That said, if we're opting for this technique, we may be equally as interested in the Module pattern. It still uses object literals but only as the return value from a scoping function.

## The Module Pattern

---

The Module pattern was originally defined as a way to provide both private and public encapsulation for classes in conventional software engineering.

In JavaScript, the Module pattern is used to further *emulate* the concept of classes in such a way that we're able to include both public/private methods and variables inside a single object, thus shielding particular parts from the global scope. What this results in is a reduction in the likelihood of our function names conflicting with other functions defined in additional scripts on the page.

### Privacy

The Module pattern encapsulates "privacy", state and organization using closures. It provides a way of wrapping a mix of public and private methods and variables, protecting pieces from leaking into the global scope and accidentally colliding with another developer's interface. With this pattern, only a public API is returned, keeping everything else within the closure private.

This gives us a clean solution for shielding logic doing the heavy lifting whilst only exposing an interface we wish other parts of our application to use. The pattern utilizes an immediately-invoked function expression ([IIFE](#) - see the section on namespacing patterns for more on this) where an object is returned.

It should be noted that there isn't really an explicitly true sense of "privacy" inside JavaScript because unlike some traditional languages, it doesn't have access modifiers. Variables can't technically be declared as being public nor private and so we use function scope to simulate this concept. Within the Module pattern, variables or methods declared are only available inside the module itself thanks to closure. Variables or methods defined within the returning object however are available to everyone.

### History

From a historical perspective, the Module pattern was originally developed by a number of people including [Richard Cornford](#) in 2003. It was later popularized by Douglas Crockford in his lectures. Another piece of trivia is that if you've ever played with Yahoo's YUI library, some of its features may appear quite familiar and the reason for this is that the Module pattern was a strong influence for YUI when creating their components.

## Examples

Let's begin looking at an implementation of the Module pattern by creating a module which is self-contained.

```
1  var testModule = (function () {
2
3     var counter = 0;
4
5     return {
6
7         incrementCounter: function () {
8             return counter++;
9         },
10
11        resetCounter: function () {
12            console.log( "counter value prior to reset: " + counter );
13            counter = 0;
14        }
15    };
16
17 })();
18
19 // Usage:
20
21 // Increment our counter
22 testModule.incrementCounter();
23
24 // Check the counter value and reset
25 // Outputs: counter value prior to reset: 1
26 testModule.resetCounter();
```

Here, other parts of the code are unable to directly read the value of our `incrementCounter()` or `resetCounter()`. The counter variable is actually fully shielded from our global scope so it acts just like a private variable would - its existence is limited to within the module's closure so that the only code able to access its scope are our two functions. Our methods are effectively namespaced so in the test section of our code, we need to prefix any calls with the name of the module (e.g. "testModule").

When working with the Module pattern, we may find it useful to define a simple template that we use for getting started with it. Here's one that covers namespacing, public and private

variables:

```

1  var myNamespace = (function () {
2
3      var myPrivateVar, myPrivateMethod;
4
5      // A private counter variable
6      myPrivateVar = 0;
7
8      // A private function which logs any arguments
9      myPrivateMethod = function( foo ) {
10         console.log( foo );
11     };
12
13     return {
14
15         // A public variable
16         myPublicVar: "foo",
17
18         // A public function utilizing privates
19         myPublicFunction: function( bar ) {
20
21             // Increment our private counter
22             myPrivateVar++;
23
24             // Call our private method using bar
25             myPrivateMethod( bar );
26
27         }
28     };
29
30 })();

```

Looking at another example, below we can see a shopping basket implemented using this pattern. The module itself is completely self-contained in a global variable called `basketModule`. The `basket` array in the module is kept private and so other parts of our application are unable to directly read it. It only exists with the module's closure and so the only methods able to access it are those with access to its scope (i.e. `addItem()`, `getItemCount()` etc).

```

1  var basketModule = (function () {
2
3     // privates
4
5     var basket = [];
6
7     function doSomethingPrivate() {
8         //...
9     }
10
11    function doSomethingElsePrivate() {
12        //...
13    }

```

```

13 }
14
15 // Return an object exposed to the public
16 return {
17
18     // Add items to our basket
19     addItem: function( values ) {
20         basket.push(values);
21     },
22
23     // Get the count of items in the basket
24     getItemCount: function () {
25         return basket.length;
26     },
27
28     // Public alias to a private function
29     doSomething: doSomethingPrivate,
30
31     // Get the total value of items in the basket
32     getTotal: function () {
33
34         var q = this.getItemCount(),
35             p = 0;
36
37         while (q--) {
38             p += basket[q].price;
39         }
40
41         return p;
42     }
43 };
44 })();

```

Inside the module, you may have noticed that we return an `object`. This gets automatically assigned to `basketModule` so that we can interact with it as follows:

```

1 // basketModule returns an object with a public API we can use
2
3 basketModule.addItem({
4     item: "bread",
5     price: 0.5
6 });
7
8 basketModule.addItem({
9     item: "butter",
10    price: 0.3
11 });
12
13 // Outputs: 2
14 console.log( basketModule.getItemCount() );
15
16 // Outputs: 0.8
17 console.log( basketModule.getTotal() );
18

```

```

19 // However, the following will not work:
20
21 // Outputs: undefined
22 // This is because the basket itself is not exposed as a part of our
23 // public API
24 console.log( basketModule.basket );
25
26 // This also won't work as it only exists within the scope of our
27 // basketModule closure, but not in the returned public object
28 console.log( basket );

```

The methods above are effectively namespaced inside `basketModule`.

Notice how the scoping function in the above basket module is wrapped around all of our functions, which we then call and immediately store the return value of. This has a number of advantages including:

- The freedom to have private functions and private members which can only be consumed by our module. As they aren't exposed to the rest of the page (only our exported API is), they're considered truly private.
- Given that functions are declared normally and are named, it can be easier to show call stacks in a debugger when we're attempting to discover what function(s) threw an exception.
- As T.J Crowder has pointed out in the past, it also enables us to return different functions depending on the environment. In the past, I've seen developers use this to perform UA testing in order to provide a code-path in their module specific to IE, but we can easily opt for feature detection these days to achieve a similar goal.

## Module Pattern Variations

### Import mixins

This variation of the pattern demonstrates how globals (e.g jQuery, Underscore) can be passed in as arguments to our module's anonymous function. This effectively allows us to *import* them and locally alias them as we wish.

```

1 // Global module
2 var myModule = (function ( jQ, _ ) {
3
4     function privateMethod1(){
5         jQ(".container").html("test");
6     }
7
8     function privateMethod2(){

```

```

9   console.log( _.min([10, 5, 100, 2, 1000]) );
10 }
11
12 return{
13   publicMethod: function(){
14     privateMethod1();
15   }
16 };
17
18 // Pull in jQuery and Underscore
19 })(jQuery, _ );
20
21 myModule.publicMethod();

```

## Exports

This next variation allows us to declare globals without consuming them and could similarly support the concept of global imports seen in the last example.

```

1 // Global module
2 var myModule = (function () {
3
4   // Module object
5   var module = {},
6     privateVariable = "Hello World";
7
8   function privateMethod() {
9     // ...
10  }
11
12  module.publicProperty = "Foobar";
13  module.publicMethod = function () {
14    console.log( privateVariable );
15  };
16
17  return module;
18
19 })();

```

## Toolkit And Framework-specific Module Pattern Implementations

### Dojo

Dojo provides a convenience method for working with objects called `dojo.setObject()`. This takes as its first argument a dot-separated string such as `myObj.parent.child` which refers to a property called "child" within an object "parent" defined inside "myObj". Using `setObject()` allows us to set the value of children, creating any of the intermediate objects in the rest of the path passed if they don't already exist.

For example, if we wanted to declare `basket.core` as an object of the `store` namespace, this could be achieved as follows using the traditional way:

```

1  var store = window.store || {};
2
3  if ( !store["basket"] ) {
4      store.basket = {};
5  }
6
7  if ( !store.basket["core"] ) {
8      store.basket.core = {};
9  }
10
11 store.basket.core = {
12     // ...rest of our logic
13 };

```

Or as follows using Dojo 1.7 (AMD-compatible version) and above:

```

1  require(["dojo/_base/customStore"], function( store ){
2
3      // using dojo.setObject()
4      store.setObject("basket.core", (function() {
5
6          var basket = [];
7
8          function privateMethod() {
9              console.log(basket);
10         }
11
12         return {
13             publicMethod: function(){
14                 privateMethod();
15             }
16         };
17     })());
18 });
19 });
20 });

```

For more information on `dojo.setObject()`, see the official [documentation](#).

## ExtJS

For those using Sencha's ExtJS, an example demonstrating how to correctly use the Module pattern with the framework can be found below.

Here, we see an example of how to define a namespace which can then be populated with a module containing both a private and public API. With the exception of some semantic differences, it's quite close to how the Module pattern is implemented in vanilla JavaScript:

```
1 // create namespace
2 Ext.namespace("myNameSpace");
3
4 // create application
5 myNameSpace.app = function () {
6
7     // do NOT access DOM from here; elements don't exist yet
8
9     // private variables
10    var btn1,
11        privVar1 = 11;
12
13    // private functions
14    var btn1Handler = function ( button, event ) {
15        console.log( "privVar1=" + privVar1 );
16        console.log( "this.btn1Text=" + this.btn1Text );
17    };
18
19    // public space
20    return {
21        // public properties, e.g. strings to translate
22        btn1Text: "Button 1",
23
24        // public methods
25        init: function () {
26
27            if ( Ext.Ext2 ) {
28
29                btn1 = new Ext.Button({
30                    renderTo: "btn1-ct",
31                    text: this.btn1Text,
32                    handler: btn1Handler
33                });
34
35            } else {
36
37                btn1 = new Ext.Button( "btn1-ct", {
38                    text: this.btn1Text,
39                    handler: btn1Handler
40                });
41
42            }
43        }
44    };
45}();
```

## YUI

Similarly, we can also implement the Module pattern when building applications using YUI3. The following example is heavily based on the original YUI Module pattern implementation by Eric Miraglia, but again, isn't vastly different from the vanilla JavaScript version:

```

1  Y.namespace( "store.basket" );
2  Y.store.basket = (function () {
3
4      var myPrivateVar, myPrivateMethod;
5
6      // private variables:
7      myPrivateVar = "I can be accessed only within Y.store.basket.";
8
9      // private method:
10     myPrivateMethod = function () {
11         Y.log( "I can be accessed only from within YAHOO.store.basket" )
12     }
13
14     return {
15         myPublicProperty: "I'm a public property.",
16
17         myPublicMethod: function () {
18             Y.log( "I'm a public method." );
19
20             // Within basket, I can access "private" vars and methods:
21             Y.log( myPrivateVar );
22             Y.log( myPrivateMethod() );
23
24             // The native scope of myPublicMethod is store so we can
25             // access public members using "this":
26             Y.log( this.myPublicProperty );
27         }
28     };
29
30 })();

```

## jQuery

There are a number of ways in which jQuery code unspecific to plugins can be wrapped inside the Module pattern. Ben Cherry previously suggested an implementation where a function wrapper is used around module definitions in the event of there being a number of commonalities between modules.

In the following example, a `library` function is defined which declares a new library and automatically binds up the `init` function to `document.ready` when new libraries (i.e. modules) are created.

```
1 function library( module ) {
2
3     $( function() {
4         if ( module.init ) {
5             module.init();
6         }
7     });
8
9     return module;
10}
11
12var myLibrary = library(function () {
13
14    return {
15        init: function () {
16            // module implementation
17        }
18    };
19}());
```

## Advantages

We've seen why the Constructor pattern can be useful, but why is the Module pattern a good choice? For starters, it's a lot cleaner for developers coming from an object-oriented background than the idea of true encapsulation, at least from a JavaScript perspective.

Secondly, it supports private data - so, in the Module pattern, public parts of our code are able to touch the private parts, however the outside world is unable to touch the class's private parts (no laughing! Oh, and thanks to David Engfer for the joke).

## Disadvantages

The disadvantages of the Module pattern are that as we access both public and private members differently, when we wish to change visibility, we actually have to make changes to each place the member was used.

We also can't access private members in methods that are added to the object at a later point. That said, in many cases the Module pattern is still quite useful and when used correctly, certainly has the potential to improve the structure of our application.

Other disadvantages include the inability to create automated unit tests for private members and additional complexity when bugs require hot fixes. It's simply not possible to patch privates. Instead, one must override all public methods which interact with the buggy privates. Developers can't easily extend privates either, so it's worth remembering privates are not as flexible as they may initially appear.

For further reading on the Module pattern, see Ben Cherry's excellent in-depth [article](#) on it.

# The Revealing Module Pattern

Now that we're a little more familiar with the module pattern, let's take a look at a slightly improved version - Christian Heilmann's Revealing Module pattern.

The Revealing Module pattern came about as Heilmann was frustrated with the fact that he had to repeat the name of the main object when we wanted to call one public method from another or access public variables. He also disliked the Module pattern's requirement for having to switch to object literal notation for the things he wished to make public.

The result of his efforts was an updated pattern where we would simply define all of our functions and variables in the private scope and return an anonymous object with pointers to the private functionality we wished to reveal as public.

An example of how to use the Revealing Module pattern can be found below:

```
1  var myRevealingModule = (function () {
2
3      var privateVar = "Ben Cherry",
4          publicVar = "Hey there!";
5
6      function privateFunction() {
7          console.log( "Name:" + privateVar );
8      }
9
10     function publicSetName( strName ) {
11         privateVar = strName;
12     }
13
14     function publicGetName() {
15         privateFunction();
16     }
17
18
19     // Reveal public pointers to
20     // private functions and properties
21
22     return {
23         setName: publicSetName,
24         greeting: publicVar,
25         getName: publicGetName
26     };
27 }
```

```

28     })();
29
30     myRevealingModule.setName( "Paul Kinlan" );

```

The pattern can also be used to reveal private functions and properties with a more specific naming scheme if we would prefer:

```

1  var myRevealingModule = (function () {
2
3     var privateCounter = 0;
4
5     function privateFunction() {
6         privateCounter++;
7     }
8
9     function publicFunction() {
10        publicIncrement();
11    }
12
13    function publicIncrement() {
14        privateFunction();
15    }
16
17    function publicGetCount(){
18        return privateCounter;
19    }
20
21    // Reveal public pointers to
22    // private functions and properties
23
24    return {
25        start: publicFunction,
26        increment: publicIncrement,
27        count: publicGetCount
28    };
29
30 })();
31
32     myRevealingModule.start();

```

## Advantages

This pattern allows the syntax of our scripts to be more consistent. It also makes it more clear at the end of the module which of our functions and variables may be accessed publicly which eases readability.

## Disadvantages

A disadvantage of this pattern is that if a private function refers to a public function, that public function can't be overridden if a patch is necessary. This is because the private function will continue to refer to the private implementation and the pattern doesn't apply to public members, only to functions.

Public object members which refer to private variables are also subject to the no-patch rule noted above.

As a result of this, modules created with the Revealing Module pattern may be more fragile than those created with the original Module pattern, so care should be taken during usage.

## The Singleton Pattern

The Singleton pattern is thus known because it restricts instantiation of a class to a single object. Classically, the Singleton pattern can be implemented by creating a class with a method that creates a new instance of the class if one doesn't exist. In the event of an instance already existing, it simply returns a reference to that object.

Singletons differ from static *classes* (or objects) as we can delay their initialization, generally because they require some information that may not be available during initialization time. They don't provide a way for code that is unaware of a previous reference to them to easily retrieve them. This is because it is neither the object or "class" that's returned by a Singleton, it's a structure. Think of how closure variables aren't actually closures - the function scope that provides the closure is the closure.

In JavaScript, Singletons serve as a shared resource namespace which isolate implementation code from the global namespace so as to provide a single point of access for functions.

We can implement a Singleton as follows:

```
1  var mySingleton = (function () {
2
3      // Instance stores a reference to the Singleton
4      var instance;
5
6      function init() {
7
8          // Singleton
9
10         // Private methods and variables
```

```
11     function privateMethod(){
12         console.log( "I am private" );
13     }
14
15     var privateVariable = "Im also private";
16
17     var privateRandomNumber = Math.random();
18
19     return {
20
21         // Public methods and variables
22         publicMethod: function () {
23             console.log( "The public can see me!" );
24         },
25
26         publicProperty: "I am also public",
27
28         getRandomNumber: function() {
29             return privateRandomNumber;
30         }
31
32     };
33
34 };
35
36 return {
37
38     // Get the Singleton instance if one exists
39     // or create one if it doesn't
40     getInstance: function () {
41
42         if ( !instance ) {
43             instance = init();
44         }
45
46         return instance;
47     }
48
49 };
50
51 })();
52
53 var myBadSingleton = (function () {
54
55     // Instance stores a reference to the Singleton
56     var instance;
57
58     function init() {
59
60         // Singleton
61
62         var privateRandomNumber = Math.random();
63
64         return {
65
66             getRandomNumber: function() {
67                 return privateRandomNumber;
68             }
69         };
70     }
71
72     return {
73         getInstance: function () {
74             return instance;
75         }
76     };
77 }
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
559
560
561
562
563
564
565
566
567
568
569
569
570
571
572
573
574
575
576
577
578
579
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
617
618
619
619
620
621
622
623
624
625
625
626
627
627
628
628
629
629
630
631
631
632
632
633
633
634
634
635
635
636
636
637
637
638
638
639
639
640
640
641
641
642
642
643
643
644
644
645
645
646
646
647
647
648
648
649
649
650
650
651
651
652
652
653
653
654
654
655
655
656
656
657
657
658
658
659
659
660
660
661
661
662
662
663
663
664
664
665
665
666
666
667
667
668
668
669
669
670
670
671
671
672
672
673
673
674
674
675
675
676
676
677
677
678
678
679
679
680
680
681
681
682
682
683
683
684
684
685
685
686
686
687
687
688
688
689
689
690
690
691
691
692
692
693
693
694
694
695
695
696
696
697
697
698
698
699
699
700
700
701
701
702
702
703
703
704
704
705
705
706
706
707
707
708
708
709
709
710
710
711
711
712
712
713
713
714
714
715
715
716
716
717
717
718
718
719
719
720
720
721
721
722
722
723
723
724
724
725
725
726
726
727
727
728
728
729
729
730
730
731
731
732
732
733
733
734
734
735
735
736
736
737
737
738
738
739
739
740
740
741
741
742
742
743
743
744
744
745
745
746
746
747
747
748
748
749
749
750
750
751
751
752
752
753
753
754
754
755
755
756
756
757
757
758
758
759
759
760
760
761
761
762
762
763
763
764
764
765
765
766
766
767
767
768
768
769
769
770
770
771
771
772
772
773
773
774
774
775
775
776
776
777
777
778
778
779
779
780
780
781
781
782
782
783
783
784
784
785
785
786
786
787
787
788
788
789
789
790
790
791
791
792
792
793
793
794
794
795
795
796
796
797
797
798
798
799
799
800
800
801
801
802
802
803
803
804
804
805
805
806
806
807
807
808
808
809
809
810
810
811
811
812
812
813
813
814
814
815
815
816
816
817
817
818
818
819
819
820
820
821
821
822
822
823
823
824
824
825
825
826
826
827
827
828
828
829
829
830
830
831
831
832
832
833
833
834
834
835
835
836
836
837
837
838
838
839
839
840
840
841
841
842
842
843
843
844
844
845
845
846
846
847
847
848
848
849
849
850
850
851
851
852
852
853
853
854
854
855
855
856
856
857
857
858
858
859
859
860
860
```

```

68      }
69
70    };
71
72  };
73
74  return {
75
76    // Always create a new Singleton instance
77    getInstance: function () {
78
79      instance = init();
80
81      return instance;
82    }
83
84  };
85
86 })();
87
88
89 // Usage:
90
91 var singleA = mySingleton.getInstance();
92 var singleB = mySingleton.getInstance();
93 console.log( singleA.getRandomNumber() === singleB.getRandomNumber() );
94
95 var badSingleA = myBadSingleton.getInstance();
96 var badSingleB = myBadSingleton.getInstance();
97 console.log( badSingleA.getRandomNumber() !== badSingleB.getRandomNumber() );
98
99 // Note: as we are working with random numbers, there is a
100 // mathematical possibility both numbers will be the same,
101 // however unlikely. The above example should otherwise still
102 // be valid.

```

What makes the Singleton is the global access to the instance (generally through `MySingleton.getInstance()`) as we don't (at least in static languages) call `new MySingleton()` directly. This is however possible in JavaScript.

In the GoF book, the *applicability* of the Singleton pattern is described as follows:

- There must be exactly one instance of a class, and it must be accessible to clients from a well-known access point.
- When the sole instance should be extensible by subclassing, and clients should be able to use an extended instance without modifying their code.

The second of these points refers to a case where we might need code such as:

```

1  mySingleton.getInstance = function(){
2      if ( this._instance == null ) {
3          if ( isFoo() ) {
4              this._instance = new FooSingleton();
5          } else {
6              this._instance = new BasicSingleton();
7          }
8      }
9      return this._instance;
10 };

```

Here, `getInstance` becomes a little like a Factory method and we don't need to update each point in our code accessing it. `FooSingleton` above would be a subclass of `BasicSingleton` and implement the same interface.

Why is deferring execution considered important for a Singleton?:

In C++ it serves to isolate from the unpredictability of the order of dynamic initialization, returning control to the programmer.

It is important to note the difference between a static instance of a class (object) and a Singleton: whilst a Singleton can be implemented as a static instance, it can also be constructed lazily, without the need for resources nor memory until this is actually needed.

If we have a static object that can be initialized directly, we need to ensure the code is always executed in the same order (e.g in case `objCar` needs `objWheel` during its initialization) and this doesn't scale when you have a large number of source files.

Both Singletons and static objects are useful but they shouldn't be overused - the same way in which we shouldn't overuse other patterns.

In practice, the Singleton pattern is useful when exactly one object is needed to coordinate others across a system. Here is one example with the pattern being used in this context:

```

1  var SingletonTester = (function () {
2
3      // options: an object containing configuration options for the singlet
4      // e.g var options = { name: "test", pointX: 5};
5      function Singleton( options ) {
6
7          // set options to the options supplied
8          // or an empty object if none are provided
9          options = options || {};

```

```
10 // set some properties for our singleton
11 this.name = "SingletonTester";
12
13 this.pointX = options.pointX || 6;
14
15 this.pointY = options.pointY || 10;
16
17 }
18
19 // our instance holder
20 var instance;
21
22 // an emulation of static variables and methods
23 var _static = {
24
25   name: "SingletonTester",
26
27   // Method for getting an instance. It returns
28   // a singleton instance of a singleton object
29   getInstance: function( options ) {
30     if( instance === undefined ) {
31       instance = new Singleton( options );
32     }
33
34     return instance;
35   }
36 }
37
38 };
39
40 return _static;
41
42 })();
43
44 var singletonTest = SingletonTester.getInstance({
45   pointX: 5
46 });
47
48 // Log the output of pointX just to verify it is correct
49 // Outputs: 5
50 console.log( singletonTest.pointX );
```

Whilst the Singleton has valid uses, often when we find ourselves needing it in JavaScript it's a sign that we may need to re-evaluate our design.

They're often an indication that modules in a system are either tightly coupled or that logic is overly spread across multiple parts of a codebase. Singletons can be more difficult to test due to issues ranging from hidden dependencies, the difficulty in creating multiple instances, difficulty in stubbing dependencies and so on.

Miller Medeiros has previously recommended [this](#) excellent article on the Singleton and its various issues for further reading as well as the comments to [this](#) article, discussing how Singletons can increase tight coupling. I'm happy to second these recommendations as both pieces raise many important points about this pattern that are also worth noting.

## The Observer Pattern

The Observer is a design pattern where an object (known as a subject) maintains a list of objects depending on it (observers), automatically notifying them of any changes to state.

When a subject needs to notify observers about something interesting happening, it broadcasts a notification to the observers (which can include specific data related to the topic of the notification).

When we no longer wish for a particular observer to be notified of changes by the subject they are registered with, the subject can remove them from the list of observers.

It's often useful to refer back to published definitions of design patterns that are language agnostic to get a broader sense of their usage and advantages over time. The definition of the Observer pattern provided in the GoF book, *Design Patterns: Elements of Reusable Object-Oriented Software*, is:

*"One or more observers are interested in the state of a subject and register their interest with the subject by attaching themselves. When something changes in our subject that the observer may be interested in, a notify message is sent which calls the update method in each observer. When the observer is no longer interested in the subject's state, they can simply detach themselves."*

We can now expand on what we've learned to implement the Observer pattern with the following components:

- **Subject:** maintains a list of observers, facilitates adding or removing observers
- **Observer:** provides an update interface for objects that need to be notified of a Subject's changes of state
- **ConcreteSubject:** broadcasts notifications to observers on changes of state, stores the state of ConcreteObservers
- **ConcreteObserver:** stores a reference to the ConcreteSubject, implements an update interface for the Observer to ensure state is consistent with the Subject's

First, let's model the list of dependent Observers a subject may have:

```

1  function ObserverList(){
2      this.observerList = [];
3  }
4
5  ObserverList.prototype.add = function( obj ){
6      return this.observerList.push( obj );
7  };
8
9  ObserverList.prototype.count = function(){
10     return this.observerList.length;
11 };
12
13 ObserverList.prototype.get = function( index ){
14     if( index > -1 && index < this.observerList.length ){
15         return this.observerList[ index ];
16     }
17 };
18
19 ObserverList.prototype.indexOf = function( obj, startIndex ){
20     var i = startIndex;
21
22     while( i < this.observerList.length ){
23         if( this.observerList[i] === obj ){
24             return i;
25         }
26         i++;
27     }
28
29     return -1;
30 };
31
32 ObserverList.prototype.removeAt = function( index ){
33     this.observerList.splice( index, 1 );
34 };

```

Next, let's model the Subject and the ability to add, remove or notify observers on the observer list.

```

1  function Subject(){
2      this.observers = new ObserverList();
3  }
4
5  Subject.prototype.addObserver = function( observer ){
6      this.observers.add( observer );
7  };
8
9  Subject.prototype.removeObserver = function( observer ){
10     this.observers.removeAt( this.observers.indexOf( observer, 0 ) );
11 };
12

```

```

13 | Subject.prototype.notify = function( context ){
14 |   var observerCount = this.observers.count();
15 |   for(var i=0; i < observerCount; i++){
16 |     this.observers.get(i).update( context );
17 |   }
18 |

```

We then define a skeleton for creating new Observers. The `update` functionality here will be overwritten later with custom behaviour.

```

1 | // The Observer
2 | function Observer(){
3 |   this.update = function(){
4 |     // ...
5 |   };
6 |

```

In our sample application using the above Observer components, we now define:

- A button for adding new observable checkboxes to the page
- A control checkbox which will act as a subject, notifying other checkboxes they should be checked
- A container for the new checkboxes being added

We then define ConcreteSubject and ConcreteObserver handlers for both adding new observers to the page and implementing the updating interface. See below for inline comments on what these components do in the context of our example.

## HTML:

```

1 | <button id="addNewObserver">Add New Observer checkbox</button>
2 | <input id="mainCheckbox" type="checkbox"/>
3 | <div id="observersContainer"></div>

```

## Sample script:

```

1 | // Extend an object with an extension
2 | function extend( obj, extension ){
3 |   for ( var key in extension ){
4 |     obj[key] = extension[key];
5 |   }
6 |
7 |

```

```

8 // References to our DOM elements
9
10 var controlCheckbox = document.getElementById( "mainCheckbox" ),
11     addBtn = document.getElementById( "addNewObserver" ),
12     container = document.getElementById( "observersContainer" );
13
14
15 // Concrete Subject
16
17 // Extend the controlling checkbox with the Subject class
18 extend( controlCheckbox, new Subject() );
19
20 // Clicking the checkbox will trigger notifications to its observers
21 controlCheckbox.onclick = function(){
22     controlCheckbox.notify( controlCheckbox.checked );
23 };
24
25 addBtn.onclick = addNewObserver;
26
27 // Concrete Observer
28
29 function addNewObserver(){
30
31     // Create a new checkbox to be added
32     var check = document.createElement( "input" );
33     check.type = "checkbox";
34
35     // Extend the checkbox with the Observer class
36     extend( check, new Observer() );
37
38     // Override with custom update behaviour
39     check.update = function( value ){
40         this.checked = value;
41     };
42
43     // Add the new observer to our list of observers
44     // for our main subject
45     controlCheckbox.addObserver( check );
46
47     // Append the item to the container
48     container.appendChild( check );
49 }

```

In this example, we looked at how to implement and utilize the Observer pattern, covering the concepts of a Subject, Observer, ConcreteSubject and ConcreteObserver.

## Differences Between The Observer And Publish/Subscribe Pattern

Whilst the Observer pattern is useful to be aware of, quite often in the JavaScript world, we'll find it commonly implemented using a variation known as the Publish/Subscribe pattern. Whilst very similar, there are differences between these patterns worth noting.

The Observer pattern requires that the observer (or object) wishing to receive topic notifications must subscribe this interest to the object firing the event (the subject).

The Publish/Subscribe pattern however uses a topic/event channel which sits between the objects wishing to receive notifications (subscribers) and the object firing the event (the publisher). This event system allows code to define application specific events which can pass custom arguments containing values needed by the subscriber. The idea here is to avoid dependencies between the subscriber and publisher.

This differs from the Observer pattern as it allows any subscriber implementing an appropriate event handler to register for and receive topic notifications broadcast by the publisher.

Here is an example of how one might use the Publish/Subscribe if provided with a functional implementation powering `publish()`, `subscribe()` and `unsubscribe()` behind the scenes:

```
1 // A very simple new mail handler
2
3 // A count of the number of messages received
4 var mailCounter = 0;
5
6 // Initialize subscribers that will listen out for a topic
7 // with the name "inbox/newMessage".
8
9 // Render a preview of new messages
10 var subscriber1 = subscribe( "inbox/newMessage", function( topic, data )
11
12     // Log the topic for debugging purposes
13     console.log( "A new message was received: ", topic );
14
15     // Use the data that was passed from our subject
16     // to display a message preview to the user
17     $(".messageSender").html( data.sender );
18     $(".messagePreview").html( data.body );
19
20 });
21
22 // Here's another subscriber using the same data to perform
23 // a different task.
24
25 // Update the counter displaying the number of new
26 // messages received via the publisher
27
28 var subscriber2 = subscribe( "inbox/newMessage", function( topic, data )
29
30     $('.newMessageCounter').html( ++mailCounter );
31
32 });
33
34 publish( "inbox/newMessage", [
35     sender: "hello@google.com",
```

```
36     body: "Hey there! How are you doing today?"  
37   }]);  
38  
39 // We could then at a later point unsubscribe our subscribers  
40 // from receiving any new topic notifications as follows:  
41 // unsubscribe( subscriber1 );  
42 // unsubscribe( subscriber2 );
```

The general idea here is the promotion of loose coupling. Rather than single objects calling on the methods of other objects directly, they instead subscribe to a specific task or activity of another object and are notified when it occurs.

## Advantages

---

The Observer and Publish/Subscribe patterns encourage us to think hard about the relationships between different parts of our application. They also help us identify what layers containing direct relationships which could instead be replaced with sets of subjects and observers. This effectively could be used to break down an application into smaller, more loosely coupled blocks to improve code management and potentials for re-use.

Further motivation behind using the Observer pattern is where we need to maintain consistency between related objects without making classes tightly coupled. For example, when an object needs to be able to notify other objects without making assumptions regarding those objects.

Dynamic relationships can exist between observers and subjects when using either pattern. This provides a great deal of flexibility which may not be as easy to implement when disparate parts of our application are tightly coupled.

Whilst it may not always be the best solution to every problem, these patterns remain one of the best tools for designing decoupled systems and should be considered an important tool in any JavaScript developer's utility belt.

## Disadvantages

---

Consequently, some of the issues with these patterns actually stem from their main benefits. In Publish/Subscribe, by decoupling publishers from subscribers, it can sometimes become difficult to obtain guarantees that particular parts of our applications are functioning as we may expect.

For example, publishers may make an assumption that one or more subscribers are listening to them. Say that we're using such an assumption to log or output errors regarding some application

process. If the subscriber performing the logging crashes (or for some reason fails to function), the publisher won't have a way of seeing this due to the decoupled nature of the system.

Another draw-back of the pattern is that subscribers are quite ignorant to the existence of each other and are blind to the cost of switching publishers. Due to the dynamic relationship between subscribers and publishers, the update dependency can be difficult to track.

## Publish/Subscribe Implementations

---

Publish/Subscribe fits in very well in JavaScript ecosystems, largely because at the core, ECMAScript implementations are event driven. This is particularly true in browser environments as the DOM uses events as its main interaction API for scripting.

That said, neither ECMAScript nor DOM provide core objects or methods for creating custom events systems in implementation code (with the exception of perhaps the DOM3 CustomEvent, which is bound to the DOM and is thus not generically useful).

Luckily, popular JavaScript libraries such as dojo, jQuery (custom events) and YUI already have utilities that can assist in easily implementing a Publish/Subscribe system with very little effort. Below we can see some examples of this:

```
1 // Publish
2
3 // jQuery: $(obj).trigger("channel", [arg1, arg2, arg3]);
4 $( el ).trigger( "/login", [{username:"test", userData:"test"}] );
5
6 // Dojo: dojo.publish("channel", [arg1, arg2, arg3] );
7 dojo.publish( "/login", [{username:"test", userData:"test"}] );
8
9 // YUI: el.publish("channel", [arg1, arg2, arg3]);
10 el.publish( "/login", {username:"test", userData:"test"} );
11
12
13 // Subscribe
14
15 // jQuery: $(obj).on( "channel", [data], fn );
16 $( el ).on( "/login", function( event ){...} );
17
18 // Dojo: dojo.subscribe( "channel", fn);
19 var handle = dojo.subscribe( "/login", function(data){..} );
20
21 // YUI: el.on("channel", handler);
22 el.on( "/login", function( data ){...} );
23
24
25 // Unsubscribe
26
27 // jQuery: $(obj).off( "channel" );
```

```

28 |   $( el ).off( "/login" );
29 |
30 |   // Dojo: dojo.unsubscribe( handle );
31 |   dojo.unsubscribe( handle );
32 |
33 |   // YUI: el.detach("channel");
34 |   el.detach( "/login" );

```

For those wishing to use the Publish/Subscribe pattern with vanilla JavaScript (or another library) [AmplifyJS](#) includes a clean, library-agnostic implementation that can be used with any library or toolkit. Radio.js (<http://radio.uxder.com/>), PubSubJS (<https://github.com/mroderick/PubSubJS>) or Pure JS PubSub by Peter Higgins (<https://github.com/phiggins42/bloody-jquery-plugins/blob/55e41df9bf08f42378bb08b93efcb28555b61aeb/pubsub.js>) are also similar alternatives worth checking out.

jQuery developers in particular have quite a few other options and can opt to use one of the many well-developed implementations ranging from Peter Higgins's jQuery plugin to Ben Alman's (optimized) Pub/Sub jQuery gist on GitHub. Links to just a few of these can be found below.

- Ben Alman's Pub/Sub gist <https://gist.github.com/661855> (recommended)
- Rick Waldron's jQuery-core style take on the above <https://gist.github.com/705311>
- Peter Higgins' plugin <http://github.com/phiggins42/bloody-jquery-plugins/blob/master/pubsub.js>.
- AppendTo's Pub/Sub in AmplifyJS <http://amplifyjs.com>
- Ben Truyman's gist <https://gist.github.com/826794>

So that we are able to get an appreciation for how many of the vanilla JavaScript implementations of the Observer pattern might work, let's take a walk through of a minimalist version of Publish/Subscribe I released on GitHub under a project called [pubsubz](#). This demonstrates the core concepts of subscribe, publish as well as the concept of unsubscribing.

I've opted to base our examples on this code as it sticks closely to both the method signatures and approach of implementation I would expect to see in a JavaScript version of the classic Observer pattern.

## A Publish/Subscribe Implementation

```

1 | var pubsub = {};
2 |
3 | (function(myObject) {
4 |
5 |     // Storage for topics that can be broadcast
6 |     // or listened to

```

```
7  var topics = {};
8
9  // A topic identifier
10 var subUid = -1;
11
12 // Publish or broadcast events of interest
13 // with a specific topic name and arguments
14 // such as the data to pass along
15 myObject.publish = function( topic, args ) {
16
17     if ( !topics[topic] ) {
18         return false;
19     }
20
21     var subscribers = topics[topic],
22         len = subscribers ? subscribers.length : 0;
23
24     while (len--) {
25         subscribers[len].func( topic, args );
26     }
27
28     return this;
29 };
30
31 // Subscribe to events of interest
32 // with a specific topic name and a
33 // callback function, to be executed
34 // when the topic/event is observed
35 myObject.subscribe = function( topic, func ) {
36
37     if ( !topics[topic] ) {
38         topics[topic] = [];
39     }
40
41     var token = ( ++subUid ).toString();
42     topics[topic].push({
43         token: token,
44         func: func
45     });
46     return token;
47 };
48
49 // Unsubscribe from a specific
50 // topic, based on a tokenized reference
51 // to the subscription
52 myObject.unsubscribe = function( token ) {
53     for ( var m in topics ) {
54         if ( topics[m] ) {
55             for ( var i = 0, j = topics[m].length; i < j; i++ ) {
56                 if ( topics[m][i].token === token ) {
57                     topics[m].splice( i, 1 );
58                     return token;
59                 }
60             }
61         }
62     }
63     return this;
}
```

```
64  };  
65  }( pubsub ));
```

## Example: Using Our Implementation

We can now use the implementation to publish and subscribe to events of interest as follows:

```
1 // Another simple message handler  
2  
3 // A simple message logger that logs any topics and data received through  
4 // subscriber  
5 var messageLogger = function ( topics, data ) {  
6     console.log( "Logging: " + topics + ": " + data );  
7 };  
8  
9 // Subscribers listen for topics they have subscribed to and  
10 // invoke a callback function (e.g messageLogger) once a new  
11 // notification is broadcast on that topic  
12 var subscription = pubsub.subscribe( "inbox/newMessage", messageLogger )  
13  
14 // Publishers are in charge of publishing topics or notifications of  
15 // interest to the application. e.g:  
16  
17 pubsub.publish( "inbox/newMessage", "hello world!" );  
18  
19 // or  
20 pubsub.publish( "inbox/newMessage", [ "test", "a", "b", "c" ] );  
21  
22 // or  
23 pubsub.publish( "inbox/newMessage", {  
24     sender: "hello@google.com",  
25     body: "Hey again!"  
26 });  
27  
28 // We can also unsubscribe if we no longer wish for our subscribers  
29 // to be notified  
30 pubsub.unsubscribe( subscription );  
31  
32 // Once unsubscribed, this for example won't result in our  
33 // messageLogger being executed as the subscriber is  
34 // no longer listening  
35 pubsub.publish( "inbox/newMessage", "Hello! are you still there?" );
```

## Example: User-Interface Notifications

Next, let's imagine we have a web application responsible for displaying real-time stock information.

The application might have a grid for displaying the stock stats and a counter for displaying the last point of update. When the data model changes, the application will need to update the grid and counter. In this scenario, our subject (which will be publishing topics/notifications) is the data model and our subscribers are the grid and counter.

When our subscribers receive notification that the model itself has changed, they can update themselves accordingly.

In our implementation, our subscriber will listen to the topic "newDataAvailable" to find out if new stock information is available. If a new notification is published to this topic, it will trigger `gridUpdate` to add a new row to our grid containing this information. It will also update a *last updated* counter to log the last time data was added

```

1 // Return the current local time to be used in our UI later
2 getCurrentTime = function (){
3
4     var date = new Date(),
5         m = date.getMonth() + 1,
6         d = date.getDate(),
7         y = date.getFullYear(),
8         t = date.toLocaleTimeString().toLowerCase();
9
10        return (m + "/" + d + "/" + y + " " + t);
11    };
12
13 // Add a new row of data to our fictional grid component
14 function addGridRow( data ) {
15
16     // ui.grid.addRow( data );
17     console.log( "updated grid component with:" + data );
18
19 }
20
21 // Update our fictional grid to show the time it was last
22 // updated
23 function updateCounter( data ) {
24
25     // ui.grid.updateLastChanged( getCurrentTime() );
26     console.log( "data last updated at: " + getCurrentTime() + " with " +
27
28 }
29
30 // Update the grid using the data passed to our subscribers
31 gridUpdate = function( topic, data ){
32
33     if ( data !== undefined ) {
34         addGridRow( data );
35         updateCounter( data );
36     }
37
38 };

```

```

39 // Create a subscription to the newDataAvailable topic
40 var subscriber = pubsub.subscribe( "newDataAvailable", gridUpdate );
41
42 // The following represents updates to our data layer. This could be
43 // powered by ajax requests which broadcast that new data is available
44 // to the rest of the application.
45
46 // Publish changes to the gridUpdated topic representing new entries
47 pubsub.publish( "newDataAvailable", {
48   summary: "Apple made $5 billion",
49   identifier: "APPL",
50   stockPrice: 570.91
51 });
52
53
54 pubsub.publish( "newDataAvailable", {
55   summary: "Microsoft made $20 million",
56   identifier: "MSFT",
57   stockPrice: 30.85
58 });

```

## Example: Decoupling applications using Ben Alman's Pub/Sub implementation

In the following movie ratings example, we'll be using Ben Alman's jQuery implementation of Publish/Subscribe to demonstrate how we can decouple a user interface. Notice how submitting a rating only has the effect of publishing the fact that new user and rating data is available.

It's left up to the subscribers to those topics to then delegate what happens with that data. In our case we're pushing that new data into existing arrays and then rendering them using the Underscore library's `.template()` method for templating.

### HTML/Templates

```

1 <script id="userTemplate" type="text/html">
2   <li><%= name %></li>
3 </script>
4
5
6 <script id="ratingsTemplate" type="text/html">
7   <li><strong><%= title %></strong> was rated <%= rating %>/5</li>
8 </script>
9
10
11 <div id="container">
12
13   <div class="sampleForm">
14     <p>
15       <label for="twitter_handle">Twitter handle:</label>
16       <input type="text" id="twitter_handle" />

```

```

17    </p>
18    <p>
19      <label for="movie_seen">Name a movie you've seen this year:</label>
20      <input type="text" id="movie_seen" />
21    </p>
22    <p>
23
24      <label for="movie_rating">Rate the movie you saw:</label>
25      <select id="movie_rating">
26        <option value="1">1</option>
27        <option value="2">2</option>
28        <option value="3">3</option>
29        <option value="4">4</option>
30        <option value="5" selected>5</option>
31
32      </select>
33    </p>
34    <p>
35
36      <button id="add">Submit rating</button>
37    </p>
38  </div>
39
40
41
42  <div class="summaryTable">
43    <div id="users"><h3>Recent users</h3></div>
44    <div id="ratings"><h3>Recent movies rated</h3></div>
45  </div>
46
47 </div>

```

## JavaScript

```

1  ;(function( $ ) {
2
3    // Pre-compile templates and "cache" them using closure
4    var
5      userTemplate = _.template($("#userTemplate").html()),
6      ratingsTemplate = _.template($("#ratingsTemplate").html());
7
8    // Subscribe to the new user topic, which adds a user
9    // to a list of users who have submitted reviews
10   $.subscribe( "/new/user", function( e, data ){
11
12     if( data ){
13
14       $('#users').append( userTemplate( data ) );
15
16     }
17
18   });
19
20   // Subscribe to the new rating topic. This is composed of a title and

```

```

21 // rating. New ratings are appended to a running list of added user
22 // ratings.
23 $.subscribe( "/new/rating", function( e, data ){
24
25     if( data ){
26
27         $( "#ratings" ).append( ratingsTemplate( data ) );
28
29     }
30
31 });
32
33 // Handler for adding a new user
34 $("#add").on("click", function( e ) {
35
36     e.preventDefault();
37
38     var strUser = $("#twitter_handle").val(),
39         strMovie = $("#movie_seen").val(),
40         strRating = $("#movie_rating").val();
41
42     // Inform the application a new user is available
43     $.publish( "/new/user", { name: strUser } );
44
45     // Inform the app a new rating is available
46     $.publish( "/new/rating", { title: strMovie, rating: strRating} );
47
48 });
49
50 })( jQuery );

```

## Example: Decoupling an Ajax-based jQuery application

In our final example, we're going to take a practical look at how decoupling our code using Pub/Sub early on in the development process can save us some potentially painful refactoring later on.

Quite often in Ajax-heavy applications, once we've received a response to a request we want to achieve more than just one unique action. One could simply add all of their post-request logic into a success callback, but there are drawbacks to this approach.

Highly coupled applications sometimes increase the effort required to reuse functionality due to the increased inter-function/code dependency. What this means is that although keeping our post-request logic hardcoded in a callback might be fine if we're just trying to grab a result set once, it's not as appropriate when we want to make further Ajax-calls to the same data source (and different end-behavior) without rewriting parts of the code multiple times. Rather than having to go back through each layer that calls the same data-source and generalizing them later on, we can use pub/sub from the start and save time.

Using Observers, we can also easily separate application-wide notifications regarding different events down to whatever level of granularity we're comfortable with - something which can be less elegantly done using other patterns.

Notice how in our sample below, one topic notification is made when a user indicates they want to make a search query and another is made when the request returns and actual data is available for consumption. It's left up to the subscribers to then decide how to use knowledge of these events (or the data returned). The benefits of this are that, if we wanted, we could have 10 different subscribers utilizing the data returned in different ways but as far as the Ajax-layer is concerned, it doesn't care. Its sole duty is to request and return data then pass it on to whoever wants to use it. This separation of concerns can make the overall design of our code a little cleaner.

### HTML/Templates:

```

1  <form id="flickrSearch">
2
3      <input type="text" name="tag" id="query"/>
4
5      <input type="submit" name="submit" value="submit"/>
6
7  </form>
8
9
10 <div id="lastQuery"></div>
11
12 <ol id="searchResults"></ol>
13
14
15
16
17 <script id="resultTemplate" type="text/html">
18     <% _.each(items, function( item ){ %>
19         <li></li>
20     <% });%>
21 </script>
```

### JavaScript:

```

1  ;(function( $ ) {
2
3      // Pre-compile template and "cache" it using closure
4      var resultTemplate = _.template($("#resultTemplate").html());
5
6      // Subscribe to the new search tags topic
7      $.subscribe( "/search/tags", function( e, tags ) {
8          $("#lastQuery")
9              .html("<p>Searched for:<strong>" + tags + "</strong></p>")
```

```
10  });
11
12 // Subscribe to the new results topic
13 $.subscribe( "/search/resultSet", function( e, results ){
14
15     $( "#searchResults" ).empty().append(resultTemplate( results ));
16
17 });
18
19 // Submit a search query and publish tags on the /search/tags topic
20 $( "#flickrSearch" ).submit( function( e ) {
21
22     e.preventDefault();
23     var tags = $(this).find( "#query" ).val();
24
25     if ( !tags ){
26         return;
27     }
28
29     $.publish( "/search/tags", [ $.trim(tags) ] );
30
31 });
32
33
34 // Subscribe to new tags being published and perform
35 // a search query using them. Once data has returned
36 // publish this data for the rest of the application
37 // to consume
38
39 $.subscribe("/search/tags", function( e, tags ) {
40
41     $.getJSON( "http://api.flickr.com/services/feeds/photos_public.gn
42                 tags: tags,
43                 tagmode: "any",
44                 format: "json"
45             },
46
47     function( data ){
48
49         if( !data.items.length ) {
50             return;
51         }
52
53         $.publish( "/search/resultSet", { items: data.items } );
54     });
55
56 });
57
58
59 })( jQuery );
```

The Observer pattern is useful for decoupling a number of different scenarios in application design and if you haven't been using it, I recommend picking up one of the pre-written

implementations mentioned today and just giving it a try out. It's one of the easier design patterns to get started with but also one of the most powerful.

# The Mediator Pattern

In the section on the Observer pattern, we were introduced to a way of channeling multiple event sources through a single object. This is also known as Publish/Subscribe or Event Aggregation. It's common for developers to think of Mediators when faced with this problem, so let's explore how they differ.

The dictionary refers to a mediator as *a neutral party that assists in negotiations and conflict resolution*. In our world, a mediator is a behavioral design pattern that allows us to expose a unified interface through which the different parts of a system may communicate.

If it appears a system has too many direct relationships between components, it may be time to have a central point of control that components communicate through instead. The Mediator promotes loose coupling by ensuring that instead of components referring to each other explicitly, their interaction is handled through this central point. This can help us decouple systems and improve the potential for component reusability.

A real-world analogy could be a typical airport traffic control system. A tower (Mediator) handles what planes can take off and land because all communications (notifications being listened out for or broadcast) are done from the planes to the control tower, rather than from plane-to-plane. A centralized controller is key to the success of this system and that's really the role a Mediator plays in software design.

Another analogy would be DOM event bubbling and event delegation. If all subscriptions in a system are made against the document rather than individual nodes, the document effectively serves as a Mediator. Instead of binding to the events of the individual nodes, a higher level object is given the responsibility of notifying subscribers about interaction events.

When it comes to the Mediator and Event Aggregator patterns, there are some times where it may look like the patterns are interchangeable due to implementation similarities. However, the semantics and intent of these patterns are very different.

And even if the implementations both use some of the same core constructs, I believe there is a distinct difference between them. I also believe they should not be interchanged or confused in

communication because of the differences.

## A Simple Mediator

A Mediator is an object that coordinates interactions (logic and behavior) between multiple objects. It makes decisions on when to call which objects, based on the actions (or inaction) of other objects and input.

You can write a mediator using a single line of code:

```
1 | var mediator = {};
```

Yes, of course this is just an object literal in JavaScript. Once again, we're talking about semantics here. The purpose of the mediator is to control the workflow between objects and we really don't need anything more than an object literal to do this.

```
1 | var orgChart = {
2 |
3 |     addNewEmployee: function(){
4 |
5 |         // getEmployeeDetail provides a view that users interact with
6 |         var employeeDetail = this.getEmployeeDetail();
7 |
8 |         // when the employee detail is complete, the mediator (the 'orgchart'
9 |         // decides what should happen next
10 |         employeeDetail.on("complete", function(employee){
11 |
12 |             // set up additional objects that have additional events, which ar
13 |             // by the mediator to do additional things
14 |             var managerSelector = this.selectManager(employee);
15 |             managerSelector.on("save", function(employee){
16 |                 employee.save();
17 |             });
18 |
19 |         });
20 |     },
21 |
22 |     // ...
23 | }
```

This example shows a very basic implementation of a mediator object with some utility methods that can trigger and subscribe to events.

I've often referred to this type of object as a "workflow" object in the past, but the truth is that it is a mediator. It is an object that handles the workflow between many other objects, aggregating the responsibility of that workflow knowledge into a single object. The result is workflow that is easier to understand and maintain.

## Similarities And Differences

There are, without a doubt, similarities between the event aggregator and mediator examples that I've shown here. The similarities boil down to two primary items: events and third-party objects. These differences are superficial at best, though. When we dig into the intent of the pattern and see that the implementations can be dramatically different, the nature of the patterns become more apparent.

### Events

Both the event aggregator and mediator use events, in the above examples. An event aggregator obviously deals with events – it's in the name after all. The mediator only uses events because it makes life easy when dealing with modern JavaScript webapp frameworks. There is nothing that says a mediator must be built with events. You can build a mediator with callback methods, by handing the mediator reference to the child object, or by any of a number of other means.

The difference, then, is why these two patterns are both using events. The event aggregator, as a pattern, is designed to deal with events. The mediator, though, only uses them because it's convenient.

### Third-Party Objects

Both the event aggregator and mediator, by design, use a third-party object to facilitate things. The event aggregator itself is a third-party to the event publisher and the event subscriber. It acts as a central hub for events to pass through. The mediator is also a third party to other objects, though. So where is the difference? Why don't we call an event aggregator a mediator? The answer largely comes down to where the application logic and workflow is coded.

In the case of an event aggregator, the third party object is there only to facilitate the pass-through of events from an unknown number of sources to an unknown number of handlers. All workflow and business logic that needs to be kicked off is put directly into the object that triggers the events and the objects that handle the events.

In the case of the mediator, though, the business logic and workflow is aggregated into the mediator itself. The mediator decides when an object should have its methods called and attributes updated based on factors that the mediator knows about. It encapsulates the workflow and process, coordinating multiple objects to produce the desired system behaviour. The

individual objects involved in this workflow each know how to perform their own task. But it's the mediator that tells the objects when to perform the tasks by making decisions at a higher level than the individual objects.

An event aggregator facilitates a "fire and forget" model of communication. The object triggering the event doesn't care if there are any subscribers. It just fires the event and moves on. A mediator, though, might use events to make decisions, but it is definitely not "fire and forget". A mediator pays attention to a known set of input or activities so that it can facilitate and coordinate additional behavior with a known set of actors (objects).

## Relationships: When To Use Which

Understanding the similarities and differences between an event aggregator and mediator is important for semantic reasons. It's equally as important to understand when to use which pattern, though. The basic semantics and intent of the patterns does inform the question of when, but actual experience in using the patterns will help you understand the more subtle points and nuanced decisions that have to be made.

### Event Aggregator Use

In general, an event aggregator is used when you either have too many objects to listen to directly, or you have objects that are entirely unrelated.

When two objects have a direct relationship already – say, a parent view and child view – there may be benefit in using an event aggregator. Have the child view trigger an event and the parent view can handle the event. In JavaScript framework terms, this is most commonly seen in Backbone's Collection and Model, where all Model events are bubbled up to and through its parent Collection. A Collection often uses model events to modify the state of itself or other models. Handling "selected" items in a collection is a good example of this.

jQuery's on method as an event aggregator is a great example of too many objects to listen to. If you have 10, 20 or 200 DOM elements that can trigger a "click" event, it might be a bad idea to set up a listener on all of them individually. This could quickly deteriorate performance of the application and user experience. Instead, using jQuery's on method allows us to aggregate all of the events and reduce the overhead of 10, 20, or 200 event handlers down to 1.

Indirect relationships are also a great time to use event aggregators. In modern applications, it is very common to have multiple view objects that need to communicate, but have no direct relationship. For example, a menu system might have a view that handles the menu item clicks. But we don't want the menu to be directly tied to the content views that show all of the details and information when a menu item is clicked. Having the content and menu coupled together

would make the code very difficult to maintain, in the long run. Instead, we can use an event aggregator to trigger “menu:click:foo” events, and have a “foo” object handle the click event to show its content on the screen.

## Mediator Use

A mediator is best applied when two or more objects have an indirect working relationship, and business logic or workflow needs to dictate the interactions and coordination of these objects.

A wizard interface is a good example of this, as shown with the “orgChart” example, above. There are multiple views that facilitate the entire workflow of the wizard. Rather than tightly coupling the view together by having them reference each other directly, we can decouple them and more explicitly model the workflow between them by introducing a mediator.

The mediator extracts the workflow from the implementation details and creates a more natural abstraction at a higher level, showing us at a much faster glance what that workflow is. We no longer have to dig into the details of each view in the workflow, to see what the workflow actually is.

## Event Aggregator (Pub/Sub) And Mediator Together

The crux of the difference between an event aggregator and a mediator, and why these pattern names should not be interchanged with each other, is illustrated best by showing how they can be used together. The menu example for an event aggregator is the perfect place to introduce a mediator as well.

Clicking a menu item may trigger a series of changes throughout an application. Some of these changes will be independent of others, and using an event aggregator for this makes sense. Some of these changes may be internally related to each other, though, and may use a mediator to enact those changes.

A mediator, then, could be set up to listen to the event aggregator. It could run its logic and process to facilitate and coordinate many objects that are related to each other, but unrelated to the original event source.

```
1  var MenuItem = MyFrameworkView.extend({  
2  
3      events: {  
4          "click .thatThing": "clickedIt"  
5      },  
6  
7      clickedIt: function(e){  
8          e.preventDefault();  
9      }  
10 }
```

```

9      // assume this triggers "menu:click:foo"
10     MyFramework.trigger("menu:click:" + this.model.get("name"));
11   }
12 }
13 );
14 );
15
16 // ... somewhere else in the app
17
18 var MyWorkflow = function(){
19   MyFramework.on("menu:click:foo", this.doStuff, this);
20 };
21
22 MyWorkflow.prototype.doStuff = function(){
23   // instantiate multiple objects here.
24   // set up event handlers for those objects.
25   // coordinate all of the objects into a meaningful workflow.
26 };

```

In this example, when the MenuItem with the right model is clicked, the “menu:click:foo” event will be triggered. An instance of the “MyWorkflow” object, assuming one is already instantiated, will handle this specific event and will coordinate all of the objects that it knows about, to create the desired user experience and workflow.

An event aggregator and a mediator have been combined to create a much more meaningful experience in both the code and the application itself. We now have a clean separation between the menu and the workflow through an event aggregator and we are still keeping the workflow itself clean and maintainable through the use of a mediator.

## Advantages & Disadvantages

---

The largest benefit of the Mediator pattern is that it reduces the communication channels needed between objects or components in a system from many to many to just many to one. Adding new publishers and subscribers is relatively easy due to the level of decoupling present.

Perhaps the biggest downside of using the pattern is that it can introduce a single point of failure. Placing a Mediator between modules can also cause a performance hit as they are always communicating indirectly. Because of the nature of loose coupling, it's difficult to establish how a system might react by only looking at the broadcasts.

That said, it's useful to remind ourselves that decoupled systems have a number of other benefits - if our modules communicated with each other directly, changes to modules (e.g another module throwing an exception) could easily have a domino effect on the rest of our application. This problem is less of a concern with decoupled systems.

At the end of the day, tight coupling causes all kinds of headaches and this is just another alternative solution, but one which can work very well if implemented correctly.

## Mediator Vs. Facade

---

We will be covering the Facade pattern shortly, but for reference purposes some developers may also wonder whether there are similarities between the Mediator and Facade patterns. They do both abstract the functionality of existing modules, but there are some subtle differences.

The Mediator centralizes communication between modules where it's explicitly referenced by these modules. In a sense this is multidirectional. The Facade however just defines a simpler interface to a module or system but doesn't add any additional functionality. Other modules in the system aren't directly aware of the concept of a facade and could be considered unidirectional.

## The Prototype Pattern

The GoF refer to the prototype pattern as one which creates objects based on a template of an existing object through cloning.

We can think of the prototype pattern as being based on prototypal inheritance where we create objects which act as prototypes for other objects. The prototype object itself is effectively used as a blueprint for each object the constructor creates. If the prototype of the constructor function used contains a property called `name` for example (as per the code sample lower down), then each object created by that same constructor will also have this same property.

Reviewing the definitions for this pattern in existing (non-JavaScript) literature, we **may** find references to classes once again. The reality is that prototypal inheritance avoids using classes altogether. There isn't a "definition" object nor a core object in theory. We're simply creating copies of existing functional objects.

One of the benefits of using the prototype pattern is that we're working with the prototypal strengths JavaScript has to offer natively rather than attempting to imitate features of other languages. With other design patterns, this isn't always the case.

Not only is the pattern an easy way to implement inheritance, but it can also come with a performance boost as well: when defining a function in an object, they're all created by reference (so all child objects point to the same function) instead of creating their own individual copies.

For those interested, real prototypal inheritance, as defined in the ECMAScript 5 standard, requires the use of `Object.create` (which we previously looked at earlier in this section). To remind ourselves, `Object.create` creates an object which has a specified prototype and optionally contains specified properties as well (e.g `Object.create( prototype, optionalDescriptorObjects )`).

We can see this demonstrated in the example below:

```

1  var myCar = {
2
3      name: "Ford Escort",
4
5      drive: function () {
6          console.log( "Weeee. I'm driving!" );
7      },
8
9      panic: function () {
10         console.log( "Wait. How do you stop this thing?" );
11     }
12
13 };
14
15 // Use Object.create to instantiate a new car
16 var yourCar = Object.create( myCar );
17
18 // Now we can see that one is a prototype of the other
19 console.log( yourCar.name );

```

`Object.create` also allows us to easily implement advanced concepts such as differential inheritance where objects are able to directly inherit from other objects. We saw earlier that `Object.create` allows us to initialise object properties using the second supplied argument. For example:

```

1  var vehicle = {
2      getModel: function () {
3          console.log( "The model of this vehicle is.." + this.model );
4      }
5  };
6
7  var car = Object.create(vehicle, {
8
9      "id": {
10         value: MY_GLOBAL.nextId(),
11         // writable:false, configurable:false by default

```

```

12     enumerable: true
13 },
14
15 "model": {
16   value: "Ford",
17   enumerable: true
18 }
19
20 });

```

Here the properties can be initialized on the second argument of `Object.create` using an object literal with a syntax similar to that used by the `Object.defineProperties` and `Object.defineProperty` methods that we looked at previously.

It is worth noting that prototypal relationships can cause trouble when enumerating properties of objects and (as Crockford recommends) wrapping the contents of the loop in a `hasOwnProperty()` check.

If we wish to implement the prototype pattern without directly using `Object.create`, we can simulate the pattern as per the above example as follows:

```

1 var vehiclePrototype = {
2
3   init: function ( carModel ) {
4     this.model = carModel;
5   },
6
7   getModel: function () {
8     console.log( "The model of this vehicle is.." + this.model );
9   }
10 };
11
12
13 function vehicle( model ) {
14
15   function F() {};
16   F.prototype = vehiclePrototype;
17
18   var f = new F();
19
20   f.init( model );
21   return f;
22
23 }
24
25 var car = vehicle( "Ford Escort" );
26 car.getModel();

```

**Note:** This alternative does not allow the user to define read-only properties in the same manner (as the vehiclePrototype may be altered if not careful).

A final alternative implementation of the Prototype pattern could be the following:

```

1  var beget = (function () {
2
3      function F() {}
4
5      return function ( proto ) {
6          F.prototype = proto;
7          return new F();
8      };
9  })();

```

One could reference this method from the `vehicle` function. Note, however that `vehicle` here is emulating a constructor, since the prototype pattern does not include any notion of initialization beyond linking an object to a prototype.

## The Command Pattern

The Command pattern aims to encapsulate method invocation, requests or operations into a single object and gives us the ability to both parameterize and pass method calls around that can be executed at our discretion. In addition, it enables us to decouple objects invoking the action from the objects which implement them, giving us a greater degree of overall flexibility in swapping out concrete *classes* (objects).

*Concrete* classes are best explained in terms of class-based programming languages and are related to the idea of abstract classes. An *abstract* class defines an interface, but doesn't necessarily provide implementations for all of its member functions. It acts as a base class from which others are derived. A derived class which implements the missing functionality is called a *concrete* class.

The general idea behind the Command pattern is that it provides us a means to separate the responsibilities of issuing commands from anything executing commands, delegating this responsibility to different objects instead.

Implementation wise, simple command objects bind together both an action and the object wishing to invoke the action. They consistently include an execution operation (such as `run()` or

`execute()`). All Command objects with the same interface can easily be swapped as needed and this is considered one of the larger benefits of the pattern.

To demonstrate the Command pattern we're going to create a simple car purchasing service.

```

1  (function(){
2
3      var carManager = {
4
5          // request information
6          requestInfo: function( model, id ){
7              return "The information for " + model + " with ID " + id + " is fo
8          },
9
10         // purchase the car
11         buyVehicle: function( model, id ){
12             return "You have successfully purchased Item " + id + ", a " + mod
13         },
14
15         // arrange a viewing
16         arrangeViewing: function( model, id ){
17             return "You have successfully booked a viewing of " + model + " ("
18         }
19
20     };
21
22 })();

```

Taking a look at the above code, it would be trivial to invoke our `carManager` methods by directly accessing the object. We would all be forgiven for thinking there is nothing wrong with this - technically, it's completely valid JavaScript. There are however scenarios where this may be disadvantageous.

For example, imagine if the core API behind the `carManager` changed. This would require all objects directly accessing these methods within our application to also be modified. This could be viewed as a layer of coupling which effectively goes against the OOP methodology of loosely coupling objects as much as possible. Instead, we could solve this problem by abstracting the API away further.

Let's now expand on our `carManager` so that our application of the Command pattern results in the following: accept any named methods that can be performed on the `carManager` object, passing along any data that might be used such as the Car model and ID.

Here is what we would like to be able to achieve:

```
1 | carManager.execute( "buyVehicle", "Ford Escort", "453543" );
```

As per this structure we should now add a definition for the `carManager.execute` method as follows:

```
1 | carManager.execute = function ( name ) {
2 |   return carManager[name] && carManager[name].apply( carManager, [].slice.call( arguments, 1 ) );
3 | }
```

Our final sample calls would thus look as follows:

```
1 | carManager.execute( "arrangeViewing", "Ferrari", "14523" );
2 | carManager.execute( "requestInfo", "Ford Mondeo", "54323" );
3 | carManager.execute( "requestInfo", "Ford Escort", "34232" );
4 | carManager.execute( "buyVehicle", "Ford Escort", "34232" );
```

## The Facade Pattern

When we put up a facade, we present an outward appearance to the world which may conceal a very different reality. This was the inspiration for the name behind the next pattern we're going to review - the Facade pattern. This pattern provides a convenient higher-level interface to a larger body of code, hiding its true underlying complexity. Think of it as simplifying the API being presented to other developers, something which almost always improves usability.

Facades are a structural pattern which can often be seen in JavaScript libraries like jQuery where, although an implementation may support methods with a wide range of behaviors, only a "facade" or limited abstraction of these methods is presented to the public for use.

This allows us to interact with the Facade directly rather than the subsystem behind the scenes. Whenever we use jQuery's `$(el).css()` or `$(el).animate()` methods, we're actually using a Facade - the simpler public interface that avoids us having to manually call the many internal methods in jQuery core required to get some behavior working. This also avoids the need to manually interact with DOM APIs and maintain state variables.

The jQuery core methods should be considered intermediate abstractions. The more immediate burden to developers is the DOM API and facades are what make the jQuery library so easy to use.

To build on what we've learned, the Facade pattern both simplifies the interface of a class and it also decouples the class from the code that utilizes it. This gives us the ability to indirectly interact with subsystems in a way that can sometimes be less prone to error than accessing the subsystem directly. A Facade's advantages include ease of use and often a small size-footprint in implementing the pattern.

Let's take a look at the pattern in action. This is an unoptimized code example, but here we're utilizing a Facade to simplify an interface for listening to events cross-browser. We do this by creating a common method that can be used in one's code which does the task of checking for the existence of features so that it can provide a safe and cross-browser compatible solution.

```
1 var addMyEvent = function( el,ev,fn ){
2
3     if( el.addEventListener ){
4         el.addEventListener( ev,fn, false );
5     }else if(el.attachEvent){
6         el.attachEvent( "on" + ev, fn );
7     } else{
8         el[ "on" + ev ] = fn;
9     }
10
11};
```

In a similar manner, we're all familiar with jQuery's `$(document).ready(..)`. Internally, this is actually being powered by a method called `bindReady()`, which is doing this:

This is another example of a Facade, where the rest of the world simply uses the limited interface exposed by `$(document).ready(..)` and the more complex implementation powering it is kept hidden from sight.

Facades don't just have to be used on their own, however. They can also be integrated with other patterns such as the Module pattern. As we can see below, our instance of the module patterns contains a number of methods which have been privately defined. A Facade is then used to supply a much simpler API to accessing these methods:

```

1  var module = (function() {
2
3      var _private = {
4          i: 5,
5          get: function() {
6              console.log( "current value:" + this.i);
7          },
8          set: function( val ) {
9              this.i = val;
10         },
11         run: function() {
12             console.log( "running" );
13         },
14         jump: function(){
15             console.log( "jumping" );
16         }
17     };
18
19     return {
20
21         facade: function( args ) {
22             _private.set(args.val);
23             _private.get();
24             if ( args.run ) {
25                 _private.run();
26             }
27         }
28     };
29 }());
30
31
32 // Outputs: "current value: 10" and "running"
33 module.facade( {run: true, val: 10} );

```

In this example, calling `module.facade()` will actually trigger a set of private behavior within the module, but again, the user isn't concerned with this. we've made it much easier for them to consume a feature without needing to worry about implementation-level details.

## Notes on abstraction

Facades generally have few disadvantages, but one concern worth noting is performance. Namely, one must determine whether there is an implicit cost to the abstraction a Facade offers to our implementation and if so, whether this cost is justifiable. Going back to the jQuery library, most of us are aware that both `getElementById("identifier")` and `$("#identifier")` can be used to query an element on a page by its ID.

Did you know however that `getElementById()` on its own is significantly faster by a high order of magnitude? Take a look at this jsPerf test to see results on a per-browser level: <http://jsperf.com/getelementbyid-vs-jquery-id>. Now of course, we have to keep in mind that jQuery (and Sizzle - its selector engine) are doing a lot more behind the scenes to optimize our query (and that a jQuery object, not just a DOM node is returned).

The challenge with this particular Facade is that in order to provide an elegant selector function capable of accepting and parsing multiple types of queries, there is an implicit cost of abstraction. The user isn't required to access `jQuery.getById("identifier")` or `jQuery.getByClass("identifier")` and so on. That said, the trade-off in performance has been tested in practice over the years and given the success of jQuery, a simple Facade actually worked out very well for the team.

When using the pattern, try to be aware of any performance costs involved and make a call on whether they are worth the level of abstraction offered.

## The Factory Pattern

The Factory pattern is another creational pattern concerned with the notion of creating objects. Where it differs from the other patterns in its category is that it doesn't explicitly require us to use a constructor. Instead, a Factory can provide a generic interface for creating objects, where we can specify the type of factory object we wish to be created.

Imagine that we have a UI factory where we are asked to create a type of UI component. Rather than creating this component directly using the `new` operator or via another creational constructor, we ask a Factory object for a new component instead. We inform the Factory what type of object is required (e.g "Button", "Panel") and it instantiates this, returning it to us for use.

This is particularly useful if the object creation process is relatively complex, e.g. if it strongly depends on dynamic factors or application configuration.

Examples of this pattern can be found in UI libraries such as ExtJS where the methods for creating objects or components may be further subclassed.

The following is an example that builds upon our previous snippets using the Constructor pattern logic to define cars. It demonstrates how a Vehicle *Factory* may be implemented using the Factory pattern:

```
1 // Types.js - Constructors used behind the scenes
2
3 // A constructor for defining new cars
4 function Car( options ) {
5
6     // some defaults
7     this.does = options.does || 4;
8     this.state = options.state || "brand new";
9     this.color = options.color || "silver";
10
11 }
12
13 // A constructor for defining new trucks
14 function Truck( options){
15
16     this.state = options.state || "used";
17     this.wheelSize = options.wheelSize || "large";
18     this.color = options.color || "blue";
19 }
20
21
22 // FactoryExample.js
23
24 // Define a skeleton vehicle factory
25 function VehicleFactory() {}
26
27 // Define the prototypes and utilities for this factory
28
29 // Our default vehicleClass is Car
30 VehicleFactory.prototype.vehicleClass = Car;
31
32 // Our Factory method for creating new Vehicle instances
33 VehicleFactory.prototype.createVehicle = function ( options ) {
34
35     switch(options.vehicleType){
36         case "car":
37             this.vehicleClass = Car;
38             break;
39         case "truck":
40             this.vehicleClass = Truck;
41             break;
42         //defaults to VehicleFactory.prototype.vehicleClass (Car)
43     }
44
45     return new this.vehicleClass( options );
46 }
```

```

47  };
48
49 // Create an instance of our factory that makes cars
50 var carFactory = new VehicleFactory();
51 var car = carFactory.createVehicle( {
52     vehicleType: "car",
53     color: "yellow",
54     doors: 6 } );
55
56 // Test to confirm our car was created using the vehicleClass/prototype
57
58 // Outputs: true
59 console.log( car instanceof Car );
60
61 // Outputs: Car object of color "yellow", doors: 6 in a "brand new" stat
62 console.log( car );

```

## Approach #1: Modify a VehicleFactory instance to use the Truck class

```

1  var movingTruck = carFactory.createVehicle( {
2      vehicleType: "truck",
3      state: "like new",
4      color: "red",
5      wheelSize: "small" } );
6
7 // Test to confirm our truck was created with the vehicleClass/prototype
8
9 // Outputs: true
10 console.log( movingTruck instanceof Truck );
11
12 // Outputs: Truck object of color "red", a "like new" state
13 // and a "small" wheelSize
14 console.log( movingTruck );

```

## Approach #2: Subclass VehicleFactory to create a factory class that builds Trucks

```

1  function TruckFactory () {}
2  TruckFactory.prototype = new VehicleFactory();
3  TruckFactory.prototype.vehicleClass = Truck;
4
5  var truckFactory = new TruckFactory();
6  var myBigTruck = truckFactory.createVehicle( {
7      state: "omg..so bad.",
8      color: "pink",
9      wheelSize: "so big" } );
10
11 // Confirms that myBigTruck was created with the prototype Truck
12 // Outputs: true
13 console.log( myBigTruck instanceof Truck );

```

```
14 // Outputs: Truck object with the color "pink", wheelSize "so big"
15 // and state "omg. so bad"
16
17 console.log( myBigTruck );
```

## When To Use The Factory Pattern

---

The Factory pattern can be especially useful when applied to the following situations:

- When our object or component setup involves a high level of complexity
- When we need to easily generate different instances of objects depending on the environment we are in
- When we're working with many small objects or components that share the same properties
- When composing objects with instances of other objects that need only satisfy an API contract (aka, duck typing) to work. This is useful for decoupling.

## When Not To Use The Factory Pattern

---

When applied to the wrong type of problem, this pattern can introduce an unnecessarily great deal of complexity to an application. Unless providing an interface for object creation is a design goal for the library or framework we are writing, I would suggest sticking to explicit constructors to avoid the unnecessary overhead.

Due to the fact that the process of object creation is effectively abstracted behind an interface, this can also introduce problems with unit testing depending on just how complex this process might be.

## Abstract Factories

---

It is also useful to be aware of the **Abstract Factory** pattern, which aims to encapsulate a group of individual factories with a common goal. It separates the details of implementation of a set of objects from their general usage.

An Abstract Factory should be used where a system must be independent from the way the objects it creates are generated or it needs to work with multiple types of objects.

An example which is both simple and easier to understand is a vehicle factory, which defines ways to get or register vehicles types. The abstract factory can be named `abstractVehicleFactory`. The Abstract factory will allow the definition of types of vehicle like "car" or "truck" and concrete factories will implement only classes that fulfill the vehicle contract (e.g `Vehicle.prototype.drive` and `Vehicle.prototype.breakDown`).

```
1  var abstractVehicleFactory = (function () {
2
3      // Storage for our vehicle types
4      var types = {};
5
6      return {
7          getVehicle: function ( type, customizations ) {
8              var Vehicle = types[type];
9
10             return (Vehicle ? new Vehicle(customizations) : null);
11         },
12
13         registerVehicle: function ( type, Vehicle ) {
14             var proto = Vehicle.prototype;
15
16             // only register classes that fulfill the vehicle contract
17             if ( proto.drive && proto.breakDown ) {
18                 types[type] = Vehicle;
19             }
20
21             return abstractVehicleFactory;
22         }
23     };
24 })();
25
26
27 // Usage:
28
29 abstractVehicleFactory.registerVehicle( "car", Car );
30 abstractVehicleFactory.registerVehicle( "truck", Truck );
31
32 // Instantiate a new car based on the abstract vehicle type
33 var car = abstractVehicleFactory.getVehicle( "car", {
34     color: "lime green",
35     state: "like new" } );
36
37 // Instantiate a new truck in a similar manner
38 var truck = abstractVehicleFactory.getVehicle( "truck", {
39     wheelSize: "medium",
40     color: "neon yellow" } );
```

# The Mixin Pattern

In traditional programming languages such as C++ and Lisp, Mixins are classes which offer functionality that can be easily inherited by a sub-class or group of sub-classes for the purpose of function re-use.

## Sub-classing

For developers unfamiliar with sub-classing, we will go through a brief beginners primer on them before diving into Mixins and Decorators further.

*Sub-classing* is a term that refers to inheriting properties for a new object from a base or *superclass* object. In traditional object-oriented programming, a class **B** is able to extend another class **A**. Here we consider **A** a superclass and **B** a subclass of **A**. As such, all instances of **B** inherit the methods from **A**. **B** is however still able to define its own methods, including those that override methods originally defined by **A**.

Should **B** need to invoke a method in **A** that has been overridden, we refer to this as method chaining. Should **B** need to invoke the constructor **A** (the superclass), we call this constructor chaining.

In order to demonstrate sub-classing, we first need a base object that can have new instances of itself created. let's model this around the concept of a person.

```

1  var Person = function( firstName, lastName ){
2
3      this.firstName = firstName;
4      this.lastName = lastName;
5      this.gender = "male";
6
7  };

```

Next, we'll want to specify a new class (object) that's a subclass of the existing **Person** object. Let us imagine we want to add distinct properties to distinguish a **Person** from a **Superhero** whilst inheriting the properties of the **Person** "superclass". As superheroes share many common traits with normal people (e.g. name, gender), this should hopefully illustrate how sub-classing works adequately.

```

1  // a new instance of Person can then easily be created as follows:
2  var clark = new Person( "Clark", "Kent" );
3
4  // Define a subclass constructor for for "Superhero":
5  var Superhero = function( firstName, lastName, powers ){

```

```

6   // Invoke the superclass constructor on the new object
7   // then use .call() to invoke the constructor as a method of
8   // the object to be initialized.
9
10  Person.call( this, firstName, lastName );
11
12  // Finally, store their powers, a new array of traits not found in a
13  // Person object
14  this.powers = powers;
15
16
17 Superhero.prototype = Object.create( Person.prototype );
18 var superman = new Superhero( "Clark", "Kent", ["flight","heat-vision"] )
19 console.log( superman );
20
21 // Outputs Person attributes as well as powers

```

The `Superhero` constructor creates an object which descends from `Person`. Objects of this type have attributes of the objects that are above it in the chain and if we had set default values in the `Person` object, `Superhero` is capable of overriding any inherited values with values specific to its object.

## Mixins

In JavaScript, we can look at inheriting from Mixins as a means of collecting functionality through extension. Each new object we define has a prototype from which it can inherit further properties. Prototypes can inherit from other object prototypes but, even more importantly, can define properties for any number of object instances. We can leverage this fact to promote function reuse.

Mixins allow objects to borrow (or inherit) functionality from them with a minimal amount of complexity. As the pattern works well with JavaScript's object prototypes, it gives us a fairly flexible way to share functionality from not just one Mixin, but effectively many through multiple inheritance.

They can be viewed as objects with attributes and methods that can be easily shared across a number of other object prototypes. Imagine that we define a Mixin containing utility functions in a standard object literal as follows:

```

1  var myMixins = {
2
3    moveUp: function(){
4      console.log( "move up" );

```

```

5   },
6
7   moveDown: function(){
8     console.log( "move down" );
9   },
10
11  stop: function(){
12    console.log( "stop! in the name of love!" );
13  }
14
15 };

```

We can then easily extend the prototype of existing constructor functions to include this behavior using a helper such as the Underscore.js `_.extend()` method:

```

1 // A skeleton carAnimator constructor
2 function CarAnimator(){
3   this.moveLeft = function(){
4     console.log( "move left" );
5   }
6 }
7
8 // A skeleton personAnimator constructor
9 function PersonAnimator(){
10   this.moveRandomly = function(){ /*..*/ };
11 }
12
13 // Extend both constructors with our Mixin
14 _.extend( CarAnimator.prototype, myMixins );
15 _.extend( PersonAnimator.prototype, myMixins );
16
17 // Create a new instance of carAnimator
18 var myAnimator = new CarAnimator();
19 myAnimator.moveLeft();
20 myAnimator.moveDown();
21 myAnimator.stop();
22
23 // Outputs:
24 // move left
25 // move down
26 // stop! in the name of love!

```

As we can see, this allows us to easily "mix" in common behaviour into object constructors fairly trivially.

In the next example, we have two constructors: a Car and a Mixin. What we're going to do is augment (another way of saying extend) the Car so that it can inherit specific methods defined in the Mixin, namely `driveForward()` and `driveBackward()`. This time we won't be using Underscore.js.

Instead, this example will demonstrate how to augment a constructor to include functionality without the need to duplicate this process for every constructor function we may have.

```
1 // Define a simple Car constructor
2 var Car = function ( settings ) {
3
4     this.model = settings.model || "no model provided";
5     this.color = settings.color || "no colour provided";
6
7 };
8
9 // Mixin
10 var Mixin = function () {};
11
12 Mixin.prototype = {
13
14     driveForward: function () {
15         console.log( "drive forward" );
16     },
17
18     driveBackward: function () {
19         console.log( "drive backward" );
20     },
21
22     driveSideways: function () {
23         console.log( "drive sideways" );
24     }
25 };
26
27
28
29 // Extend an existing object with a method from another
30 function augment( receivingClass, givingClass ) {
31
32     // only provide certain methods
33     if ( arguments[2] ) {
34         for ( var i = 2, len = arguments.length; i < len; i++ ) {
35             receivingClass.prototype[arguments[i]] = givingClass.prototype[arguments[i]];
36         }
37     }
38     // provide all methods
39     else {
40         for ( var methodName in givingClass.prototype ) {
41
42             // check to make sure the receiving class doesn't
43             // have a method of the same name as the one currently
44             // being processed
45             if ( !Object.hasOwnProperty.call(receivingClass.prototype, methodName) )
46                 receivingClass.prototype[methodName] = givingClass.prototype[methodName];
47
48             // Alternatively (check prototype chain as well):
49             // if ( !receivingClass.prototype[methodName] ) {
50                 receivingClass.prototype[methodName] = givingClass.prototype[methodName];
51             // }
52         }
53     }
54 }
```

```
53      }
54  }
55 }
56
57
58 // Augment the Car constructor to include "driveForward" and "driveBackw
59 augment( Car, Mixin, "driveForward", "driveBackward" );
60
61 // Create a new Car
62 var myCar = new Car({
63   model: "Ford Escort",
64   color: "blue"
65 });
66
67 // Test to make sure we now have access to the methods
68 myCar.driveForward();
69 myCar.driveBackward();
70
71 // Outputs:
72 // drive forward
73 // drive backward
74
75 // We can also augment Car to include all functions from our mixin
76 // by not explicitly listing a selection of them
77 augment( Car, Mixin );
78
79 var mySportsCar = new Car({
80   model: "Porsche",
81   color: "red"
82 });
83
84 mySportsCar.driveSideways();
85
86 // Outputs:
87 // drive sideways
```

## Advantages & Disadvantages

---

Mixins assist in decreasing functional repetition and increasing function re-use in a system. Where an application is likely to require shared behaviour across object instances, we can easily avoid any duplication by maintaining this shared functionality in a Mixin and thus focusing on implementing only the functionality in our system which is truly distinct.

That said, the downsides to Mixins are a little more debatable. Some developers feel that injecting functionality into an object prototype is a bad idea as it leads to both prototype pollution and a level of uncertainty regarding the origin of our functions. In large systems this may well be the case.

I would argue that strong documentation can assist in minimizing the amount of confusion regarding the source of mixed in functions, but as with every pattern, if care is taken during implementation we should be okay.

# The Decorator Pattern

Decorators are a structural design pattern that aim to promote code re-use. Similar to Mixins, they can be considered another viable alternative to object sub-classing.

Classically, Decorators offered the ability to add behaviour to existing classes in a system dynamically. The idea was that the *decoration* itself wasn't essential to the base functionality of the class, otherwise it would be baked into the *superclass* itself.

They can be used to modify existing systems where we wish to add additional features to objects without the need to heavily modify the underlying code using them. A common reason why developers use them is their applications may contain features requiring a large quantity of distinct types of object. Imagine having to define hundreds of different object constructors for say, a JavaScript game.

The object constructors could represent distinct player types, each with differing capabilities. A *Lord of the Rings* game could require constructors for `Hobbit`, `Elf`, `Orc`, `Wizard`, `Mountain Giant`, `Stone Giant` and so on, but there could easily be hundreds of these. If we then factored in capabilities, imagine having to create sub-classes for each combination of capability type e.g `HobbitWithRing`, `HobbitWithSword`, `HobbitWithRingAndSword` and so on. This isn't very practical and certainly isn't manageable when we factor in a growing number of different abilities.

The Decorator pattern isn't heavily tied to how objects are created but instead focuses on the problem of extending their functionality. Rather than just relying on prototypal inheritance, we work with a single base object and progressively add decorator objects which provide the additional capabilities. The idea is that rather than sub-classing, we add (decorate) properties or methods to a base object so it's a little more streamlined.

Adding new attributes to objects in JavaScript is a very straight-forward process so with this in mind, a very simplistic decorator may be implemented as follows:

## Example 1: Decorating Constructors With New Functionality

```
1 // A vehicle constructor
2 function Vehicle( vehicleType ){
3
4     // some sane defaults
5     this.vehicleType = vehicleType || "car";
6     this.model = "default";
7     this.license = "00000-000";
8
9 }
10
11 // Test instance for a basic vehicle
12 var testInstance = new Vehicle( "car" );
13 console.log( testInstance );
14
15 // Outputs:
16 // vehicle: car, model:default, license: 00000-000
17
18 // Lets create a new instance of vehicle, to be decorated
19 var truck = new Vehicle( "truck" );
20
21 // New functionality we're decorating vehicle with
22 truck.setModel = function( modelName ){
23     this.model = modelName;
24 };
25
26 truck.setColor = function( color ){
27     this.color = color;
28 };
29
30 // Test the value setters and value assignment works correctly
31 truck.setModel( "CAT" );
32 truck.setColor( "blue" );
33
34 console.log( truck );
35
36 // Outputs:
37 // vehicle:truck, model:CAT, color: blue
38
39 // Demonstrate "vehicle" is still unaltered
40 var secondInstance = new Vehicle( "car" );
41 console.log( secondInstance );
42
43 // Outputs:
44 // vehicle: car, model:default, license: 00000-000
```

This type of simplistic implementation is functional, but it doesn't really demonstrate all of the strengths Decorators have to offer. For this, we're first going to go through my variation of the Coffee example from an excellent book called *Head First Design Patterns* by Freeman, Sierra and Bates, which is modeled around a Macbook purchase.

## Example 2: Decorating Objects With Multiple Decorators

---

```

1 // The constructor to decorate
2 function MacBook() {
3
4     this.cost = function () { return 997; };
5     this.screenSize = function () { return 11.6; };
6
7 }
8
9 // Decorator 1
10 function memory( macbook ) {
11
12     var v = macbook.cost();
13     macbook.cost = function() {
14         return v + 75;
15     };
16
17 }
18
19 // Decorator 2
20 function engraving( macbook ){
21
22     var v = macbook.cost();
23     macbook.cost = function(){
24         return v + 200;
25     };
26
27 }
28
29 // Decorator 3
30 function insurance( macbook ){
31
32     var v = macbook.cost();
33     macbook.cost = function(){
34         return v + 250;
35     };
36
37 }
38
39 var mb = new MacBook();
40 memory( mb );
41 engraving( mb );
42 insurance( mb );
43
44 // Outputs: 1522
45 console.log( mb.cost() );
46
47 // Outputs: 11.6
48 console.log( mb.screenSize() );

```

In the above example, our Decorators are overriding the `MacBook()` super-class objects `.cost()` function to return the current price of the `Macbook` plus the cost of the upgrade being specified.

It's considered a decoration as the original `Macbook` objects constructor methods which are not overridden (e.g. `screenSize()`) as well as any other properties which we may define as a part of

the `Macbook` remain unchanged and intact.

There isn't really a defined *interface* in the above example and we're shifting away the responsibility of ensuring an object meets an interface when moving from the creator to the receiver.

## Pseudo-classical Decorators

We're now going to examine a variation of the Decorator first presented in a JavaScript form in *Pro JavaScript Design Patterns* (PJDP) by Dustin Diaz and Ross Harmes.

Unlike some of the examples from earlier, Diaz and Harmes stick more closely to how decorators are implemented in other programming languages (such as Java or C++) using the concept of an "interface", which we will define in more detail shortly.

**Note:** This particular variation of the Decorator pattern is provided for reference purposes. If finding it overly complex, I recommend opting for one of the simpler implementations covered earlier.

## Interfaces

---

PJDP describes the Decorator as a pattern that is used to transparently wrap objects inside other objects of the same interface. An interface is a way of defining the methods an object **should** have, however, it doesn't actually directly specify how those methods should be implemented.

They can also indicate what parameters the methods take, but this is considered optional.

So, why would we use an interface in JavaScript? The idea is that they're self-documenting and promote reusability. In theory, interfaces also make code more stable by ensuring changes to them must also be made to the objects implementing them.

Below is an example of an implementation of interfaces in JavaScript using duck-typing - an approach that helps determine whether an object is an instance of constructor/object based on the methods it implements.

```
1 // Create interfaces using a pre-defined Interface
2 // constructor that accepts an interface name and
3 // skeleton methods to expose.
4
5 // In our reminder example summary() and placeOrder()
```

```

6  // represent functionality the interface should
7  // support
8  var reminder = new Interface( "List", [ "summary", "placeOrder" ] );
9
10 var properties = {
11   name: "Remember to buy the milk",
12   date: "05/06/2016",
13   actions:{
14     summary: function (){
15       return "Remember to buy the milk, we are almost out!";
16     },
17     placeOrder: function (){
18       return "Ordering milk from your local grocery store";
19     }
20   }
21 };
22
23 // Now create a constructor implementing the above properties
24 // and methods
25
26 function Todo( config ){
27
28   // State the methods we expect to be supported
29   // as well as the Interface instance being checked
30   // against
31
32   Interface.ensureImplements( config.actions, reminder );
33
34   this.name = config.name;
35   this.methods = config.actions;
36
37 }
38
39 // Create a new instance of our Todo constructor
40
41 var todoItem = new Todo( properties );
42
43 // Finally test to make sure these function correctly
44
45 console.log( todoItem.methods.summary() );
46 console.log( todoItem.methods.placeOrder() );
47
48 // Outputs:
49 // Remember to buy the milk, we are almost out!
50 // Ordering milk from your local grocery store

```

In the above, `Interface.ensureImplements` provides strict functionality checking and code for both this and the `Interface` constructor can be found [here](#).

The biggest problem with interfaces is that, as there isn't built-in support for them in JavaScript, there is a danger of us attempting to emulate a feature of another language that may not be an ideal fit. Lightweight interfaces can be used without a great performance cost however and we will next look at *Abstract Decorators* using this same concept.

## Abstract Decorators

To demonstrate the structure of this version of the Decorator pattern, we're going to imagine we have a superclass that models a `Macbook` once again and a store that allows us to "decorate" our Macbook with a number of enhancements for an additional fee.

Enhancements can include upgrades to 4GB or 8GB Ram, engraving, Parallels or a case. Now if we were to model this using an individual sub-class for each combination of enhancement options, it might look something like this:

```

1  var Macbook = function(){
2      //...
3  };
4
5  var MacbookWith4GBRam = function(){}
6  MacbookWith8GBRam = function(){}
7  MacbookWith4GBRamAndEngraving = function(){}
8  MacbookWith8GBRamAndEngraving = function(){}
9  MacbookWith8GBRamAndParallels = function(){}
10 MacbookWith4GBRamAndParallels = function(){}
11 MacbookWith8GBRamAndParallelsAndCase = function(){}
12 MacbookWith4GBRamAndParallelsAndCase = function(){}
13 MacbookWith8GBRamAndParallelsAndCaseAndInsurance = function(){}
14 MacbookWith4GBRamAndParallelsAndCaseAndInsurance = function(){}

```

and so on.

This would be an impractical solution as a new subclass would be required for every possible combination of enhancements that are available. As we would prefer to keep things simple without maintaining a large set of subclasses, let's look at how decorators may be used to solve this problem better.

Rather than requiring all of the combinations we saw earlier, we should simply have to create five new decorator classes. Methods that are called on these enhancement classes would be passed on to our `Macbook` class.

In our next example, decorators transparently wrap around their components and can interestingly be interchanged as they use the same interface.

Here's the interface we're going to define for the Macbook:

```

1  var Macbook = new Interface( "Macbook",
2      ["addEngraving",
3      "addParallels",

```

```

4   "add4GBRam",
5   "add8GBRam",
6   "addCase"]);
7
8 // A Macbook Pro might thus be represented as follows:
9 var MacbookPro = function(){
10    // implements Macbook
11};
12
13 MacbookPro.prototype = {
14   addEngraving: function(){
15   },
16   addParallels: function(){
17   },
18   add4GBRam: function(){
19   },
20   add8GBRam:function(){
21   },
22   addCase: function(){
23   },
24   getPrice: function(){
25     // Base price
26     return 900.00;
27   }
28 };

```

To make it easier for us to add as many more options as needed later on, an Abstract Decorator class is defined with default methods required to implement the `Macbook` interface, which the rest of the options will sub-class. Abstract Decorators ensure that we can decorate a base class independently with as many decorators as needed in different combinations (remember the example earlier?) without needing to derive a class for every possible combination.

```

1 // Macbook decorator abstract decorator class
2
3 var MacbookDecorator = function( macbook ){
4
5   Interface.ensureImplements( macbook, Macbook );
6   this.macbook = macbook;
7
8 };
9
10 MacbookDecorator.prototype = {
11   addEngraving: function(){
12     return this.macbook.addEngraving();
13   },
14   addParallels: function(){
15     return this.macbook.addParallels();
16   },
17   add4GBRam: function(){
18     return this.macbook.add4GBRam();
19   },
20   add8GBRam:function(){
21     return this.macbook.add8GBRam();
22 };

```

```

22     },
23     addCase: function(){
24         return this.macbook.addCase();
25     },
26     getPrice: function(){
27         return this.macbook.getPrice();
28     }
29 };

```

What's happening in the above sample is that the `Macbook` Decorator accepts an object (a Macbook) to use as our base component. It's using the `Macbook` interface we defined earlier and for each method is just calling the same method on the component. We can now create our option classes for what can be added, just by using the `Macbook` Decorator.

```

1 // First, define a way to extend an object a
2 // with the properties in object b. We'll use
3 // this shortly!
4 function extend( a, b ){
5     for( var key in b )
6         if( b.hasOwnProperty(key) )
7             a[key] = b[key];
8     return a;
9 }
10
11 var CaseDecorator = function( macbook ){
12     this.macbook = macbook;
13 };
14
15 // Let's now extend (decorate) the CaseDecorator
16 // with a MacbookDecorator
17 extend( CaseDecorator, MacbookDecorator );
18
19 CaseDecorator.prototype.addCase = function(){
20     return this.macbook.addCase() + "Adding case to macbook";
21 };
22
23 CaseDecorator.prototype.getPrice = function(){
24     return this.macbook.getPrice() + 45.00;
25 };

```

What we're doing here is overriding the `addCase()` and `getPrice()` methods that need to be decorated and we're achieving this by first calling these methods on the original `macbook` and then simply appending a string or numeric value (e.g 45.00) to them accordingly.

As there's been quite a lot of information presented in this section so far, let's try to bring it all together in a single example that will hopefully highlight what we have learned.

```

1 // Instantiation of the macbook
2 var myMacbookPro = new MacbookPro();

```

```

3 // Outputs: 900.00
4 console.log( myMacbookPro.getPrice() );
5
6 // Decorate the macbook
7 var decoratedMacbookPro = new CaseDecorator( myMacbookPro );
8
9
10 // This will return 945.00
11 console.log( decoratedMacbookPro.getPrice() );

```

As decorators are able to modify objects dynamically, they're a perfect pattern for changing existing systems. Occasionally, it's just simpler to create decorators around an object versus the trouble of maintaining individual sub-classes for each object type. This makes maintaining applications that may require a large number of sub-classed objects significantly more straightforward.

A functional version of this example can be found on [JSBin](#).

## Decorators With jQuery

As with other patterns we've covered, there are also examples of the Decorator pattern that can be implemented with jQuery. `jQuery.extend()` allows us to extend (or merge) two or more objects (and their properties) together into a single object at run-time.

In this scenario, a target object can be decorated with new functionality without necessarily breaking or overriding existing methods in the source/superclass object (although this can be done).

In the following example, we define three objects: defaults, options and settings. The aim of the task is to decorate the `defaults` object with additional functionality found in `optionssettings`. We must:

- (a) Leave "defaults" in an untouched state where we don't lose the ability to access the properties or functions found in it a later point
- (b) Gain the ability to use the decorated properties and functions found in "options"

```

1 var decoratorApp = decoratorApp || {};
2
3 // define the objects we're going to use
4 decoratorApp = {
5
6     defaults: {
7         validate: false,

```

```

8     limit: 5,
9     name: "foo",
10    welcome: function () {
11      console.log( "welcome!" );
12    }
13  },
14
15  options: {
16    validate: true,
17    name: "bar",
18    helloWorld: function () {
19      console.log( "hello world" );
20    }
21  },
22
23  settings: {},
24
25  printObj: function ( obj ) {
26    var arr = [],
27        next;
28    $.each( obj, function ( key, val ) {
29      next = key + ": ";
30      next += $.isPlainObject(val) ? printObj( val ) : val;
31      arr.push( next );
32    } );
33
34    return "{" + arr.join(", ") + "}";
35  }
36
37};
38
39 // merge defaults and options, without modifying defaults explicitly
40 decoratorApp.settings = $.extend({}, decoratorApp.defaults, decoratorApp
41
42 // what we have done here is decorated defaults in a way that provides
43 // access to the properties and functionality it has to offer (as well as
44 // that of the decorator "options"). defaults itself is left unchanged
45
46 $("#log")
47   .append( decoratorApp.printObj(decoratorApp.settings) +
48         + decoratorApp.printObj(decoratorApp.options) +
49         + decoratorApp.printObj(decoratorApp.defaults));
50
51 // settings -- { validate: true, limit: 5, name: bar, welcome: function
52 // helloWorld: function () { console.log( "hello world" ); } }
53 // options -- { validate: true, name: bar, helloWorld: function () { cons
54 // defaults -- { validate: false, limit: 5, name: foo, welcome: function

```

## Advantages & Disadvantages

Developers enjoy using this pattern as it can be used transparently and is also fairly flexible - as we've seen, objects can be wrapped or "decorated" with new behavior and then continue to be

used without needing to worry about the base object being modified. In a broader context, this pattern also avoids us needing to rely on large numbers of subclasses to get the same benefits.

There are however drawbacks that we should be aware of when implementing the pattern. If poorly managed, it can significantly complicate our application architecture as it introduces many small, but similar objects into our namespace. The concern here is that in addition to becoming hard to manage, other developers unfamiliar with the pattern may have a hard time grasping why it's being used.

Sufficient commenting or pattern research should assist with the latter, however as long as we keep a handle on how widespread we use the decorator in our applications we should be fine on both counts.

# Flyweight

The Flyweight pattern is a classical structural solution for optimizing code that is repetitive, slow and inefficiently shares data. It aims to minimize the use of memory in an application by sharing as much data as possible with related objects (e.g application configuration, state and so on).

The pattern was first conceived by Paul Calder and Mark Linton in 1990 and was named after the boxing weight class that includes fighters weighing less than 112lb. The name Flyweight itself is derived from this weight classification as it refers to the small weight (memory footprint) the pattern aims to help us achieve.

In practice, Flyweight data sharing can involve taking several similar objects or data constructs used by a number of objects and placing this data into a single external object. We can pass through this object to those depending on this data, rather than storing identical data across each one.

## Using Flyweights

There are two ways in which the Flyweight pattern can be applied. The first is at the data-layer, where we deal with the concept of sharing data between large quantities of similar objects stored in memory.

The second is at the DOM-layer where the Flyweight can be used as a central event-manager to avoid attaching event handlers to every child element in a parent container we wish to have some similar behavior.

As the data-layer is where the flyweight pattern is most used traditionally, we'll take a look at this first.

## Flyweights and sharing data

For this application, there are a few more concepts around the classical Flyweight pattern that we need to be aware of. In the Flyweight pattern there's a concept of two states - intrinsic and extrinsic. Intrinsic information may be required by internal methods in our objects which they absolutely cannot function without. Extrinsic information can however be removed and stored externally.

Objects with the same intrinsic data can be replaced with a single shared object, created by a factory method. This allows us to reduce the overall quantity of implicit data being stored quite significantly.

The benefit of this is that we're able to keep an eye on objects that have already been instantiated so that new copies are only ever created should the intrinsic state differ from the object we already have.

We use a manager to handle the extrinsic states. How this is implemented can vary, but one approach to this is to have the manager object contain a central database of the extrinsic states and the flyweight objects which they belong to.

## Implementing Classical Flyweights

As the Flyweight pattern hasn't been heavily used in JavaScript in recent years, many of the implementations we might use for inspiration come from the Java and C++ worlds.

Our first look at Flyweights in code is my JavaScript implementation of the Java sample of the Flyweight pattern from Wikipedia ([http://en.wikipedia.org/wiki/Flyweight\\_pattern](http://en.wikipedia.org/wiki/Flyweight_pattern)).

We will be making use of three types of Flyweight components in this implementation, which are listed below:

- **Flyweight** corresponds to an interface through which flyweights are able to receive and act on extrinsic states
- **Concrete Flyweight** actually implements the Flyweight interface and stores intrinsic state. Concrete Flyweights need to be sharable and capable of manipulating state that is extrinsic
- **Flyweight Factory** manages flyweight objects and creates them too. It makes sure that our flyweights are shared and manages them as a group of objects which can be queried if we require individual instances. If an object has been already created in the group it returns it, otherwise it adds a new object to the pool and returns it.

These correspond to the following definitions in our implementation:

- CoffeeOrder: Flyweight
- CoffeeFlavor: Concrete Flyweight
- CoffeeOrderContext: Helper
- CoffeeFlavorFactory: Flyweight Factory
- testFlyweight: Utilization of our Flyweights

## Duck punching "implements"

---

Duck punching allows us to extend the capabilities of a language or solution without necessarily needing to modify the runtime source. As this next solution requires the use of a Java keyword (`implements`) for implementing interfaces and isn't found in JavaScript natively, let's first duck punch it.

`Function.prototype.implementsFor` works on an object constructor and will accept a parent class (function) or object and either inherit from this using normal inheritance (for functions) or virtual inheritance (for objects).

```

1 // Simulate pure virtual inheritance/"implement" keyword for JS
2 Function.prototype.implementsFor = function( parentClassOrObject ){
3     if ( parentClassOrObject.constructor === Function )
4     {
5         // Normal Inheritance
6         this.prototype = new parentClassOrObject();
7         this.prototype.constructor = this;
8         this.prototype.parent = parentClassOrObject.prototype;
9     }
10    else
11    {

```

```

12     // Pure Virtual Inheritance
13     this.prototype = parentClassOrObject;
14     this.prototype.constructor = this;
15     this.prototype.parent = parentClassOrObject;
16   }
17   return this;
18 };

```

We can use this to patch the lack of an `implements` keyword by having a function inherit an interface explicitly. Below, `CoffeeFlavor` implements the `CoffeeOrder` interface and must contain its interface methods in order for us to assign the functionality powering these implementations to an object.

```

1 // Flyweight object
2 var CoffeeOrder = {
3
4   // Interfaces
5   serveCoffee:function(context){},
6   getFlavor:function(){}
7
8 };
9
10
11 // ConcreteFlyweight object that creates ConcreteFlyweight
12 // Implements CoffeeOrder
13 function CoffeeFlavor( newFlavor ){
14
15   var flavor = newFlavor;
16
17   // If an interface has been defined for a feature
18   // implement the feature
19   if( typeof this.getFlavor === "function" ){
20     this.getFlavor = function() {
21       return flavor;
22     };
23   }
24
25   if( typeof this.serveCoffee === "function" ){
26     this.serveCoffee = function( context ) {
27       console.log("Serving Coffee flavor "
28         + flavor
29         + " to table number "
30         + context.getTable());
31     };
32   }
33
34 }
35
36
37 // Implement interface for CoffeeOrder
38 CoffeeFlavor.implementsFor( CoffeeOrder );
39
40

```

```
41 // Handle table numbers for a coffee order
42 function CoffeeOrderContext( tableNumber ) {
43     return{
44         getTable: function() {
45             return tableNumber;
46         }
47     };
48 }
49
50
51 function CoffeeFlavorFactory() {
52     var flavors = {},
53     length = 0;
54
55     return {
56         getCoffeeFlavor: function (flavorName) {
57
58             var flavor = flavors[flavorName];
59             if (typeof flavor === "undefined") {
60                 flavor = new CoffeeFlavor(flavorName);
61                 flavors[flavorName] = flavor;
62                 length++;
63             }
64             return flavor;
65         },
66
67         getTotalCoffeeFlavorsMade: function () {
68             return length;
69         }
70     };
71 }
72
73 // Sample usage:
74 // testFlyweight()
75
76 function testFlyweight(){
77
78     // The flavors ordered.
79     var flavors = [],
80
81     // The tables for the orders.
82     tables = [],
83
84     // Number of orders made
85     ordersMade = 0,
86
87     // The CoffeeFlavorFactory instance
88     flavorFactory = new CoffeeFlavorFactory();
89
90     function takeOrders( flavorIn, table) {
91         flavors.push( flavorFactory.getCoffeeFlavor( flavorIn ) );
92         tables.push( new CoffeeOrderContext( table ) );
93         ordersMade++;
94     }
95
96     takeOrders("Cappuccino", 2);
```

```

98     takeOrders("Cappuccino", 2);
99     takeOrders("Frappe", 1);
100    takeOrders("Frappe", 1);
101    takeOrders("Xpresso", 1);
102    takeOrders("Frappe", 897);
103    takeOrders("Cappuccino", 97);
104    takeOrders("Cappuccino", 97);
105    takeOrders("Frappe", 3);
106    takeOrders("Xpresso", 3);
107    takeOrders("Cappuccino", 3);
108    takeOrders("Xpresso", 96);
109    takeOrders("Frappe", 552);
110    takeOrders("Cappuccino", 121);
111    takeOrders("Xpresso", 121);
112
113    for (var i = 0; i < ordersMade; ++i) {
114        flavors[i].serveCoffee(tables[i]);
115    }
116    console.log(" ");
117    console.log("total CoffeeFlavor objects made: " + flavorFactory.getT
118 }
```

## Converting code to use the Flyweight pattern

Next, let's continue our look at Flyweights by implementing a system to manage all of the books in a library. The important meta-data for each book could probably be broken down as follows:

- ID
- Title
- Author
- Genre
- Page count
- Publisher ID
- ISBN

We'll also require the following properties to keep track of which member has checked out a particular book, the date they've checked it out on as well as the expected date of return.

- checkoutDate
- checkoutMember
- dueReturnDate
- availability

Each book would thus be represented as follows, prior to any optimization using the Flyweight pattern:

```
?
1 var Book = function( id, title, author, genre, pageCount,publisherID, IS
2
3     this.id = id;
4     this.title = title;
5     this.author = author;
6     this.genre = genre;
7     this.pageCount = pageCount;
8     this.publisherID = publisherID;
9     this.ISBN = ISBN;
10    this.checkoutDate = checkoutDate;
11    this.checkoutMember = checkoutMember;
12    this.dueReturnDate = dueReturnDate;
13    this.availability = availability;
14
15};
16
17Book.prototype = {
18
19    getTitle: function () {
20        return this.title;
21    },
22
23    getAuthor: function () {
24        return this.author;
25    },
26
27    getISBN: function (){
28        return this.ISBN;
29    },
30
31    // For brevity, other getters are not shown
32    updateCheckoutStatus: function( bookID, newStatus, checkoutDate, check
33
34        this.id = bookID;
35        this.availability = newStatus;
36        this.checkoutDate = checkoutDate;
37        this.checkoutMember = checkoutMember;
38        this.dueReturnDate = newReturnDate;
39
40    },
41
42    extendCheckoutPeriod: function( bookID, newReturnDate ){
43
44        this.id = bookID;
45        this.dueReturnDate = newReturnDate;
46
47    },
48
49    isPastDue: function(bookID){
50
51        var currentDate = new Date();
52        return currentDate.getTime() > Date.parse( this.dueReturnDate );
```

```

53
54    }
55 };

```

This probably works fine initially for small collections of books, however as the library expands to include a larger inventory with multiple versions and copies of each book available, we may find the management system running slower and slower over time. Using thousands of book objects may overwhelm the available memory, but we can optimize our system using the Flyweight pattern to improve this.

We can now separate our data into intrinsic and extrinsic states as follows: data relevant to the book object (`title`, `author` etc) is intrinsic whilst the checkout data (`checkoutMember`, `dueReturnDate` etc) is considered extrinsic. Effectively this means that only one Book object is required for each combination of book properties. it's still a considerable quantity of objects, but significantly fewer than we had previously.

The following single instance of our book meta-data combinations will be shared among all of the copies of a book with a particular title.

```

1 // Flyweight optimized version
2 var Book = function ( title, author, genre, pageCount, publisherID, ISBN
3
4     this.title = title;
5     this.author = author;
6     this.genre = genre;
7     this.pageCount = pageCount;
8     this.publisherID = publisherID;
9     this.ISBN = ISBN;
10
11 };

```

As we can see, the extrinsic states have been removed. Everything to do with library check-outs will be moved to a manager and as the object data is now segmented, a factory can be used for instantiation.

## A Basic Factory

Let's now define a very basic factory. What we're going to have it do is perform a check to see if a book with a particular title has been previously created inside the system; if it has, we'll return it -

if not, a new book will be created and stored so that it can be accessed later. This makes sure that we only create a single copy of each unique intrinsic piece of data:

```

1 // Book Factory singleton
2 var BookFactory = (function () {
3     var existingBooks = {}, existingBook;
4
5     return {
6         createBook: function ( title, author, genre, pageCount, publisherID,
7
8             // Find out if a particular book meta-data combination has been cr
9             // !!! or (bang bang) forces a boolean to be returned
10            existingBook = existingBooks[ISBN];
11            if ( !existingBook ) {
12                return existingBook;
13            } else {
14
15                // if not, let's create a new instance of the book and store it
16                var book = new Book( title, author, genre, pageCount, publisherI
17                existingBooks[ISBN] = book;
18                return book;
19
20            }
21        }
22    };
23
24 })();

```

## Managing the extrinsic states

Next, we need to store the states that were removed from the Book objects somewhere - luckily a manager (which we'll be defining as a Singleton) can be used to encapsulate them. Combinations of a Book object and the library member that's checked them out will be called Book records. Our manager will be storing both and will also include checkout related logic we stripped out during our flyweight optimization of the Book class.

```

1 // BookRecordManager singleton
2 var BookRecordManager = (function () {
3
4     var bookRecordDatabase = {};
5
6     return {
7         // add a new book into the library system
8         addBookRecord: function ( id, title, author, genre, pageCount, publi
9
10            var book = BookFactory.createBook( title, author, genre, pageCount
11

```

```

12   bookRecordDatabase[id] = {
13     checkoutMember: checkoutMember,
14     checkoutDate: checkoutDate,
15     dueReturnDate: dueReturnDate,
16     availability: availability,
17     book: book
18   };
19 }
20 updateCheckoutStatus: function ( bookID, newStatus, checkoutDate, ch
21
22   var record = bookRecordDatabase[bookID];
23   record.availability = newStatus;
24   record.checkoutDate = checkoutDate;
25   record.checkoutMember = checkoutMember;
26   record.dueReturnDate = newReturnDate;
27 },
28
29 extendCheckoutPeriod: function ( bookID, newReturnDate ) {
30   bookRecordDatabase[bookID].dueReturnDate = newReturnDate;
31 },
32
33 isPastDue: function ( bookID ) {
34   var currentDate = new Date();
35   return currentDate.getTime() > Date.parse( bookRecordDatabase[book
36 }
37 };
38
39 })();

```

The result of these changes is that all of the data that's been extracted from the Book *class* is now being stored in an attribute of the BookManager singleton (BookDatabase) - something considerably more efficient than the large number of objects we were previously using. Methods related to book checkouts are also now based here as they deal with data that's extrinsic rather than intrinsic.

This process does add a little complexity to our final solution, however it's a small concern when compared to the performance issues that have been tackled. Data wise, if we have 30 copies of the same book, we are now only storing it once. Also, every function takes up memory. With the flyweight pattern these functions exist in one place (on the manager) and not on every object, thus saving on memory use. For the above-mentioned flyweight unoptimized version we store just link to the function object as we used Book constructor's prototype but if it was implemented in other way, functions would be created for every book instance.

## The Flyweight pattern and the DOM

The DOM (Document Object Model) supports two approaches that allow objects to detect events - either top down (event capture) or bottom up (event bubbling).

In event capture, the event is first captured by the outer-most element and propagated to the inner-most element. In event bubbling, the event is captured and given to the inner-most element and then propagated to the outer-elements.

One of the best metaphors for describing Flyweights in this context was written by Gary Chisholm and it goes a little like this:

Try to think of the flyweight in terms of a pond. A fish opens its mouth (the event), bubbles rise to the surface (the bubbling) a fly sitting on the top flies away when the bubble reaches the surface (the action). In this example we can easily transpose the fish opening its mouth to a button being clicked, the bubbles as the bubbling effect and the fly flying away to some function being run

Bubbling was introduced to handle situations where a single event (e.g a click) may be handled by multiple event handlers defined at different levels of the DOM hierarchy. Where this happens, event bubbling executes event handlers defined for specific elements at the lowest level possible. From there on, the event bubbles up to containing elements before going to those even higher up.

Flyweights can be used to tweak the event bubbling process further, as we will see shortly.

## Example 1: Centralized event handling

---

For our first practical example, imagine we have a number of similar elements in a document with similar behavior executed when a user-action (e.g click, mouse-over) is performed against them.

Normally what we do when constructing our own accordion component, menu or other list-based widget is bind a click event to each link element in the parent container (e.g `$('.ul li a').on(..)`). Instead of binding the click to multiple elements, we can easily attach a Flyweight to the top of our container which can listen for events coming from below. These can then be handled using logic that is as simple or complex as required.

As the types of components mentioned often have the same repeating markup for each section (e.g. each section of an accordion), there's a good chance the behavior of each element that may be clicked is going to be quite similar and relative to similar classes nearby. We'll use this information to construct a very basic accordion using the Flyweight below.

A stateManager namespace is used here to encapsulate our flyweight logic whilst jQuery is used to bind the initial click to a container div. In order to ensure that no other logic on the page is attaching similar handles to the container, an unbind event is first applied.

Now to establish exactly what child element in the container is clicked, we make use of a `target` check which provides a reference to the element that was clicked, regardless of its parent. We then use this information to handle the click event without actually needing to bind the event to specific children when our page loads.

## HTML

```

1 <div id="container">
2   <div class="toggle" href="#">More Info (Address)
3     <span class="info">
4       This is more information
5     </span></div>
6   <div class="toggle" href="#">Even More Info (Map)
7     <span class="info">
8       <iframe src="http://www.map-generator.net/extmap.php?name=Lond
9     </span>
10    </div>
11 </div>
```

## JavaScript

```

1 var stateManager = {
2
3   fly: function () {
4
5     var self = this;
6
7     $( "#container" )
8       .unbind()
9       .on( "click", "div.toggle", function ( e ) {
10         self.handleClick( e.target );
11       });
12   },
13
14   handleClick: function ( elem ) {
15     $( elem ).find( "span" ).toggle( "slow" );
16   }
17};
```

The benefit here is that we're converting many independent actions into a shared ones (potentially saving on memory).

## Example 2: Using the Flyweight for performance optimization

In our second example, we'll reference some further performance gains that can be achieved using Flyweights with jQuery.

James Padolsey previously wrote an article called *76 bytes for faster jQuery* where he reminded us that each time jQuery fires off a callback, regardless of type (filter, each, event handler), we're able to access the function's context (the DOM element related to it) via the `this` keyword.

Unfortunately, many of us have become used to the idea of wrapping `this` in `$(this)` or `jQuery(this)`, which means that a new instance of jQuery is unnecessarily constructed every time, rather than simply doing this:

```

1  $("div").on( "click", function () {
2      console.log( "You clicked: " + $( this ).attr( "id" ) );
3  });
4
5  // we should avoid using the DOM element to create a
6  // jQuery object (with the overhead that comes with it)
7  // and just use the DOM element itself like this:
8
9  $("div").on( "click", function () {
10     console.log( "You clicked:" + this.id );
11 });

```

James had wanted to use jQuery's `jQuery.text` in the following context, however he disagreed with the notion that a new jQuery object had to be created on each iteration:

```

1  $("a").map( function () {
2      return $( this ).text();
3  });

```

Now with respect to redundant wrapping, where possible with jQuery's utility methods, it's better to use `jQuery.methodName` (e.g. `jQuery.text`) as opposed to `jQuery.fn.methodName` (e.g. `jQuery.fn.text`) where `methodName` represents a utility such as `each()` or `text`. This avoids the need to call a further level of abstraction or construct a new jQuery object each time our function is called as as `jQuery.methodName` is what the library itself uses at a lower-level to power `jQuery.fn.methodName`.

Because however not all of jQuery's methods have corresponding single-node functions, Padolsey devised the idea of a `jQuery.single` utility.

The idea here is that a single jQuery object is created and used for each call to `jQuery.single` (effectively meaning only one jQuery object is ever created). The implementation for this can be found below and as we're consolidating data for multiple possible objects into a more central singular structure, it is technically also a Flyweight.

```

1  jQuery.single = (function( o ){
2
3      var collection = jQuery([1]);
4      return function( element ) {
5
6          // Give collection the element:
7          collection[0] = element;
8
9          // Return the collection:
10         return collection;
11     };
12   })();
13 })();

```

An example of this in action with chaining is:

```

1  $( "div" ).on( "click", function () {
2
3     var html = jQuery.single( this ).next().html();
4     console.log( html );
5
6   });

```

Note: Although we may believe that simply caching our jQuery code may offer just as equivalent performance gains, Padolsey claims that `$.single()` is still worth using and can perform better. That's not to say don't apply any caching at all, just be mindful that this approach can assist. For further details about `$.single`, I recommend reading Padolsey's full post.

# JavaScript MV\* Patterns

In this section, we're going to review three very important architectural patterns - MVC (Model-View-Controller), MVP (Model-View-Presenter) and MVVM (Model-View-ViewModel). In the past, these patterns have been heavily used for structuring desktop and server-side applications but it's only been in recent years that come to being applied to JavaScript.

As the majority of JavaScript developers currently using these patterns opt to utilize libraries such as Backbone.js for implementing an MVC/MV\*-like structure, we will compare how modern solutions such as it differ in their interpretation of MVC compared to classical takes on these patterns.

Let us first now cover the basics.

## MVC

MVC is an architectural design pattern that encourages improved application organization through a separation of concerns. It enforces the isolation of business data (Models) from user interfaces (Views), with a third component (Controllers) traditionally managing logic and user-input. The pattern was originally designed by [Trygve Reenskaug](#) during his time working on Smalltalk-80 (1979) where it was initially called Model-View-Controller-Editor. MVC went on to be described in depth in 1995's "[Design Patterns: Elements of Reusable Object-Oriented Software](#)" (The "GoF" book), which played a role in popularizing its use.

### Smalltalk-80 MVC

---

It's important to understand what the original MVC pattern was aiming to solve as it's mutated quite heavily since the days of its origin. Back in the 70's, graphical user-interfaces were few and far between and a concept known as [Separated Presentation](#) began to be used as a means to make a clear division between domain objects which modeled concepts in the real world (e.g a photo, a person) and the presentation objects which were rendered to the user's screen.

The Smalltalk-80 implementation of MVC took this concept further and had an objective of separating out the application logic from the user interface. The idea was that decoupling these parts of the application would also allow the reuse of models for other interfaces in the application. There are some interesting points worth noting about Smalltalk-80's MVC architecture:

- A Model represented domain-specific data and was ignorant of the user-interface (Views and Controllers). When a model changed, it would inform its observers.
- A View represented the current state of a Model. The Observer pattern was used for letting the View know whenever the Model was updated or modified.
- Presentation was taken care of by the View, but there wasn't just a single View and Controller - a View-Controller pair was required for each section or element being displayed on the screen.

- The Controllers role in this pair was handling user interaction (such as key-presses and actions e.g. clicks), making decisions for the View.

Developers are sometimes surprised when they learn that the Observer pattern (nowadays commonly implemented as the Publish/Subscribe variation) was included as a part of MVC's architecture many decades ago. In Smalltalk-80's MVC, the View observes the Model. As mentioned in the bullet point above, anytime the Model changes, the Views react. A simple example of this is an application backed by stock market data - in order for the application to be useful, any change to the data in our Models should result in the View being refreshed instantly.

Martin Fowler has done an excellent job of writing about the [origins](#) of MVC over the years and if interested in some further historical information about Smalltalk-80's MVC, I recommend reading his work.

## MVC For JavaScript Developers

We've reviewed the 70's, but let us now return to the here and now. In modern times, the MVC pattern has been applied to a diverse range of programming languages including of most relevance to us: JavaScript. JavaScript now has a number of frameworks boasting support for MVC (or variations on it, which we refer to as the MV\* family), allowing developers to easily add structure to their applications without great effort.

These frameworks include the likes of Backbone, Ember.js and AngularJS. Given the importance of avoiding "spaghetti" code, a term which describes code that is very difficult to read or maintain due to its lack of structure, it's imperative that the modern JavaScript developer understand what this pattern provides. This allows us to effectively appreciate what these frameworks enable us to do differently.

We know that MVC is composed of three core components:

### Models

---

Models manage the data for an application. They are concerned with neither the user-interface nor presentation layers but instead represent unique forms of data that an application may require. When a model changes (e.g when it is updated), it will typically notify its observers (e.g views, a concept we will cover shortly) that a change has occurred so that they may react accordingly.

To understand models further, let us imagine we have a JavaScript photo gallery application. In a photo gallery, the concept of a photo would merit its own model as it represents a unique kind of domain-specific data. Such a model may contain related attributes such as a caption, image source and additional meta-data. A specific photo would be stored in an instance of a model and a model may also be reusable. Below we can see an example of a very simplistic model implemented using Backbone.

```
1 var Photo = Backbone.Model.extend({  
2     // Default attributes for the photo  
3     defaults: {  
4         src: "placeholder.jpg",  
5         caption: "A default image",  
6         viewed: false  
7     },  
8  
9     // Ensure that each photo created has an `src`.  
10    initialize: function() {  
11        this.set( { "src": this.defaults.src} );  
12    }  
13}  
14});  
15
```

The built-in capabilities of models vary across frameworks, however it is quite common for them to support validation of attributes, where attributes represent the properties of the model, such as a model identifier. When using models in real-world applications we generally also desire model persistence. Persistence allows us to edit and update models with the knowledge that its most recent state will be saved in either: memory, in a user's localStorage data-store or synchronized with a database.

In addition, a model may also have multiple views observing it. If say, our photo model contained meta-data such as its location (longitude and latitude), friends that were present in the photo (a list of identifiers) and a list of tags, a developer may decide to provide a single view to display each of these three facets.

It is not uncommon for modern MVC/MV\* frameworks to provide a means to group models together (e.g. in Backbone, these groups are referred to as "collections"). Managing models in groups allows us to write application logic based on notifications from the group should any model it contains be changed. This avoids the need to manually observe individual model instances.

A sample grouping of models into a simplified Backbone collection can be seen below.

```

1  var PhotoGallery = Backbone.Collection.extend({
2
3      // Reference to this collection's model.
4      model: Photo,
5
6      // Filter down the list of all photos
7      // that have been viewed
8      viewed: function() {
9          return this.filter(function( photo ){
10             return photo.get( "viewed" );
11         });
12     },
13
14     // Filter down the list to only photos that
15     // have not yet been viewed
16     unviewed: function() {
17         return this.without.apply( this, this.viewed() );
18     }
19 });

```

Older texts on MVC may also contain reference to a notion of models managing application *state*. In JavaScript applications *state* has a different connotation, typically referring to the current "state" i.e view or sub-view (with specific data) on a users screen at a fixed point. State is a topic which is regularly discussed when looking at Single-page applications, where the concept of state needs to be simulated.

So to summarize, models are primarily concerned with business data.

## Views

---

Views are a visual representation of models that present a filtered view of their current state. Whilst Smalltalk views are about painting and maintaining a bitmap, JavaScript views are about building and maintaining a DOM element.

A view typically observes a model and is notified when the model changes, allowing the view to update itself accordingly. Design pattern literature commonly refers to views as "dumb" given that their knowledge of models and controllers in an application is limited.

Users are able to interact with views and this includes the ability to read and edit (i.e get or set the attribute values in) models. As the view is the presentation layer, we generally present the ability to edit and update in a user-friendly fashion. For example, in the former photo gallery application we discussed earlier, model editing could be facilitated through an "edit' view where a user who has selected a specific photo could edit its meta-data.

The actual task of updating the model falls to controllers (which we will be covering shortly).

Let's explore views a little further using a vanilla JavaScript sample implementation. Below we can see a function that creates a single Photo view, consuming both a model instance and a controller instance.

We define a `render()` utility within our view which is responsible for rendering the contents of the `photoModel` using a JavaScript templating engine (Underscore templating) and updating the contents of our view, referenced by `photoEl`.

The `photoModel` then adds our `render()` callback as one of its subscribers so that through the Observer pattern we can trigger the view to update when the model changes.

One may wonder where user-interaction comes into play here. When users click on any elements within the view, it's not the view's responsibility to know what to do next. It relies on a controller to make this decision for it. In our sample implementation, this is achieved by adding an event listener to `photoEl` which will delegate handling the click behavior back to the controller, passing the model information along with it in case it's needed.

The benefit of this architecture is that each component plays its own separate role in making the application function as needed.

```
1  var buildPhotoView = function ( photoModel, photoController ) {
2
3      var base = document.createElement( "div" ),
4          photoEl = document.createElement( "div" );
5
6      base.appendChild(photoEl);
7
8      var render = function () {
9          // We use a templating library such as Underscore
10         // templating which generates the HTML for our
11         // photo entry
12         photoEl.innerHTML = _.template( "#photoTemplate", {
13             src: photoModel.getSrc()
14         });
15     };
16
17     photoModel.addSubscriber( render );
18
19     photoEl.addEventListener( "click", function () {
20         photoController.handleEvent( "click", photoModel );
21     });
22
23     var show = function () {
24         photoEl.style.display = "";
25     };
26
27     var hide = function () {
28         photoEl.style.display = "none";
29     };
30
31     return {
32         show: show,
33         hide: hide
34     };
35 }
```

```

29     };
30
31     return {
32       showView: show,
33       hideView: hide
34     };
35   };
36 }

```

## Templating

In the context of JavaScript frameworks that support MVC/MV\*, it is worth briefly discussing JavaScript templating and its relationship to views as we briefly touched upon it in the last section.

It has long been considered (and proven) a performance bad practice to manually create large blocks of HTML markup in-memory through string concatenation. Developers doing so have fallen prey to inperformantly iterating through their data, wrapping it in nested divs and using outdated techniques such as `document.write` to inject the "template" into the DOM. As this typically means keeping scripted markup inline with our standard markup, it can quickly become both difficult to read and more importantly, maintain such disasters, especially when building non-trivially sized applications.

JavaScript templating solutions (such as Handlebars.js and Mustache) are often used to define templates for views as markup (either stored externally or within script tags with a custom type - e.g text/template) containing template variables. Variables may be delimitated using a variable syntax (e.g {{name}}) and frameworks are typically smart enough to accept data in a JSON form (which model instances can be converted to) such that we only need be concerned with maintaining clean models and clean templates. Most of the grunt work to do with population is taken care of by the framework itself. This has a large number of benefits, particularly when opting to store templates externally as this can give way to templates being dynamically loaded on an as-needed basis when it comes to building larger applications.

Below we can see two examples of HTML templates. One implemented using the popular Handlebars.js framework and another using Underscore's templates.

### Handlebars.js:

```

1 <li class="photo">
2   <h2>{{caption}}</h2>
3   
4   <div class="meta-data">
5     {{metadata}}

```

```
6 |     </div>
7 | </li>
```

## Underscore.js Microtemplates:

```
1 | <li class="photo">
2 |   <h2><%= caption %></h2>
3 |   
4 |   <div class="meta-data">
5 |     <%= metadata %>
6 |   </div>
7 | </li>
```

Note that templates are not themselves views. Developers coming from a Struts Model 2 architecture may feel like a template *\*is\** a view, but it isn't. A view is an object which observes a model and keeps the visual representation up-to-date. A template *\*might\** be a declarative way to specify part or even all of a view object so that it can be generated from the template specification.

It is also worth noting that in classical web development, navigating between independent views required the use of a page refresh. In Single-page JavaScript applications however, once data is fetched from a server via Ajax, it can simply be dynamically rendered in a new view within the same page without any such refresh being necessary.

The role of navigation thus falls to a "router", which assists in managing application state (e.g allowing users to bookmark a particular view they have navigated to). As routers are, however, neither a part of MVC nor present in every MVC-like framework, I will not be going into them in greater detail in this section.

To summarize, views are a visual representation of our application data.

## Controllers

---

Controllers are an intermediary between models and views which are classically responsible for updating the model when the user manipulates the view.

In our photo gallery application, a controller would be responsible for handling changes the user made to the edit view for a particular photo, updating a specific photo model when a user has finished editing.

Remember that the controllers fulfill one role in MVC: the facilitation of the Strategy pattern for the view. In the Strategy pattern regard, the view delegates to the controller at the view's discretion. So, that's how the strategy pattern works. The view could delegate handling user

events to the controller when the view sees fit. The view \*could\* delegate handling model change events to the controller if the view sees fit, but this is not the traditional role of the controller.

In terms of where most JavaScript MVC frameworks detract from what is conventionally considered "MVC" however, it is with controllers. The reasons for this vary, but in my honest opinion, it is that framework authors initially look at the server-side interpretation of MVC, realize that it doesn't translate 1:1 on the client-side and re-interpret the C in MVC to mean something they feel makes more sense. The issue with this however is that it is subjective, increases the complexity in both understanding the classical MVC pattern and of course the role of controllers in modern frameworks.

As an example, let's briefly review the architecture of the popular architectural framework Backbone.js. Backbone contains models and views (somewhat similar to what we reviewed earlier), however it doesn't actually have true controllers. Its views and routers act a little similar to a controller, but neither are actually controllers on their own.

In this respect, contrary to what might be mentioned in the official documentation or in blog posts, Backbone is neither a truly MVC/MVP nor MVVM framework. It's in fact better to consider it a member of the MV\* family which approaches architecture in its own way. There is of course nothing wrong with this, but it is important to distinguish between classical MVC and MV\* should we begin relying on advice from classical literature on the former to help with the latter.

## Controllers in another library (Spine.js) vs Backbone.js

---

### Spine.js

We now know that controllers are traditionally responsible for updating the model when the user updates the view. It's interesting to note that the most popular JavaScript MVC/MV\* framework at the time of writing (Backbone) does not have its **own** explicit concept of controllers.

It can thus be useful for us to review the controller from another MVC framework to appreciate the difference in implementations and further demonstrate how nontraditionally frameworks approach the role of the controller. For this, let's take a look at a sample controller from Spine.js:

In this example, we're going to have a controller called `PhotosController` which will be in charge of individual photos in the application. It will ensure that when the view updates (e.g a user edited the photo meta-data) the corresponding model does too.

Note: We won't be delving heavily into Spine.js at all, but will just take a ten-foot view of what its controllers can do:

```

1 // Controllers in Spine are created by inheriting from Spine.Controller
2
3 var PhotosController = Spine.Controller.sub({
4
5   init: function () {
6     this.item.bind( "update", this.proxy( this.render ) );
7     this.item.bind( "destroy", this.proxy( this.remove ) );
8   ,
9
10  render: function () {
11    // Handle templating
12    this.replace( $( "#photoTemplate" ).tmpl( this.item ) );
13    return this;
14  ,
15
16  remove: function () {
17    this.el.remove();
18    this.release();
19  }
20 });

```

In Spine, controllers are considered the glue for an application, adding and responding to DOM events, rendering templates and ensuring that views and models are kept in sync (which makes sense in the context of what we know to be a controller).

What we're doing in the above example is setting up listeners in the `update` and `destroy` events using `render()` and `remove()`. When a photo entry gets updated, we re-render the view to reflect the changes to the meta-data. Similarly, if the photo gets deleted from the gallery, we remove it from the view. In the `render()` function, we're using Underscore micro-templating (via `_.template()`) to render a JavaScript template with the ID `#photoTemplate`. This simply returns a compiled HTML string used to populate the contents of `photoEl`.

What this provides us with is a very lightweight, simple way to manage changes between the model and the view.

## Backbone.js

Later on in this section we're going to revisit the differences between Backbone and traditional MVC, but for now let's focus on controllers.

In Backbone, one shares the responsibility of a controller with both the `Backbone.View` and `Backbone.Router`. Some time ago Backbone did once come with its own `Backbone.Controller`, but as the naming for this component didn't make sense for the context in which it was being used, it was later renamed to Router.

Routers handle a little more of the controller responsibility as it's possible to bind the events there for models and have our view respond to DOM events and rendering. As Tim Branyen (another Bocoup-based Backbone contributor) has also previously pointed out, it's possible to get away with not needing `Backbone.Router` at all for this, so a way to think about it using the Router paradigm is probably:

```

1  var PhotoRouter = Backbone.Router.extend({
2    routes: { "photos/:id": "route" },
3
4    route: function( id ) {
5      var item = photoCollection.get( id );
6      var view = new PhotoView( { model: item } );
7
8      $('.content').html( view.render().el );
9    }
10 });

```

To summarize, the takeaway from this section is that controllers manage the logic and coordination between models and views in an application.

## What does MVC give us?

This separation of concerns in MVC facilitates simpler modularization of an application's functionality and enables:

- Easier overall maintenance. When updates need to be made to the application it is very clear whether the changes are data-centric, meaning changes to models and possibly controllers, or merely visual, meaning changes to views.
- Decoupling models and views means that it is significantly more straight-forward to write unit tests for business logic
- Duplication of low-level model and controller code (i.e what we may have been using instead) is eliminated across the application
- Depending on the size of the application and separation of roles, this modularity allows developers responsible for core logic and developers working on the user-interfaces to work simultaneously

## Smalltalk-80 MVC In JavaScript

Although the majority of modern-day JavaScript frameworks attempt to evolve the MVC paradigm to better fit the differing needs of web application development, there is one

framework which attempts to adhere to the pure form of the pattern found in Smalltalk-80. Maria.js (<https://github.com/petermichaix/maria>) by Peter Michaux offers an implementation which is faithful to MVCs origins - Models are models, Views are views and Controllers are nothing but controllers. Whilst some developers might feel an MV\* framework should address more concerns, this is a useful reference to be aware of in case you would like a JavaScript implementation of the original MVC.

## Delving deeper

---

At this point in the book, we should have a basic understanding of what the MVC pattern provides, but there's still some fascinating information about it worth noting.

The GoF do not refer to MVC as a design pattern, but rather consider it a *set of classes to build a user interface*. In their view, it's actually a variation of three classical design patterns: the Observer, Strategy and Composite patterns. Depending on how MVC has been implemented in a framework, it may also use the Factory and Template patterns. The GoF book mentions these patterns as useful extras when working with MVC.

As we have discussed, models represent application data whilst views are what the user is presented on screen. As such, MVC relies on the Observer pattern for some of its core communication (something that surprisingly isn't covered in many articles about the MVC pattern). When a model is changed it notifies its observers (Views) that something has been updated - this is perhaps the most important relationship in MVC. The observer nature of this relationship is also what facilitates multiple views being attached to the same model.

For developers interested in knowing more about the decoupled nature of MVC (once again, depending on the implementation), one of the goals of the pattern is to help define one-to-many relationships between a topic (data object) and its observers. When a topic changes, its observers are updated. Views and controllers have a slightly different relationship. Controllers facilitate views to respond to different user input and are an example of the Strategy pattern.

## Summary

---

Having reviewed the classical MVC pattern, we should now understand how it allows us to cleanly separate concerns in an application. We should also now appreciate how JavaScript MVC frameworks may differ in their interpretation of the MVC pattern, which although quite open to variation, still shares some of the fundamental concepts the original pattern has to offer.

When reviewing a new JavaScript MVC/MV\* framework, remember - it can be useful to step back and review how it's opted to approach architecture (specifically, how it supports implementing

models, views, controllers or other alternatives) as this can better help us grok how the framework expects to be used.

# MVP

Model-view-presenter (MVP) is a derivative of the MVC design pattern which focuses on improving presentation logic. It originated at a company named [Telligent](#) in the early 1990s while they were working on a model for a C++ CommonPoint environment. Whilst both MVC and MVP target the separation of concerns across multiple components, there are some fundamental differences between them.

For the purposes of this summary we will focus on the version of MVP most suitable for web-based architectures.

## Models, Views & Presenters

---

The P in MVP stands for presenter. It's a component which contains the user-interface business logic for the view. Unlike MVC, invocations from the view are delegated to the presenter, which are decoupled from the view and instead talk to it through an interface. This allows for all kinds of useful things such as being able to mock views in unit tests.

The most common implementation of MVP is one which uses a Passive View (a view which is for all intents and purposes "dumb"), containing little to no logic. If MVC and MVP are different it is because the C and P do different things. In MVP, the P observes models and updates views when models change. The P effectively binds models to views, a responsibility which was previously held by controllers in MVC.

Solicited by a view, presenters perform any work to do with user requests and pass data back to them. In this respect, they retrieve data, manipulate it and determine how the data should be displayed in the view. In some implementations, the presenter also interacts with a service layer to persist data (models). Models may trigger events but it's the presenters role to subscribe to them so that it can update the view. In this passive architecture, we have no concept of direct data binding. Views expose setters which presenters can use to set data.

The benefit of this change from MVC is that it increases the testability of our application and provides a more clean separation between the view and the model. This isn't however without its costs as the lack of data binding support in the pattern can often mean having to take care of this task separately.

Although a common implementation of a **Passive View** is for the view to implement an interface, there are variations on it, including the use of events which can decouple the View from the Presenter a little more. As we don't have the interface construct in JavaScript, we're using more a protocol than an explicit interface here. It's technically still an API and it's probably fair for us to refer to it as an interface from that perspective.

There is also a **Supervising Controller** variation of MVP, which is closer to the MVC and **MVVM** patterns as it provides data-binding from the Model directly from the View. Key-value observing (KVO) plugins (such as Derick Bailey's Backbone.ModelBinding plugin) tend to bring Backbone out of the Passive View and more into the Supervising Controller or MVVM variations.

## MVP or MVC?

---

MVP is generally used most often in enterprise-level applications where it's necessary to reuse as much presentation logic as possible. Applications with very complex views and a great deal of user interaction may find that MVC doesn't quite fit the bill here as solving this problem may mean heavily relying on multiple controllers. In MVP, all of this complex logic can be encapsulated in a presenter, which can simplify maintenance greatly.

As MVP views are defined through an interface and the interface is technically the only point of contact between the system and the view (other than a presenter), this pattern also allows developers to write presentation logic without needing to wait for designers to produce layouts and graphics for the application.

Depending on the implementation, MVP may be easier to automatically unit test than MVC. The reason often cited for this is that the presenter can be used as a complete mock of the user-interface and so it can be unit tested independent of other components. In my experience this really depends on the languages we are implementing MVP in (there's quite a difference between opting for MVP for a JavaScript project over one for say, ASP.net).

At the end of the day, the underlying concerns we may have with MVC will likely hold true for MVP given that the differences between them are mainly semantic. As long as we are cleanly separating concerns into models, views and controllers (or presenters) we should be achieving most of the same benefits regardless of the variation we opt for.

## MVC, MVP and Backbone.js

---

There are very few, if any architectural JavaScript frameworks that claim to implement the MVC or MVP patterns in their classical form as many JavaScript developers don't view MVC and MVP as being mutually exclusive (we are actually more likely to see MVP strictly implemented when

looking at web frameworks such as ASP.net or GWT). This is because it's possible to have additional presenter/view logic in our application and yet still consider it a flavor of MVC.

Backbone contributor Irene Ros (of Boston-based Bocoup) subscribes to this way of thinking as when she separates views out into their own distinct components, she needs something to actually assemble them for her. This could either be a controller route (such as a `Backbone.Router`, covered later in the book) or a callback in response to data being fetched.

That said, some developers do however feel that Backbone.js better fits the description of MVP than it does MVC. Their view is that:

- The presenter in MVP better describes the `Backbone.View` (the layer between View templates and the data bound to it) than a controller does
- The model fits `Backbone.Model` (it isn't greatly different to the models in MVC at all)
- The views best represent templates (e.g Handlebars/Mustache markup templates)

A response to this could be that the view can also just be a View (as per MVC) because Backbone is flexible enough to let it be used for multiple purposes. The V in MVC and the P in MVP can both be accomplished by `Backbone.View` because they're able to achieve two purposes: both rendering atomic components and assembling those components rendered by other views.

We've also seen that in Backbone the responsibility of a controller is shared with both the `Backbone.View` and `Backbone.Router` and in the following example we can actually see that aspects of that are certainly true.

Our Backbone `PhotoView` uses the Observer pattern to "subscribe" to changes to a View's model in the line `this.model.bind("change", ...)`. It also handles templating in the `render()` method, but unlike some other implementations, user interaction is also handled in the View (see `events`).

```

1  var PhotoView = Backbone.View.extend({
2
3      //... is a list tag.
4      tagName: "li",
5
6      // Pass the contents of the photo template through a templating
7      // function, cache it for a single photo
8      template: _.template( $("#photo-template").html() ),
9
10     // The DOM events specific to an item.
11     events: {
12         "click img": "toggleViewed"
13     },
14
15     // The PhotoView listens for changes to

```

```

16 // its model, re-rendering. Since there's
17 // a one-to-one correspondence between a
18 // **Photo** and a **PhotoView** in this
19 // app, we set a direct reference on the model for convenience.
20
21 initialize: function() {
22   this.model.on( "change", this.render, this );
23   this.model.on( "destroy", this.remove, this );
24 },
25
26 // Re-render the photo entry
27 render: function() {
28   $( this.el ).html( this.template(this.model.toJSON() ) );
29   return this;
30 },
31
32 // Toggle the `"viewed"` state of the model.
33 toggleViewed: function() {
34   this.model.viewed();
35 }
36
37 });

```

Another (quite different) opinion is that Backbone more closely resembles [Smalltalk-80 MVC](#), which we went through earlier.

As regular Backbone blogger Derick Bailey has [previously](#) put it, it's ultimately best not to force Backbone to fit any specific design patterns. Design patterns should be considered flexible guides to how applications may be structured and in this respect, Backbone fits neither MVC nor MVP. Instead, it borrows some of the best concepts from multiple architectural patterns and creates a flexible framework that just works well.

It is however worth understanding where and why these concepts originated, so I hope that my explanations of MVC and MVP have been of help. Call it **the Backbone way**, MV\* or whatever helps reference its flavor of application architecture. Most structural JavaScript frameworks will adopt their own take on classical patterns, either intentionally or by accident, but the important thing is that they help us develop applications which are organized, clean and can be easily maintained.

## MVVM

MVVM (Model View ViewModel) is an architectural pattern based on MVC and MVP, which attempts to more clearly separate the development of user-interfaces (UI) from that of the

business logic and behavior in an application. To this end, many implementations of this pattern make use of declarative data bindings to allow a separation of work on Views from other layers.

This facilitates UI and development work occurring almost simultaneously within the same codebase. UI developers write bindings to the ViewModel within their document markup (HTML), where the Model and ViewModel are maintained by developers working on the logic for the application.

## History

---

MVVM (by name) was originally defined by Microsoft for use with Windows Presentation Foundation ([WPF](#)) and [Silverlight](#), having been officially announced in 2005 by [John Grossman](#) in a blog post about Avalon (the codename for WPF). It also found some popularity in the Adobe Flex community as an alternative to simply using MVC.

Prior to Microsoft adopting the MVVM name, there was however a movement in the community to go from MVP to MVPM: Model View [PresentationModel](#). Martin Fowler wrote an [article](#) on PresentationModels back in 2004 for those interested in reading more about it. The idea of a [PresentationModel](#) had been around much longer than this article, however it was considered the big break in the idea and greatly helped popularize it.

There was quite a lot of uproar in the "alt.net" circles after Microsoft announced MVVM as an alternative to MVPM. Many claimed the company's dominance in the GUI world was giving them the opportunity to take over the community as a whole, renaming existing concepts as they pleased for marketing purposes. A progressive crowd recognized that whilst MVVM and MVPM were effectively the same idea, they came in slightly different packages.

In recent years, MVVM has been implemented in JavaScript in the form of structural frameworks such as [KnockoutJS](#), [Kendo MVVM](#) and [Knockback.js](#), with an overall positive response from the community.

Let's now review the three components that compose MVVM.

## Model

---

As with other members of the MV\* family, the Model in MVVM represents domain-specific data or information that our application will be working with. A typical example of domain-specific data might be a user account (e.g name, avatar, e-mail) or a music track (e.g title, year, album).

Models hold information, but typically don't handle behavior. They don't format information or influence how data appears in the browser as this isn't their responsibility. Instead, formatting of data is handled by the View, whilst behavior is considered business logic that should be encapsulated in another layer that interacts with the Model - the ViewModel.

The only exception to this rule tends to be validation and it's considered acceptable for Models to validate data being used to define or update existing models (e.g does an e-mail address being input meet the requirements of a particular regular expression?).

In KnockoutJS, Models fall under the above definition, but often make Ajax calls to a server-side service to both read and write Model data.

If we were constructing a simple Todo application, a KnockoutJS Model representing a single Todo item could look as follows:

```
1 | var Todo = function ( content, done ) {
2 |   this.content = ko.observable(content);
3 |   this.done = ko.observable(done);
4 |   this.editing = ko.observable(false);
5 | };
```

Note: One may notice in the above snippet that we are calling the method `observable()` on the KnockoutJS namespace `ko`. In KnockoutJS, observables are special JavaScript objects that can notify subscribers about changes and automatically detect dependencies. This allows us to synchronize Models and ViewModels when the value of a Model attribute is modified.

## View

---

As with MVC, the View is the only part of the application that users actually interact with. They are an interactive UI that represent the state of a ViewModel. In this sense, the view is considered active rather than passive, but this is also true for views in MVC and MVP. In MVC, MVP and MVVM a view can also be passive, but what does this mean?

A passive View only outputs a display and does not accept any user input.

Such a view may also have no real knowledge of the models in our application and could be manipulated by a presenter. MVVM's active View contains the data-bindings, events and behaviors which requires an understanding of the ViewModel. Although these behaviors can be mapped to properties, the View is still responsible for handling events from the ViewModel.

It's important to remember the View isn't responsible here for handling state - it keeps this in sync with the ViewModel.

A KnockoutJS View is simply a HTML document with declarative bindings to link it to the ViewModel. KnockoutJS Views display information from the ViewModel, pass commands to it (e.g a user clicking on an element) and update as the state of the ViewModel changes. Templates generating markup using data from the ViewModel can however also be used for this purpose.

To give a brief initial example, we can look to the JavaScript MVVM framework KnockoutJS for how it allows the definition of a ViewModel and its related bindings in markup:

ViewModel:

```
1 | var aViewModel = {
2 |   contactName: ko.observable("John")
3 | };
4 | ko.applyBindings(aViewModel);
```

View:

```
1 | <p><input id="source" data-bind="value: contactName, valueUpdate: 'keyup'>
2 | <div data-bind="visible: contactName().length > 10">
3 |   You have a really long name!
4 | </div>
5 | <p>Contact name: <strong data-bind="text: contactName"></strong></p>
```

Our input text-box (source) obtains its initial value from `contactName`, automatically updating this value whenever `contactName` changes. As the data binding is two-way, typing into the text-box will update `contactName` accordingly so the values are always in sync.

Although implementation specific to KnockoutJS, the `<div>` containing the "You have a really long name!" text also contains simple validation (once again in the form of data bindings). If the input exceeds 10 characters, it will display, otherwise it will remain hidden.

Moving on to a more advanced example, we can return to our Todo application. A trimmed down KnockoutJS View for this, including all the necessary data-bindings may look as follows.

```
1 | <div id="todoapp">
2 |   <header>
3 |     <h1>Todos</h1>
```

```

4      <input id="new-todo" type="text" data-bind="value: current, valueUpdate: 'afterkey'
5          placeholder="What needs to be done?"/>
6  </header>
7  <section id="main" data-bind="block: todos().length">
8
9      <input id="toggle-all" type="checkbox" data-bind="checked: allCompleted">
10     <label for="toggle-all">Mark all as complete</label>
11
12     <ul id="todo-list" data-bind="foreach: todos">
13
14         <!-- item -->
15         <li data-bind="css: { done: done, editing: editing }">
16             <div class="view" data-bind="event: { dblclick: $root.editItem }">
17                 <input class="toggle" type="checkbox" data-bind="checked: done">
18                 <label data-bind="text: content"></label>
19                 <a class="destroy" href="#" data-bind="click: $root.removeTodo">X</a>
20             </div>
21             <input class="edit" type="text"
22                 data-bind="value: content, valueUpdate: 'afterkeypress'" />
23         </li>
24
25     </ul>
26
27 </section>
28 </div>

```

Note that the basic layout of the mark-up is relatively straight-forward, containing an input textbox (`new-todo`) for adding new items, togglers for marking items as complete and a list (`todo-list`) with a template for a Todo item in the form of an `li`.

The data bindings in the above markup can be broken down as follows:

- The input textbox `new-todo` has a data-binding for the `current` property, which is where the value of the current item being added is stored. Our ViewModel (shown shortly) observes the `current` property and also has a binding against the `add` event. When the enter key is pressed, the `add` event is triggered and our ViewModel can then trim the value of `current` and add it to the Todo list as needed
- The input checkbox `toggle-all` can mark all of the current items as completed if clicked. If checked, it triggers the `allCompleted` event, which can be seen in our ViewModel
- The item `li` has the class `done`. When a task is marked as done, the CSS class `editing` is marked accordingly. If double-clicking on the item, the `$root.editItem` callback will be executed
- The checkbox with the class `toggle` shows the state of the `done` property
- A label contains the text value of the Todo item (`content`)
- There is also a remove button that will call the `$root.remove` callback when clicked.

- An input textbox used for editing mode also holds the value of the Todo item `content`.  
The `enterKey` event will set the `editing` property to true or false

## ViewModel

---

The ViewModel can be considered a specialized Controller that acts as a data converter. It changes Model information into View information, passing commands from the View to the Model.

For example, let us imagine that we have a model containing a date attribute in unix format (e.g 1333832407). Rather than our models being aware of a user's view of the date (e.g 04/07/2012 @ 5:00pm), where it would be necessary to convert the attribute to its display format, our model simply holds the raw format of the data. Our View contains the formatted date and our ViewModel acts as a middle-man between the two.

In this sense, the ViewModel might be looked upon as more of a Model than a View but it does handle most of the View's display logic. The ViewModel may also expose methods for helping to maintain the View's state, update the model based on the action's on a View and trigger events on the View.

In summary, the ViewModel sits behind our UI layer. It exposes data needed by a View (from a Model) and can be viewed as the source our Views go to for both data and actions.

KnockoutJS interprets the ViewModel as the representation of data and operations that can be performed on a UI. This isn't the UI itself nor the data model that persists, but rather a layer that can also hold the yet to be saved data a user is working with. Knockout's ViewModels are implemented JavaScript objects with no knowledge of HTML markup. This abstract approach to their implementation allows them to stay simple, meaning more complex behavior can be more easily managed on-top as needed.

A partial KnockoutJS ViewModel for our Todo application could thus look as follows:

```

1 // our main ViewModel
2 var ViewModel = function ( todos ) {
3     var self = this;
4
5     // map array of passed in todos to an observableArray of Todo object
6     self.todos = ko.observableArray(
7         ko.utils.arrayMap( todos, function ( todo ) {
8             return new Todo( todo.content, todo.done );
9         })
10    );
11 }
12
13 // Create a new Todo object
14 function Todo( content, done ) {
15     this.content = content;
16     this.done = done;
17 }
18
19 // Create a new Todo object
20 function Todo( content, done ) {
21     this.content = content;
22     this.done = done;
23 }
24
25 // Create a new Todo object
26 function Todo( content, done ) {
27     this.content = content;
28     this.done = done;
29 }
30
31 // Create a new Todo object
32 function Todo( content, done ) {
33     this.content = content;
34     this.done = done;
35 }
36
37 // Create a new Todo object
38 function Todo( content, done ) {
39     this.content = content;
40     this.done = done;
41 }
42
43 // Create a new Todo object
44 function Todo( content, done ) {
45     this.content = content;
46     this.done = done;
47 }
48
49 // Create a new Todo object
50 function Todo( content, done ) {
51     this.content = content;
52     this.done = done;
53 }
54
55 // Create a new Todo object
56 function Todo( content, done ) {
57     this.content = content;
58     this.done = done;
59 }
60
61 // Create a new Todo object
62 function Todo( content, done ) {
63     this.content = content;
64     this.done = done;
65 }
66
67 // Create a new Todo object
68 function Todo( content, done ) {
69     this.content = content;
70     this.done = done;
71 }
72
73 // Create a new Todo object
74 function Todo( content, done ) {
75     this.content = content;
76     this.done = done;
77 }
78
79 // Create a new Todo object
80 function Todo( content, done ) {
81     this.content = content;
82     this.done = done;
83 }
84
85 // Create a new Todo object
86 function Todo( content, done ) {
87     this.content = content;
88     this.done = done;
89 }
90
91 // Create a new Todo object
92 function Todo( content, done ) {
93     this.content = content;
94     this.done = done;
95 }
96
97 // Create a new Todo object
98 function Todo( content, done ) {
99     this.content = content;
100    this.done = done;
101 }
102
103 // Create a new Todo object
104 function Todo( content, done ) {
105     this.content = content;
106     this.done = done;
107 }
108
109 // Create a new Todo object
110 function Todo( content, done ) {
111     this.content = content;
112     this.done = done;
113 }
114
115 // Create a new Todo object
116 function Todo( content, done ) {
117     this.content = content;
118     this.done = done;
119 }
120
121 // Create a new Todo object
122 function Todo( content, done ) {
123     this.content = content;
124     this.done = done;
125 }
126
127 // Create a new Todo object
128 function Todo( content, done ) {
129     this.content = content;
130     this.done = done;
131 }
132
133 // Create a new Todo object
134 function Todo( content, done ) {
135     this.content = content;
136     this.done = done;
137 }
138
139 // Create a new Todo object
140 function Todo( content, done ) {
141     this.content = content;
142     this.done = done;
143 }
144
145 // Create a new Todo object
146 function Todo( content, done ) {
147     this.content = content;
148     this.done = done;
149 }
150
151 // Create a new Todo object
152 function Todo( content, done ) {
153     this.content = content;
154     this.done = done;
155 }
156
157 // Create a new Todo object
158 function Todo( content, done ) {
159     this.content = content;
160     this.done = done;
161 }
162
163 // Create a new Todo object
164 function Todo( content, done ) {
165     this.content = content;
166     this.done = done;
167 }
168
169 // Create a new Todo object
170 function Todo( content, done ) {
171     this.content = content;
172     this.done = done;
173 }
174
175 // Create a new Todo object
176 function Todo( content, done ) {
177     this.content = content;
178     this.done = done;
179 }
180
181 // Create a new Todo object
182 function Todo( content, done ) {
183     this.content = content;
184     this.done = done;
185 }
186
187 // Create a new Todo object
188 function Todo( content, done ) {
189     this.content = content;
190     this.done = done;
191 }
192
193 // Create a new Todo object
194 function Todo( content, done ) {
195     this.content = content;
196     this.done = done;
197 }
198
199 // Create a new Todo object
200 function Todo( content, done ) {
201     this.content = content;
202     this.done = done;
203 }
204
205 // Create a new Todo object
206 function Todo( content, done ) {
207     this.content = content;
208     this.done = done;
209 }
210
211 // Create a new Todo object
212 function Todo( content, done ) {
213     this.content = content;
214     this.done = done;
215 }
216
217 // Create a new Todo object
218 function Todo( content, done ) {
219     this.content = content;
220     this.done = done;
221 }
222
223 // Create a new Todo object
224 function Todo( content, done ) {
225     this.content = content;
226     this.done = done;
227 }
228
229 // Create a new Todo object
230 function Todo( content, done ) {
231     this.content = content;
232     this.done = done;
233 }
234
235 // Create a new Todo object
236 function Todo( content, done ) {
237     this.content = content;
238     this.done = done;
239 }
240
241 // Create a new Todo object
242 function Todo( content, done ) {
243     this.content = content;
244     this.done = done;
245 }
246
247 // Create a new Todo object
248 function Todo( content, done ) {
249     this.content = content;
250     this.done = done;
251 }
252
253 // Create a new Todo object
254 function Todo( content, done ) {
255     this.content = content;
256     this.done = done;
257 }
258
259 // Create a new Todo object
260 function Todo( content, done ) {
261     this.content = content;
262     this.done = done;
263 }
264
265 // Create a new Todo object
266 function Todo( content, done ) {
267     this.content = content;
268     this.done = done;
269 }
270
271 // Create a new Todo object
272 function Todo( content, done ) {
273     this.content = content;
274     this.done = done;
275 }
276
277 // Create a new Todo object
278 function Todo( content, done ) {
279     this.content = content;
280     this.done = done;
281 }
282
283 // Create a new Todo object
284 function Todo( content, done ) {
285     this.content = content;
286     this.done = done;
287 }
288
289 // Create a new Todo object
290 function Todo( content, done ) {
291     this.content = content;
292     this.done = done;
293 }
294
295 // Create a new Todo object
296 function Todo( content, done ) {
297     this.content = content;
298     this.done = done;
299 }
300
301 // Create a new Todo object
302 function Todo( content, done ) {
303     this.content = content;
304     this.done = done;
305 }
306
307 // Create a new Todo object
308 function Todo( content, done ) {
309     this.content = content;
310     this.done = done;
311 }
312
313 // Create a new Todo object
314 function Todo( content, done ) {
315     this.content = content;
316     this.done = done;
317 }
318
319 // Create a new Todo object
320 function Todo( content, done ) {
321     this.content = content;
322     this.done = done;
323 }
324
325 // Create a new Todo object
326 function Todo( content, done ) {
327     this.content = content;
328     this.done = done;
329 }
330
331 // Create a new Todo object
332 function Todo( content, done ) {
333     this.content = content;
334     this.done = done;
335 }
336
337 // Create a new Todo object
338 function Todo( content, done ) {
339     this.content = content;
340     this.done = done;
341 }
342
343 // Create a new Todo object
344 function Todo( content, done ) {
345     this.content = content;
346     this.done = done;
347 }
348
349 // Create a new Todo object
350 function Todo( content, done ) {
351     this.content = content;
352     this.done = done;
353 }
354
355 // Create a new Todo object
356 function Todo( content, done ) {
357     this.content = content;
358     this.done = done;
359 }
360
361 // Create a new Todo object
362 function Todo( content, done ) {
363     this.content = content;
364     this.done = done;
365 }
366
367 // Create a new Todo object
368 function Todo( content, done ) {
369     this.content = content;
370     this.done = done;
371 }
372
373 // Create a new Todo object
374 function Todo( content, done ) {
375     this.content = content;
376     this.done = done;
377 }
378
379 // Create a new Todo object
380 function Todo( content, done ) {
381     this.content = content;
382     this.done = done;
383 }
384
385 // Create a new Todo object
386 function Todo( content, done ) {
387     this.content = content;
388     this.done = done;
389 }
390
391 // Create a new Todo object
392 function Todo( content, done ) {
393     this.content = content;
394     this.done = done;
395 }
396
397 // Create a new Todo object
398 function Todo( content, done ) {
399     this.content = content;
400     this.done = done;
401 }
402
403 // Create a new Todo object
404 function Todo( content, done ) {
405     this.content = content;
406     this.done = done;
407 }
408
409 // Create a new Todo object
410 function Todo( content, done ) {
411     this.content = content;
412     this.done = done;
413 }
414
415 // Create a new Todo object
416 function Todo( content, done ) {
417     this.content = content;
418     this.done = done;
419 }
420
421 // Create a new Todo object
422 function Todo( content, done ) {
423     this.content = content;
424     this.done = done;
425 }
426
427 // Create a new Todo object
428 function Todo( content, done ) {
429     this.content = content;
430     this.done = done;
431 }
432
433 // Create a new Todo object
434 function Todo( content, done ) {
435     this.content = content;
436     this.done = done;
437 }
438
439 // Create a new Todo object
440 function Todo( content, done ) {
441     this.content = content;
442     this.done = done;
443 }
444
445 // Create a new Todo object
446 function Todo( content, done ) {
447     this.content = content;
448     this.done = done;
449 }
450
451 // Create a new Todo object
452 function Todo( content, done ) {
453     this.content = content;
454     this.done = done;
455 }
456
457 // Create a new Todo object
458 function Todo( content, done ) {
459     this.content = content;
460     this.done = done;
461 }
462
463 // Create a new Todo object
464 function Todo( content, done ) {
465     this.content = content;
466     this.done = done;
467 }
468
469 // Create a new Todo object
470 function Todo( content, done ) {
471     this.content = content;
472     this.done = done;
473 }
474
475 // Create a new Todo object
476 function Todo( content, done ) {
477     this.content = content;
478     this.done = done;
479 }
480
481 // Create a new Todo object
482 function Todo( content, done ) {
483     this.content = content;
484     this.done = done;
485 }
486
487 // Create a new Todo object
488 function Todo( content, done ) {
489     this.content = content;
490     this.done = done;
491 }
492
493 // Create a new Todo object
494 function Todo( content, done ) {
495     this.content = content;
496     this.done = done;
497 }
498
499 // Create a new Todo object
500 function Todo( content, done ) {
501     this.content = content;
502     this.done = done;
503 }
504
505 // Create a new Todo object
506 function Todo( content, done ) {
507     this.content = content;
508     this.done = done;
509 }
510
511 // Create a new Todo object
512 function Todo( content, done ) {
513     this.content = content;
514     this.done = done;
515 }
516
517 // Create a new Todo object
518 function Todo( content, done ) {
519     this.content = content;
520     this.done = done;
521 }
522
523 // Create a new Todo object
524 function Todo( content, done ) {
525     this.content = content;
526     this.done = done;
527 }
528
529 // Create a new Todo object
530 function Todo( content, done ) {
531     this.content = content;
532     this.done = done;
533 }
534
535 // Create a new Todo object
536 function Todo( content, done ) {
537     this.content = content;
538     this.done = done;
539 }
540
541 // Create a new Todo object
542 function Todo( content, done ) {
543     this.content = content;
544     this.done = done;
545 }
546
547 // Create a new Todo object
548 function Todo( content, done ) {
549     this.content = content;
550     this.done = done;
551 }
552
553 // Create a new Todo object
554 function Todo( content, done ) {
555     this.content = content;
556     this.done = done;
557 }
558
559 // Create a new Todo object
560 function Todo( content, done ) {
561     this.content = content;
562     this.done = done;
563 }
564
565 // Create a new Todo object
566 function Todo( content, done ) {
567     this.content = content;
568     this.done = done;
569 }
570
571 // Create a new Todo object
572 function Todo( content, done ) {
573     this.content = content;
574     this.done = done;
575 }
576
577 // Create a new Todo object
578 function Todo( content, done ) {
579     this.content = content;
580     this.done = done;
581 }
582
583 // Create a new Todo object
584 function Todo( content, done ) {
585     this.content = content;
586     this.done = done;
587 }
588
589 // Create a new Todo object
590 function Todo( content, done ) {
591     this.content = content;
592     this.done = done;
593 }
594
595 // Create a new Todo object
596 function Todo( content, done ) {
597     this.content = content;
598     this.done = done;
599 }
600
601 // Create a new Todo object
602 function Todo( content, done ) {
603     this.content = content;
604     this.done = done;
605 }
606
607 // Create a new Todo object
608 function Todo( content, done ) {
609     this.content = content;
610     this.done = done;
611 }
612
613 // Create a new Todo object
614 function Todo( content, done ) {
615     this.content = content;
616     this.done = done;
617 }
618
619 // Create a new Todo object
620 function Todo( content, done ) {
621     this.content = content;
622     this.done = done;
623 }
624
625 // Create a new Todo object
626 function Todo( content, done ) {
627     this.content = content;
628     this.done = done;
629 }
630
631 // Create a new Todo object
632 function Todo( content, done ) {
633     this.content = content;
634     this.done = done;
635 }
636
637 // Create a new Todo object
638 function Todo( content, done ) {
639     this.content = content;
640     this.done = done;
641 }
642
643 // Create a new Todo object
644 function Todo( content, done ) {
645     this.content = content;
646     this.done = done;
647 }
648
649 // Create a new Todo object
650 function Todo( content, done ) {
651     this.content = content;
652     this.done = done;
653 }
654
655 // Create a new Todo object
656 function Todo( content, done ) {
657     this.content = content;
658     this.done = done;
659 }
660
661 // Create a new Todo object
662 function Todo( content, done ) {
663     this.content = content;
664     this.done = done;
665 }
666
667 // Create a new Todo object
668 function Todo( content, done ) {
669     this.content = content;
670     this.done = done;
671 }
672
673 // Create a new Todo object
674 function Todo( content, done ) {
675     this.content = content;
676     this.done = done;
677 }
678
679 // Create a new Todo object
680 function Todo( content, done ) {
681     this.content = content;
682     this.done = done;
683 }
684
685 // Create a new Todo object
686 function Todo( content, done ) {
687     this.content = content;
688     this.done = done;
689 }
690
691 // Create a new Todo object
692 function Todo( content, done ) {
693     this.content = content;
694     this.done = done;
695 }
696
697 // Create a new Todo object
698 function Todo( content, done ) {
699     this.content = content;
700     this.done = done;
701 }
702
703 // Create a new Todo object
704 function Todo( content, done ) {
705     this.content = content;
706     this.done = done;
707 }
708
709 // Create a new Todo object
710 function Todo( content, done ) {
711     this.content = content;
712     this.done = done;
713 }
714
715 // Create a new Todo object
716 function Todo( content, done ) {
717     this.content = content;
718     this.done = done;
719 }
720
721 // Create a new Todo object
722 function Todo( content, done ) {
723     this.content = content;
724     this.done = done;
725 }
726
727 // Create a new Todo object
728 function Todo( content, done ) {
729     this.content = content;
730     this.done = done;
731 }
732
733 // Create a new Todo object
734 function Todo( content, done ) {
735     this.content = content;
736     this.done = done;
737 }
738
739 // Create a new Todo object
740 function Todo( content, done ) {
741     this.content = content;
742     this.done = done;
743 }
744
745 // Create a new Todo object
746 function Todo( content, done ) {
747     this.content = content;
748     this.done = done;
749 }
750
751 // Create a new Todo object
752 function Todo( content, done ) {
753     this.content = content;
754     this.done = done;
755 }
756
757 // Create a new Todo object
758 function Todo( content, done ) {
759     this.content = content;
760     this.done = done;
761 }
762
763 // Create a new Todo object
764 function Todo( content, done ) {
765     this.content = content;
766     this.done = done;
767 }
768
769 // Create a new Todo object
770 function Todo( content, done ) {
771     this.content = content;
772     this.done = done;
773 }
774
775 // Create a new Todo object
776 function Todo( content, done ) {
777     this.content = content;
778     this.done = done;
779 }
780
781 // Create a new Todo object
782 function Todo( content, done ) {
783     this.content = content;
784     this.done = done;
785 }
786
787 // Create a new Todo object
788 function Todo( content, done ) {
789     this.content = content;
790     this.done = done;
791 }
792
793 // Create a new Todo object
794 function Todo( content, done ) {
795     this.content = content;
796     this.done = done;
797 }
798
799 // Create a new Todo object
800 function Todo( content, done ) {
801     this.content = content;
802     this.done = done;
803 }
804
805 // Create a new Todo object
806 function Todo( content, done ) {
807     this.content = content;
808     this.done = done;
809 }
810
811 // Create a new Todo object
812 function Todo( content, done ) {
813     this.content = content;
814     this.done = done;
815 }
816
817 // Create a new Todo object
818 function Todo( content, done ) {
819     this.content = content;
820     this.done = done;
821 }
822
823 // Create a new Todo object
824 function Todo( content, done ) {
825     this.content = content;
826     this.done = done;
827 }
828
829 // Create a new Todo object
830 function Todo( content, done ) {
831     this.content = content;
832     this.done = done;
833 }
834
835 // Create a new Todo object
836 function Todo( content, done ) {
837     this.content = content;
838     this.done = done;
839 }
840
841 // Create a new Todo object
842 function Todo( content, done ) {
843     this.content = content;
844     this.done = done;
845 }
846
847 // Create a new Todo object
848 function Todo( content, done ) {
849     this.content = content;
850     this.done = done;
851 }
852
853 // Create a new Todo object
854 function Todo( content, done ) {
855     this.content = content;
856     this.done = done;
857 }
858
859 // Create a new Todo object
860 function Todo( content, done ) {
861     this.content = content;
862     this.done = done;
863 }
864
865 // Create a new Todo object
866 function Todo( content, done ) {
867     this.content = content;
868     this.done = done;
869 }
870
871 // Create a new Todo object
872 function Todo( content, done ) {
873     this.content = content;
874     this.done = done;
875 }
876
877 // Create a new Todo object
878 function Todo( content, done ) {
879     this.content = content;
880     this.done = done;
881 }
882
883 // Create a new Todo object
884 function Todo( content, done ) {
885     this.content = content;
886     this.done = done;
887 }
888
889 // Create a new Todo object
890 function Todo( content, done ) {
891     this.content = content;
892     this.done = done;
893 }
894
895 // Create a new Todo object
896 function Todo( content, done ) {
897     this.content = content;
898     this.done = done;
899 }
900
901 // Create a new Todo object
902 function Todo( content, done ) {
903     this.content = content;
904     this.done = done;
905 }
906
907 // Create a new Todo object
908 function Todo( content, done ) {
909     this.content = content;
910     this.done = done;
911 }
912
913 // Create a new Todo object
914 function Todo( content, done ) {
915     this.content = content;
916     this.done = done;
917 }
918
919 // Create a new Todo object
920 function Todo( content, done ) {
921     this.content = content;
922     this.done = done;
923 }
924
925 // Create a new Todo object
926 function Todo( content, done ) {
927     this.content = content;
928     this.done = done;
929 }
930
931 // Create a new Todo object
932 function Todo( content, done ) {
933     this.content = content;
934     this.done = done;
935 }
936
937 // Create a new Todo object
938 function Todo( content, done ) {
939     this.content = content;
940     this.done = done;
941 }
942
943 // Create a new Todo object
944 function Todo( content, done ) {
945     this.content = content;
946     this.done = done;
947 }
948
949 // Create a new Todo object
950 function Todo( content, done ) {
951     this.content = content;
952     this.done = done;
953 }
954
955 // Create a new Todo object
956 function Todo( content, done ) {
957     this.content = content;
958     this.done = done;
959 }
960
961 // Create a new Todo object
962 function Todo( content, done ) {
963     this.content = content;
964     this.done = done;
965 }
966
967 // Create a new Todo object
968 function Todo( content, done ) {
969     this.content = content;
970     this.done = done;
971 }
972
973 // Create a new Todo object
974 function Todo( content, done ) {
975     this.content = content;
976     this.done = done;
977 }
978
979 // Create a new Todo object
980 function Todo( content, done ) {
981     this.content = content;
982     this.done = done;
983 }
984
985 // Create a new Todo object
986 function Todo( content, done ) {
987     this.content = content;
988     this.done = done;
989 }
990
991 // Create a new Todo object
992 function Todo( content, done ) {
993     this.content = content;
994     this.done = done;
995 }
996
997 // Create a new Todo object
998 function Todo( content, done ) {
999     this.content = content;
1000    this.done = done;
1001 }
1002
1003 // Create a new Todo object
1004 function Todo( content, done ) {
1005     this.content = content;
1006     this.done = done;
1007 }
1008
1009 // Create a new Todo object
1010 function Todo( content, done ) {
1011     this.content = content;
1012     this.done = done;
1013 }
1014
1015 // Create a new Todo object
1016 function Todo( content, done ) {
1017     this.content = content;
1018     this.done = done;
1019 }
1020
1021 // Create a new Todo object
1022 function Todo( content, done ) {
1023     this.content = content;
1024     this.done = done;
1025 }
1026
1027 // Create a new Todo object
1028 function Todo( content, done ) {
1029     this.content = content;
1030     this.done = done;
1031 }
1032
1033 // Create a new Todo object
1034 function Todo( content, done ) {
1035     this.content = content;
1036     this.done = done;
1037 }
1038
1039 // Create a new Todo object
1040 function Todo( content, done ) {
1041     this.content = content;
1042     this.done = done;
1043 }
1044
1045 // Create a new Todo object
1046 function Todo( content, done ) {
1047     this.content = content;
1048     this.done = done;
1049 }
1050
1051 // Create a new Todo object
1052 function Todo( content, done ) {
1053     this.content = content;
1054     this.done = done;
1055 }
1056
1057 // Create a new Todo object
1058 function Todo( content, done ) {
1059     this.content = content;
1060     this.done = done;
1061 }
1062
1063 // Create a new Todo object
1064 function Todo( content, done ) {
1065     this.content = content;
1066     this.done = done;
1067 }
1068
1069 // Create a new Todo object
1070 function Todo( content, done ) {
1071     this.content = content;
1072     this.done = done;
1073 }
1074
1075 // Create a new Todo object
1076 function Todo( content, done ) {
1077     this.content = content;
1078     this.done = done;
1079 }
1080
1081 // Create a new Todo object
1082 function Todo( content, done ) {
1083     this.content = content;
1084     this.done = done;
1085 }
1086
1087 // Create a new Todo object
1088 function Todo( content, done ) {
1089     this.content = content;
1090     this.done = done;
1091 }
1092
1093 // Create a new Todo object
1094 function Todo( content, done ) {
1095     this.content = content;
1096     this.done = done;
1097 }
1098
1099 // Create a new Todo object
1100 function Todo( content, done ) {
1101     this.content = content;
1102     this.done = done;
1103 }
1104
1105 // Create a new Todo object
1106 function Todo( content, done ) {
1107     this.content = content;
1108     this.done = done;
1109 }
1110
1111 // Create a new Todo object
1112 function Todo( content, done ) {
1113     this.content = content;
1114     this.done = done;
1115 }
1116
1117 // Create a new Todo object
1118 function Todo( content, done ) {
1119     this.content = content;
1120     this.done = done;
1121 }
1122
1123 // Create a new Todo object
1124 function Todo( content, done ) {
1125     this.content = content;
1126     this.done = done;
1127 }
1128
1129 // Create a new Todo object
1130 function Todo( content, done ) {
1131     this.content = content;
1132     this.done = done;
1133 }
1134
1135 // Create a new Todo object
1136 function Todo( content, done ) {
1137     this.content = content;
1138     this.done = done;
1139 }
1140
1141 // Create a new Todo object
1142 function Todo( content, done ) {
1143     this.content = content;
1144     this.done = done;
1145 }
1146
1147 // Create a new Todo object
1148 function Todo( content, done ) {
1149     this.content = content;
1150     this.done = done;
1151 }
1152
1153 // Create a new Todo object
1154 function Todo( content, done ) {
1155     this.content = content;
1156     this.done = done;
1157 }
1158
1159 // Create a new Todo object
1160 function Todo( content, done ) {
1161     this.content = content;
1162     this.done = done;
1163 }
1164
1165 // Create a new Todo object
1166 function Todo( content, done ) {
1167     this.content = content;
1168     this.done = done;
1169 }
1170
1171 // Create a new Todo object
1172 function Todo( content, done ) {
1173     this.content = content;
1174     this.done = done;
1175 }
1176
1177 // Create a new Todo object
1178 function Todo( content, done ) {
1179     this.content = content;
1180     this.done = done;
1181 }
1182
1183 // Create a new Todo object
1184 function Todo( content, done ) {
1185     this.content = content;
1186     this.done = done;
1187 }
1188
1189 // Create a new Todo object
1190 function Todo( content, done ) {
1191     this.content = content;
1192     this.done = done;
1193 }
1194
1195 // Create a new Todo object
1196 function Todo( content, done ) {
1197     this.content = content;
1198     this.done = done;
1199 }
1200
1201 // Create a new Todo object
1202 function Todo( content, done ) {
1203     this.content = content;
1204     this.done = done;
1205 }
1206
1207 // Create a new Todo object
1208 function Todo( content, done ) {
1209     this.content = content;
1210     this.done = done;
1211 }
1212
1213 // Create a new Todo object
1214 function Todo( content, done ) {
1215     this.content = content;
1216     this.done = done;
1217 }
1218
1219 // Create a new Todo object
1220 function Todo( content, done ) {
1221     this.content = content;
1222     this.done = done;
1223 }
1224
1225 // Create a new Todo object
1226 function Todo( content, done ) {
1227     this.content = content;
1228     this.done = done;
1229 }
1230
1231 // Create a new Todo object
1232 function Todo( content, done ) {
1233     this.content = content;
1234     this.done = done;
1235 }
1236
1237 // Create a new Todo object
1238 function Todo( content, done ) {
1239     this.content = content;
1240     this.done = done;
1241 }
1242
1243 // Create a new Todo object
1244 function Todo( content, done ) {
1245     this.content = content;
1246     this.done = done;
1247 }
1248
1249 // Create a new Todo object
1250 function Todo( content, done ) {
1251     this.content = content;
1252     this.done = done;
1253 }
1254
1255 // Create a new Todo object
1256 function Todo( content, done ) {
1257     this.content = content;
1258     this.done = done;
1259 }
1260
1261 // Create a new Todo object
1262 function Todo( content, done ) {
1263     this.content = content;
1264     this.done = done;
1265 }
1266
1267 // Create a new Todo object
1268 function Todo( content, done ) {
1269     this.content = content;
1270     this.done = done;
1271 }
1272
1273 // Create a new Todo object
1274 function Todo( content, done ) {
1275     this.content = content;
1276     this.done = done;
1277 }
1278
1279 // Create a new Todo object
1280 function Todo( content, done ) {
1281     this.content = content;
1282     this.done = done;
1283 }
1284
1285 // Create a new Todo object
1286 function Todo( content, done ) {
1287     this.content = content;
1288     this.done = done;
1289 }
1290
1291 // Create a new Todo object
1292 function Todo( content, done ) {
1293     this.content = content;
1294     this.done = done;
1295 }
1296
1297 // Create a new Todo object
1298 function Todo( content, done ) {
1299     this.content = content;
1300     this.done = done;
1301 }
1302
1303 // Create a new Todo object
1304 function Todo( content, done ) {
1305     this.content = content;
1306     this.done = done;
1307 }
1308
1309 // Create a new Todo object
1310 function Todo( content, done ) {
1311     this.content = content;
1312     this.done = done;
1313 }
1314
1315 // Create a new Todo object
1316 function Todo( content, done ) {
1317     this.content = content;
1318     this.done = done;
1319 }
1320
1321 // Create a new Todo object
1322 function Todo( content, done ) {
1323     this.content = content;
1324     this.done = done;
132
```

```

9   });
10
11 // store the new todo value being entered
12 self.current = ko.observable();
13
14 // add a new todo, when enter key is pressed
15 self.add = function ( data, event ) {
16     var newTodo, current = self.current().trim();
17     if ( current ) {
18         newTodo = new Todo( current );
19         self.todos.push( newTodo );
20         self.current("");
21     }
22 };
23
24 // remove a single todo
25 self.remove = function ( todo ) {
26     self.todos.remove( todo );
27 };
28
29 // remove all completed todos
30 self.removeCompleted = function () {
31     self.todos.remove(function (todo) {
32         return todo.done();
33     });
34 };
35
36 // writeable computed observable to handle marking all complete/inco
37 self.allCompleted = ko.computed({
38
39     // always return true/false based on the done flag of all todos
40     read:function () {
41         return !self.remainingCount();
42     },
43
44     // set all todos to the written value (true/false)
45     write:function ( newValue ) {
46         ko.utils.arrayForEach( self.todos(), function ( todo ) {
47             //set even if value is the same, as subscribers are not
48             todo.done( newValue );
49         });
50     }
51 });
52
53 // edit an item
54 self.editItem = function( item ) {
55     item.editing( true );
56 };
57 ..

```

Above we are basically providing the methods needed to add, edit or remove items as well as the logic to mark all remaining items as having been completed Note: The only real difference worth noting from previous examples in our ViewModel are observable arrays. In KnockoutJS, if we

wish to detect and respond to changes on a single object, we would use `observables`. If however we wish to detect and respond to changes of a collection of things, we can use an `observableArray` instead. A simpler example of how to use observables arrays may look as follows:

```

1 // Define an initially an empty array
2 var myObservableArray = ko.observableArray();
3
4 // Add a value to the array and notify our observers
5 myObservableArray.push( 'A new todo item' );

```

Note: The complete Knockout.js Todo application we reviewed above can be grabbed from [TodoMVC](#) if interested.

## Recap: The View and the ViewModel

---

Views and ViewModels communicate using data-bindings and events. As we saw in our initial ViewModel example, the ViewModel doesn't just expose Model attributes but also access to other methods and features such as validation.

Our Views handle their own user-interface events, mapping them to the ViewModel as necessary. Models and attributes on the ViewModel are synchronized and updated via two-way data-binding.

Triggers (data-triggers) also allow us to further react to changes in the state of our Model attributes.

## Recap: The ViewModel and the Model

---

Whilst it may appear the ViewModel is completely responsible for the Model in MVVM, there are some subtleties with this relationship worth noting. The ViewModel can expose a Model or Model attributes for the purposes of data-binding and can also contain interfaces for fetching and manipulating properties exposed in the view.

## Pros and Cons

We now hopefully have a better appreciation for what MVVM is and how it works. Let's now review the advantages and disadvantages of employing the pattern:

### Advantages

---

- MVVM Facilitates easier parallel development of a UI and the building blocks that power it
- Abstracts the View and thus reduces the quantity of business logic (or glue) required in the code behind it
- The ViewModel can be easier to unit test than event-driven code
- The ViewModel (being more Model than View) can be tested without concerns of UI automation and interaction

## Disadvantages

---

- For simpler UIs, MVVM can be overkill
- Whilst data-bindings can be declarative and nice to work with, they can be harder to debug than imperative code where we simply set breakpoints
- Data-bindings in non-trivial applications can create a lot of book-keeping. We also don't want to end up in a situation where bindings are heavier than the objects being bound to
- In larger applications, it can be more difficult to design the ViewModel up front to get the necessary amount of generalization

## MVVM With Looser Data-Bindings

It's not uncommon for JavaScript developers from an MVC or MVP background to review MVVM and complain about its true separation of concerns. Namely, the quantity of inline data-bindings maintained in the HTML markup of a View.

I must admit that when I first reviewed implementations of MVVM (e.g KnockoutJS, Knockback), I was surprised that any developer would want to return to the days of old where we mixed logic (JavaScript) with our markup and found it quickly unmaintainable. The reality however is that MVVM does this for a number of good reasons (which we've covered), including facilitating designers to more easily bind to logic from their markup.

For the purists among us, you'll be happy to know that we can now also greatly reduce how reliant we are on data-bindings thanks to a feature known as custom binding providers, introduced in KnockoutJS 1.3 and available in all versions since.

KnockoutJS by default has a data-binding provider which searches for any elements with `data-bind` attributes on them such as in the below example.

```
1 | <input id="new-todo" type="text" data-bind="value: current, valueUpdate:
```

When the provider locates an element with this attribute, it parses it and turns it into a binding object using the current data context. This is the way KnockoutJS has always worked, allowing us to declaratively add bindings to elements which KnockoutJS binds to the data at that layer.

Once we start building Views that are no longer trivial, we may end up with a large number of elements and attributes whose bindings in markup can become difficult to manage. With custom binding providers however, this is no longer a problem.

A binding provider is primarily interested in two things:

- When given a DOM node, does it contain any data-bindings?
- If the node passed this first question, what does the binding object look like in the current data context?

Binding providers implement two functions:

- `nodeHasBindings` : this takes in a DOM node which doesn't necessarily have to be an element
- `getBindings` : returns an object representing the bindings as applied to the current data context

A skeleton binding provider might thus look as follows:

```

1  var ourBindingProvider = {
2      nodeHasBindings: function( node ) {
3          // returns true/false
4      },
5
6      getBindings: function( node, bindingContext ) {
7          // returns a binding object
8      }
9  };

```

Before we get to fleshing out this provider, let's briefly discuss logic in data-bind attributes.

If when using Knockout's MVVM we find yourself dissatisfied with the idea of application logic being overly tied into your View, we can change this. We could implement something a little like CSS classes to assign bindings by name to elements. Ryan Niemeyer (of knockmeout.net) has previously suggested using `data-class` for this to avoid confusing presentation classes with data classes, so let's get our `nodeHasBindings` function supporting this:

```

1 // does an element have any bindings?
2 function nodeHasBindings( node ) {
3     return node.getAttribute ? node.getAttribute("data-class") : false;
4 }

```

Next, we need a sensible `getBindings()` function. As we're sticking with the idea of CSS classes, why not also consider supporting space-separated classes to allow us to share binding specs between different elements?

Let's first review what our bindings will look like. We create an object to hold them where our property names need to match the keys we wish to use in our data-classes.

Note: There isn't a great deal of work required to convert a KnockoutJS application from using traditional data-bindings over to unobtrusive bindings with custom binding providers. We simply pull our all of our data-bind attributes, replace them with data-class attributes and place our bindings in a binding object as per below:

```

1 var viewModel = new ViewModel( todos || [] ),
2     bindings = {
3
4     newTodo: {
5         value: viewModel.current,
6         valueUpdate: "afterkeydown",
7         enterKey: viewModel.add
8     },
9
10    taskTooltip: {
11        visible: viewModel.showTooltip
12    },
13    checkAllContainer: {
14        visible: viewModel.todos().length
15    },
16    checkAll: {
17        checked: viewModel.allCompleted
18    },
19
20    todos: {
21        foreach: viewModel.todos
22    },
23    todoListItem: function() {
24        return {
25            css: {
26                editing: this.editing
27            }
28        };
29    },
30    todoListItemWrapper: function() {
31        return {

```

```
32         css: {
33             done: this.done
34         }
35     };
36 },
37 todoCheckBox: function() {
38     return {
39         checked: this.done
40     };
41 },
42 todoContent: function() {
43     return {
44         text: this.content,
45         event: {
46             dblclick: this.edit
47         }
48     };
49 },
50 todoDestroy: function() {
51     return {
52         click: viewModel.remove
53     };
54 },
55 todoEdit: function() {
56     return {
57         value: this.content,
58         valueUpdate: "afterkeydown",
59         enterKey: this.stopEditing,
60         event: {
61             blur: this.stopEditing
62         }
63     };
64 },
65 todoCount: {
66     visible: viewModel.remainingCount
67 },
68 remainingCount: {
69     text: viewModel.remainingCount
70 },
71 remainingCountWord: function() {
72     return {
73         text: viewModel.getLabel(viewModel.remainingCount)
74     };
75 },
76 todoClear: {
77     visible: viewModel.completedCount
78 },
79 todoClearAll: {
80     click: viewModel.removeCompleted
81 },
82 completedCount: {
83     text: viewModel.completedCount
84 },
85 completedCountWord: function() {
86     return {
87 }
```

```

89         text: viewModel.getLabel(viewModel.completedCount)
90     );
91 },
92 todoInstructions: {
93     visible: viewModel.todos().length
94 }
95 };
96
97 ....

```

There are however two lines missing from the above snippet - we still need our `getBindings` function, which will loop through each of the keys in our data-class attributes and build up the resulting object from each of them. If we detect that the binding object is a function, we call it with our current data using the context `this`. Our complete custom binding provider would look as follows:

```

1 // We can now create a bindingProvider that uses
2 // something different than data-bind attributes
3 ko.customBindingProvider = function( bindingObject ) {
4     this.bindingObject = bindingObject;
5
6     // determine if an element has any bindings
7     this.nodeHasBindings = function( node ) {
8         return node.getAttribute ? node.getAttribute( "data-class" )
9     };
10 };
11
12 // return the bindings given a node and the bindingContext
13 this.getBindings = function( node, bindingContext ) {
14
15     var result = {},
16         classes = node.getAttribute( "data-class" );
17
18     if ( classes ) {
19         classes = classes.split( "" );
20
21         //evaluate each class, build a single object to return
22         for ( var i = 0, j = classes.length; i < j; i++ ) {
23
24             var bindingAccessor = this.bindingObject[classes[i]];
25             if ( bindingAccessor ) {
26                 var binding = typeof bindingAccessor === "function" ?
27                     ko.utils.extend(result, binding);
28             }
29
30         }
31     }
32
33     return result;
34 };
35 };

```

Thus, the final few lines of our `bindings` object can be defined as follows:

```

1 // set ko's current bindingProvider equal to our new binding provider
2 ko.bindingProvider.instance = new ko.customBindingProvider( bindings );
3
4 // bind a new instance of our ViewModel to the page
5 ko.applyBindings( viewModel );
6
7 })();

```

What we're doing here is effectively defining constructor for our binding handler which accepts an object (`bindings`) which we use to lookup our bindings. We could then re-write the markup for our application View using data-classes as follows:

```

1 <div id="create-todo">
2     <input id="new-todo" data-class="newTodo" placeholder="New Todo" type="text" />
3     <span class="ui-tooltip-top" data-class="taskTooltip" style="display: none;"></span>
4 </div>
5 <div id="todos">
6     <div data-class="checkAllContainer" >
7         <input id="check-all" class="check" type="checkbox" checked="" />
8         <label for="check-all">Mark all as complete</label>
9     </div>
10    <ul id="todo-list" data-class="todos" >
11        <li data-class="todoListItems" >
12            <div class="todo" data-class="todoListItemWrapper" >
13                <div class="display" >
14                    <input class="check" type="checkbox" checked="" />
15                    <div class="todo-content" data-class="todoContent" >
16                        <span class="todo-destroy" data-class="todoDestroy" ><span></span></span>
17                    </div>
18                    <div class="edit" >
19                        <input class="todo-input" data-class="todoInput" type="text" value="Edit" />
20                    </div>
21                </div>
22            </li>
23        </ul>
24    </div>

```

Neil Kerkin has put together a complete TodoMVC demo app using the above, which can be accessed and played around with [here](#).

Whilst it may look like quite a lot of work in the explanation above, now that we have a generic `getBindings` method written, it's a lot more trivial to simply re-use it and use data-classes rather than strict data-bindings for writing our KnockoutJS applications instead. The net result is

hopefully cleaner markup with our data bindings being shifted from the View to a bindings object instead.

## MVC Vs. MVP Vs. MVVM

Both MVP and MVVM are derivatives of MVC. The key difference between it and its derivatives is the dependency each layer has on other layers as well as how tightly bound they are to each other.

In MVC, the View sits on top of our architecture with the controller beside it. Models sit below the controller and so our Views know about our controllers and controllers know about Models. Here, our Views have direct access to Models. Exposing the complete Model to the View however may have security and performance costs, depending on the complexity of our application. MVVM attempts to avoid these issues.

In MVP, the role of the controller is replaced with a Presenter. Presenters sit at the same level as views, listening to events from both the View and model and mediating the actions between them. Unlike MVVM, there isn't a mechanism for binding Views to ViewModels, so we instead rely on each View implementing an interface allowing the Presenter to interact with the View.

MVVM consequently allows us to create View-specific subsets of a Model which can contain state and logic information, avoiding the need to expose the entire Model to a View. Unlike MVP's Presenter, a ViewModel is not required to reference a View. The View can bind to properties on the ViewModel which in turn expose data contained in Models to the View. As we've mentioned, the abstraction of the View means there is less logic required in the code behind it.

One of the downsides to this however is that a level of interpretation is needed between the ViewModel and the View and this can have performance costs. The complexity of this interpretation can also vary - it can be as simple as copying data or as complex as manipulating them to a form we would like the View to see. MVC doesn't have this problem as the whole Model is readily available and such manipulation can be avoided.

## Backbone.js Vs. KnockoutJS

Understanding the subtle differences between MVC, MVP and MVVM are important but developers ultimately will ask whether they should consider using KnockoutJS over Backbone based in what we've learned. The following notes may be of help here:

- Both libraries are designed with different goals in mind and it's often not as simple as just choosing MVC or MVVM
- If data-binding and two-way communication are your main concerns, KnockoutJS is definitely the way to go. Practically any attribute or value stored in DOM nodes can be mapped to JavaScript objects with this approach.
- Backbone excels with its ease of integration with RESTful services, whilst KnockoutJS Models are simply JavaScript objects and code needed for updating the Model must be written by the developer.
- KnockoutJS has a focus on automating UI bindings, which requires significantly more verbose custom code if attempting to do this with Backbone. This isn't a problem with Backbone itself per se as it purposefully attempts to stay out of the UI. Knockback does however attempt to assist with this problem.
- With KnockoutJS, we can bind our own functions to ViewModel observables, which are executed anytime the observable changes. This allows us the same level of flexibility as can be found in Backbone
- Backbone has a solid routing solution built-in, whilst KnockoutJS offers no routing options out of the box. One can however easily fill this behavior in if needed using Ben Alman's [BBQ plugin](#) or a standalone routing system like Miller Medeiros's excellent [Crossroads](#).

To conclude, I personally find KnockoutJS more suitable for smaller applications whilst Backbone's feature set really shines when building anything non-trivial. That said, many developers have used both frameworks to write applications of varying complexity and I recommend trying out both at a smaller scale before making a decision on which might work best for your project.

### For further reading about MVVM or Knockout, I recommend the following articles:

- [The Advantages Of MVVM](#)
- [SO: What are the problems with MVVM?](#)
- [MVVM Explained](#)
- [How does MVVM compare to MVC?](#)
- [Custom bindings in KnockoutJS](#)
- [Exploring Knockout with TodoMVC](#)

# Modern Modular JavaScript Design Patterns

## The Importance Of Decoupling Applications

In the world of scalable JavaScript, when we say an application is **modular**, we often mean it's composed of a set of highly decoupled, distinct pieces of functionality stored in modules. **Loose coupling** facilitates easier maintainability of apps by removing *dependencies* where possible. When this is implemented efficiently, it's quite easy to see how changes to one part of a system may affect another.

Unlike some more traditional programming languages however, the current iteration of JavaScript ([ECMA-262](#)) doesn't provide developers with the means to import such modules of code in a clean, organized manner. It's one of the concerns with specifications that haven't required great thought until more recent years where the need for more organized JavaScript applications became apparent.

Instead, developers at present are left to fall back on variations of the **module** or **object literal** patterns, which we covered earlier in the book. With many of these, module scripts are strung together in the DOM with namespaces being described by a single global object where it's still possible to incur naming collisions in our architecture. There's also no clean way to handle dependency management without some manual effort or third party tools.

Whilst native solutions to these problems will be arriving in [ES Harmony](#) (likely to be the next version of JavaScript), the good news is that writing modular JavaScript has never been easier and we can start doing it today.

In this section, we're going to look at three formats for writing modular JavaScript: **AMD**, **CommonJS** and proposals for the next version of JavaScript, **Harmony**.

## A Note On Script Loaders

It's difficult to discuss AMD and CommonJS modules without talking about the elephant in the room - **script loaders**. At the time of writing this book, script loading is a means to a goal, that goal being modular JavaScript that can be used in applications today - for this, use of a compatible script loader is unfortunately necessary. In order to get the most out of this section, I

recommend gaining a **basic understanding** of how popular script loading tools work so the explanations of module formats make sense in context.

There are a number of great loaders for handling module loading in the AMD and CommonJS formats, but my personal preferences are [RequireJS](#) and [curl.js](#). Complete tutorials on these tools are outside the scope of this book, but I can recommend reading John Hann's article about [curl.js](#) and James Burke's [RequireJS](#) API documentation for more.

From a production perspective, the use of optimization tools (like the RequireJS optimizer) to concatenate scripts is recommended for deployment when working with such modules.

Interestingly, with the [Almond](#) AMD shim, RequireJS doesn't need to be rolled in the deployed site and what one might consider a script loader can be easily shifted outside of development.

That said, James Burke would probably say that being able to dynamically load scripts after page load still has its use cases and RequireJS can assist with this too. With these notes in mind, let's get started.

## AMD

### A Format For Writing Modular JavaScript In The Browser

---

The overall goal for the AMD (Asynchronous Module Definition) format is to provide a solution for modular JavaScript that developers can use today. It was born out of Dojo's real world experience using XHR+eval and proponents of this format wanted to avoid any future solutions suffering from the weaknesses of those in the past.

The AMD module format itself is a proposal for defining modules where both the module and dependencies can be [asynchronously](#) loaded. It has a number of distinct advantages including being both asynchronous and highly flexible by nature which removes the tight coupling one might commonly find between code and module identity. Many developers enjoy using it and one could consider it a reliable stepping stone towards the [module system](#) proposed for ES Harmony.

AMD began as a draft specification for a module format on the CommonJS list but as it wasn't able to reach full consensus, further development of the format moved to the [amdjs](#) group.

Today it's embraced by projects including Dojo, MooTools, Firebug and even jQuery. Although the term *CommonJS AMD format* has been seen in the wild on occasion, it's best to refer to it as just AMD or Async Module support as not all participants on the CommonJS list wished to pursue it.

**Note:** There was a time when the proposal was referred to as Modules Transport/C, however as the spec wasn't geared towards transporting existing CommonJS modules, but rather - for defining modules - it made more sense to opt for the AMD naming convention.

## Getting Started With Modules

The first two concepts worth noting about AMD are the idea of a `define` method for facilitating module definition and a `require` method for handling dependency loading. `define` is used to define named or unnamed modules based using the following signature:

```

1 | define(
2 |   module_id /*optional*/,
3 |   [dependencies] /*optional*/,
4 |   definition function /*function for instantiating the module or object
5 | );
```

As we can tell by the inline comments, the `module_id` is an optional argument which is typically only required when non-AMD concatenation tools are being used (there may be some other edge cases where it's useful too). When this argument is left out, we refer to the module as *anonymous*.

When working with anonymous modules, the idea of a module's identity is DRY, making it trivial to avoid duplication of filenames and code. Because the code is more portable, it can be easily moved to other locations (or around the file-system) without needing to alter the code itself or change its module ID. Consider the `module_id` similar to the concept of folder paths.

Note: Developers can run this same code on multiple environments just by using an AMD optimizer that works with a CommonJS environment such as `r.js`.

Back to the `define` signature, the dependencies argument represents an array of dependencies which are required by the module we are defining and the third argument ("definition function" or "factory function") is a function that's executed to instantiate our module. A bare bone module could be defined as follows:

### Understanding AMD: `define()`

```

1 | // A module_id (myModule) is used here for demonstration purposes only
2 | define( "myModule",
3 |
4 |   ["foo", "bar"],
5 |
6 |   // module definition function
```

```

7   // dependencies (foo and bar) are mapped to function parameters
8   function ( foo, bar ) {
9     // return a value that defines the module export
10    // (i.e the functionality we want to expose for consumption)
11
12    // create your module here
13    var myModule = {
14      doStuff: function () {
15        console.log( "Yay! Stuff" );
16      }
17    };
18
19    return myModule;
20  });
21
22 // An alternative version could be..
23 define( "myModule",
24
25   [ "math", "graph" ],
26
27   function ( math, graph ) {
28
29     // Note that this is a slightly different pattern
30     // With AMD, it's possible to define modules in a few
31     // different ways due to it's flexibility with
32     // certain aspects of the syntax
33     return {
34       plot: function( x, y ){
35         return graph.drawPie( math.randomGrid( x, y ) );
36       }
37     };
38   });

```

*require* on the other hand is typically used to load code in a top-level JavaScript file or within a module should we wish to dynamically fetch dependencies. An example of its usage is:

## Understanding AMD: require()

```

1 // Consider "foo" and "bar" are two external modules
2 // In this example, the "exports" from the two modules
3 // loaded are passed as function arguments to the
4 // callback (foo and bar) so that they can similarly be accessed
5
6 require([ "foo", "bar" ], function ( foo, bar ) {
7   // rest of your code here
8   foo.doSomething();
9 });

```

## Dynamically-loaded Dependencies

```

1 define(function ( require ) {
2     var isReady = false, foobar;
3
4     // note the inline require within our module definition
5     require(["foo", "bar"], function ( foo, bar ) {
6         isReady = true;
7         foobar = foo() + bar();
8     });
9
10    // we can still return a module
11    return {
12        isReady: isReady,
13        foobar: foobar
14    };
15 });

```

## Understanding AMD: plugins

The following is an example of defining an AMD-compatible plugin:

```

1 // With AMD, it's possible to load in assets of almost any kind
2 // including text-files and HTML. This enables us to have template
3 // dependencies which can be used to skin components either on
4 // page-load or dynamically.
5
6 define( ["./templates", "text!./template.md","css!./template.css" ],
7
8     function( templates, template ){
9         console.log( templates );
10        // do something with our templates here
11    }
12
13 });

```

**Note:** Although css! is included for loading CSS dependencies in the above example, it's important to remember that this approach has some caveats such as it not being fully possible to establish when the CSS is fully loaded. Depending on how we approach our build process, it may also result in CSS being included as a dependency in the optimized file, so use CSS as a loaded dependency in such cases with caution. If interested in doing the above, we can also explore @VIISON's RequireJS CSS plugin further [here](#).

## Loading AMD Modules Using RequireJS

```

1 require(["app/myModule"],
2
3     function( myModule ){
4         // start the main module which in-turn
5         // loads other modules

```

```

6   var module = new myModule();
7     module.doStuff();
8   });

```

This example could simply be looked at as `requirejs(["app/myModule"], function(){})` which indicates the loader's top level globals are being used. This is how to kick off top-level loading of modules with different AMD loaders however with a `define()` function, if it's passed a local require all `require([])` examples apply to both types of loader (curl.js and RequireJS).

## Loading AMD Modules Using curl.js

```

1 curl(["app/myModule.js"],
2
3   function( myModule ){
4     // start the main module which in-turn
5     // loads other modules
6     var module = new myModule();
7     module.doStuff();
8
9   });

```

## Modules With Deferred Dependencies

```

1 // This could be compatible with jQuery's Deferred implementation,
2 // futures.js (slightly different syntax) or any one of a number
3 // of other implementations
4
5 define(["lib/Deferred"], function( Deferred ){
6   var defer = new Deferred();
7
8   require(["lib/templates/?index.html","lib/data/?stats"],
9     function( template, data ){
10       defer.resolve( { template: template, data:data } );
11     }
12   );
13   return defer.promise();
14 });

```

## AMD Modules With Dojo

Defining AMD-compatible modules using Dojo is fairly straight-forward. As per above, define any module dependencies in an array as the first argument and provide a callback (factory) which will execute the module once the dependencies have been loaded. e.g:

```

1 define(["dijit/Tooltip"], function( Tooltip ){
2
3     //Our dijit tooltip is now available for local use
4     new Tooltip(...);
5
6 });

```

Note the anonymous nature of the module, which can now be both consumed by a Dojo asynchronous loader, RequireJS or the standard `dojo.require()` module loader.

There are some interesting gotchas with module referencing that are useful to know here. Although the AMD-advocated way of referencing modules declares them in the dependency list with a set of matching arguments, this isn't supported by the older Dojo 1.6 build system - it really only works for AMD-compliant loaders. e.g:

```

1 define(["dojo/cookie", "dijit/Tooltip"], function( cookie, Tooltip ){
2
3     var cookieValue = cookie( "cookieName" );
4     new Tooltip(...);
5
6 });

```

This has many advantages over nested namespacing as modules no longer need to directly reference complete namespaces every time - all we require is the "dojo/cookie" path in dependencies, which once aliased to an argument, can be referenced by that variable. This removes the need to repeatedly type out "dojo." in our applications.

The final gotcha to be aware of is that if we wish to continue using the older Dojo build system or wish to migrate older modules to this newer AMD-style, the following more verbose version enables easier migration. Notice that `dojo` and `dijit` are referenced as dependencies too:

```

1 define(["dojo", "dijit", "dojo/cookie", "dijit/Tooltip"], function( dojo,
2         var cookieValue = dojo.cookie( "cookieName" );
3         new dijit.Tooltip(...);
4     });

```

## AMD Module Design Patterns (Dojo)

---

As we've seen in previous sections, design patterns can be highly effective in improving how we approach structuring solutions to common development problems. [John Hann](#) has given some excellent presentations about AMD module design patterns covering the Singleton, Decorator, Mediator and others and I highly recommend checking out his [slides](#) if we get a chance.

A selection of AMD design patterns can be found below.

### Decorator pattern:

```

1 // mylib/UpdatableObservable: a Decorator for dojo/store/Observable
2 define(["dojo", "dojo/store/Observable"], function ( dojo, Observable ) {
3     return function UpdatableObservable ( store ) {
4
5         var observable = dojo.isFunction( store.notify ) ? store :
6             new Observable(store);
7
8         observable.updated = function( object ) {
9             dojo.when( object, function ( itemOrArray ) {
10                 dojo.forEach( [].concat(itemOrArray), this.notify, this
11             });
12         };
13
14         return observable;
15     };
16 });
17
18
19 // Decorator consumer
20 // a consumer for mylib/UpdatableObservable
21
22 define([ "mylib/UpdatableObservable" ], function ( makeUpdatable ) {
23     var observable,
24         updatable,
25         someItem;
26
27     // make the observable store updatable
28     updatable = makeUpdatable( observable ); // `new` is optional!
29
30     // we can then call .updated() later on if we wish to pass
31     // on data that has changed
32     //updatable.updated( updatedItem );
33 });

```

### Adapter pattern

```

1 // "mylib/Array" adapts `each` function to mimic jQuery's:
2 define(["dojo/_base/lang", "dojo/_base/array"], function ( lang, array )
3     return lang.delegate( array, {

```

```

4   each: function ( arr, lambda ) {
5     array.forEach( arr, function ( item, i ) {
6       lambda.call( item, i, item ); // like jQuery's each
7     });
8   });
9 });
10 });
11
12 // Adapter consumer
13 // "myapp/my-module":
14 define([ "mylib/Array" ], function ( array ) {
15   array.each( [ "uno", "dos", "tres" ], function ( i, esp ) {
16     // here, `this` == item
17   });
18 });

```

## AMD Modules With jQuery

---

Unlike Dojo, jQuery really only comes with one file, however given the plugin-based nature of the library, we can demonstrate how straight-forward it is to define an AMD module that uses it below.

```

1 define([ "js/jquery.js", "js/jquery.color.js", "js/underscore.js" ],
2
3   function( $, colorPlugin, _ ){
4     // Here we've passed in jQuery, the color plugin and Underscore
5     // None of these will be accessible in the global scope, but we
6     // can easily reference them below.
7
8     // Pseudo-randomize an array of colors, selecting the first
9     // item in the shuffled array
10    var shuffleColor = _.first( _.shuffle( [ "#666", "#333", "#111" ] ) );
11
12    // Animate the background-color of any elements with the class
13    // "item" on the page using the shuffled color
14    $( ".item" ).animate( { "backgroundColor": shuffleColor } );
15
16    // What we return can be used by other modules
17    return {};
18  });

```

There is however something missing from this example and it's the concept of registration.

### Registering jQuery As An Async-compatible Module

One of the key features that landed in jQuery 1.7 was support for registering jQuery as an asynchronous module. There are a number of compatible script loaders (including RequireJS and

curl) which are capable of loading modules using an asynchronous module format and this means fewer hacks are required to get things working.

If a developer wants to use AMD and does not want their jQuery version leaking into the global space, they should call `noConflict` in their top level module that uses jQuery. In addition, since multiple versions of jQuery can be on a page there are special considerations that an AMD loader must account for, and so jQuery only registers with AMD loaders that have recognized these concerns, which are indicated by the loader specifying `define.amd.jQuery`. RequireJS and curl are two loaders that do so

The named AMD provides a safety blanket of being both robust and safe for most use-cases.

```

1 // Account for the existence of more than one global
2 // instances of jQuery in the document, cater for testing
3 // .noConflict()
4
5 var jQuery = this.jQuery || "jQuery",
6 $ = this.$ || "$",
7 originaljQuery = jQuery,
8 original$ = $;
9
10 define(["jquery"], function ( $ ) {
11     $(".items").css("background", "green");
12     return function () {};
13 });

```

## Why Is AMD A Better Choice For Writing Modular JavaScript?

- Provides a clear proposal for how to approach defining flexible modules.
- Significantly cleaner than the present global namespace and `<script>` tag solutions many of us rely on. There's a clean way to declare stand-alone modules and dependencies they may have.
- Module definitions are encapsulated, helping us to avoid pollution of the global namespace.
- Arguably works better than some alternative solutions (e.g. CommonJS, which we'll be looking at shortly). It doesn't have issues with cross-domain, local or debugging and doesn't have a reliance on server-side tools to be used. Most AMD loaders support loading modules in the browser without a build process.
- Provides a "transport" approach for including multiple modules in a single file. Other approaches like CommonJS have yet to agree on a transport format.
- It's possible to lazy load scripts if this is needed.

**Note:** Many of the above could be said about YUI's module loading strategy as well.

## Related Reading

The RequireJS Guide To AMD

What's the fastest way to load AMD modules?

AMD vs. CommonJS, what's the better format?

AMD Is Better For The Web Than CommonJS Modules

The Future Is Modules Not Frameworks

AMD No Longer A CommonJS Specification

On Inventing JavaScript Module Formats And Script Loaders

The AMD Mailing List

What Script Loaders & Frameworks Support AMD?

### In-browser:

- RequireJS <http://requirejs.org>
- curl.js <http://github.com/unscriptable/curl>
- bdLoad <http://bdframework.com/bdLoad>
- Yabble <http://github.com/jbrantly/yabble>
- PINF <http://github.com/pinf/loader-js>
- (and more)

### Server-side:

- RequireJS <http://requirejs.org>
- PINF <http://github.com/pinf/loader-js>

## AMD Conclusions

---

Having used AMD for a number of projects, my conclusions are that it ticks a lot of the checkboxes developers creating serious applications might desire from a better module format. It avoids the need to worry about globals, supports named modules, doesn't require server transformation to function and is a pleasure to use for dependency management.

It's also an excellent addition for modular development using Backbone.js, ember.js or any number of other structural frameworks for keeping applications organized.

As AMD has been heavily discussed for almost two years within the Dojo and CommonJS worlds, we know it's had time to mature and evolve. We also know it's been battle-tested in the wild by a number of large companies to build non-trivial applications (IBM, BBC iPlayer) and so, if it didn't work, chances are they would have abandoned it by now, but haven't.

That said, there are still areas where AMD could be improved. Developers who have used the format for some time may feel the AMD boilerplate/wrapper-code is an annoying overhead. Whilst I share this concern, there are tools such as [Volo](#) that can help work around these issues and I would argue that on the whole, the pros with using AMD far outweigh the cons.

## CommonJS

### A Module Format Optimized For The Server

---

The CommonJS module proposal specifies a simple API for declaring modules server-side and unlike AMD attempts to cover a broader set of concerns such as io, file-system, promises and more.

The format was proposed by [CommonJS](#) - a volunteer working group which aim to design, prototype and standardize JavaScript APIs. To date they've attempted to ratify standards for both [modules](#) and [packages](#).

### Getting Started

---

From a structure perspective, a CommonJS module is a reusable piece of JavaScript which exports specific objects made available to any dependent code. Unlike AMD, there are typically no function wrappers around such modules (so we won't see `define` here for example).

CommonJS modules basically contain two primary parts: a free variable named `exports` which contains the objects a module wishes to make available to other modules and a `require` function that modules can use to import the exports of other modules.

## Understanding CommonJS: require() and exports

```

1 // package/lib is a dependency we require
2 var lib = require( "package/lib" );
3
4 // behaviour for our module
5 function foo(){
6     lib.log( "hello world!" );
7 }
8
9 // export (expose) foo to other modules
10 exports.foo = foo;

```

## Basic consumption of exports

```

1 // define more behaviour we would like to expose
2 function foobar(){
3     this.foo = function(){
4         console.log( "Hello foo" );
5     }
6
7     this.bar = function(){
8         console.log( "Hello bar" );
9     }
10 }
11
12 // expose foobar to other modules
13 exports.foobar = foobar;
14
15 // an application consuming "foobar"
16
17 // access the module relative to the path
18 // where both usage and module files exist
19 // in the same directory
20
21 var foobar = require("./foobar").foobar,
22     test   = new foobar();
23
24 // Outputs: "Hello bar"
25 test.bar();

```

## AMD-equivalent Of The First CommonJS Example

```

1 define(function(require){
2     var lib = require( "package/lib" );

```

```

3   // some behaviour for our module
4   function foo(){
5       lib.log( "hello world!" );
6   }
7
8
9   // export (expose) foo for other modules
10  return {
11      foobar: foo
12  };
13 });

```

This can be done as AMD supports a [simplified CommonJS wrapping](#) feature.

## Consuming Multiple Dependencies

### app.js

```

1 var modA = require( "./foo" );
2 var modB = require( "./bar" );
3
4 exports.app = function(){
5     console.log( "Im an application!" );
6 }
7
8 exports.foo = function(){
9     return modA.helloWorld();
10}

```

### bar.js

```
1 | exports.name = "bar";
```

### foo.js

```

1 | require( "./bar" );
2 | exports.helloWorld = function(){
3 |     return "Hello World!!"
4 | }

```

## What Loaders & Frameworks Support CommonJS?

### In-browser:

- curl.js <http://github.com/unscriptable/curl>

- SproutCore 1.1 <http://sproutcore.com>
- PINF <http://github.com/pinf/loader-js>

## Server-side:

- Node <http://nodejs.org>
- Narwhal <https://github.com/tlrobinson/narwhal>
- Persevere <http://www.persvr.org/>
- Wakanda <http://www.wakandasoft.com/>

## Is CommonJS Suitable For The Browser?

There are developers that feel CommonJS is better suited to server-side development which is one reason there's currently a level of **disagreement** over which format should and will be used as the de facto standard in the pre-Harmony age moving forward. Some of the arguments against CommonJS include a note that many CommonJS APIs address server-oriented features which one would simply not be able to implement at a browser-level in JavaScript - for example, *io*, *system* and *js* could be considered unimplementable by the nature of their functionality.

That said, it's useful to know how to structure CommonJS modules regardless so that we can better appreciate how they fit in when defining modules which may be used everywhere. Modules which have applications on both the client and server include validation, conversion and templating engines. The way some developers are approaching choosing which format to use is opting for CommonJS when a module can be used in a server-side environment and using AMD if this is not the case.

As AMD modules are capable of using plugins and can define more granular things like constructors and functions this makes sense. CommonJS modules are only able to define objects which can be tedious to work with if we're trying to obtain constructors out of them.

Although it's beyond the scope of this section, one may have also noticed that there were different types of "require" methods mentioned when discussing AMD and CommonJS. The concern with a similar naming convention is of course confusion and the community are currently split on the merits of a global require function. John Hann's suggestion here is that rather than calling it "require", which would probably fail to achieve the goal of informing users about the difference between a global and inner require, it may make more sense to rename the global loader method something else (e.g. the name of the library). It's for this reason that a loader like curl.js uses `curl()` as opposed to `require`.

## Related Reading

[Demystifying CommonJS Modules](#)

[JavaScript Growing Up](#)

[The RequireJS Notes On CommonJS](#)

[Taking Baby Steps With Node.js And CommonJS - Creating Custom Modules](#)

[Asynchronous CommonJS Modules for the Browser](#)

[The CommonJS Mailing List](#)

# AMD && CommonJS Competing, But Equally Valid Standards

Both AMD and CommonJS are valid module formats with different end-goals.

AMD adopts a browser-first approach to development, opting for asynchronous behavior and simplified backwards compatibility but it doesn't have any concept of File I/O. It supports objects, functions, constructors, strings, JSON and many other types of modules, running natively in the browser. It's incredibly flexible.

CommonJS on the other hand takes a server-first approach, assuming synchronous behavior, no global *baggage* and attempts to cater for the future (on the server). What we mean by this is that because CommonJS supports unwrapped modules, it can feel a little more close to the ES.next/Harmony specifications, freeing us of the `define()` wrapper that AMD enforces. CommonJS modules however only support objects as modules.

## UMD: AMD And CommonJS-Compatible Modules For Plugins

---

For developers wishing to create modules that can work in both browser and server-side environments, existing solutions could be considered little lacking. To help alleviate this, James

Burke, I and a number of other developers created UMD (Universal Module Definition) <https://github.com/umdjs/umd>.

UMD is an experimental module format that allows the definition of modules that work in both client and server environments with all or most of the popular script-loading techniques available at the time of writing. Although the idea of (yet) another module format may be daunting, we will cover UMD briefly for the sake of thoroughness.

We originally began defining UMD by taking a look at the simplified CommonJS wrapper supported in the AMD specification. For developers wishing to write modules as if they were CommonJS modules, the following CommonJS-compatible format could be used:

## Basic AMD Hybrid Format

```
1 define( function ( require, exports, module ){
2     var shuffler = require( "lib/shuffle" );
3     exports.randomize = function( input ){
4         return shuffler.shuffle( input );
5     }
6 });
7 });
8 });
```

It's important however to note that a module is really only treated as a CommonJS module if it doesn't contain a dependency array and the definition function contains one parameter at minimum. This also won't work correctly on some devices (e.g the PS3). For further information about the above wrapper, see <http://requirejs.org/docs/api.html#cjsmodule>.

Taking this further, we wanted to provide a number of different patterns that not just worked with AMD and CommonJS, but also solved common compatibility problems developers wishing to develop such modules had with other environments.

One such variation we can see below allows us to use CommonJS, AMD or browser globals to create a module.

## Using CommonJS, AMD or browser globals to create a module

Define a module `commonJsStrict`, which depends on another module called `b`. The name of the module is implied by the file name and its best practice for the file name and the exported global to have the same name.

If the module `b` also uses the same type of boilerplate in the browser, it will create a global `.b` that is used. If we don't wish to support the browser global patch, we can remove the `root` and the passing `this` as the first argument to the top function.

```

1  (function ( root, factory ) {
2      if ( typeof exports === 'object' ) {
3          // CommonJS
4          factory( exports, require('b') );
5      } else if ( typeof define === 'function' && define.amd ) {
6          // AMD. Register as an anonymous module.
7          define( ['exports', 'b'], factory );
8      } else {
9          // Browser globals
10         factory( (root.commonJsStrict = {}), root.b );
11     }
12 })(this, function ( exports, b ) {
13     //use b in some fashion.
14
15     // attach properties to the exports object to define
16     // the exported module properties.
17     exports.action = function () {};
18 }));

```

The UMD repository contains variations covering modules that work optimally in the browser, those best for providing exports, those optimal for CommonJS runtimes and even those that work best for defining jQuery plugins, which we will look at next.

## jQuery plugins that function in all environments

UMD provides two patterns for working with jQuery plugins - one which defines plugins that work well with AMD and browser globals and another which can also work in CommonJS environments. jQuery is not likely to be used in most CommonJS environments so keep this in mind unless we're working with an environment which does play well with it.

We will now define a plugin composed of a core and an extension to that core. The core plugin is loaded into a `$.core` namespace, which can then be easily extended using plugin extensions via the namespacing pattern. Plugins loaded via script tags automatically populate a `plugin` namespace under `core` (i.e. `$.core.plugin.methodName()`).

The pattern can be quite nice to work with because plugin extensions can access properties and methods defined in the base or, with a little tweaking, override default behavior so that it can be extended to do more. A loader is also not required to make any of this fully functional.

For more details of what is being done, please see the inline comments in the code samples below.

## usage.html

```

1 <script type="text/javascript" src="jquery-1.7.2.min.js"></script>
2 <script type="text/javascript" src="pluginCore.js"></script>
3 <script type="text/javascript" src="pluginExtension.js"></script>
4
5 <script type="text/javascript">
6
7 $(function(){
8
9     // Our plugin "core" is exposed under a core namespace in
10    // this example, which we first cache
11    var core = $.core;
12
13    // Then use some of the built-in core functionality to
14    // highlight all divs in the page yellow
15    core.highlightAll();
16
17    // Access the plugins (extensions) loaded into the "plugin"
18    // namespace of our core module:
19
20    // Set the first div in the page to have a green background.
21    core.plugin.setGreen( "div:first" );
22    // Here we're making use of the core's "highlight" method
23    // under the hood from a plugin loaded in after it
24
25    // Set the last div to the "errorColor" property defined in
26    // our core module/plugin. If we review the code further down,
27    // we can see how easy it is to consume properties and methods
28    // between the core and other plugins
29    core.plugin.setRed("div:last");
30 });
31
32 </script>
```

## pluginCore.js

```

1 // Module/Plugin core
2 // Note: the wrapper code we see around the module is what enables
3 // us to support multiple module formats and specifications by
4 // mapping the arguments defined to what a specific format expects
5 // to be present. Our actual module functionality is defined lower
6 // down, where a named module and exports are demonstrated.
7 //
8 // Note that dependencies can just as easily be declared if required
9 // and should work as demonstrated earlier with the AMD module examples.
10
11 (function ( name, definition ){
12     var theModule = definition(),
13         // this is considered "safe":
14         hasDefine = typeof define === "function" && define.amd,
15         // hasDefine = typeof define === "function",
16         hasExports = typeof module !== "undefined" && module.exports;
```

```

17
18     if ( hasDefine ){ // AMD Module
19         define(theModule);
20     } else if ( hasExports ) { // Node.js Module
21         module.exports = theModule;
22     } else { // Assign to common namespaces or simply the global object (w
23         ( this.jQuery || this.ender || this.$ || this )[name] = theModule;
24     }
25 })( "core", function () {
26     var module = this;
27     module.plugins = [];
28     module.highlightColor = "yellow";
29     module.errorColor = "red";
30
31     // define the core module here and return the public API
32
33     // This is the highlight method used by the core highlightAll()
34     // method and all of the plugins highlighting elements different
35     // colors
36     module.highlight = function( el,strColor ){
37         if( this.jQuery ){
38             jQuery(el).css( "background", strColor );
39         }
40     }
41     return {
42         highlightAll:function(){
43             module.highlight("div", module.highlightColor);
44         }
45     };
46
47 });

```

## pluginExtension.js

```

1 // Extension to module core
2
3 (function ( name, definition ) {
4     var theModule = definition(),
5         hasDefine = typeof define === "function",
6         hasExports = typeof module !== "undefined" && module.exports;
7
8     if ( hasDefine ) { // AMD Module
9         define(theModule);
10    } else if ( hasExports ) { // Node.js Module
11        module.exports = theModule;
12    } else {
13
14        // Assign to common namespaces or simply the global object (wind
15        // account for for flat-file/global module extensions
16        var obj = null,
17            namespaces,
18            scope;
19

```

```

20     obj = null;
21     namespaces = name.split(".");
22     scope = ( this.jQuery || this.ender || this.$ || this );
23
24     for ( var i = 0; i < namespaces.length; i++ ) {
25         var packageName = namespaces[i];
26         if ( obj && i == namespaces.length - 1 ) {
27             obj[packageName] = theModule;
28         } else if ( typeof scope[packageName] === "undefined" ) {
29             scope[packageName] = {};
30         }
31         obj = scope[packageName];
32     }
33
34 }
35 })( "core.plugin", function () {
36
37     // Define our module here and return the public API.
38     // This code could be easily adapted with the core to
39     // allow for methods that overwrite and extend core functionality
40     // in order to expand the highlight method to do more if we wish.
41     return {
42         setGreen: function ( el ) {
43             highlight(el, "green");
44         },
45         setRed: function ( el ) {
46             highlight(el, errorColor);
47         }
48     };
49 });
50 });

```

UMD doesn't aim to replace AMD nor CommonJS but merely offers some supplemental assistance for developers wishing to get their code working in more environments today. For further information or to contribute suggestions towards this experimental format, see <https://github.com/umdjs/umd>.

## Further Reading

- “[Using AMD Loaders to Write and Manage Modular JavaScript](#),” John Hann
- “[Demystifying CommonJS Modules](#),” Alex Young
- “[AMD Module Patterns: Singleton](#),” John Hann
- “[Run-Anywhere JavaScript Modules Boilerplate Code](#),” Kris Zyp
- “[Standards And Proposals for JavaScript Modules And jQuery](#),” James Burke

# ES Harmony

## Modules Of The Future

---

TC39, the standards body charged with defining the syntax and semantics of ECMAScript and its future iterations is composed of a number of very intelligent developers. Some of these developers (such as [Alex Russell](#)) have been keeping a close eye on the evolution of JavaScript usage for large-scale development over the past few years and are acutely aware of the need for better language features for writing more modular JS.

For this reason, there are currently proposals for a number of exciting additions to the language including flexible **modules** that can work on both the client and server, a **module loader** and **more**. In this section, we'll explore code samples using the syntax proposed for modules in ES.next so we can get a taste of what's to come.

**Note:** Although Harmony is still in the proposal phases, we can already try out (partial) features of ES.next that address native support for writing modular JavaScript thanks to Google's **Traceur** compiler. To get up and running with Traceur in under a minute, read this [getting started](#) guide. There's also a JSConf [presentation](#) about it that's worth looking at if interested in learning more about the project.

## Modules With Imports And Exports

---

Having read through the sections on AMD and CommonJS modules you may be familiar with the concept of module dependencies (imports) and module exports (or, the public API/variables we allow other modules to consume). In ES.next, these concepts have been proposed in a slightly more succinct manner with dependencies being specified using an **import** keyword. **export** isn't greatly different to what we might expect and many developers will look at the code samples lower down and instantly grab them.

- **import** declarations bind a module's exports as local variables and may be renamed to avoid name collisions/conflicts.
- **export** declarations declare that a local-binding of a module is externally visible such that other modules may read the exports but can't modify them. Interestingly, modules may export child modules but can't export modules that have been defined elsewhere. We can also rename exports so their external name differs from their local names.

```

2   // specify (public) exports that can be consumed by
3   // other modules
4   export var baker = {
5       bake: function( item ){
6           console.log( "Woo! I just baked " + item );
7       }
8   }
9 }
10
11 module skills{
12     export var specialty = "baking";
13     export var experience = "5 years";
14 }
15
16 module cakeFactory{
17
18     // specify dependencies
19     import baker from staff;
20
21     // import everything with wildcards
22     import * from skills;
23
24     export var oven = {
25         makeCupcake: function( toppings ){
26             baker.bake( "cupcake", toppings );
27         },
28         makeMuffin: function( mSize ){
29             baker.bake( "muffin", size );
30         }
31     }
32 }

```

## Modules Loaded From Remote Sources

The module proposals also cater for modules which are remotely based (e.g. a third-party libraries) making it simplistic to load modules in from external locations. Here's an example of pulling in the module we defined above and utilizing it:

```

1 module cakeFactory from "http://addyosmani.com/factory/cakes.js";
2 cakeFactory.oven.makeCupcake( "sprinkles" );
3 cakeFactory.oven.makeMuffin( "large" );

```

## Module Loader API

The module loader proposed describes a dynamic API for loading modules in highly controlled contexts. Signatures supported on the loader include `load(url, moduleInstance, error)` for loading modules, `createModule(object, globalModuleReferences)` and `others`.

Here's another example for dynamically loading in the module we initially defined. Note that unlike the last example where we pulled in a module from a remote source, the module loader API is better suited to dynamic contexts.

```
1 | Loader.load( "http://addyosmani.com/factory/cakes.js",
2 |   function( cakeFactory ){
3 |     cakeFactory.oven.makeCupcake( "chocolate" );
4 |   });
?
```

## CommonJS-like Modules For The Server

---

For developers who are more interested in server environments, the module system proposed for ES.next isn't just constrained to looking at modules in the browser. Below for example, we can see a CommonJS-like module proposed for use on the server:

```
1 | // io/File.js
2 | export function open( path ) { ... };
3 | export function close( hnd ) { ... };
?
```

```
1 | // compiler/LexicalHandler.js
2 | module file from "io/File";
3 |
4 | import { open, close } from file;
5 | export function scan( in ) {
6 |   try {
7 |     var h = open( in ) ...
8 |   }
9 |   finally { close( h ) }
10 }
?
```

```
1 | module lexer from "compiler/LexicalHandler";
2 | module stdlib from "@std";
3 |
4 | //... scan(cmdline[0]) ...
?
```

## Classes With Constructors, Getters & Setters

---

The notion of a class has always been a contentious issue with purists and we've so far got along with either falling back on JavaScript's **prototypal** nature or through using frameworks or abstractions that offer the ability to use *class* definitions in a form that de-sugars to the same prototypal behavior.

In Harmony, classes have been proposed for the language along with constructors and (finally) some sense of true privacy. In the following examples, inline comments are provided to help explain how classes are structured.

Reading through, one may also notice the lack of the word "function" in here. This isn't a typo error: TC39 have been making a conscious effort to decrease our abuse of the `function` keyword for everything and the hope is that this will help simplify how we write code.

```
1 class Cake{  
2  
3     // We can define the body of a class" constructor  
4     // function by using the keyword "constructor" followed  
5     // by an argument list of public and private declarations.  
6     constructor( name, toppings, price, cakeSize ){  
7         public name = name;  
8         public cakeSize = cakeSize;  
9         public toppings = toppings;  
10        private price = price;  
11    }  
12  
13    // As a part of ES.next's efforts to decrease the unnecessary  
14    // use of "function" for everything, you'll notice that it's  
15    // dropped for cases such as the following. Here an identifier  
16    // followed by an argument list and a body defines a new method  
17  
18    addTopping( topping ){  
19        public( this ).toppings.push( topping );  
20    }  
21  
22    // Getters can be defined by declaring get before  
23    // an identifier/method name and a curly body.  
24    get allToppings(){  
25        return public( this ).toppings;  
26    }  
27  
28    get qualifiesForDiscount(){  
29        return private( this ).price > 5;  
30    }  
31  
32    // Similar to getters, setters can be defined by using  
33    // the "set" keyword before an identifier  
34    set cakeSize( cSize ){  
35        if( cSize < 0 ){  
36            throw new Error( "Cake must be a valid size -  
37            either small, medium or large" );  
38        }  
39        public( this ).cakeSize = cSize;  
40    }  
41  
42    }  
43  
44 }
```

## ES Harmony Conclusions

---

As we've seen, Harmony might come with some exciting new additions that will ease the development of modular applications and handling concerns such as dependency management.

At present, our best options for using Harmony syntax in today's browsers is through a transpiler such as [Google Traceur](#) or [Esprima](#). There are also projects such as [Require HM](#) which allow us to use Harmony modules with AMD. Our best bets however until we have specification finalization are AMD (for in-browser modules) and CommonJS (for those on the server).

### Related Reading

[A First Look At The Upcoming JavaScript Modules](#)

[David Herman On JavaScript/ES.Next \(Video\)](#)

[ES Harmony Module Proposals](#)

[ES Harmony Module Semantics/Structure Rationale](#)

[ES Harmony Class Proposals](#)

## Conclusions

In this section we reviewed several of the options available for writing modular JavaScript using modern module formats.

These formats have a number of advantages over using the module pattern alone including: avoiding the need to manage global variables, better support for static and dynamic dependency management, improved compatibility with script loaders, better compatibility for modules on the server and more.

In short, I recommend trying out what's been suggested in this chapter as these formats offer a great deal of power and flexibility that can significantly assist with better organizing our applications.

# Design Patterns In jQuery

jQuery is currently the most popular JavaScript DOM manipulation library and provides an abstracted layer for interacting with the DOM in a safe, cross-browser manner. Interestingly, the library also serves as an example of how design patterns can be effectively used to create an API which is both readable and easy to use.

Whilst in many cases the core contributors that wrote jQuery didn't set out to use specific patterns, they exist there regardless and are useful to learn from. Let's take a look at what some of these patterns are and how they are used in the API.

## The Composite Pattern

**The Composite Pattern** describes a group of objects that can be treated in the same way a single instance of an object may be.

This allows us to treat both individual objects and compositions in a uniform manner, meaning that the same behavior will be applied regardless of whether we're working with one item or a thousand.

In jQuery, when we're applying methods to an element or collection of elements, we can treat both sets in a uniform manner as both selections return a jQuery object.

This is demonstrated by the code sample using the jQuery selector below. Here it's possible to add an `active` class to both selections for a single element (e.g an element with a unique ID) or a group of elements with the same tag name or class, without additional effort:

```
1 // Single elements
2 $( "#singleItem" ).addClass( "active" );
3 $( "#container" ).addClass( "active" );
4
5 // Collections of elements
6 $( "div" ).addClass( "active" );
7 $( ".item" ).addClass( "active" );
8 $( "input" ).addClass( "active" );
```

The jQuery `addClass()` implementation could either directly use native `for` loops (or jQuery's `jQuery.each()` / `jQuery.fn.each()`) to iterate through a collection in order to apply the method to both single items or groups. Looking through the source we can see this is indeed the case:

```

1  addClass: function( value ) {
2    var classNames, i, l, elem,
3      setClass, c, cl;
4
5    if ( jQuery.isFunction( value ) ) {
6      return this.each(function( j ) {
7        jQuery( this ).addClass( value.call(this, j, this.className) );
8      });
9    }
10
11   if ( value && typeof value === "string" ) {
12     classNames = value.split( rspace );
13
14     for ( i = 0, l = this.length; i < l; i++ ) {
15       elem = this[ i ];
16
17       if ( elem.nodeType === 1 ) {
18         if ( !elem.className && classNames.length === 1 ) {
19           elem.className = value;
20
21         } else {
22           setClass = " " + elem.className + " ";
23
24           for ( c = 0, cl = classNames.length; c < cl; c++ ) {
25             if ( !~setClass.indexOf( " " + classNames[ c ] + " " ) ) {
26               setClass += classNames[ c ] + " ";
27             }
28           }
29           elem.className = jQuery.trim( setClass );
30         }
31       }
32     }
33   }
34
35   return this;
36 }
```

# The Adapter Pattern

**The Adapter Pattern** translates an *interface* for an object or class into an interface compatible with a specific system.

Adapters basically allow objects or classes to function together which normally couldn't due to their incompatible interfaces. The adapter translates calls to its interface into calls to the original interface and the code required to achieve this is usually quite minimal.

One example of an adapter we may have used is the jQuery `jQuery.fn.css()` method. It helps normalize the interfaces to how styles can be applied across a number of browsers, making it trivial for us to use a simple syntax which is adapted to use what the browser actually supports behind the scenes:

```

1 // Cross browser opacity:
2 // opacity: 0.9; Chrome 4+, FF2+, Saf3.1+, Opera 9+, IE9, iOS 3.2+, Andro
3 // filter: alpha(opacity=90); IE6-IE8
4
5 // Setting opacity
6 $(".container").css( { opacity: .5 } );
7
8 // Getting opacity
9 var currentOpacity = $(".container").css('opacity');

```

The corresponding jQuery core cssHook which makes the above possible can be seen below:

```

1 get: function( elem, computed ) {
2     // IE uses filters for opacity
3     return ropacity.test( (
4         computed && elem.currentStyle ?
5             elem.currentStyle.filter : elem.style.filter) || "" ) ?
6             ( parseFloat( RegExp.$1 ) / 100 ) + "" :
7             computed ? "1" : "";
8 },
9
10 set: function( elem, value ) {
11     var style = elem.style,
12         currentState = elem.currentStyle,
13         opacity = jQuery.isNumeric( value ) ?
14             "alpha(opacity=" + value * 100 + ")" : "",
15         filter = currentState && currentState.filter || style.filter || "";
16
17     // IE has trouble with opacity if it does not have layout
18     // Force it by setting the zoom level
19     style.zoom = 1;
20
21     // if setting opacity to 1, and no other filters
22     // exist - attempt to remove filter attribute #6652
23     if ( value >= 1 && jQuery.trim( filter.replace( ralpha, "" ) ) === "" )
24
25         // Setting style.filter to null, "" & " " still leave

```

```

26 // "filter:" in the cssText if "filter:" is present at all,
27 // clearType is disabled, we want to avoid this style.removeAttribute
28 // is IE Only, but so apparently is this code path...
29 style.removeAttribute( "filter" );
30
31 // if there is no filter style applied in a css rule, we are done
32 if ( currentStyle && !currentStyle.filter ) {
33     return;
34 }
35
36
37 // otherwise, set new filter values
38 style.filter = ralpha.test( filter ) ?
39     filter.replace( ralpha, opacity ) :
40     filter + " " + opacity;
41 }
42 };

```

## The Facade Pattern

As we reviewed earlier in the book, the **Facade Pattern** provides a simpler abstracted interface to a larger (potentially more complex) body of code.

Facades can be frequently found across the jQuery library and provide developers easy access to implementations for handling DOM manipulation, animation and of particular interest, cross-browser Ajax.

The following are facades for jQuery's `$.ajax()`:

```

1 $.get( url, data, callback, dataType );
2 $.post( url, data, callback, dataType );
3 $.getJSON( url, data, callback );
4 $.getScript( url, callback );

```

These are translated behind the scenes to:

```

1 // $.get()
2 $.ajax({
3     url: url,
4     data: data,
5     dataType: dataType
6 }).done( callback );
7
8 // $.post
9 $.ajax({

```

```

10    type: "POST",
11    url: url,
12    data: data,
13    dataType: dataType
14 }).done( callback );
15
16 // $.getJSON()
17 $.ajax({
18   url: url,
19   dataType: "json",
20   data: data,
21 }).done( callback );
22
23 // $.getScript()
24 $.ajax({
25   url: url,
26   dataType: "script",
27 }).done( callback );

```

What's even more interesting is that the above facades are actually facades in their own right, hiding a great deal of complexity behind the scenes.

This is because the `jQuery.ajax()` implementation in jQuery core is a non-trivial piece of code to say the least. At minimum it normalizes the cross-browser differences between XHR (XMLHttpRequest) and makes it trivial for us to perform common HTTP actions (e.g `get`, `post` etc), work with Deferreds and so on.

As it would take an entire chapter to show all of the code related to the above facades, here is instead the code in jQuery core normalizing XHR:

```

1 // Functions to create xhrs
2 function createStandardXHR() {
3   try {
4     return new window.XMLHttpRequest();
5   } catch( e ) {}
6 }
7
8 function createActiveXHR() {
9   try {
10     return new window.ActiveXObject( "Microsoft.XMLHTTP" );
11   } catch( e ) {}
12 }
13
14 // Create the request object
15 jQuery.ajaxSettings.xhr = window.ActiveXObject ?
16   /* Microsoft failed to properly
17    * implement the XMLHttpRequest in IE7 (can't request local files),
18    * so we use the ActiveXObject when it is available
19    * Additionally XMLHttpRequest can be disabled in IE7/IE8 so
20    * we need a fallback.
21   */

```

```

22  function() {
23    return !this.isLocal && createStandardXHR() || createActiveXHR();
24  } :
25  // For all other browsers, use the standard XMLHttpRequest object
26  createStandardXHR;
27  ...

```

Whilst the following block of code is also a level above the actual jQuery XHR (`jqXHR`) implementation, it's the convenience facade that we actually most commonly interact with:

```

1   // Request the remote document
2   jQuery.ajax({
3     url: url,
4     type: type,
5     dataType: "html",
6     data: params,
7     // Complete callback (responseText is used internally)
8     complete: function( jqXHR, status, responseText ) {
9       // Store the response as specified by the jqXHR object
10      responseText = jqXHR.responseText;
11      // If successful, inject the HTML into all the matched elements
12      if ( jqXHR.isResolved() ) {
13        // Get the actual response in case
14        // a dataFilter is present in ajaxSettings
15        jqXHR.done(function( r ) {
16          responseText = r;
17        });
18        // See if a selector was specified
19        self.html( selector ?
20          // Create a dummy div to hold the results
21          jQuery("<div>")
22          // inject the contents of the document in, removing the sc
23          // to avoid any 'Permission Denied' errors in IE
24          .append(responseText.replace(rscript, ""))
25
26          // Locate the specified elements
27          .find(selector) :
28
29          // If not, just inject the full result
30          responseText );
31      }
32
33      if ( callback ) {
34        self.each( callback, [ responseText, status, jqXHR ] );
35      }
36    });
37  });
38
39  return this;
40 }
</div>

```

# The Observer Pattern

Another pattern we reviewed earlier is the Observer (Publish/Subscribe) pattern. This is where the objects in a system may subscribe to other objects and be notified by them when an event of interest occurs.

jQuery core has come with built-in support for a publish/subscribe-like system for a few years now, which it refers to as *custom events*.

In earlier versions of the library, access to these custom events was possible using `jQuery.bind()` (subscribe), `jQuery.trigger()` (publish) and `jQuery.unbind()` (unsubscribe), but in recent versions this can be done using `jQuery.on()`, `jQuery.trigger()` and `jQuery.off()`.

Below we can see an example of this being used in practice:

```

1 // Equivalent to subscribe(topicName, callback)
2 $( document ).on( "topicName", function () {
3     //..perform some behaviour
4 });
5
6 // Equivalent to publish(topicName)
7 $( document ).trigger( "topicName" );
8
9 // Equivalent to unsubscribe(topicName)
10 $( document ).off( "topicName" );

```

Calls to `jQuery.on()` and `jQuery.off()` eventually go through the jQuery events system. Similar to Ajax, as the implementation for this is relatively long, we can instead look at where and how the actual event handlers for custom events are attached:

```

1 jQuery.event = {
2
3     add: function( elem, types, handler, data, selector ) {
4
5         var elemData, eventHandle, events,
6             t, tns, type, namespaces, handleObj,
7             handleObjIn, quick, handlers, special;
8
9         ...
10
11         // Init the element's event structure and main handler,
12         //if this is the first

```

```

13     events = elemData.events;
14     if ( !events ) {
15         elemData.events = events = {};
16     }
17     ...
18
19     // Handle multiple events separated by a space
20     // jQuery(...).bind("mouseover mouseout", fn);
21     types = jQuery.trim( hoverHack(types) ).split( " " );
22     for ( t = 0; t < types.length; t++ ) {
23
24         ...
25
26         // Init the event handler queue if we're the first
27         handlers = events[ type ];
28         if ( !handlers ) {
29             handlers = events[ type ] = [];
30             handlers.delegateCount = 0;
31
32             // Only use addEventListener/attachEvent if the special
33             // events handler returns false
34             if ( !special.setup || special.setup.call( elem, data,
35                 //namespaces, eventHandle ) === false ) {
36                 // Bind the global event handler to the element
37                 if ( elem.addEventListener ) {
38                     elem.addEventListener( type, eventHandle, false );
39
40                 } else if ( elem.attachEvent ) {
41                     elem.attachEvent( "on" + type, eventHandle );
42                 }
43             }
44         }
    }

```

For those that prefer to use the conventional naming scheme for the Observer pattern, [Ben Alman](#) created a simple wrapper around the above methods which provides us access to

[jQuery.publish\(\)](#), [jQuery.subscribe](#), and [jQuery.unsubscribe](#) methods. I've previously linked to them earlier in the book, but we can see the wrapper in full below.

```

1 (function( $ ) {
2
3     var o = $( {} );
4
5     $.subscribe = function() {
6         o.on.apply(o, arguments);
7     };
8
9     $.unsubscribe = function() {
10        o.off.apply(o, arguments);
11    };
12
13    $.publish = function() {
14        o.trigger.apply(o, arguments);
15    };

```

```

16
17  })( jQuery );

```

In recent versions of jQuery, a multi-purpose callbacks object (`jQuery.Callbacks`) was made available to enable users to write new solutions based on callback lists. One such solution to write using this feature is another Publish/Subscribe system. An implementation of this is the following:

```

?
1  var topics = {};
2
3  jQuery.Topic = function( id ) {
4      var callbacks,
5          topic = id && topics[ id ];
6      if ( !topic ) {
7          callbacks = jQuery.Callbacks();
8          topic = {
9              publish: callbacks.fire,
10             subscribe: callbacks.add,
11             unsubscribe: callbacks.remove
12         };
13         if ( id ) {
14             topics[ id ] = topic;
15         }
16     }
17     return topic;
18 };

```

which can then be used as follows:

```

?
1 // Subscribers
2 $.Topic( "mailArrived" ).subscribe( fn1 );
3 $.Topic( "mailArrived" ).subscribe( fn2 );
4 $.Topic( "mailSent" ).subscribe( fn1 );
5
6 // Publisher
7 $.Topic( "mailArrived" ).publish( "hello world!" );
8 $.Topic( "mailSent" ).publish( "woo! mail!" );
9
10 // Here, "hello world!" gets pushed to fn1 and fn2
11 // when the "mailArrived" notification is published
12 // with "woo! mail!" also being pushed to fn1 when
13 // the "mailSent" notification is published.
14
15 // Outputs:
16 // hello world!
17 // fn2 says: hello world!
18 // woo! mail!

```

# The Iterator Pattern

The Iterator is a design pattern where iterators (objects that allow us to traverse through all the elements of a collection) access the elements of an aggregate object sequentially without needing to expose its underlying form.

Iterators encapsulate the internal structure of how that particular iteration occurs. In the case of jQuery's `jQuery.fn.each()` iterator, we are actually able to use the underlying code behind `jQuery.each()` to iterate through a collection, without needing to see or understand the code working behind the scenes providing this capability.

This is a pattern that could be considered a special case of the facade, where we explicitly deal with problems related to iteration.

```

1  $.each( ["john", "dave", "rick", "julian"], function( index, value ) {
2      console.log( index + ": " + value);
3  });
4
5  $("li").each( function ( index ) {
6      console.log( index + ": " + $( this ).text());
7  });

```

Here we can see the code for `jQuery.fn.each()`:

```

1 // Execute a callback for every element in the matched set.
2 each: function( callback, args ) {
3     return jQuery.each( this, callback, args );
4 }

```

Followed by the code behind `jQuery.each()` which handles two ways of iterating through objects:

```

1  each: function( object, callback, args ) {
2      var name, i = 0,
3          length = object.length,
4          isObj = length === undefined || jQuery.isFunction( object );
5
6      if ( args ) {
7          if ( isObj ) {
8              for ( name in object ) {
9                  if ( callback.apply( object[ name ], args ) === false ) {
10                     break;
11                 }
12             }
13         } else {

```

```

14    for ( ; i < length; ) {
15        if ( callback.apply( object[ i++ ], args ) === false ) {
16            break;
17        }
18    }
19 }
20
21 // A special, fast, case for the most common use of each
22 } else {
23     if ( isObj ) {
24         for ( name in object ) {
25             if ( callback.call( object[ name ], name, object[ name ] ) === f
26                 break;
27             }
28         }
29     } else {
30         for ( ; i < length; ) {
31             if ( callback.call( object[ i ], i, object[ i++ ] ) === false )
32                 break;
33             }
34         }
35     }
36 }
37
38     return object;
39 };

```

## The Lazy Initialization Pattern

**Lazy Initialization** is a design pattern which allows us to delay expensive processes until the first instance they are needed. An example of this is the `.ready()` function in jQuery that only executes a callback once the DOM is ready.

```

1 $( document ).ready( function () {
2
3     // The ajax request won't attempt to execute until
4     // the DOM is ready
5
6     var jqxhr = $.ajax({
7         url: "http://domain.com/api/",
8         data: "display=latest&order=ascending"
9     })
10    .done( function( data ) ){
11        $(".status").html( "content loaded" );
12        console.log( "Data output:" + data );
13    });
14

```

```
15 | });

```

`jQuery.fn.ready()` is powered by `jQuery.bindReady()`, seen below:

```

1 bindReady: function() {
2   if ( readyList ) {
3     return;
4   }
5
6   readyList = jQuery.Callbacks( "once memory" );
7
8   // Catch cases where $(document).ready() is called after the
9   // browser event has already occurred.
10  if ( document.readyState === "complete" ) {
11    // Handle it asynchronously to allow scripts the opportunity to dela
12    return setTimeout( jQuery.ready, 1 );
13  }
14
15  // Mozilla, Opera and webkit support this event
16  if ( document.addEventListener ) {
17    // Use the handy event callback
18    document.addEventListener( "DOMContentLoaded", DOMContentLoaded, fal
19
20    // A fallback to window.onload, that will always work
21    window.addEventListener( "load", jQuery.ready, false );
22
23    // If IE event model is used
24  } else if ( document.attachEvent ) {
25    // ensure firing before onload,
26    // maybe late but safe also for iframes
27    document.attachEvent( "onreadystatechange", DOMContentLoaded );
28
29    // A fallback to window.onload, that will always work
30    window.attachEvent( "onload", jQuery.ready );
31
32    // If IE and not a frame
33    // continually check to see if the document is ready
34    var toplevel = false;
35
36    try {
37      toplevel = window.frameElement == null;
38    } catch(e) {}
39
40    if ( document.documentElement.doScroll && toplevel ) {
41      doScrollCheck();
42    }
43  }
44},

```

Whilst not directly used in jQuery core, some developers may also be familiar with the concept of LazyLoading via plugins such as [this](#).

LazyLoading is effectively the same as Lazy initialization and is a technique whereby additional data on a page is loaded when needed (e.g. when a user has scrolled to the end of the page). In recent years this pattern has become quite prominent and can be currently be found in both the Twitter and Facebook UIs.

# The Proxy Pattern

There are times when it is necessary for us to control the access and context behind an object and this is where the Proxy pattern can be useful.

It can help us control when an expensive object should be instantiated, provide advanced ways to reference the object or modify the object to function a particular way in specific contexts.

In jQuery core, a `jQuery.proxy()` method exists which accepts as input a function and returns a new one which will always have a specific context. This ensures that the value of `this` within a function is the value we expect.

An example of where this is useful is when we're making use of timers within a `click` event handler. Imagine we have the following handler prior to adding any timers:

```
1 | $( "button" ).on( "click", function () {
2 |   // Within this function, "this" refers to the element that was clicked
3 |   $( this ).addClass( "active" );
4 | });
```

If we wished to add a hard delay before the `active` class was added, we *could* use `setTimeout()` to achieve this. Unfortunately there is a small problem with this solution: whatever function is passed to `setTimeout()` will have a different value for `this` within that function. It will instead refer to the `window` object, which is not what we desire.

```
1 | $( "button" ).on( "click", function () {
2 |   setTimeout(function () {
3 |     // "this" doesn't refer to our element!
4 |     // It refers to window
5 |     $( this ).addClass( "active" );
6 |   });
7 | });
```

To work around this problem, we can use `jQuery.proxy()` to implement a type of proxy pattern. By calling it with the function and value we would like assigned to `this` it will actually return a function that retains the value we desire within the correct context. Here's how this would look:

```

1  $( "button" ).on( "click", function () {
2
3      setTimeout( $.proxy( function () {
4          // "this" now refers to our element as we wanted
5          $( this ).addClass( "active" );
6      }, this ), 500 );
7
8      // the last "this" we're passing tells $.proxy() that our DOM elemen
9      // is the value we want "this" to refer to.
10 });

```

jQuery's implementation of `jQuery.proxy()` can be found below:

```

1  // Bind a function to a context, optionally partially applying any
2  // arguments.
3  proxy: function( fn, context ) {
4      if ( typeof context === "string" ) {
5          var tmp = fn[ context ];
6          context = fn;
7          fn = tmp;
8      }
9
10     // Quick check to determine if target is callable, in the spec
11     // this throws a TypeError, but we will just return undefined.
12     if ( !jQueryisFunction( fn ) ) {
13         return undefined;
14     }
15
16     // Simulated bind
17     var args = slice.call( arguments, 2 ),
18         proxy = function() {
19             return fn.apply( context, args.concat( slice.call( arguments ) ) )
20         };
21
22     // Set the guid of unique handler to the same of original handler, so
23     proxy.guid = fn.guid = fn.guid || proxy.guid || jQuery.guid++;
24
25     return proxy;
26 }

```

## The Builder Pattern

When working with the DOM, we often want to construct new elements dynamically - a process which can increase in complexity depending on the final markup, attributes and properties we wish our constructed elements to contain.

Complex elements require special care when being defined, especially if we want the flexibility to either literally define the final markup for our elements (which can get messy) or take a more readable object-oriented route instead. Having a mechanism for building our complex DOM objects that is independent from the objects themselves gives us this flexibility and that is exactly what the Builder pattern provides.

Builders allow us to construct complex objects by only specifying the type and content of the object, shielding us from the process of creating or representing the object explicitly.

The jQuery dollar sign allows us to do just this as it provides a number of different means for dynamically building new jQuery (and DOM) objects, by either passing in the complete markup for an element, partial markup and content or using the jQuery for construction:

```

1  $( '<div class="foo">bar</div>' );
2
3  $( '<p id="test">foo <em>bar</em></p>' ).appendTo( "body" );
4
5  var newParagraph = $( "<p />" ).text( "Hello world" );
6
7  $( "<input />" )
8    .attr({ "type": "text", "id": "sample" })
9    .appendTo("#container");

```

Below is a snippet from jQuery core's internal `jQuery.prototype` method which assists with the construction of jQuery objects from markup passed to the `jQuery()` selector. Regardless of whether or not `document.createElement` is used to create a new element, a reference to the element (found or created) is injected into the returned object so further methods such as `.attr()` can be easily used on it right after.

```

1  // HANDLE: $(html) -> $(array)
2  if ( match[1] ) {
3    context = context instanceof jQuery ? context[0] : context;
4    doc = ( context ? context.ownerDocument || context : document );
5
6    // If a single string is passed in and it's a single tag
7    // just do a createElement and skip the rest
8    ret = rsingleTag.exec( selector );
9

```

```
10  if ( ret ) {
11    if ( jQuery.isPlainObject( context ) ) {
12      selector = [ document.createElement( ret[1] ) ];
13      jQuery.fn.attr.call( selector, context, true );
14    }
15  } else {
16    selector = [ doc.createElement( ret[1] ) ];
17  }
18
19 } else {
20   ret = jQuery.buildFragment( [ match[1] ], [ doc ] );
21   selector = ( ret.cacheable ? jQuery.clone(ret.fragment) : ret.frag
22 }
23
24 return jQuery.merge( this, selector );
```

# jQuery Plugin Design Patterns

jQuery plugin development has evolved over the past few years. We no longer have just one way to write plugins, but many. In reality, certain plugin design patterns might work better for a particular problem or component than others.

Some developers may wish to use the jQuery UI [widget factory](#); it's great for complex, flexible UI components. Some may not.

Some might like to structure their plugins more like modules (similar to the module pattern) or use a more modern module format such as AMD.

Some might want their plugins to harness the power of prototypal inheritance. Others may wish to use custom events or Publish/Subscribe to communicate from plugins to the rest of their app. And so on.

I began to think about plugin patterns after noticing a number of efforts to create a one-size-fits-all jQuery plugin boilerplate. While such a boilerplate is a great idea in theory, the reality is that we rarely write plugins in one fixed way, using a single pattern all the time.

Let us assume that we've tried our hand at writing our own jQuery plugins at some point and we're comfortable putting together something that works. It's functional. It does what it needs to do, but perhaps we feel it could be structured better. Maybe it could be more flexible or could be designed to address more of the issues developers commonly run into. If this sounds familiar,

then you might find this chapter useful. In it, we're going to explore a number of jQuery plugin patterns that have worked well for other developers in the wild.

**Note:** This chapter is targeted at intermediate to advanced developers, although we will briefly review some jQuery plugin fundamentals to begin.

If you don't feel quite ready for this just yet, I'm happy to recommend the official [jQuery Plugins/Authoring](#) guide, Ben Alman's [plugin style guide](#) and Remy Sharp's "[Signs of a Poorly Written jQuery Plugin](#)." as reading material prior to starting this section.

## Patterns

---

jQuery plugins have few concrete rules, which is one of the reasons for the incredible diversity in how they are implemented across the community. At the most basic level, we can write a plugin simply by adding a new function property to jQuery's `jQuery.fn` object, as follows:

```
1 | $.fn.myPluginName = function () {
2 |     // our plugin logic
3 | };
?
```

This is great for compactness, but the following would be a better foundation to build on:

```
1 | (function( $ ){
2 |     $.fn.myPluginName = function () {
3 |         // our plugin logic
4 |     };
5 | })( jQuery );
?
```

Here, we've wrapped our plugin logic in an anonymous function. To ensure that our use of the `$` sign as a shorthand creates no conflicts between jQuery and other JavaScript libraries, we simply pass it to this closure, which maps it to the dollar sign. This ensures that it can't be affected by anything outside of its scope of execution.

An alternative way to write this pattern would be to use `jQuery.extend()`, which enables us to define multiple functions at once and which sometimes make more sense semantically:

```
1 | (function( $ ){
2 |     $.extend($.fn, {
3 |         myplugin: function(){
4 |             // your plugin logic
5 |         }
6 |     });
?
```

```
7 | })( jQuery );
```

We have now reviewed some jQuery plugin fundamentals, but a lot more could be done to take this further. *A Lightweight Start* is the first complete plugin design pattern we'll be exploring and it covers some best practices that we can use for basic everyday plugin development, taking into account common gotchas worth applying.

## Note

While most of the patterns below will be explained, I recommend reading through the comments in the code, because they will offer more insight into why certain best practices are applied.

I should also mention that none of this would be possible without the previous work, input and advice of other members of the jQuery community. I've listed them inline with each pattern so that one can read up on their individual work if interested.

## 'A Lightweight Start' Pattern

---

Let's begin our deeper look at plugin patterns with something basic that follows best practices (including those in the jQuery plugin-authoring guide). This pattern is ideal for developers who are either new to plugin development or who just want to achieve something simple (such as a utility plugin). *A Lightweight Start* uses the following:

- Common best practices such as a semi-colon placed before the functions invocation (we'll go through why in the comments below)
- `window, document, undefined` passed in as arguments.
- A basic defaults object.
- A simple plugin constructor for logic related to the initial creation and the assignment of the element to work with.
- Extending the options with defaults.
- A lightweight wrapper around the constructor, which helps to avoid issues such as multiple instantiations.
- Adherence to the jQuery core style guidelines for maximized readability.

```
1 | /*!
2 | *  jQuery lightweight plugin boilerplate
3 | *  Original author: @ajpiano
```

```
4  * Further changes, comments: @addyosmani
5  * Licensed under the MIT license
6  */
7
8
9 // the semi-colon before the function invocation is a safety
10 // net against concatenated scripts and/or other plugins
11 // that are not closed properly.
12 ;(function ( $, window, document, undefined ) {
13
14     // undefined is used here as the undefined global
15     // variable in ECMAScript 3 and is mutable (i.e. it can
16     // be changed by someone else). undefined isn't really
17     // being passed in so we can ensure that its value is
18     // truly undefined. In ES5, undefined can no longer be
19     // modified.
20
21     // window and document are passed through as local
22     // variables rather than as globals, because this (slightly)
23     // quickens the resolution process and can be more
24     // efficiently minified (especially when both are
25     // regularly referenced in our plugin).
26
27     // Create the defaults once
28     var pluginName = "defaultPluginName",
29         defaults = {
30             propertyName: "value"
31         };
32
33     // The actual plugin constructor
34     function Plugin( element, options ) {
35         this.element = element;
36
37         // jQuery has an extend method that merges the
38         // contents of two or more objects, storing the
39         // result in the first object. The first object
40         // is generally empty because we don't want to alter
41         // the default options for future instances of the plugin
42         this.options = $.extend( {}, defaults, options );
43
44         this._defaults = defaults;
45         this._name = pluginName;
46
47         this.init();
48     }
49
50     Plugin.prototype.init = function () {
51         // Place initialization logic here
52         // We already have access to the DOM element and
53         // the options via the instance, e.g. this.element
54         // and this.options
55     };
56
57     // A really lightweight plugin wrapper around the constructor,
58     // preventing against multiple instantiations
59     $.fn[pluginName] = function ( options ) {
60         return this.each(function () {
```

```

61   if ( !$.data(this, "plugin_" + pluginName) ) {
62     $.data( this, "plugin_" + pluginName,
63           new Plugin( this, options ) );
64   }
65 });
66
67 })( jQuery, window, document );

```

Usage:

```

1  $("#elem").defaultPluginName({
2    propertyName: "a custom value"
3  });

```

## Further Reading

- [Plugins/Authoring](#), jQuery
- “[Signs of a Poorly Written jQuery Plugin](#),” Remy Sharp
- “[How to Create Your Own jQuery Plugin](#),” Elijah Manor
- “[Style in jQuery Plugins and Why It Matters](#),” Ben Almon
- “[Create Your First jQuery Plugin, Part 2](#),” Andrew Wirick

## “Complete” Widget Factory Pattern

---

While the jQuery plugin authoring guide is a great introduction to plugin development, it doesn't help obscure away common plugin plumbing tasks that we have to deal with on a regular basis.

The jQuery UI Widget Factory is a solution to this problem that helps us build complex, stateful plugins based on object-oriented principles. It also eases communication with our plugins instance, obfuscating a number of the repetitive tasks that we would have to code when working with basic plugins.

Stateful plugins help us keep track of their current state, also allowing us to change properties of the plugin after it has been initialized.

One of the great things about the Widget Factory is that the majority of the jQuery UI library actually uses it as a base for its components. This means that if we're looking for further guidance

on structure beyond this pattern, we won't have to look beyond the jQuery UI repository on GitHub (<https://github.com/jquery/jquery-ui>).

This jQuery UI Widget Factory pattern covers almost all of the supported default factory methods, including triggering events. As per the last pattern, comments are included for all of the methods used and further guidance is given in the inline comments.

```
1  /*!
2   * jQuery UI Widget-factory plugin boilerplate (for 1.8/9+)
3   * Author: @addyosmani
4   * Further changes: @peolanha
5   * Licensed under the MIT license
6   */
7
8
9  ;(function ( $, window, document, undefined ) {
10
11     // define our widget under a namespace of your choice
12     // with additional parameters e.g.
13     // $.widget( "namespace.widgetname", (optional) - an
14     // existing widget prototype to inherit from, an object
15     // literal to become the widget's prototype );
16
17     $.widget( "namespace.widgetname", {
18
19         //Options to be used as defaults
20         options: {
21             someValue: null
22         },
23
24         //Setup widget (e.g. element creation, apply theming
25         //, bind events etc.)
26         _create: function () {
27
28             // _create will automatically run the first time
29             // this widget is called. Put the initial widget
30             // setup code here, then we can access the element
31             // on which the widget was called via this.element.
32             // The options defined above can be accessed
33             // via this.options this.element.addStuff();
34         },
35
36         // Destroy an instantiated plugin and clean up
37         // modifications the widget has made to the DOM
38         destroy: function () {
39
40             // this.element.removeStuff();
41             // For UI 1.8, destroy must be invoked from the
42             // base widget
43             $.Widget.prototype.destroy.call( this );
44             // For UI 1.9, define _destroy instead and don't
45             // worry about
46             // calling the base widget
47
48     }
49
50     // this._create();
51
52     // this._destroy();
53
54     // this._option();
55
56     // this._option();
57
58     // this._option();
59
60     // this._option();
61
62     // this._option();
63
64     // this._option();
65
66     // this._option();
67
68     // this._option();
69
70     // this._option();
71
72     // this._option();
73
74     // this._option();
75
76     // this._option();
77
78     // this._option();
79
80     // this._option();
81
82     // this._option();
83
84     // this._option();
85
86     // this._option();
87
88     // this._option();
89
90     // this._option();
91
92     // this._option();
93
94     // this._option();
95
96     // this._option();
97
98     // this._option();
99
100    // this._option();
101
102    // this._option();
103
104    // this._option();
105
106    // this._option();
107
108    // this._option();
109
110    // this._option();
111
112    // this._option();
113
114    // this._option();
115
116    // this._option();
117
118    // this._option();
119
120    // this._option();
121
122    // this._option();
123
124    // this._option();
125
126    // this._option();
127
128    // this._option();
129
130    // this._option();
131
132    // this._option();
133
134    // this._option();
135
136    // this._option();
137
138    // this._option();
139
140    // this._option();
141
142    // this._option();
143
144    // this._option();
145
146    // this._option();
147
148    // this._option();
149
150    // this._option();
151
152    // this._option();
153
154    // this._option();
155
156    // this._option();
157
158    // this._option();
159
160    // this._option();
161
162    // this._option();
163
164    // this._option();
165
166    // this._option();
167
168    // this._option();
169
170    // this._option();
171
172    // this._option();
173
174    // this._option();
175
176    // this._option();
177
178    // this._option();
179
180    // this._option();
181
182    // this._option();
183
184    // this._option();
185
186    // this._option();
187
188    // this._option();
189
190    // this._option();
191
192    // this._option();
193
194    // this._option();
195
196    // this._option();
197
198    // this._option();
199
200    // this._option();
201
202    // this._option();
203
204    // this._option();
205
206    // this._option();
207
208    // this._option();
209
210    // this._option();
211
212    // this._option();
213
214    // this._option();
215
216    // this._option();
217
218    // this._option();
219
220    // this._option();
221
222    // this._option();
223
224    // this._option();
225
226    // this._option();
227
228    // this._option();
229
230    // this._option();
231
232    // this._option();
233
234    // this._option();
235
236    // this._option();
237
238    // this._option();
239
240    // this._option();
241
242    // this._option();
243
244    // this._option();
245
246    // this._option();
247
248    // this._option();
249
250    // this._option();
251
252    // this._option();
253
254    // this._option();
255
256    // this._option();
257
258    // this._option();
259
260    // this._option();
261
262    // this._option();
263
264    // this._option();
265
266    // this._option();
267
268    // this._option();
269
270    // this._option();
271
272    // this._option();
273
274    // this._option();
275
276    // this._option();
277
278    // this._option();
279
280    // this._option();
281
282    // this._option();
283
284    // this._option();
285
286    // this._option();
287
288    // this._option();
289
290    // this._option();
291
292    // this._option();
293
294    // this._option();
295
296    // this._option();
297
298    // this._option();
299
300    // this._option();
301
302    // this._option();
303
304    // this._option();
305
306    // this._option();
307
308    // this._option();
309
310    // this._option();
311
312    // this._option();
313
314    // this._option();
315
316    // this._option();
317
318    // this._option();
319
320    // this._option();
321
322    // this._option();
323
324    // this._option();
325
326    // this._option();
327
328    // this._option();
329
330    // this._option();
331
332    // this._option();
333
334    // this._option();
335
336    // this._option();
337
338    // this._option();
339
340    // this._option();
341
342    // this._option();
343
344    // this._option();
345
346    // this._option();
347
348    // this._option();
349
350    // this._option();
351
352    // this._option();
353
354    // this._option();
355
356    // this._option();
357
358    // this._option();
359
360    // this._option();
361
362    // this._option();
363
364    // this._option();
365
366    // this._option();
367
368    // this._option();
369
370    // this._option();
371
372    // this._option();
373
374    // this._option();
375
376    // this._option();
377
378    // this._option();
379
380    // this._option();
381
382    // this._option();
383
384    // this._option();
385
386    // this._option();
387
388    // this._option();
389
390    // this._option();
391
392    // this._option();
393
394    // this._option();
395
396    // this._option();
397
398    // this._option();
399
400    // this._option();
401
402    // this._option();
403
404    // this._option();
405
406    // this._option();
407
408    // this._option();
409
410    // this._option();
411
412    // this._option();
413
414    // this._option();
415
416    // this._option();
417
418    // this._option();
419
420    // this._option();
421
422    // this._option();
423
424    // this._option();
425
426    // this._option();
427
428    // this._option();
429
430    // this._option();
431
432    // this._option();
433
434    // this._option();
435
436    // this._option();
437
438    // this._option();
439
440    // this._option();
441
442    // this._option();
443
444    // this._option();
445
446    // this._option();
447
448    // this._option();
449
450    // this._option();
451
452    // this._option();
453
454    // this._option();
455
456    // this._option();
457
458    // this._option();
459
460    // this._option();
461
462    // this._option();
463
464    // this._option();
465
466    // this._option();
467
468    // this._option();
469
470    // this._option();
471
472    // this._option();
473
474    // this._option();
475
476    // this._option();
477
478    // this._option();
479
480    // this._option();
481
482    // this._option();
483
484    // this._option();
485
486    // this._option();
487
488    // this._option();
489
490    // this._option();
491
492    // this._option();
493
494    // this._option();
495
496    // this._option();
497
498    // this._option();
499
500    // this._option();
501
502    // this._option();
503
504    // this._option();
505
506    // this._option();
507
508    // this._option();
509
510    // this._option();
511
512    // this._option();
513
514    // this._option();
515
516    // this._option();
517
518    // this._option();
519
520    // this._option();
521
522    // this._option();
523
524    // this._option();
525
526    // this._option();
527
528    // this._option();
529
530    // this._option();
531
532    // this._option();
533
534    // this._option();
535
536    // this._option();
537
538    // this._option();
539
540    // this._option();
541
542    // this._option();
543
544    // this._option();
545
546    // this._option();
547
548    // this._option();
549
550    // this._option();
551
552    // this._option();
553
554    // this._option();
555
556    // this._option();
557
558    // this._option();
559
560    // this._option();
561
562    // this._option();
563
564    // this._option();
565
566    // this._option();
567
568    // this._option();
569
570    // this._option();
571
572    // this._option();
573
574    // this._option();
575
576    // this._option();
577
578    // this._option();
579
580    // this._option();
581
582    // this._option();
583
584    // this._option();
585
586    // this._option();
587
588    // this._option();
589
590    // this._option();
591
592    // this._option();
593
594    // this._option();
595
596    // this._option();
597
598    // this._option();
599
600    // this._option();
601
602    // this._option();
603
604    // this._option();
605
606    // this._option();
607
608    // this._option();
609
610    // this._option();
611
612    // this._option();
613
614    // this._option();
615
616    // this._option();
617
618    // this._option();
619
620    // this._option();
621
622    // this._option();
623
624    // this._option();
625
626    // this._option();
627
628    // this._option();
629
630    // this._option();
631
632    // this._option();
633
634    // this._option();
635
636    // this._option();
637
638    // this._option();
639
640    // this._option();
641
642    // this._option();
643
644    // this._option();
645
646    // this._option();
647
648    // this._option();
649
650    // this._option();
651
652    // this._option();
653
654    // this._option();
655
656    // this._option();
657
658    // this._option();
659
660    // this._option();
661
662    // this._option();
663
664    // this._option();
665
666    // this._option();
667
668    // this._option();
669
670    // this._option();
671
672    // this._option();
673
674    // this._option();
675
676    // this._option();
677
678    // this._option();
679
680    // this._option();
681
682    // this._option();
683
684    // this._option();
685
686    // this._option();
687
688    // this._option();
689
690    // this._option();
691
692    // this._option();
693
694    // this._option();
695
696    // this._option();
697
698    // this._option();
699
700    // this._option();
701
702    // this._option();
703
704    // this._option();
705
706    // this._option();
707
708    // this._option();
709
710    // this._option();
711
712    // this._option();
713
714    // this._option();
715
716    // this._option();
717
718    // this._option();
719
720    // this._option();
721
722    // this._option();
723
724    // this._option();
725
726    // this._option();
727
728    // this._option();
729
730    // this._option();
731
732    // this._option();
733
734    // this._option();
735
736    // this._option();
737
738    // this._option();
739
740    // this._option();
741
742    // this._option();
743
744    // this._option();
745
746    // this._option();
747
748    // this._option();
749
750    // this._option();
751
752    // this._option();
753
754    // this._option();
755
756    // this._option();
757
758    // this._option();
759
760    // this._option();
761
762    // this._option();
763
764    // this._option();
765
766    // this._option();
767
768    // this._option();
769
770    // this._option();
771
772    // this._option();
773
774    // this._option();
775
776    // this._option();
777
778    // this._option();
779
780    // this._option();
781
782    // this._option();
783
784    // this._option();
785
786    // this._option();
787
788    // this._option();
789
790    // this._option();
791
792    // this._option();
793
794    // this._option();
795
796    // this._option();
797
798    // this._option();
799
800    // this._option();
801
802    // this._option();
803
804    // this._option();
805
806    // this._option();
807
808    // this._option();
809
810    // this._option();
811
812    // this._option();
813
814    // this._option();
815
816    // this._option();
817
818    // this._option();
819
820    // this._option();
821
822    // this._option();
823
824    // this._option();
825
826    // this._option();
827
828    // this._option();
829
830    // this._option();
831
832    // this._option();
833
834    // this._option();
835
836    // this._option();
837
838    // this._option();
839
840    // this._option();
841
842    // this._option();
843
844    // this._option();
845
846    // this._option();
847
848    // this._option();
849
850    // this._option();
851
852    // this._option();
853
854    // this._option();
855
856    // this._option();
857
858    // this._option();
859
860    // this._option();
861
862    // this._option();
863
864    // this._option();
865
866    // this._option();
867
868    // this._option();
869
870    // this._option();
871
872    // this._option();
873
874    // this._option();
875
876    // this._option();
877
878    // this._option();
879
880    // this._option();
881
882    // this._option();
883
884    // this._option();
885
886    // this._option();
887
888    // this._option();
889
890    // this._option();
891
892    // this._option();
893
894    // this._option();
895
896    // this._option();
897
898    // this._option();
899
900    // this._option();
901
902    // this._option();
903
904    // this._option();
905
906    // this._option();
907
908    // this._option();
909
910    // this._option();
911
912    // this._option();
913
914    // this._option();
915
916    // this._option();
917
918    // this._option();
919
920    // this._option();
921
922    // this._option();
923
924    // this._option();
925
926    // this._option();
927
928    // this._option();
929
930    // this._option();
931
932    // this._option();
933
934    // this._option();
935
936    // this._option();
937
938    // this._option();
939
940    // this._option();
941
942    // this._option();
943
944    // this._option();
945
946    // this._option();
947
948    // this._option();
949
950    // this._option();
951
952    // this._option();
953
954    // this._option();
955
956    // this._option();
957
958    // this._option();
959
960    // this._option();
961
962    // this._option();
963
964    // this._option();
965
966    // this._option();
967
968    // this._option();
969
970    // this._option();
971
972    // this._option();
973
974    // this._option();
975
976    // this._option();
977
978    // this._option();
979
980    // this._option();
981
982    // this._option();
983
984    // this._option();
985
986    // this._option();
987
988    // this._option();
989
990    // this._option();
991
992    // this._option();
993
994    // this._option();
995
996    // this._option();
997
998    // this._option();
999
1000   // this._option();
1001
1002   // this._option();
1003
1004   // this._option();
1005
1006   // this._option();
1007
1008   // this._option();
1009
1010  // this._option();
1011
1012  // this._option();
1013
1014  // this._option();
1015
1016  // this._option();
1017
1018  // this._option();
1019
1020  // this._option();
1021
1022  // this._option();
1023
1024  // this._option();
1025
1026  // this._option();
1027
1028  // this._option();
1029
1030  // this._option();
1031
1032  // this._option();
1033
1034  // this._option();
1035
1036  // this._option();
1037
1038  // this._option();
1039
1040  // this._option();
1041
1042  // this._option();
1043
1044  // this._option();
1045
1046  // this._option();
1047
1048  // this._option();
1049
1050  // this._option();
1051
1052  // this._option();
1053
1054  // this._option();
1055
1056  // this._option();
1057
1058  // this._option();
1059
1060  // this._option();
1061
1062  // this._option();
1063
1064  // this._option();
1065
1066  // this._option();
1067
1068  // this._option();
1069
1070  // this._option();
1071
1072  // this._option();
1073
1074  // this._option();
1075
1076  // this._option();
1077
1078  // this._option();
1079
1080  // this._option();
1081
1082  // this._option();
1083
1084  // this._option();
1085
1086  // this._option();
1087
1088  // this._option();
1089
1090  // this._option();
1091
1092  // this._option();
1093
1094  // this._option();
1095
1096  // this._option();
1097
1098  // this._option();
1099
1100 // this._option();
1101
1102 // this._option();
1103
1104 // this._option();
1105
1106 // this._option();
1107
1108 // this._option();
1109
1110 // this._option();
1111
1112 // this._option();
1113
1114 // this._option();
1115
1116 // this._option();
1117
1118 // this._option();
1119
1120 // this._option();
1121
1122 // this._option();
1123
1124 // this._option();
1125
1126 // this._option();
1127
1128 // this._option();
1129
1130 // this._option();
1131
1132 // this._option();
1133
1134 // this._option();
1135
1136 // this._option();
1137
1138 // this._option();
1139
1140 // this._option();
1141
1142 // this._option();
1143
1144 // this._option();
1145
1146 // this._option();
1147
1148 // this._option();
1149
1150 // this._option();
1151
1152 // this._option();
1153
1154 // this._option();
1155
1156 // this._option();
1157
1158 // this._option();
1159
1160 // this._option();
1161
1162 // this._option();
1163
1164 // this._option();
1165
1166 // this._option();
1167
1168 // this._option();
1169
1170 // this._option();
1171
1172 // this._option();
1173
1174 // this._option();
1175
1176 // this._option();
1177
1178 // this._option();
1179
1180 // this._option();
1181
1182 // this._option();
1183
1184 // this._option();
1185
1186 // this._option();
1187
1188 // this._option();
1189
1190 // this._option();
1191
1192 // this._option();
1193
1194 // this._option();
1195
1196 // this._option();
1197
1198 // this._option();
1199
1200 // this._option();
1201
1202 // this._option();
1203
1204 // this._option();
1205
1206 // this._option();
1207
1208 // this._option();
1209
1210 // this._option();
1211
1212 // this._option();
1213
1214 // this._option();
1215
1216 // this._option();
1217
1218 // this._option();
1219
1220 // this._option();
1221
1222 // this._option();
1223
1224 // this._option();
1225
1226 // this._option();
1227
1228 // this._option();
1229
1230 // this._option();
1231
1232 // this._option();
1233
1234 // this._option();
1235
1236 // this._option();
1237
1238 // this._option();
1239
1240 // this._option();
1241
1242 // this._option();
1243
1244 // this._option();
1245
1246 // this._option();
1247
1248 // this._option();
1249
1250 // this._option();
1251
1252 // this._option();
1253
1254 // this._option();
1255
1256 // this._option();
1257
1258 // this._option();
1259
1260 // this._option();
1261
1262 // this._option();
1263
1264 // this._option();
1265
1266 // this._option();
1267
1268 // this._option();
1269
1270 // this._option();
1271
1272 // this._option();
1273
1274 // this._option();
1275
1276 // this._option();
1277
1278 // this._option();
1279
1280 // this._option();
1281
1282 // this._option();
1283
1284 // this._option();
1285
1286 // this._option();
1287
1288 // this._option();
1289
1290 // this._option();
1291
1292 // this._option();
1293
1294 // this._option();
1295
1296 // this._option();
1297
1298 // this._option();
1299
1300 // this._option();
1301
1302 // this._option();
1303
1304 // this._option();
1305
1306 // this._option();
1307
1308 // this._option();
1309
1310 // this._option();
1311
1312 // this._option();
1313
1314 // this._option();
1315
1316 // this._option();
1317
1318 // this._option();
1319
1320 // this._option();
1321
1322 // this._option();
1323
1324 // this._option();
1325
1326 // this._option();
1327
1328 // this._option();
1329
1330 // this._option();
1331
1332 // this._option();
1333
1334 // this._option();
1335
1336 // this._option();
1337
1338 // this._option();
1339
1340 // this._option();
1341
1342 // this._option();
1343
1344 // this._option();
1345
1346 // this._option();
1347
1348 // this._option();
1349
1350 // this._option();
1351
1352 // this._option();
1353
1354 // this._option();
1355
1356 // this._option();
1357
1358 // this._option();
1359
1360 // this._option();
1361
1362 // this._option();
1363
1364 // this._option();
1365
1366 // this._option();
1367
1368 // this._option();
1369
1370 // this._option();
1371
1372 // this._option();
1373
1374 // this._option();
1375
1376 // this._option();
1377
1378 // this._option();
1379
1380 // this._option();
1381
1382 // this._option();
1383
1384 // this._option();
1385
1386 // this._option();
1387
1388 // this._option();
1389
1390 // this._option();
1391
1392 // this._option();
1393
1394 // this._option();
1395
1396 // this._option();
1397
1398 // this._option();
1399
1400 // this._option();
1401
1402 // this._option();
1403
1404 // this._option();
1405
1406 // this._option();
1407
1408 // this._option();
1409
1410 // this._option();
1411
1412 // this._option();
1413
1414 // this._option();
1415
1416 // this._option();
1417
1418 // this._option();
1419
1420 // this._option();
1421
1422 // this._option();
1423
1424 // this._option();
1425
1426 // this._option();
1427
1428 // this._option();
1429
1430 // this._option();
1431
1432 // this._option();
1433
1434 // this._option();
1435
1436 // this._option();
1437
1438 // this._option();
1439
1440 // this._option();
1441
1442 // this._option();
1443
1444 // this._option();
1445
1446 // this._option();
1447
1448 // this._option();
1449
1450 // this._option();
1451
1452 // this._option();
1453
1454 // this._option();
1455
1456 // this._option();
1457
1458 // this._option();
1459
1460 // this._option();
1461
1462 // this._option();
1463
1464 // this._option();
1465
1466 // this._option();
1467
1468 // this._option();
1469
1470 // this._option();
1471
1472 // this._option();
1473
1474 // this._option();
1475
1476 // this._option();
1477
1478 // this._option();
1479
1480 // this._option();
1481
1482 // this._option();
1483
1484 // this._option();
1485
1486 // this._option();
1487
1488 // this._option();
1489
1490 // this._option();
1491
1492 // this._option();
1493
1494 // this._option();
1495
1496 // this._option();
1497
1498 // this._option();
1499
1500 // this._option();
1501
1502 // this._option();
1503
1504 // this._option();
1505
1506 // this._option();
1507
1508 // this._option();
1509
1510 // this._option();
1511
1512 // this._option();
1513
1514 // this._option();
1515
1516 // this._option();
1517
1518 // this._option();
1519
1520 // this._option();
1521
1522 // this._option();
1523
1524 // this._option();
1525
1526 // this._option();
1527
1528 // this._option();
1529
1530 // this._option();
1531
1532 // this._option();
1533
1534 // this._option();
1535
1536 // this._option();
1537
1538 // this._option();
1539
1540 // this._option();
1541
1542 // this._option();
1543
1544 // this._option();
1545
1546 // this._option();
1547
1548 // this._option();
1549
1550 // this._option();
1551
1552 // this._option();
1553
1554 // this._option();
1555
1556 // this._option();
1557
1558 // this._option();
1559
1560 // this._option();
1561
1562 // this._option();
1563
1564 // this._option();
1565
1566 // this._option();
1567
1568 // this._option();
1569
1570 // this._option();
1571
1572 // this._option();
1573
1574 // this._option();
1575
1576 // this._option();
1577
1578 // this._option();
1579
1580 // this._option();
1581
1582 // this._option();
1583
1584 // this._option();
1585
1586 // this._option();
1587
1588 // this._option();
1589
1590 // this._option();
1591
1592 // this._option();
1593
1594 // this._option();
1595
1596 // this._option();
1597
1598 // this._option();
1599
1600 // this._option();
1601
1602 // this._option();
1603
1604 // this._option();
1605
1606 // this._option();
1607
1608 // this._option();
1609
1610 // this._option();
1611
1612 // this._option();
1613
1614 // this._option();
1615
1616 // this._option();
1617
1618 // this._option();
1619
1620 // this._option();
1621
1622 // this._option();
1623
1624 // this._option();
1625
1626 // this._option();
1627
1628 // this._option();
1629
1630 // this._option();
1631
1632 // this._option();
1633
1634 // this._option();
1635
1636 // this._option();
1637
1638 // this._option();
1639
1640 // this._option();
1641
1642 // this._option();
1643
1644 // this._option();
1645
164
```

```

47 },
48
49     methodB: function ( event ) {
50         // _trigger dispatches callbacks the plugin user
51         // can subscribe to
52         // signature: _trigger( "callbackName", [eventObject],
53         // [uiObject] )
54         // e.g. this._trigger( "hover", e /*where e.type ==
55         // "mouseenter"*/, { hovered: $(e.target)} );
56         this._trigger( "methodA", event, {
57             key: value
58         });
59     },
60
61     methodA: function ( event ) {
62         this._trigger( "dataChanged", event, {
63             key: value
64         });
65     },
66
67     // Respond to any changes the user makes to the
68     // option method
69     _setOption: function ( key, value ) {
70         switch ( key ) {
71             case "someValue":
72                 // this.options.someValue = doSomethingWith( value );
73                 break;
74             default:
75                 // this.options[ key ] = value;
76                 break;
77         }
78
79         // For UI 1.8, _setOption must be manually invoked
80         // from the base widget
81         $.Widget.prototype._setOption.apply( this, arguments );
82         // For UI 1.9 the _super method can be used instead
83         // this._super( "_setOption", key, value );
84     }
85 };
86
87 })( jQuery, window, document );

```

Usage:

```

1 var collection = $("#elem").widgetName({
2     foo: false
3 });
4
5 collection.widgetName("methodB");

```

## Further Reading

- [The jQuery UI Widget Factory](#)
- ["Introduction to Stateful Plugins and the Widget Factory," Doug Neiner](#)
- ["Widget Factory" \(explained\), Scott Gonzalez](#)
- ["Understanding jQuery UI Widgets: A Tutorial," Hacking at 0300](#)

## Nested Namespacing Plugin Pattern

---

As we've previously covered in the book, namespacing our code is a way to avoid collisions with other objects and variables in the global namespace. They're important because we want to safeguard our plugin from breaking in the event that another script on the page uses the same variable or plugin names as ours. As a good citizen of the global namespace, we must also do our best not to prevent other developers scripts from executing because of the same issues.

JavaScript doesn't really have built-in support for namespaces as other languages do, but it does have objects that can be used to achieve a similar effect. Employing a top-level object as the name of our namespace, we can easily check for the existence of another object on the page with the same name. If such an object does not exist, then we define it; if it does exist, then we simply extend it with our plugin.

Objects (or, rather, object literals) can be used to create nested namespaces, such as `namespace.subnamespace.pluginName` and so on. But to keep things simple, the namespacing boilerplate below should show us everything we need to get started with these concepts.

```
1  /*!
2   * jQuery namespaced "Starter" plugin boilerplate
3   * Author: @dougneiner
4   * Further changes: @addyosmani
5   * Licensed under the MIT license
6   */
7
8  ;(function ( $ ) {
9      if (!$.myNamespace) {
10          $.myNamespace = {};
11      };
12
13      $.myNamespace.myPluginName = function ( el, myFunctionParam, options
14          // To avoid scope issues, use "base" instead of "this"
15          // to reference this class from internal events and functions.
16          var base = this;
17
18          // Access to jQuery and DOM versions of element
```

```

19  base.$el = $( el );
20  base.el = el;
21
22  // Add a reverse reference to the DOM object
23  base.$el.data( "myNamespace.myPluginName", base );
24
25  base.init = function () {
26      base.myFunctionParam = myFunctionParam;
27
28      base.options = $.extend({}, 
29          $myNamespace.myPluginName.defaultOptions, options);
30
31      // Put our initialization code here
32  };
33
34  // Sample Function, Uncomment to use
35  // base.functionName = function( parameters ){
36  // }
37  // };
38  // Run initializer
39  base.init();
40 };
41
42 $.myNamespace.myPluginName.defaultOptions = {
43     myDefaultValue: ""
44 };
45
46 $.fn.mynamespace_myPluginName = function
47     ( myFunctionParam, options ) {
48         return this.each(function () {
49             (new $.myNamespace.myPluginName( this,
50                 myFunctionParam, options ));
51         });
52     };
53
54 })( jQuery );

```

Usage:

```

1  $("#elem").mynamespace_myPluginName({
2      myDefaultValue: "foobar"
3  });

```

## Further Reading

- “Namespacing in JavaScript,” Angus Croll
- “Use Your \$.fn jQuery Namespace,” Ryan Florence
- “JavaScript Namespacing,” Peter Michaux
- “Modules and namespaces in JavaScript,” Axel Rauschmayer

## Custom Events Plugin Pattern (With The Widget factory)

In the *JavaScript Design Patterns* section of the book, we discussed the Observer pattern and later went on to cover jQuery's support for custom events, which offer a similar solution for implementing Publish/Subscribe. This same pattern can be used when writing jQuery plugins.

The basic idea here is that objects in a page can publish event notifications when something interesting occurs in our application. Other objects then subscribe to (or listen) for these events and respond accordingly. This results in the logic for our application being significantly more decoupled, as each object no longer needs to directly communicate with another.

In the following jQuery UI widget factory pattern, we'll implement a basic custom event-based Publish/Subscribe system that allows our plugin to subscribe to event notifications from the rest of our application, which will be responsible for publishing them.

```
1  /*!
2   * jQuery custom-events plugin boilerplate
3   * Author: DevPatch
4   * Further changes: @addyosmani
5   * Licensed under the MIT license
6   */
7
8 // In this pattern, we use jQuery's custom events to add
9 // pub/sub (publish/subscribe) capabilities to widgets.
10 // Each widget would publish certain events and subscribe
11 // to others. This approach effectively helps to decouple
12 // the widgets and enables them to function independently.
13
14 ;(function ( $, window, document, undefined ) {
15     $.widget( "ao.eventStatus", {
16         options: {
17
18             },
19
20             _create: function() {
21                 var self = this;
22
23                 //self.element.addClass( "my-widget" );
24
25                 //subscribe to "myEventStart"
26                 self.element.on( "myEventStart", function( e )
27                     console.log( "event start" );
28                 });
29             }
30         }
31     );
32
33     //publish to "myEventStart"
34     self.element.trigger( "myEventStart" );
35
36     //unsubscribe from "myEventStart"
37     self.element.off( "myEventStart" );
38
39     //destroy the widget
40     self.widgetDestroy();
41
42     //clean up
43     self.element.remove();
44
45     //return the destroyed widget
46     return self;
47 }
48
49 })(jQuery);
```

```

30 //subscribe to "myEventEnd"
31 self.element.on( "myEventEnd", function( e ) {
32     console.log( "event end" );
33 });
34
35 //unsubscribe to "myEventStart"
36 //self.element.off( "myEventStart", function(e){
37     //console.log( "unsubscribed to this event" );
38 });
39 },
40
41 destroy: function(){
42     $.Widget.prototype.destroy.apply( this, arguments );
43 },
44 });
45 })( jQuery, window, document );
46
47 // Publishing event notifications
48 // $( ".my-widget" ).trigger( "myEventStart" );
49 // $( ".my-widget" ).trigger( "myEventEnd" );

```

Usage:

```

1 var el = $( "#elem" );
2 el.eventStatus();
3 el.eventStatus().trigger( "myEventStart" );

```

## Further Reading

- “[Communication Between jQuery UI Widgets](#),” Benjamin Sternthal

## Prototypal Inheritance With The DOM-To-Object Bridge Pattern

---

As covered earlier, in JavaScript, we don’t have the traditional notion of classes that we would find in other classical programming languages, but we do have prototypal inheritance. With prototypal inheritance, an object inherits from another object. We can apply this concept to jQuery plugin development.

Yepnope.js author [Alex Sexton](#) and jQuery team member [Scott Gonzalez](#) have looked at this topic in detail. In sum, they discovered that for organized modular development, clearly separating the

object that defines the logic for a plugin from the plugin-generation process itself can be beneficial.

The benefit is that testing our plugins code becomes significantly easier and we are also able to adjust the way things work behind the scenes without altering the way that any object APIs we implement are used.

In Sexton's article on this topic, he implemented a bridge that enables us to attach our general logic to a particular plugin, which we've implemented in the pattern below.

One of the other advantages of this pattern is that we don't have to constantly repeat the same plugin initialization code, thus ensuring that the concepts behind DRY development are maintained. Some developers might also find this pattern easier to read than others.

```
1  /*!
2   * jQuery prototypal inheritance plugin boilerplate
3   * Author: Alex Sexton, Scott Gonzalez
4   * Further changes: @addyosmani
5   * Licensed under the MIT license
6   */
7
8
9 // myObject - an object representing a concept we wish to model
10 // (e.g. a car)
11 var myObject = {
12     init: function( options, elem ) {
13         // Mix in the passed-in options with the default options
14         this.options = $.extend( {}, this.options, options );
15
16         // Save the element reference, both as a jQuery
17         // reference and a normal reference
18         this.elem = elem;
19         this.$elem = $( elem );
20
21         // Build the DOM's initial structure
22         this._build();
23
24         // return this so that we can chain and use the bridge with less code
25         return this;
26     },
27     options: {
28         name: "No name"
29     },
30     _build: function(){
31         //this.$elem.html( "<h1>" +this.options.name+ "</h1>" );
32     },
33     myMethod: function( msg ){
34         // We have direct access to the associated and cached
35         // jQuery element
36         // this.$elem.append( "<p>" +msg+ "</p>" );
```

```

37    }
38  };
39
40
41 // Object.create support test, and fallback for browsers without it
42 if ( typeof Object.create !== "function" ) {
43     Object.create = function (o) {
44         function F() {}
45         F.prototype = o;
46         return new F();
47     };
48 }
49
50
51 // Create a plugin based on a defined object
52 $.plugin = function( name, object ) {
53     $.fn[name] = function( options ) {
54         return this.each(function() {
55             if ( ! $.data( this, name ) ) {
56                 $.data( this, name, Object.create( object ).init(
57                     options, this ) );
58             }
59         });
60     };
61 };

```

Usage:

```

1  $.plugin( "myobj", myObject );
2
3  $("#elem").myobj( {name: "John"} );
4
5  var collection = $( "#elem" ).data( "myobj" );
6  collection.myMethod( "I am a method" );

```

## Further Reading

- “[Using Inheritance Patterns To Organize Large jQuery Applications](#),” Alex Sexton
- “[How to Manage Large Applications With jQuery or Whatever](#)” (further discussion), Alex Sexton
- “[Practical Example of the Need for Prototypal Inheritance](#),” Neeraj Singh
- “[Prototypal Inheritance in JavaScript](#),” Douglas Crockford

# jQuery UI Widget Factory Bridge Pattern

If you liked the idea of generating plugins based on objects in the last design pattern, then you might be interested in a method found in the jQuery UI Widget Factory called `$.widget.bridge`.

This bridge basically serves as a middle layer between a JavaScript object that is created using `$.widget` and the jQuery core API, providing a more built-in solution to achieving object-based plugin definition. Effectively, we're able to create stateful plugins using a custom constructor.

Moreover, `$.widget.bridge` provides access to a number of other capabilities, including the following:

- Both public and private methods are handled as one would expect in classical OOP (i.e. public methods are exposed, while calls to private methods are not possible).
- Automatic protection against multiple initializations.
- Automatic generation of instances of a passed object, and storage of them within the selection's internal `$.data` cache.
- Options can be altered post-initialization.

For further information on how to use this pattern, please see the inline comments below:

```

1  /*!
2   * jQuery UI Widget factory "bridge" plugin boilerplate
3   * Author: @erichynds
4   * Further changes, additional comments: @addyosmani
5   * Licensed under the MIT license
6   */
7
8
9  // a "widgetName" object constructor
10 // required: this must accept two arguments,
11 // options: an object of configuration options
12 // element: the DOM element the instance was created on
13 var widgetName = function( options, element ){
14     this.name = "myWidgetName";
15     this.options = options;
16     this.element = element;
17     this._init();
18 }
19
20 // the "widgetName" prototype
21 widgetName.prototype = {
22
23     // _create will automatically run the first time this
24     // widget is called
25     _create: function(){
26         // creation code
27     },

```

```

28
29     // required: initialization logic for the plugin goes into _init
30     // This fires when our instance is first created and when
31     // attempting to initialize the widget again (by the bridge)
32     // after it has already been initialized.
33     _init: function(){
34         // init code
35     },
36
37     // required: objects to be used with the bridge must contain an
38     // "option". Post-initialization, the logic for changing options
39     // goes here.
40     option: function( key, value ){
41
42         // optional: get/change options post initialization
43         // ignore if you don't require them.
44
45         // signature: $("#foo").bar({ cool:false });
46         if( $.isPlainObject( key ) ){
47             this.options = $.extend( true, this.options, key );
48
49             // signature: $( "#foo" ).option( "cool" ); - getter
50         } else if ( key && typeof value === "undefined" ){
51             return this.options[ key ];
52
53             // signature: $( "#foo" ).bar("option", "baz", false );
54         } else {
55             this.options[ key ] = value;
56         }
57
58         // required: option must return the current instance.
59         // When re-initializing an instance on elements, option
60         // is called first and is then chained to the _init method.
61         return this;
62     },
63
64     // notice no underscore is used for public methods
65     publicFunction: function(){
66         console.log( "public function" );
67     },
68
69     // underscores are used for private methods
70     _privateFunction: function(){
71         console.log( "private function" );
72     }
73 };

```

Usage:

```

1 // connect the widget obj to jQuery's API under the "foo" namespace
2 $.widget.bridge( "foo", widgetName );
3
4 // create an instance of the widget for use
5 var instance = $( "#foo" ).foo({
6     baz: true

```

```

7  });
8
9  // our widget instance exists in the elem's data
10 // Outputs: #elem
11 console.log(instance.data( "foo" ).element);
12
13 // bridge allows us to call public methods
14 // Outputs: "public method"
15 instance.foo("publicFunction");
16
17 // bridge prevents calls to internal methods
18 instance.foo("_privateFunction");

```

## Further Reading

- “[Using `\$.widget.bridge` Outside of the Widget Factory](#),” Eric Hynds

## jQuery Mobile Widgets With The Widget factory

---

jQuery mobile is a jQuery project framework that encourages the design of ubiquitous web applications that work both on popular mobile devices and platforms and on the desktop. Rather than writing unique applications for each device or OS, we simply write the code once and it should ideally run on many of the A-, B- and C-grade browsers out there at the moment.

The fundamentals behind jQuery mobile can also be applied to plugin and widget development.

What’s interesting in this next pattern is that although there are small, subtle differences in writing a “mobile”-optimized widget, those familiar with using the jQuery UI Widget Factory pattern from earlier should be able to grasp this in next to no time.

The mobile-optimized widget below has a number of interesting differences than the standard UI widget pattern we saw earlier:

- `$.mobile.widget` is referenced as an existing widget prototype from which to inherit. For standard widgets, passing through any such prototype is unnecessary for basic development, but using this jQuery-mobile specific widget prototype provides internal access to further “options” formatting.
- In `_create()`, a guide is provided on how the official jQuery mobile widgets handle element selection, opting for a role-based approach that better fits the jQM mark-up.

This isn't at all to say that standard selection isn't recommended, only that this approach might make more sense given the structure of jQuery Mobile pages.

- Guidelines are also provided in comment form for applying our plugin methods on `pagecreate` as well as for selecting the plugin application via data roles and data attributes.

```

1  /*!
2   * (jQuery mobile) jQuery UI Widget-factory plugin boilerplate (for 1.8/
3   * Author: @scottjehl
4   * Further changes: @addyosmani
5   * Licensed under the MIT license
6   */
7
8  ;(function ( $, window, document, undefined ) {
9
10     // define a widget under a namespace of our choice
11     // here "mobile" has been used in the first argument
12     $.widget( "mobile.widgetName", $.mobile.widget, {
13
14         // Options to be used as defaults
15         options: {
16             foo: true,
17             bar: false
18         },
19
20         _create: function() {
21             // _create will automatically run the first time this
22             // widget is called. Put the initial widget set-up code
23             // here, then we can access the element on which
24             // the widget was called via this.element
25             // The options defined above can be accessed via
26             // this.options
27
28             // var m = this.element,
29             // p = m.parents( ":jqmData(role='page')"),
30             // c = p.find( ":jqmData(role='content')")
31         },
32
33         // Private methods/props start with underscores
34         _dosomething: function(){ ... },
35
36         // Public methods like these below can be called
37         // externally:
38         // $("#myelem").foo( "enable", arguments );
39
40         enable: function() { ... },
41
42         // Destroy an instantiated plugin and clean up modifications
43         // the widget has made to the DOM
44         destroy: function () {
45             // this.element.removeStuff();
46             // For UI 1.8, destroy must be invoked from the
47             // base widget
48             $.Widget.prototype.destroy.call( this );

```

```

49         // For UI 1.9, define _destroy instead and don't
50         // worry about calling the base widget
51     },
52
53     methodB: function ( event ) {
54         // _trigger dispatches callbacks the plugin user can
55         // subscribe to
56         // signature: _trigger( "callbackName", [eventObject],
57         // [uiObject] )
58         // e.g. this._trigger( "hover", e /*where e.type ==
59         // "mouseenter"*/, { hovered: $(e.target)} );
60         this._trigger( "methodA", event, {
61             key: value
62         });
63     },
64
65     methodA: function ( event ) {
66         this._trigger( "dataChanged", event, {
67             key: value
68         });
69     },
70
71     // Respond to any changes the user makes to the option method
72     _setOption: function ( key, value ) {
73         switch ( key ) {
74             case "someValue":
75                 // this.options.someValue = doSomethingWith( value );
76                 break;
77             default:
78                 // this.options[ key ] = value;
79                 break;
80         }
81
82         // For UI 1.8, _setOption must be manually invoked from
83         // the base widget
84         $.Widget.prototype._setOption.apply(this, arguments);
85         // For UI 1.9 the _super method can be used instead
86         // this._super( "_setOption", key, value );
87     }
88 };
89 })( jQuery, window, document );

```

Usage:

```

1 var instance = $( "#foo" ).widgetName({
2     foo: false
3 });
4
5 instance.widgetName( "methodB" );

```

We can also self-initialize this widget whenever a new page in jQuery Mobile is created. jQuery Mobile's *page* plugin dispatches a *create* event when a jQuery Mobile page (found via the `data-role="page"` attribute) is first initialized. We can listen for that event (called "pagecreate") and run our plugin automatically whenever a new page is created.

```

1  $(document).on("pagecreate", function ( e ) {
2      // In here, e.target refers to the page that was created
3      // (it's the target of the pagecreate event)
4      // So, we can simply find elements on this page that match a
5      // selector of our choosing, and call our plugin on them.
6      // Here's how we'd call our "foo" plugin on any element with a
7      // data-role attribute of "foo":
8      $(e.target).find( "[data-role='foo']" ).foo( options );
9
10     // Or, better yet, let's write the selector accounting for the config
11     // data-attribute namespace
12     $( e.target ).find( ":jqmData(role='foo')" ).foo( options );
13 });

```

We can now simply reference the script containing our widget and `pagecreate` binding in a page running jQuery Mobile site, and it will automatically run like any other jQuery Mobile plugin.

## RequireJS And The jQuery UI Widget Factory

---

As we covered in the section on *Modern Module Design Patterns*, RequireJS is an AMD-compatible script loader that provides a clean solution for encapsulating application logic inside manageable modules.

It's able to load modules in the correct order (through its `order` plugin), simplifies the process of combining scripts via its excellent `r.js` optimizer and provides the means for defining dynamic dependencies on a per-module basis.

In the boilerplate pattern below, we demonstrate how an AMD (and thus RequireJS) compatible jQuery UI widget can be defined that does the following:

- Allows the definition of widget module dependencies, building on top of the previous jQuery UI Widget Factory pattern presented earlier.

- Demonstrates one approach to passing in HTML template assets for creating templated widgets (using Underscore.js micro-templating).
- Includes a quick tip on adjustments that we can make to our widget module if we wish to later pass it through to the RequireJS optimizer.

```
?
1  /*!
2   * jQuery UI Widget + RequireJS module boilerplate (for 1.8/9+)
3   * Authors: @jrburke, @addyosmani
4   * Licensed under the MIT license
5  */
6
7 // Note from James:
8 //
9 // This assumes we are using the RequireJS+jQuery file, and
10 // that the following files are all in the same directory:
11 //
12 // - require-jquery.js
13 // - jquery-ui.custom.min.js (custom jQuery UI build with widget factory
14 // - templates/
15 // - asset.html
16 // - ao.myWidget.js
17
18 // Then we can construct the widget as follows:
19
20 // ao.myWidget.js file:
21 define( "ao.myWidget", ["jquery", "text!templates/asset.html", "undersco
22
23     // define our widget under a namespace of our choice
24     // "ao" is used here as a demonstration
25     $widget( "ao.myWidget", {
26
27         // Options to be used as defaults
28         options: {},
29
30         // Set up widget (e.g. create element, apply theming,
31         // bind events, etc.)
32         _create: function () {
33
34             // _create will automatically run the first time
35             // this widget is called. Put the initial widget
36             // set-up code here, then we can access the element
37             // on which the widget was called via this.element.
38             // The options defined above can be accessed via
39             // this.options
40
41             // this.element.addStuff();
42             // this.element.addStuff();
43
44             // We can then use Underscore templating with
45             // with the assetHtml that has been pulled in
46             // var template = _.template( assetHtml );
47             // this.content.append( template({}) );
48
49 },
```

```

50 // Destroy an instantiated plugin and clean up modifications
51 // that the widget has made to the DOM
52 destroy: function () {
53     // this.element.removeStuff();
54     // For UI 1.8, destroy must be invoked from the base
55     // widget
56     $.Widget.prototype.destroy.call( this );
57     // For UI 1.9, define _destroy instead and don't worry
58     // about calling the base widget
59 },
60
61 methodB: function ( event ) {
62     // _trigger dispatches callbacks the plugin user can
63     // subscribe to
64     // signature: _trigger( "callbackName", [eventObject],
65     // [uiObject] )
66     this._trigger( "methodA", event, {
67         key: value
68     });
69 },
70
71 methodA: function ( event ) {
72     this._trigger("dataChanged", event, {
73         key: value
74     });
75 },
76
77 // Respond to any changes the user makes to the option method
78 _setOption: function ( key, value ) {
79     switch (key) {
80     case "someValue":
81         // this.options.someValue = doSomethingWith( value );
82         break;
83     default:
84         // this.options[ key ] = value;
85         break;
86     }
87
88     // For UI 1.8, _setOption must be manually invoked from
89     // the base widget
90     $.Widget.prototype._setOption.apply( this, arguments );
91     // For UI 1.9 the _super method can be used instead
92     // this._super( "_setOption", key, value );
93 }
94
95 });
96 });

```

Usage:

index.html:

```
1 | <script data-main="scripts/main" src="http://requirejs.org/docs/release/1
```

main.js

```
1 | require({
2 |
3 |     paths: {
4 |         "jquery": "https://ajax.googleapis.com/ajax/libs/jquery/1.7.1/jq
5 |         "jqueryui": "https://ajax.googleapis.com/ajax/libs/jqueryui/1.8.
6 |         "boilerplate": "../patterns/jquery.widget-factory.requirejs.boil
7 |     }
8 | }, ["require", "jquery", "jqueryui", "boilerplate"],
9 | function (req, $) {
10 |
11 |     $(function () {
12 |
13 |         var instance = $("#elem").myWidget();
14 |         instance.myWidget("methodB");
15 |
16 |     });
17 |});
```

## Further Reading

- “Fast Modular Code With jQuery and RequireJS,” James Burke
- “jQuery’s Best Friends,” Alex Sexton
- “Managing Dependencies With RequireJS,” Ruslan Matveev

## Globally And Per-Call Overridable Options (Best Options Pattern)

---

For our next pattern, we’ll look at an optimal approach to configuring options and defaults for a plugin. The way most of us are probably familiar with defining plugin options is to pass through an object literal of defaults to `$.extend()`, as demonstrated in our basic plugin boilerplate.

If, however, we’re working with a plugin with many customizable options that we would like users to be able to override either globally or on a per-call level, then we can structure things a little more optimally.

Instead, by referring to an options object defined within the plugin namespace explicitly (for example, `$fn.pluginName.options`) and merging this with any options passed through to the plugin when it is initially invoked, users have the option of either passing options through during plugin initialization or overriding options outside of the plugin (as demonstrated here).

```
?
1  /*!
2   * jQuery "best options" plugin boilerplate
3   * Author: @cowboy
4   * Further changes: @addyosmani
5   * Licensed under the MIT license
6   */
7
8
9  ;(function ( $, window, document, undefined ) {
10
11     $.fn.pluginName = function ( options ) {
12
13         // Here's a best practice for overriding "defaults"
14         // with specified options. Note how, rather than a
15         // regular defaults object being passed as the second
16         // parameter, we instead refer to $.fn.pluginName.options
17         // explicitly, merging it with the options passed directly
18         // to the plugin. This allows us to override options both
19         // globally and on a per-call level.
20
21         options = $.extend( {}, $.fn.pluginName.options, options );
22
23         return this.each(function () {
24
25             var elem = $(this);
26
27         });
28     };
29
30     // Globally overriding options
31     // Here are our publicly accessible default plugin options
32     // that are available in case the user doesn't pass in all
33     // of the values expected. The user is given a default
34     // experience but can also override the values as necessary.
35     // e.g. $fn.pluginName.key ="otherval";
36
37     $.fn.pluginName.options = {
38
39         key: "value",
40         myMethod: function ( elem, param ) {
41
42             }
43         };
44     })( jQuery, window, document );
```

Usage:

```

1 | $("#elem").pluginName({
2 |   key: "foobar"
3 | });

```

## Further Reading

- [jQuery Pluginization](#) and the [accompanying gist](#), Ben Alman

## A Highly Configurable And Mutable Plugin Pattern

In this pattern, similar to Alex Sexton's prototypal inheritance plugin pattern, logic for our plugin isn't nested in a jQuery plugin itself. We instead define our plugin logic using a constructor and an object literal defined on its prototype. jQuery is then used for the actual instantiation of the plugin object.

Customization is taken to the next level by employing two little tricks, one of which we've seen in previous patterns:

- Options can be overridden both globally and per collection of elements/
- Options can be customized on a **per-element** level through HTML5 data attributes (as shown below). This facilitates plugin behavior that can be applied to a collection of elements but then customized inline without the need to instantiate each element with a different default value.

We don't see the latter option in the wild too often, but it can be a significantly cleaner solution (as long as we don't mind the inline approach). If wondering where this could be useful, imagine writing a draggable plugin for a large set of elements. We could go about customizing their options as follows:

```

1 | $(".item-a").draggable( {"defaultPosition": "top-left"} );
2 | $(".item-b").draggable( {"defaultPosition": "bottom-right"} );
3 | $(".item-c").draggable( {"defaultPosition": "bottom-left"} );
4 | //etc

```

But using our patterns inline approach, the following would be possible:

```

1 | $( ".items" ).draggable();
2 |
3 | html
4 | <li class="item" data-plugin-options="{"defaultPosition":"top-left"}></d
5 | <li class="item" data-plugin-options="{"defaultPosition":"bottom-left"}>
6 |
7 |
8 |
9 |
10 |
11 |
12 |
13 |
14 |
15 |
16 |
17 |
18 |
19 |
20 |
21 |
22 |
23 |
24 |
25 |
26 |
27 |
28 |
29 |
30 |
31 |
32 |
33 |
34 |
35 |
36 |
37 |
38 |
39 |
40 |
41 |
42 |

```

And so on. We may well have a preference for one of these approaches, but it is just another variation worth being aware of.

```

1 | /*
2 |  * "Highly configurable" mutable plugin boilerplate
3 |  * Author: @markdalgleish
4 |  * Further changes, comments: @addyosmani
5 |  * Licensed under the MIT license
6 | */
7 |
8 |
9 | // Note that with this pattern, as per Alex Sexton's, the plugin logic
10 | // hasn't been nested in a jQuery plugin. Instead, we just use
11 | // jQuery for its instantiation.
12 |
13 |;(function( $, window, document, undefined ){
14 |
15 |    // our plugin constructor
16 |    var Plugin = function( elem, options ){
17 |        this.elem = elem;
18 |        this.$elem = $(elem);
19 |        this.options = options;
20 |
21 |        // This next line takes advantage of HTML5 data attributes
22 |        // to support customization of the plugin on a per-element
23 |        // basis. For example,
24 |        // <div class="item" data-plugin-options="{'message':'Goodbye Worl
25 |        this.metadata = this.$elem.data( "plugin-options" );
26 |    };
27 |
28 |    // the plugin prototype
29 |    Plugin.prototype = {
30 |        defaults: {
31 |            message: "Hello world!"
32 |        },
33 |
34 |        init: function() {
35 |            // Introduce defaults that can be extended either
36 |            // globally or using an object literal.
37 |            this.config = $.extend( {}, this.defaults, this.options,
38 |            this.metadata );
39 |
40 |            // Sample usage:
41 |            // Set the message per instance:
42 |            // $( "#elem" ).plugin( { message: "Goodbye World!"} );

```

```

43     // or
44     // var p = new Plugin( document.getElementById( "elem" ) ,
45     // { message: "Goodbye World!" }).init()
46     // or, set the global default message:
47     // Plugin.defaults.message = "Goodbye World!"
48
49     this.sampleMethod();
50     return this;
51 },
52
53 sampleMethod: function() {
54     // e.g. show the currently configured message
55     // console.log(this.config.message);
56 }
57 }
58
59 Plugin.defaults = Plugin.prototype.defaults;
60
61 $.fn.plugin = function( options ) {
62     return this.each(function() {
63         new Plugin( this, options ).init();
64     });
65 };
66
67 // optional: window.Plugin = Plugin;
68
69 })( jQuery, window, document );

```

Usage:

```

1 | $("#elem").plugin({
2 |   message: "foobar"
3 | });

```

## Further Reading

- “[Creating Highly Configurable jQuery Plugins](#),” Mark Dalgleish
- “[Writing Highly Configurable jQuery Plugins, Part 2](#),” Mark Dalgleish

## What Makes A Good Plugin Beyond Patterns?

At the end of the day, design patterns are just one facet to writing maintainable jQuery plugins. There are a number of other factors worth considering and I would like to share my own criteria

for selecting third-party plugins to address some of the other concerns. I hope this helps increase the overall quality of your plugin projects:

## Quality

Adhere to best practices with respect to both the JavaScript and jQuery that you write. Are efforts being made to lint the plugin code using either jsHint or jsLint? Is the plugin written optimally?

## Code Style

Does the plugin follow a consistent code style guide such as the [jQuery Core Style Guidelines](#)? If not, is your code at least relatively clean and readable?

## Compatibility

Which versions of jQuery is the plugin compatible with? Has it been tested with the latest jQuery-git builds or latest stable? If the plugin was written before jQuery 1.6, then it might have issues with attributes and properties, because the way they were approached changed in that release.

New versions of jQuery offer improvements and opportunities for the jQuery project to improve on what the core library offers. With this comes occasional breakages (mainly in major releases) as we move towards a better way of doing things. I'd like to see plugin authors update their code when necessary or, at a minimum, test their plugins with new versions to make sure everything works as expected.

## Reliability

The plugin should come with its own set of unit tests. Not only do these prove it actually functions as expected, but they can also improve the design without breaking it for end users. I consider unit tests essential for any serious jQuery plugin that is meant for a production environment, and they're not that hard to write. For an excellent guide to automated JavaScript testing with QUnit, you may be interested in "[Automating JavaScript Testing With QUnit](#)," by [Jörn Zaefferer](#).

## Performance

If the plugin needs to perform tasks that require extensive processing or heavily manipulation of the DOM, one should follow best practices for benchmarking to help minimize this. Use [jsPerf.com](#) to test segments of the code to a) how well it performs in different browsers and b) discover what, if anything, might be optimized further.

## Documentation

If the intention is for other developers to use the plugin, ensure that it's well documented. Document the API and how the plugin is to be used. What methods and options does the plugin support? Does it have any gotchas that users need to be aware of? If users cannot figure out how to use the plugin, they'll likely look for an alternative. It is also of great help to comment your plugin code. This is by far the best gift you can offer other developers. If someone feels they can navigate your code base well enough to use it or improve it, then you've done a good job.

## Likelihood of maintenance

When releasing a plugin, estimate how much time may be required for maintenance and support. We all love to share our plugins with the community, but one needs to set expectations for ones ability to answer questions, address issues and make continuous improvements. This can be done simply by stating the project intentions for maintenance support upfront in the *README* file.

# Conclusions

In this chapter, we explored several time-saving design patterns and best practices that can be employed to improve how jQuery plugins can be written. Some are better suited to certain use cases than others, but I hope on the whole these patterns are useful.

Remember, when selecting a pattern, it is important to be practical. Don't use a plugin pattern just for the sake of it, rather, invest time in understanding the underlying structure, and establish how well it solves your problem or fits the component you're trying to build.

# Namespacing Patterns

In this section, we're going to explore patterns for namespacing in JavaScript. Namespaces can be considered a logical grouping of units of code under a unique identifier. The identifier can be referenced in many namespaces and each identifier can itself contain a hierarchy of its own nested (or sub) namespaces.

In application development, we employ namespaces for a number of important reasons. In JavaScript, they help us avoid **collisions** with other objects or variables in the global namespace. They're also extremely useful for helping organize blocks of functionality in a code-base so that it can be more easily referenced and used.

Namespacing any serious script or application is critical as it's important to safeguard our code from breaking in the event of another script on the page using the **same** variable or method names we are. With the number of **third-party** tags regularly injected into pages these days, this can be a common problem we all need to tackle at some point in our careers. As a well-behaved "citizen" of the global namespace, it's also imperative that we do our best to similarly not prevent other developer's scripts executing due to the same issues.

Whilst JavaScript doesn't really have built-in support for namespaces like other languages, it does have objects and closures which can be used to achieve a similar effect.

# Namespacing Fundamentals

Namespaces can be found in almost any serious JavaScript application. Unless we're working with a simple code-snippet, it's imperative that we do our best to ensure that we're implementing namespacing correctly as it's not just simple to pick-up, it'll also avoid third party code clobbering our own. The patterns we'll be examining in this section are:

1. Single global variables
2. Prefix namespacing
3. Object literal notation
4. Nested namespacing
5. Immediately-invoked Function Expressions
6. Namespace injection

## 1. Single global variables

---

One popular pattern for namespacing in JavaScript is opting for a single global variable as our primary object of reference. A skeleton implementation of this where we return an object with functions and properties can be found below:

```
1 | var myApplication = (function () {  
2 |   function() {  
3 |     //...  
4 |   },  
5 |   return {  
6 |     //...  
7 |   }  
8 | })();
```

?

Although this works for certain situations, the biggest challenge with the single global variable pattern is ensuring that no one else has used the same global variable name as we have in the

page.

## 2. Prefix namespacing

One solution to the above problem, as mentioned by [Peter Michaux](#), is to use prefix namespacing. It's a simple concept at heart, but the idea is we select a unique prefix namespace we wish to use (in this example, `myApplication_`) and then define any methods, variables or other objects after the prefix as follows:

```
1 | var myApplication_propertyA = {};
2 | var myApplication_propertyB = {};
3 | function myApplication_myMethod() {
4 |   //...
5 | }
```

This is effective from the perspective of decreasing the chances of a particular variable existing in the global scope, but remember that a uniquely named object can have the same effect.

This aside, the biggest issue with the pattern is that it can result in a large number of global objects once our application starts to grow. There is also quite a heavy reliance on our prefix not being used by any other developers in the global namespace, so be careful if opting to use this.

For more on Peter's views about the single global variable pattern, read his excellent post on them <http://peter.michaux.ca/articles/javascript-namespacing>.

## 3. Object literal notation

Object literal notation (which we also cover in the module pattern section of the book) can be thought of as an object containing a collection of key:value pairs with a colon separating each pair of keys and values where keys can also represent new namespaces.

```
1 | var myApplication = {
2 |
3 |   // As we've seen, we can easily define functionality for
4 |   // this object literal..
5 |   getInfo: function() {
6 |     //...
7 |   },
8 |
9 |   // but we can also populate it to support
10 |   // further object namespaces containing anything
11 |   // anything we wish:
12 |   models: {},
13 |   views: {
```

```

14     pages: {}
15   },
16   collections: {}
17 };

```

One can also opt for adding properties directly to the namespace:

```

1 myApplication.foo = function() {
2   return "bar";
3 }
4
5 myApplication.utils = {
6   toString: function() {
7     //...
8   },
9   export: function() {
10    //...
11  }
12 }

```

Object literals have the advantage of not polluting the global namespace but assist in organizing code and parameters logically. They are truly beneficial if we wish to create easily-readable structures that can be expanded to support deep nesting. Unlike simple global variables, object literals often also take into account tests for the existence of a variable by the same name so the chances of collision occurring are significantly reduced.

In the next sample, we demonstrate a number of different ways in which we can check to see if a variable (object or plugin namespace) already exists, defining it if it doesn't.

```

1 // This doesn't check for existence of "myApplication" in
2 // the global namespace. Bad practice as we can easily
3 // clobber an existing variable/namespace with the same name
4 var myApplication = {};
5
6 // The following options *do* check for variable/namespace existence.
7 // If already defined, we use that instance, otherwise we assign a new
8 // object literal to myApplication.
9 //
10 // Option 1: var myApplication = myApplication || {};
11 // Option 2: if( !MyApplication ){ MyApplication = {} };
12 // Option 3: window.myApplication || ( window.myApplication = {} );
13 // Option 4: var myApplication = $.fn.myApplication = function() {};
14 // Option 5: var myApplication = myApplication === undefined ? {} : myAp

```

We'll often see developers opting for Option 1 or Option 2 - they are both straight-forward to understand and are equivalent in terms of their end-result.

Option 3 assumes that we're working in the global namespace, but it could also be written as:

```
1 | myApplication || (myApplication = {});
```

This variation assumes that `myApplication` has already been initialized and so it's only really useful for a parameter/argument scenario as in the following example:

```
1 | function foo() {
2 |   myApplication || ( myApplication = {} );
3 | }
4 |
5 | // myApplication hasn't been initialized,
6 | // so foo() throws a ReferenceError
7 |
8 | foo();
9 |
10 | // However accepting myApplication as an
11 | // argument
12 |
13 | function foo( myApplication ) {
14 |   myApplication || ( myApplication = {} );
15 | }
16 |
17 | foo();
18 |
19 | // Even if myApplication === undefined, there is no error
20 | // and myApplication gets set to {} correctly
```

Options 4 can be useful for writing jQuery plugins where:

```
1 | // If we were to define a new plugin..
2 | var myPlugin = $.fn.myPlugin = function() { ... };
3 |
4 | // Then later rather than having to type:
5 | $.fn.myPlugin.defaults = {};
6 |
7 | // We can do:
8 | myPlugin.defaults = {};
```

This results in better compression (minification) and can save on scope lookups.

Option 5 is a little similar to Option 4, but is a long-form which evaluates whether `myApplication` is `undefined` inline such that it's defined as an object if not, otherwise set to an existing value for `myApplication` if so.

It is shown just for the sake of being thorough but in most situations, Options 1-4 will more than suffice for most needs.

There is of course a great deal of variance in how and where object literals are used for organizing and structuring code. For smaller applications wishing to expose a nested API for a particular self-enclosed module, we may just find ourselves using the Revealing Module Pattern, which we covered earlier in the book:

```
1 var namespace = (function () {
2
3     // defined within the local scope
4     var privateMethod1 = function () { /* ... */ },
5         privateMethod2 = function () { /* ... */ },
6         privateProperty1 = "foobar";
7
8     return {
9
10        // the object literal returned here can have as many
11        // nested depths as we wish, however as mentioned,
12        // this way of doing things works best for smaller,
13        // limited-scope applications in my personal opinion
14        publicMethod1: privateMethod1,
15
16        // nested namespace with public properties
17        properties: {
18            publicProperty1: privateProperty1
19        },
20
21        // another tested namespace
22        utils: {
23            publicMethod2: privateMethod2
24        }
25        ...
26    }
27 })();
```

The benefit of object literals is that they offer us a very elegant key/value syntax to work with; one where we're able to easily encapsulate any distinct logic or functionality for our application in a way that clearly separates it from others and provides a solid foundation for extending our code.

A possible downside however is that object literals have the potential to grow into long syntactic constructs. Opting to take advantage of the nested namespace pattern (which also uses the same pattern as its base)

This pattern has a number of other useful applications too. In addition to namespacing, it's often of benefit to decouple the default configuration for our application into a single area that can be easily modified without the need to search through our entire codebase just to alter them - object

literals work great for this purpose. Here's an example of a hypothetical object literal for configuration:

```

1 | var myConfig = {
2 |
3 |   language: "english",
4 |
5 |   defaults: {
6 |     enableGeolocation: true,
7 |     enableSharing: false,
8 |     maxPhotos: 20
9 |   },
10 |
11 |   theme: {
12 |     skin: "a",
13 |     toolbars: {
14 |       index: "ui-navigation-toolbar",
15 |       pages: "ui-custom-toolbar"
16 |     }
17 |   }
18 |

```

Note that JSON is a subset of object literal notation and there are really only minor syntactical differences between it and the above (e.g JSON keys must be strings). If for any reason one wishes to use JSON for storing configuration data instead (e.g. for simpler storage when sending to the back-end), feel free to. For more on the object literal pattern, I recommend reading Rebecca Murphey's excellent [article](#) on the topic as she covers a few areas we didn't touch upon.

## 4. Nested namespacing

---

An extension of the object literal pattern is nested namespacing. It's another common pattern used that offers a lower risk of collision due to the fact that even if a namespace already exists, it's unlikely the same nested children do.

Does this look familiar?

```

1 | YAHOO.util.Dom.getElementsByClassName("test");

```

Older versions of Yahoo!'s YUI library use the nested object namespacing pattern regularly. During my time as an engineer at AOL, we also used this pattern in many of our larger applications. A sample implementation of nested namespacing may look like this:

```

1 | var myApp = myApp || {};
2 |

```

```

3 // perform a similar existence check when defining nested
4 // children
5 myApp.routers = myApp.routers || {};
6 myApp.model = myApp.model || {};
7 myApp.model.special = myApp.model.special || {};
8
9 // nested namespaces can be as complex as required:
10 // myApp.utilities.charting.html5.plotGraph(/...*/);
11 // myApp.modules.financePlanner.getSummary();
12 // myApp.services.social.facebook.realtimeStream.getLatest();

```

**Note:** The above differs from how YUI3 approaches namespacing as modules there use a sandboxed API host object with far less and far shallower namespacing.

We can also opt to declare new nested namespaces/properties as indexed properties as follows:

```

1 myApp["routers"] = myApp["routers"] || {};
2 myApp["models"] = myApp["models"] || {};
3 myApp["controllers"] = myApp["controllers"] || {};

```

Both options are readable, organized and offer a relatively safe way of namespacing our application in a similar fashion to what we may be used to in other languages. The only real caveat however is that it requires our browser's JavaScript engine first locating the myApp object and then digging down until it gets to the function we actually wish to use.

This can mean an increased amount of work to perform lookups, however developers such as [Juriy Zaytsev](#) have previously tested and found the performance differences between single object namespacing vs the "nested" approach to be quite negligible.

## 5. Immediately-invoked Function Expressions (IIFE)s

Earlier in the book, we briefly covered the concept of an [IIFE](#) (immediately-invoked function expression) which is effectively an unnamed function, immediately invoked after it's been defined. If it sounds familiar it's because you may have previous come across it referred to as a self-executing (or self-invoked) anonymous function, however I personally feel Ben Alman's IIFE naming is more accurate. In JavaScript, because both variables and functions explicitly defined within such a context may only be accessed inside of it, function invocation provides an easy means to achieving privacy.

IIFEs are a popular approach to encapsulating application logic to protect it from the global namespace but also have their use in the world of namespacing.

Examples of IIFEs can be found below:

```

1 // an (anonymous) immediately-invoked function expression
2 (function () { /*...*/ })();
3
4 // a named immediately-invoked function expression
5 (function foobar () { /*..*/ })();

```

Examples of self-executing functions, which are quite different than IIFEs, can be found below:

```

1 // named self-executing function
2 function foobar () { foobar(); }
3
4 // anonymous self-executing function
5 var foobar = function () { argumentscallee(); }

```

Back to the IIFEs, a slightly more expanded version of the first IIFE example might look like:

```

1 var namespace = namespace || {};
2
3 // here a namespace object is passed as a function
4 // parameter, where we assign public methods and
5 // properties to it
6 (function( o ) {
7   o.foo = "foo";
8   o.bar = function() {
9     return "bar";
10  };
11 })( namespace );
12
13 console.log( namespace );

```

Whilst readable, this example could be significantly expanded on to address common development concerns such as defined levels of privacy (public/private functions and variables) as well as convenient namespace extension. Let's go through some more code:

```

1 // namespace (our namespace name) and undefined are passed here
2 // to ensure 1. namespace can be modified locally and isn't
3 // overwritten outside of our function context
4 // 2. the value of undefined is guaranteed as being truly
5 // undefined. This is to avoid issues with undefined being
6 // mutable pre-ES5.
7
8 ;(function ( namespace, undefined ) {
9
10  // private properties
11  var foo = "foo",
12      bar = "bar";
13

```

```

14 // public methods and properties
15 namespace.foobar = "foobar";
16
17 namespace.say = function ( msg ) {
18     speak( msg );
19 };
20
21 namespace.sayHello = function () {
22     namespace.say( "hello world" );
23 };
24
25 // private method
26 function speak(msg) {
27     console.log( "You said: " + msg );
28 };
29
30 // check to evaluate whether "namespace" exists in the
31 // global namespace - if not, assign window.namespace an
32 // object literal
33
34 })( window.namespace = window.namespace || {} );
35
36
37 // we can then test our properties and methods as follows
38
39 // public
40
41 // Outputs: foobar
42 console.log( namespace.foobar );
43
44 // Outputs: You said: hello world
45 namespace.sayHello();
46
47 // assigning new properties
48 namespace.foobar2 = "foobar";
49
50 // Outputs: foobar
51 console.log( namespace.foobar2 );

```

Extensibility is of course key to any scalable namespacing pattern and IIFEs can be used to achieve this quite easily. In the below example, our "namespace" is once again passed as an argument to our anonymous function and is then extended (or decorated) with further functionality:

```

1 // let's extend the namespace with new functionality
2 (function( namespace, undefined ) {
3
4     // public method
5     namespace.sayGoodbye = function () {
6         namespace.say( "goodbye" );
7     }
8 })( window.namespace = window.namespace || {} );
9

```

```
10 // Outputs: goodbye  
11 namespace.sayGoodbye();
```

If you would like to find out more about this pattern, I recommend reading Ben's [IIFE post](#) for more information.

## 6. Namespace injection

---

Namespace injection is another variation on the IIFE where we "inject" the methods and properties for a specific namespace from within a function wrapper using `this` as a namespace proxy. The benefit this pattern offers is easy application of functional behaviour to multiple objects or namespaces and can come in useful when applying a set of base methods to be built on later (e.g. getters and setters).

The disadvantages of this pattern are that there may be easier or more optimal approaches to achieving this goal (e.g. deep object extension / merging) which I cover earlier in the section.

Below we can see an example of this pattern in action, where we use it to populate the behaviour for two namespaces: one initially defined (`utils`) and another which we dynamically create as a part of the functionality assignment for `utils` (a new namespace called `tools`).

```
1 var myApp = myApp || {};  
2 myApp.utils = {};  
3  
4 (function () {  
5     var val = 5;  
6  
7     this.getValue = function () {  
8         return val;  
9     };  
10  
11    this.setValue = function( newVal ) {  
12        val = newVal;  
13    }  
14  
15    // also introduce a new sub-namespace  
16    this.tools = {};  
17  
18 }).apply( myApp.utils );  
19  
20 // inject new behaviour into the tools namespace  
21 // which we defined via the utilities module  
22  
23 (function () {  
24     this.diagnose = function() {  
25         return "diagnosis";  
26     }  
27 }).apply( myApp.utils.tools );
```

```

28
29 // note, this same approach to extension could be applied
30 // to a regular IIFE, by just passing in the context as
31 // an argument and modifying the context rather than just
32 // "this"
33
34 // Usage:
35
36 // Outputs our populated namespace
37 console.log( myApp );
38
39 // Outputs: 5
40 console.log( myApp.utils.getValue() );
41
42 // Sets the value of `val` and returns it
43 myApp.utils.setValue( 25 );
44 console.log( myApp.utils.getValue() );
45
46 // Testing another level down
47 console.log( myApp.utils.tools.diagnose() );

```

Angus Croll has also [previously](#) suggested the idea of using the call API to provide a natural separation between contexts and arguments. This pattern can feel a lot more like a module creator, but as modules still offer an encapsulation solution, we'll briefly cover it for the sake of thoroughness:

```

1 // define a namespace we can use later
2 var ns = ns || {},
3     ns2 = ns2 || {};
4
5 // the module/namespace creator
6 var creator = function( val ) {
7
8     var val = val || 0;
9
10    this.next = function () {
11        return val++
12    };
13
14    this.reset = function () {
15        val = 0;
16    };
17};
18
19 creator.call( ns );
20
21 // ns.next, ns.reset now exist
22 creator.call( ns2, 5000 );
23
24 // ns2 contains the same methods
25 // but has an overridden value for val
26 // of 5000

```

As mentioned, this type of pattern is useful for assigning a similar base set of functionality to multiple modules or namespaces. I would however only really suggest using it where explicitly declaring functionality within an object/closure for direct access doesn't make sense.

# Advanced namespacing patterns

We'll now explore some advanced patterns and utilities that I have found invaluable when working on larger applications - some of which have required a re-think of traditional approaches to application namespacing. I'll note that I am not advocating any of the following as *the* way to namespace, but rather ways that I have found work in practice.

## Automating nested namespacing

---

As we've reviewed, nested namespaces can provide an organized hierarchy of structure for a unit of code. An example of such a namespace could be the following:  
`application.utilities.drawing.canvas.2d`. This can also be expanded using the object literal pattern to be:

```
1 | var application = {  
2 |   utilities: {  
3 |     drawing: {  
4 |       canvas: {  
5 |         2d:{  
6 |           //...  
7 |         }  
8 |       }  
9 |     }  
10|   }  
11|};
```

One of the obvious challenges with this pattern is that each additional layer we wish to create requires yet another object to be defined as a child of some parent in our top-level namespace. This can become particularly laborious when multiple depths are required as our application increases in complexity.

How can this problem be better solved? In [JavaScript Patterns](#), Stoyan Stefanov presents a very-clever approach for automatically defining nested namespaces under an existing global variable. He suggests a convenience method that takes a single string argument for a nest, parses this and automatically populates our base namespace with the objects required.

The method he suggests using is the following, which I've updated it to be a generic function for easier re-use with multiple namespaces:

```
1 // top-level namespace being assigned an object literal
2 var myApp = myApp || {};
3
4 // a convenience function for parsing string namespaces and
5 // automatically generating nested namespaces
6 function extend( ns, ns_string ) {
7     var parts = ns_string.split("."),
8         parent = ns,
9         pl;
10
11    pl = parts.length;
12
13    for ( var i = 0; i < pl; i++ ) {
14        // create a property if it doesn't exist
15        if ( typeof parent[parts[i]] === "undefined" ) {
16            parent[parts[i]] = {};
17        }
18
19        parent = parent[parts[i]];
20    }
21
22    return parent;
23 }
24
25 // Usage:
26 // extend myApp with a deeply nested namespace
27 var mod = extend(myApp, "modules.module2");
28
29 // the correct object with nested depths is output
30 console.log(mod);
31
32 // minor test to check the instance of mod can also
33 // be used outside of the myApp namesapce as a clone
34 // that includes the extensions
35
36 // Outputs: true
37 console.log(mod == myApp.modules.module2);
38
39 // further demonstration of easier nested namespace
40 // assignment using extend
41 extend(myApp, "moduleA.moduleB.moduleC.moduleD");
42 extend(myApp, "longer.version.looks.like.this");
43 console.log(myApp);
```

Web inspector output:

The screenshot shows a browser's developer tools with the object inspector open. It displays a nested object structure. At the top level, there are properties: longer, version, looks, like, moduleA, moduleB, moduleC, moduleD, modules, and module2. Each of these properties has its own nested \_\_proto\_\_ object. Callouts from the UI point to specific lines in the code: top.html:33, top.html:37, and top.html:42.

Where one would previously have had to explicitly declare the various nests for their namespace as objects, this can now be easily achieved using a single, cleaner line of code.

## Dependency declaration pattern

We're now going to explore a minor augmentation to the nested namespacing pattern which we'll refer to as the Dependency Declaration pattern. We all know that local references to objects can decrease overall lookup times, but let's apply this to namespacing to see how it might look in practice:

```

1 // common approach to accessing nested namespaces
2 myApp.utilities.math.fibonacci( 25 );
3 myApp.utilities.math.sin( 56 );
4 myApp.utilities.drawing.plot( 98,50,60 );
5
6 // with local/cached references
7 var utils = myApp.utilities,
8 maths = utils.math,
9 drawing = utils.drawing;
10
11 // easier to access the namespace
12 maths.fibonacci( 25 );
13 maths.sin( 56 );
14 drawing.plot( 98, 50,60 );
15
16 // note that the above is particularly performant when
17 // compared to hundreds or thousands of calls to nested
18 // namespaces vs. a local reference to the namespace

```

Working with a local variable here is almost always faster than working with a top-level global (e.g. `myApp`). It's also both more convenient and more performant than accessing nested properties/sub-namespaces on every subsequent line and can improve readability in more complex applications.

Stoyan recommends declaring localized namespaces required by a function or module at the top of our function scope (using the single-variable pattern) and calls this a dependency declaration pattern. One of the benefits this offers is a decrease in locating dependencies and resolving them, should we have an extendable architecture that dynamically loads modules into our namespace when required.

In my opinion this pattern works best when working at a modular level, localizing a namespace to be used by a group of methods. Localizing namespaces on a per-function level, especially where there is significant overlap between namespace dependencies would be something I would recommend avoiding where possible. Instead, define it further up and just have them all access the same reference.

## Deep object extension

---

An alternative approach to automatic namespacing is deep object extension. Namespaces defined using object literal notation may be easily extended (or merged) with other objects (or namespaces) such that the properties and functions of both namespaces can be accessible under the same namespace post-merge.

This is something that's been made fairly easy to accomplish with modern JavaScript frameworks (e.g. see jQuery's `$.extend`), however, if looking to extend object (namespaces) using vanilla JS, the following routine may be of assistance.

```
1 // extend.js
2 // Written by Andrew Dupont, optimized by Addy Osmani
3
4 function extend( destination, source ) {
5
6     var toString = Object.prototype.toString,
7         objTest = toString.call({}); 
8
9     for ( var property in source ) {
10        if ( source[property] && objTest === toString.call(source[property]) )
11            destination[property] = destination[property] || {};
12            extend(destination[property], source[property]);
13        } else {
14            destination[property] = source[property];
15        }
}
?
```

```
16      }
17
18      return destination;
19  };
20
21 console.group( "objExtend namespacing tests" );
22
23 // define a top-level namespace for usage
24 var myNS = myNS || {};
25
26 // 1. extend namespace with a "utils" object
27 extend(myNS, {
28     utils:{
29         //...
30     }
31 });
32
33 console.log( "test 1", myNS);
34 // myNS.utils now exists
35
36 // 2. extend with multiple depths (namespace.hello.world.wave)
37 extend(myNS, {
38     hello: {
39         world: {
40             wave: {
41                 test: function() {
42                     //...
43                 }
44             }
45         }
46     }
47 });
48
49 // test direct assignment works as expected
50 myNS.hello.test1 = "this is a test";
51 myNS.hello.world.test2 = "this is another test";
52 console.log( "test 2", myNS );
53
54 // 3. what if myNS already contains the namespace being added
55 // (e.g. "library")? we want to ensure no namespaces are being
56 // overwritten during extension
57
58 myNS.library = {
59     foo:function () {}
60 };
61
62 extend( myNS, {
63     library: {
64         bar: function() {
65             //...
66         }
67     }
68 });
69
70 // confirmed that extend is operating safely (as expected)
71 // myNS now also contains library.foo, library.bar
72 console.log( "test 3", myNS );
```

```

73 // 4. what if we wanted easier access to a specific namespace without ha
74 // to type the whole namespace out each time?
75
76
77 var shorterAccess1 = myNS.hello.world;
78 shorterAccess1.test3 = "hello again";
79 console.log( "test 4", myNS);
80
81 //success, myApp.hello.world.test3 is now "hello again"
82
83 console.groupEnd();

```

**Note:** The above implementation is not cross-browser compatible for all objects and should be considered a proof-of-concept only. One may find the Underscore.js `extend()` method a simpler, more cross-browser implementation to start with

<http://documentcloud.github.io/underscore/docs/underscore.html#section-82>.

For developers that are going to use jQuery in their application, one can achieve the exact same object namespace extensibility with `$.extend` as follows:

```

1 // top-level namespace
2 var myApp = myApp || {};
3
4 // directly assign a nested namespace
5 myApp.library = {
6   foo: function() {
7     //...
8   }
9 };
10
11 // deep extend/merge this namespace with another
12 // to make things interesting, let's say it's a namespace
13 // with the same name but with a different function
14 // signature: $.extend( deep, target, object1, object2 )
15 $.extend( true, myApp, {
16   library:{
17     bar: function(){
18       //...
19     }
20   }
21 });
22
23 console.log("test", myApp);
24 // myApp now contains both library.foo() and library.bar() methods
25 // nothing has been overwritten which is what we're hoping for.

```

For the sake of thoroughness, please see [here](#) for jQuery `$.extend` equivalents to the rest of the namespacing experiments found in this section.

## Recommendation

---

Reviewing the namespace patterns we've explored in this section, the option that I would personally use for most larger applications is nested object namespacing with the object literal pattern. Where possible, I would implement this using automated nested namespacing, however this is just a personal preference.

IIFEs and single global variables may work fine for applications in the small to medium range, however, larger codebases requiring both namespaces and deep sub-namespaces require a succinct solution that promotes readability and scales. I feel this pattern achieves all of these objectives well.

I would also recommend trying out some of the suggested advanced utility methods for namespace extension as they really can save us time in the long-run.

## Conclusions

That's it for this introductory adventure into the world of design patterns in JavaScript and jQuery - I hope you've found it beneficial.

Design patterns make it easy for us to build on the shoulders of developers who have defined solutions to challenging problems and architectures over a number of decades. The contents of this book should hopefully provide sufficient information to get started using the patterns we covered in your own scripts, plugins and web applications.

It's important for us to be aware of these patterns but it's also essential to know how and when to use them. Study the pros and cons of each pattern before employing them. Take the time out to experiment with patterns to fully appreciate what they offer and make usage judgements based on a pattern's true value to your application.

If I've encouraged your interest in this area further and you would like to learn more about design patterns, there are a number of excellent titles on this area available for generic software development and of course, JavaScript.

I am happy to recommend:

1. "Patterns Of Enterprise Application Architecture" by Martin Fowler

## 2. "JavaScript Patterns" by Stoyan Stefanov

Thanks for reading *Learning JavaScript Design Patterns*. For more educational material on learning JavaScript, please feel free to read more from me on my blog at <http://addyosmani.com> or on Twitter @[addyo](#)smani.

Until next time, the very best of luck with your adventures in JavaScript!

# References

1. Design Principles and Design Patterns - Robert C Martin  
[http://www.objectmentor.com/resources/articles/Principles\\_and\\_Patterns.pdf](http://www.objectmentor.com/resources/articles/Principles_and_Patterns.pdf)
2. Ralph Johnson - Special Issue of ACM On Patterns and Pattern Languages -  
<http://www.cs.wustl.edu/~schmidt/CACM-editorial.html>
3. Hillside Engineering Design Patterns Library - <http://hillside.net/patterns/>
4. Pro JavaScript Design Patterns - Ross Harmes and Dustin Diaz  
<http://jsdesignpatterns.com/>
5. Design Pattern Definitions - [http://en.wikipedia.org/wiki/Design\\_Patterns](http://en.wikipedia.org/wiki/Design_Patterns)
6. Patterns and Software Terminology  
<http://www.cmcrossroads.com/bradapp/docs/patterns-intro.html>
7. Reap the benefits of Design Patterns - Jeff Juday  
[http://articles.techrepublic.com.com/5100-10878\\_11-5173591.html](http://articles.techrepublic.com.com/5100-10878_11-5173591.html)
8. JavaScript Design Patterns - Subramanyan Guhan  
<http://www.slideshare.net/rmsguhan/javascript-design-patterns>
9. What Are Design Patterns and Do I Need Them? - James Moaoriello  
<http://www.developer.com/design/article.php/1474561>
10. Software Design Patterns - Alex Barnett  
<http://alexbarnett.net/blog/archive/2007/07/20/software-design-patterns.aspx>
11. Evaluating Software Design Patterns - Gunni Rode <http://www.rode.dk/thesis/>
12. SourceMaking Design Patterns [http://sourcemaking.com/design\\_patterns](http://sourcemaking.com/design_patterns)
13. JavaScript Patterns - Stoyan Stevanov - <http://www.slideshare.net/stoyan/javascript-patterns>

14. Stack Overflow - Design Pattern Implementations in JavaScript (discussion)  
<http://stackoverflow.com/questions/24642/what-are-some-examples-of-design-pattern-implementations-using-javascript>
15. The Elements of a Design Pattern - Jared Spool  
[http://www.uie.com/articles/elements\\_of\\_a\\_design\\_pattern/](http://www.uie.com/articles/elements_of_a_design_pattern/)
16. Stack Overflow - Examples of Practical JS Design Patterns (discussion)  
<http://stackoverflow.com/questions/3722820/examples-of-practical-javascript-object-oriented-design-patterns>
17. Design Patterns in JavaScript Part 1 - Nicholas Zakas  
<http://www.webreference.com/programming/javascript/ncz/column5/>
18. Stack Overflow - Design Patterns in jQuery  
<http://stackoverflow.com/questions/3631039/design-patterns-used-in-the-jquery-library>
19. Classifying Design Patterns By AntiClue - Elyse Neilson  
<http://www.anticlue.net/archives/000198.htm>
20. Design Patterns, Pattern Languages and Frameworks - Douglas Schmidt  
<http://www.cs.wustl.edu/~schmidt/patterns.html>
21. Show Love To The Module Pattern - Christian Heilmann <http://www.wait-till-i.com/2007/07/24/show-love-to-the-module-pattern/>
22. Software Designs Made Simple - Anoop Mashudanan  
<http://www.scribd.com/doc/16352479/Software-Design-Patterns-Made-Simple>
23. Introduction to the JavaScript Module Pattern <https://www.unleashed-technologies.com/blog/2010/12/09/introduction-javascript-module-design-pattern>
24. Design Patterns Explained - <http://c2.com/cgi/wiki?DesignPatterns>
25. Mixins explained <http://en.wikipedia.org/wiki/Mixin>
26. Working with GoF's Design Patterns In JavaScript  
[http://aspalliance.com/1782\\_Working\\_with\\_GoFs\\_Design\\_Patterns\\_in\\_JavaScript\\_Programming.all](http://aspalliance.com/1782_Working_with_GoFs_Design_Patterns_in_JavaScript_Programming.all)
27. Using Object.create <http://stackoverflow.com/questions/2709612/using-object-create-instead-of-new>
28. t3knomanster's JavaScript Design Patterns -  
<http://t3knomanser.livejournal.com/922171.html>
29. JavaScript Advantages - Object Literals  
<http://stackoverflow.com/questions/1600130/javascript-advantages-of-object-literal>
30. JavaScript Class Patterns - Liam McLennan  
<http://geekswithblogs.net/liammclennan/archive/2011/02/06/143842.aspx>
31. Understanding proxies in jQuery -  
<http://stackoverflow.com/questions/4986329/understanding-proxy-in-jquery>
32. Observer Pattern Using JavaScript -  
<http://www.codeproject.com/Articles/13914/Observer-Design-Pattern-Using-JavaScript>

33. Speaking on the Observer pattern - <http://www.javaworld.com/javaworld/javaqa/2001-05/04-qa-0525-observer.html>

Learning JavaScript Design Patterns. © Addy Osmani 2017.