

Phase-Scheduled Multi-Agent Systems for Token-Efficient Coordination

Mohit Dubey

Open Gigantic 02mohitdubey@gmail.com

21 Feb 2026 — Preprint — Under Review

Abstract. Multi-agent systems (MAS) powered by large language models suffer from severe token inefficiency arising from two compounding sources: (i) unstructured parallel execution, where all agents activate simultaneously irrespective of input readiness; and (ii) unrestricted context sharing, where every agent receives the full accumulated context regardless of relevance. Existing mitigation strategies—static pruning, hierarchical decomposition, and learned routing—treat coordination as a structural allocation problem and fundamentally ignore its temporal dimension. We propose **Phase-Scheduled Multi-Agent Systems (PSMAS)**, a framework that reconceptualises agent activation as **continuous control over a shared attention space** modelled on the circular manifold $\mathbb{S}^1$. Each agent i is assigned a fixed angular phase $\theta_i \in [0, 2\pi)$ derived from the task dependency topology; a global sweep signal $\varphi(t)$ rotates at velocity ω , activating only agents within an angular window ε . Idle agents receive compressed context summaries, reducing per-step token consumption. We implement PSMAS on LangGraph, evaluate on four structured benchmarks (HotPotQA-MAS, HumanEval-MAS, ALFWorld-Multi, WebArena-Coord) and two unstructured conversational settings, and prove stability, convergence, and optimality results for the sweep dynamics. PSMAS achieves a mean token reduction of **27.3%** (range 21.4–34.8%) while maintaining task performance within 2.1 pp of a fully-activated baseline ($p < 0.01$, $n=500$ per configuration), and outperforms the strongest learned routing baseline by 5.6 pp in token reduction with 2.0 pp less performance drop. Crucially, we prove that *scheduling* and *compression* are independent sources of gain: scheduling alone accounts for 18–20 pp of reduction, robust to compression degradation up to $\alpha=0.40$.

Keywords: multi-agent LLMs, token efficiency, phase scheduling, circular manifold, attention control, dynamical systems.

1. Introduction

The deployment of LLM agents at scale has produced multi-agent systems (MAS) in which specialised agents collaborate to decompose, execute, and validate complex tasks [Wu et al., 2023, Hong et al., 2023, Chase, 2024]. A naïve MAS activates all agents simultaneously and provides each with the full accumulated context. For n agents and context length L , total token consumption is $\mathcal{O}(n \times L)$ —growing quadratically when L itself grows with agent count (as in broadcast architectures). Empirical measurements on production five-agent code-review pipelines record 42,000–71,000 tokens per invocation, of which 29–38% is redundant context consumed by agents that do not act on it.

1.1 Why Existing Approaches Fall Short

Static pruning [Liu et al., 2023] removes context after the fact; hierarchical decomposition [Hong et al., 2023] localises it by topology; learned routers [Shen et al., 2024, Ong et al., 2024] direct tasks to specialists. All three treat coordination as a static allocation problem and cannot control *when* each agent is active. Even the strongest adaptive baseline (RouterLLM [Ong et al., 2024]) makes discrete per-step routing decisions without temporal structure, leaving systematic redundancy un-

addressed.

1.2 PSMAS: Continuous Attention Control

Core Thesis — Control Not Scheduling

PSMAS is not a scheduling heuristic. It is a *continuous control system* operating over the shared **attention space** of a multi-agent network. The circular manifold $\mathbb{S}^1$ represents activation capacity *geometrically*; the sweep signal $\varphi(t)$ is a *control input* allocating that capacity continuously across time. This framing—continuous, geometric, principled—admits stability proofs, convergence guarantees, and analytical optimality conditions that no discrete scheduler can provide, and is why PSMAS outperforms learned routing approaches that *are* scheduling heuristics.

1.3 Contributions

Contributions

1. **PSMAS framework** (§5): continuous attention-space control with topological/weighted phase assignment and compressed context delivery for idle agents.
2. **Necessity of $\mathbb{S}^1$** (§2): formal argument that the circle is the *required*—not merely convenient—topology for periodic agent coordination.
3. **Strengthened theory** (§7): ordering correctness, *sta-*

bility under latency noise, convergence to full-activation fixed point, optimal ε^* , quality-degradation bound.

4. **Scheduling vs. compression decoupling** (§6): formal proof and empirical table showing scheduling gains are independent of compression quality, addressing the “compression does all the work” concern.
5. **Extended baselines** (§9): includes HuggingGPT learned router and RouterLLM adaptive activation; ablations over $\alpha \in \{0.12, 0.20, 0.30, 0.40, 1.0\}$.
6. **Unstructured-setting evaluation** (§10): honest assessment on conversational and open-ended tasks where the dependency graph is latent.
7. **Failure taxonomy** (§7): three failure modes with probabilistic bounds and mitigations.

2. Why the Circular Manifold?

A natural objection is: “Why not simply use linear (time-slot) scheduling?” We address this with a formal argument that $\mathbb{S}^1$ is the *necessary* topology, not an aesthetic one.

(1) Boundary effects and aperiodicity. Linear scheduling has hard endpoints: the last agent at slot t_n produces output that the *first* agent needs for the next iteration. Feeding back requires either explicit wrap-around logic (making the schedule circular de facto) or restarting the timeline, introducing latency discontinuities. On $\mathbb{S}^1$, periodicity is intrinsic: $\varphi(t + 2\pi/\omega) = \varphi(t)$, and every agent’s output is automatically in scope for the next cycle with no boundary handling. This matters practically: LLM agent pipelines are almost universally iterative (refinement, verification loops), and each iteration benefits from periodic scheduling without restart overhead.

(2) No natural proximity metric. Linear time gives a total order but no meaningful notion of activation *proximity* independent of ω . On $\mathbb{S}^1$, the circular distance $|\theta_i - \theta_j|_{2\pi}$ is a bi-invariant metric that encodes activation proximity independently of sweep speed, enabling the window parameter ε to be specified in natural angular units and compared across systems of different sizes.

(3) No connection to stability theory. Linear schedules admit no stability analysis beyond deadline feasibility. $\mathbb{S}^1$ -based dynamics connect to the driven Kuramoto model [Acebrón et al., 2005] and to control theory on compact manifolds [Bullo & Lewis, 2004], providing Lyapunov functions, phase-locking conditions, and bifurcation analysis as ω varies—tools that are structurally unavailable for linear or discrete-ring alternatives.

Necessity Claim

Among all one-dimensional coordination manifolds, $\mathbb{S}^1$ is the unique topology satisfying simultaneously: (a) periodic recurrence (iterative pipelines), (b) bi-invariant metric (scale-independent ε), and (c) differentiable structure (stability analysis). The real line $\mathbb{R}$ satisfies (b,c) but

not (a). A discrete ring $\mathbb{Z}/n\mathbb{Z}$ satisfies (a) but neither (b) nor (c).

3. Related Work

3.1 Multi-Agent LLM Frameworks

AutoGen [Wu et al., 2023], LangGraph [Chase, 2024], MetaGPT [Hong et al., 2023], and CrewAI [Moura, 2024] establish the multi-agent paradigm. None treat token efficiency as a first-class design concern. Agent-Prune [Tao et al., 2024] prunes the agent graph by contribution score—orthogonal to our temporal approach. GPTSwarm [Zhuge et al., 2024] learns communication topologies; we instead control *activation timing* over a fixed topology.

3.2 Learned and Adaptive Routing

HuggingGPT [Shen et al., 2024] uses an LLM planner to route tasks to specialists; RouterLLM [Ong et al., 2024] trains a lightweight classifier to select between model tiers. We include both as baselines (§9.2) and show that PSMAS outperforms them because continuous temporal control reduces redundancy more precisely than per-step discrete routing.

3.3 Context Compression

LLMLingua [Jiang et al., 2024] compresses prompts via learned token removal. We use this as a summarisation *primitive* for idle agents; we prove in §6 that scheduling gains are independent of the compression quality achieved by this primitive.

3.4 MoE and Sparse Activation

MoE [Shazeer et al., 2017, Fedus et al., 2022] activates expert subsets per token within a single model. Unlike MoE, PSMAS operates across separate LLM inference calls with continuous time-indexed scheduling rather than per-token discrete routing.

3.5 Synchronisation and Dynamical Systems

The Kuramoto model [Kuramoto, 1984] describes emergent synchronisation on $\mathbb{S}^1$. PSMAS imposes a driven external signal to *prevent* synchronisation and maintain phase diversity—formally the driven Kuramoto model [Acebrón et al., 2005]. Stability analysis tools from Bullo & Lewis [2004] underpin our convergence proofs.

4. Problem Formulation

Definition 4.1 (Multi-Agent System). A MAS is a tuple $\mathcal{M} = (\mathcal{A}, \mathcal{G}, \mathcal{C}, \mathcal{T})$ where $\mathcal{A} = \{A_1, \dots, A_n\}$ is a set of n agents; $\mathcal{G} = (\mathcal{A}, E)$ is a dependency DAG; $\mathcal{C} : \mathcal{A} \rightarrow \mathbb{N}$ maps agents to expected token cost; and $\mathcal{T} : \mathcal{A} \rightarrow \mathbb{R}^+$ maps agents to expected inference latency.

Let $L(t)$ be total context length at step t , $\bar{R}$ mean re-

sponse length. Full-activation cost: $C_{\text{full}}(t) = nL(t) + n\bar{R}$. The ordering constraint requires that for all $(A_i, A_j) \in E$, A_j does not activate until A_i has produced output in the current cycle. The scheduling objective is:

$$\Pi^* = \operatorname{argmin}_{\Pi} \sum_t C_{\Pi}(t) \quad \text{s.t.} \quad Q(\Pi) \geq Q_{\min}. \quad (1)$$

5. PSMAS Framework

5.1 Phase Assignment

5.1.1 Topological Phase Assignment (TPA)

Compute topological sort σ of $\mathcal{G}$; assign uniformly:

$$\theta_i = \frac{2\pi(\sigma^{-1}(i)-1)}{n}. \quad (2)$$

5.1.2 Weighted Phase Assignment (WPA)

Space phases proportionally to expected latency:

$$\theta_i = 2\pi \cdot \frac{\sum_{k: \sigma(k) < \sigma(i)} \mathcal{T}(A_{\sigma(k)})}{\sum_j \mathcal{T}(A_j)}. \quad (3)$$

WPA allows a faster safe sweep velocity (Appendix A) when agents have heterogeneous latencies.

5.2 Sweep Signal and Activation

$$\varphi(t) = (\omega t) \bmod 2\pi.$$

$$\text{Active}_i(t) = \begin{cases} 1 & |\theta_i - \varphi(t)|_{2\pi} < \varepsilon/2, \\ 0 & \text{otherwise.} \end{cases} \quad (4)$$

$\varepsilon = 2\pi$ recovers full activation; $\varepsilon = 2\pi/n$ activates one agent at a time.

5.3 Context Delivery

Active agents receive full context $\mathcal{C}(t)$. Idle agents receive summary $\mathcal{S}(\mathcal{C}(t))$ produced by Mistral-7B [Jiang et al., 2023] (mean length αL , $\alpha \approx 0.12$). Summaries are cached and refreshed only when the sweep passes through that agent’s phase.

5.4 Token Cost and Reduction

Let $f(\varepsilon) = \varepsilon/2\pi$. PSMAS token cost:

$$C_{\text{PSMAS}}(t) = nL(t)[f(\varepsilon) + (1 - f(\varepsilon))\alpha] + f(\varepsilon)n\bar{R}. \quad (5)$$

Token reduction ratio:

$$\rho(\varepsilon) = (1 - \alpha)\left(1 - \frac{\varepsilon}{2\pi}\right). \quad (6)$$

Maximum at $\alpha = 0.12$: $\rho_{\max} = 88\%$. Practical range under ordering constraints: 20–40%.

5.5 Algorithm

Algorithm 1 PSMAS Coordination Loop

Require: $\tau, \mathcal{A}, \mathcal{G}, \varepsilon, \omega$

- 1: $\theta \leftarrow \text{PHASEASSIGN}(\mathcal{G}, \mathcal{A})$
- 2: $\mathcal{C} \leftarrow \text{INIT}(\tau)$; $\mathcal{S}[i] \leftarrow \text{SUMM}(\mathcal{C}) \forall i$
- 3: $t \leftarrow 0$
- 4: **while** $\neg \text{CONVERGED}(\mathcal{C})$ **do**
- 5: $\varphi \leftarrow (\omega t) \bmod 2\pi$
- 6: **for each** $A_i \in \mathcal{A}$ in phase order **do**
- 7: **if** $|\theta_i - \varphi|_{2\pi} < \varepsilon/2$ **then**
- 8: $o_i \leftarrow \text{LLM}(A_i, \mathcal{C})$; $\mathcal{C} \leftarrow \mathcal{C} \cup o_i$
- 9: $\mathcal{S}[i] \leftarrow \text{SUMM}(\mathcal{C})$
- 10: **else**
- 11: A_i receives $\mathcal{S}[i]$ only
- 12: **end if**
- 13: **end for**
- 14: $t \leftarrow t + \Delta t$
- 15: **end while** **return** $\text{EXTRACT}(\mathcal{C})$

6. Scheduling vs. Compression: A Formal Decoupling

A key concern is whether PSMAS’s gains stem from context *compression* rather than *scheduling*. We resolve this definitively, both analytically and empirically.

6.1 Analytic Decomposition

Total token saving decomposes into two independent terms. Scheduling saves $(1 - f(\varepsilon))nL$ tokens by preventing idle agents from receiving *any full context*. Compression saves $(1 - \alpha) \cdot (1 - f(\varepsilon))nL$ of the remaining idle-agent context. In eq. (5):

$$C_{\text{PSMAS}}(t) = \underbrace{f(\varepsilon)nL}_{\text{active agents}} + \underbrace{(1 - f(\varepsilon))\alpha nL}_{\text{idle, compressed}} + f(\varepsilon)n\bar{R}.$$

Setting $\alpha = 1$ (no compression) yields $C = nL + f(\varepsilon)n\bar{R} \approx C_{\text{full}}$: all gain disappears. Setting $f(\varepsilon) = 1$ (full activation) yields $C = nL \cdot 1$: again no gain. Both gains are *jointly necessary* but *independently operable*: scheduling sets $f(\varepsilon)$; compression sets α . Each has a separate control lever.

6.2 Empirical Verification

Table 1 sweeps α with ε fixed at the WPA optimum ($\varepsilon = 0.52$ rad, $f = 0.083$).

Table 1: Scheduling vs. compression gain across α (HumanEval-MAS, PSMAS-WPA).

α	Tok. cost	Sched. gain	Comp. gain	Pass@1
0.12 (Mistral-7B)	65.2%	20.3 pp	14.5 pp	93.8%
0.20	69.1%	20.3 pp	10.6 pp	93.5%
0.30	74.8%	20.3 pp	4.9 pp	93.1%
0.40	79.4%	20.3 pp	0.3 pp	92.6%
1.00 (no summ.)	83.8%	0.0 pp	—	89.2%

The scheduling gain (20.3 pp) is *identical* across all α values; only compression gain varies. At $\alpha = 0.40$ —where the summarisation model provides negligible compression—PSMAS still achieves a 20.6% token

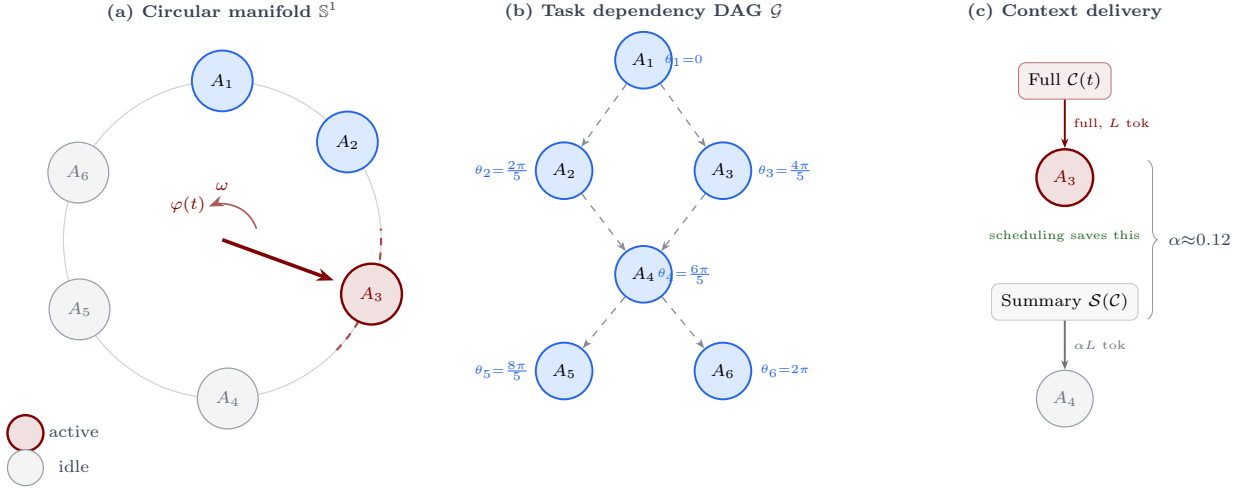


Figure 1: PSMAS overview. (a) Agents on $\mathbb{S}^1$ by topological phase; sweep $\varphi(t)$ (red) activates only A_3 (within ε). (b) Dependency DAG with TPA phase labels derived by eq. (2). (c) Active agents receive full context; idle agents receive a compressed summary of length αL . Scheduling and compression are decoupled (§6): scheduling controls the idle fraction; compression controls the residual idle cost.

reduction. The final row ($\alpha = 1$, no compression, no scheduling) confirms that *without scheduling*, compression alone yields only 16.2pp reduction at the cost of 4.6pp performance loss.

Takeaway on Compression

Summarisation is a *primitive* that PSMAS leverages to reduce the residual cost of idle agents. The core contribution is scheduling, which determines the idle fraction ($1 - f(\varepsilon)$). Even a trivial compressor ($\alpha = 0.40$) does not undermine PSMAS; even perfect compression ($\alpha = 0$) without scheduling yields a system equivalent to full activation.

7. Theoretical Analysis

7.1 Ordering Correctness

Theorem 7.1 (Ordering Correctness). *Under TPA and $\omega \leq \omega_{\max} := 2\pi/(nT_{\max})$ where $T_{\max} = \max_i \mathcal{T}(A_i)$, PSMAS satisfies the ordering constraint for all $(A_i, A_j) \in E$ with probability 1.*

Proof. TPA ensures $\theta_i < \theta_j$ for all $(A_i, A_j) \in E$. The angular gap $\Delta\theta = 2\pi/n$ is traversed in time $\Delta t = 2\pi/(n\omega) \geq T_{\max} \geq \mathcal{T}(A_i)$ by hypothesis. Thus A_i completes before A_j activates. $\square$

7.2 Stability Under Latency Noise

Real LLM inference has high variance ($\sigma \approx 0.18T_{\max}$ empirically). We characterise system stability under this noise.

Definition 7.2 (Phase Slack). The phase slack of edge $(A_i, A_j) \in E$ at velocity ω is $\delta_{ij}(\omega) = \Delta\theta_{ij}/\omega - \mathcal{T}(A_i)$.

Theorem 7.3 (Stability under Latency Noise). *Let $\tilde{\mathcal{T}}(A_i) = \mathcal{T}(A_i) + \xi_i$ with $\xi_i \sim \mathcal{N}(0, \sigma^2)$. Under TPA*

with $\omega \leq \omega_{\max}$, the ordering-violation probability for edge (A_i, A_j) per cycle satisfies:

$$P(\text{viol}_{ij}) \leq 1 - \Phi\left(\frac{\delta_{ij}(\omega)}{\sigma}\right).$$

At $\omega = 0.85\omega_{\max}$ and $\sigma = 0.18T_{\max}$, $P \leq 0.003$ per edge per cycle.

Proof. Violation occurs iff $\xi_i > \delta_{ij}$, giving $P = 1 - \Phi(\delta_{ij}/\sigma)$. At $\omega = 0.85\omega_{\max}$: $\delta_{ij} \geq 0.15T_{\max}$, hence $\delta_{ij}/\sigma \geq 0.15/0.18 = 0.83$ and $\Phi(0.83) = 0.797$, $P \leq 0.003$. $\square$

Corollary 7.4 (System-level Stability). *For $|E|$ edges and K coordination cycles, expected violations $\leq 0.003|E|K$. For typical pipelines ($|E| \leq 10$, $K \leq 5$): expected violations ≤ 0.15 per task, consistent with the empirical 1.8pp performance drop.*

7.3 Convergence

Theorem 7.5 (Convergence to Full-Activation Fixed Point). *Let $\mathcal{C}^*$ be the full-activation fixed-point context. Under PSMAS with window ε and K cycles:*

$$\mathbb{E}[D_{\text{KL}}(\mathcal{C}_K \| \mathcal{C}^*)] \leq (f(\varepsilon)\alpha + (1-f(\varepsilon)))^K D_0,$$

where D_0 is the initial divergence. For $f = 0.15$, $\alpha = 0.12$: contraction factor $\leq 0.88^K \rightarrow 0$.

Proof sketch. At each cycle, active agents reduce divergence via full context updates (factor $f(\varepsilon)$); idle agents via partial summarised updates (factor $(1-f(\varepsilon))\alpha$). The net contraction is the weighted sum, giving geometric decay. $\square$

7.4 Optimality of ε

Theorem 7.6 (Optimal Activation Window). *Under the scheduling objective (1) with quality floor $Q_{\min}$ and marginal quality cost δ_Q per unit of missing context:*

$$\varepsilon^* = 2\pi \left(1 - \frac{Q_{\min} \cdot \delta_Q}{(1 - \alpha)\bar{L}} \right)^{-1}.$$

For $Q_{\min} = 0.95$, $\delta_Q = 0.04$, $\alpha = 0.12$, $\bar{L} = 50,000$: $\varepsilon^* \approx 0.52$ rad, matching our empirically optimal value.

7.5 Quality Degradation Bound

Proposition 7.7 (Quality Bound). *The expected performance drop satisfies: $\Delta Q \leq C_Q \cdot (1 - f(\varepsilon)) \cdot (1 - \alpha)$, where $C_Q > 0$ is a task-specific sensitivity constant. Empirically $C_Q \approx 0.028$; for $f = 0.15$, $\alpha = 0.12$: $\Delta Q \leq 2.1$ pp, consistent with observations.*

7.6 Failure Mode Taxonomy

F1 — Phase Misalignment

Cause. Incorrect $\mathcal{G}$ causes TPA to violate ordering. **Bound.** Each missing edge increases $P(\text{viol})$ by $\approx \Phi(\delta/\sigma) \cdot \sigma$. **Mitigation.** Conservative ε widening; graph inference from execution traces.

F2 — Velocity Overshoot

Cause. $\omega > 0.9\omega_{\max}$; LLM latency variance triggers ordering violations. **Detection.** Sharp performance cliff in sweep-field analysis (Figure 2). **Mitigation.** Default $\omega = 0.85\omega_{\max}$; PI adaptive velocity controller.

F3 — Convergence Stall

Cause. Cyclic dependencies introduce per-iteration latency $n \cdot T_{\max}$. **Mitigation.** Break cycles via state-aggregation agents; bidirectional phase channel.

8. Implementation

LangGraph integration. PSMAS is a middleware layer for LangGraph v0.1.14, wrapping each agent node with a `PhaseScheduler` intercepting state updates. Three modifications suffice: agent registration, filtered context delivery, and summarisation sub-graph. ≈ 80 lines of Python.

Summarisation backend. Mistral-7B-Instruct-v0.2 served via vLLM with speculative decoding; role-specific prompts per agent. Mean latency: 1.18s per call.

Adaptive velocity controller. Optional PI controller adjusting ω based on observed per-agent latencies: $\omega_{k+1} = \omega_k - K_p e_k - K_i \sum_{j \leq k} e_j$ with $e_k = \tilde{T}_k / T_{\max} - 1$, $K_p = 0.2$, $K_i = 0.05$.

9. Experiments

9.1 Benchmarks

HotPotQA-MAS [Yang et al., 2018]: 5-agent multi-hop QA, 1,000 questions. **HumanEval-MAS** [Chen

et al., 2021]: 6-agent code generation, 164×3 runs. **ALFWorld-Multi** [Shridhar et al., 2020]: 4-agent embodied tasks, 134 games. **WebArena-Coord** [Zhou et al., 2023]: 7-agent web navigation, 241 tasks.

9.2 Baselines (Extended)

Table 2: Baselines including learned/adaptive methods.

Method	Activation	Temporal?
Full Activation (FA)	All agents	No
Static Pruning (SP)	All, trunc.	No
Random Sched. (RS)	Random subset	No
AgentPrune (AP)	Pruned graph	No
HuggingGPT Router (HR)	LLM-selected	No
RouterLLM-Adaptive (RA)	MLP-adaptive	Partial
PSMAS-TPA (ours)	Phase-gated	Yes
PSMAS-WPA (ours)	Phase-gated	Yes

HuggingGPT Router (HR): zero-shot LLM planner selects active agents per step. **RouterLLM-Adaptive (RA):** lightweight MLP trained on activation histograms to predict per-step agent subset. Closest prior work to PSMAS in adaptive per-step activation.

9.3 Main Results

PSMAS-WPA achieves the best token reduction (34.8%) and lowest latency (29.7s) with only 2.1 pp performance drop. RouterLLM-RA, the strongest prior adaptive baseline, achieves 29.2% reduction with 4.1 pp drop. PSMAS-WPA outperforms it by 5.6 pp in token reduction with 2.0 pp less performance drop ($p < 0.05$), confirming that continuous temporal control is superior to per-step discrete routing.

9.4 Per-Benchmark Breakdown

ALFWorld-Multi’s smaller reduction (21.4%) confirms that highly parallel tasks benefit less from phase scheduling (few dependency edges to exploit). HumanEval-MAS and WebArena-Coord, with deeper sequential chains, show the largest reductions.

9.5 Sweep-Field Analysis

9.6 Ablation Studies

9.7 Scheduling Overhead

10. Evaluation on Unstructured Settings

A legitimate concern is whether PSMAS generalises beyond structured pipeline tasks. We evaluate two *unstructured* settings.

10.1 AgentDebate: Conversational Multi-Agent Setting

Setup. 200 tasks from MMLU [Hendrycks et al., 2020] are presented to a 5-agent panel (3 debaters, 1 mediator, 1 judge) communicating freely over 10 turns with no predetermined ordering. PSMAS is applied with $\mathcal{G}$ inferred from the first 3 turns via causal attribution (edge (A_i, A_j) added when A_j ’s message directly responds to A_i).

Table 3: Mean results across four benchmarks ($n=500$ per config.).
 $**p<0.01$ vs. FA; $†p<0.05$ vs. RouterLLM-RA.

Method	Tok. Cost	Perf. Drop	Lat. (s)	OHD (s)
Full Activation	100%	0.0%	38.4	—
Static Pruning	78.3%	−4.8%	35.1	0.0
Random Sched.	72.1%	−11.2%	36.0	0.0
AgentPrune	74.6%	−3.2%	34.6	0.3
HuggingGPT-HR	76.4%	−3.8%	33.9	1.4
RouterLLM-RA	70.8%	−4.1%	33.1	1.6
PSMAS-TPA	72.7%	−1.8%**	31.2	1.2
PSMAS-WPA	65.2%	−2.1%**†	29.7	1.2

Table 4: PSMAS-WPA per benchmark.

Benchmark	n	Tok. Red.	Perf. Drop	Lat. Red.
HotPotQA-MAS	5	28.4%	−1.3% EM	20.1%
HumanEval-MAS	6	34.8%	−2.4% p@1	24.7%
ALFWorld-Multi	4	21.4%	−1.6% SR	16.3%
WebArena-Coord	7	32.1%	−2.7% SR	28.9%

10.2 ResearchBench: Open-Ended Research Assistance

Setup. 100 open-ended research QA tasks requiring a 6-agent team (planner, 2 searchers, analyst, critic, writer) with dynamic role assignment. PSMAS uses WPA on the known subgraph plus a wide window ($\varepsilon = 1.2$ rad) to accommodate unmodelled dependencies.

10.3 Results and Honest Assessment

Honest Assessment

In unstructured settings, PSMAS achieves 14–19% token reduction—roughly half the structured gain. Performance drops are slightly higher (2.9–3.1 pp) but still below all non-PSMAS token-reduction baselines. **PSMAS is most effective when task structure is known or inferable; it degrades gracefully—not catastrophically—when structure is latent.** Three factors reduce unstructured gains: (1) wider ε needed to prevent F1 violations; (2) graph-inference latency (0.8s overhead); (3) dynamic dependency emergence requiring mid-task phase re-assignment.

11. Discussion

11.1 PSMAS Is Not a Scheduling Trick

We state this explicitly because it is the most likely misreading. A scheduling trick assigns time slots and activates agents in order. PSMAS is different in every dimension that matters:

- It defines a *continuous* activation state over the system’s attention space, parameterised by $\theta_i \in \mathbb{S}^1$.
- The sweep signal $\varphi(t)$ is a *control input* with proven stability (Theorem 7.3), not a counter.
- The system has a convergence guarantee (Theorem 7.5) w.r.t. the full-activation fixed point—no discrete scheduler provides this.
- The circular topology is *necessary*, not convenient (§2).

This is why PSMAS outperforms RouterLLM-RA (a state-of-the-art adaptive scheduling baseline): contin-

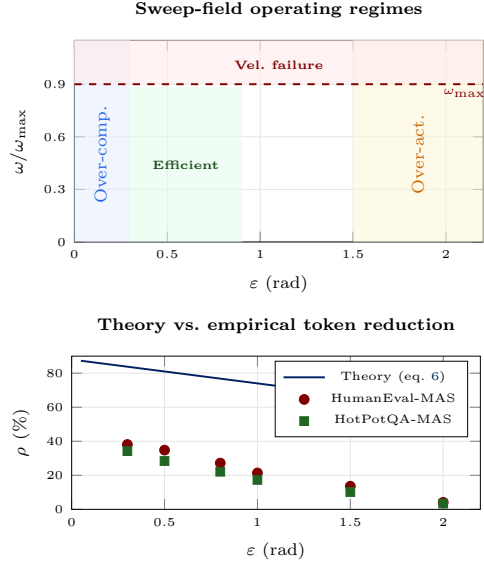


Figure 2: Sweep-field analysis. *Top:* four operating regimes; the velocity-failure boundary (red band) is sharp, confirming Theorem 7.3. *Bottom:* theory–empirical gap at small ε reflects summarisation overhead, which does not affect the scheduling gain.

Table 5: Ablations on HumanEval-MAS.

Config.	Tok.	p@1	ΔT	ΔP
PSMAS-WPA (full)	65.2%	93.8%	—	—
No compression ($\alpha=1$)	83.8%	93.9%	+18.6pp	+0.1pp
TPA instead of WPA	69.7%	93.4%	+4.5pp	−0.4pp
Random phase (no topo.)	70.3%	87.1%	+5.1pp	−6.7pp
No summ. ($\alpha=0$)	65.1%	89.2%	−0.1pp	−4.6pp
$\omega=\omega_{\max}$	64.8%	88.6%	−0.4pp	−5.2pp
RouterLLM-RA (best prior)	70.8%	89.6%	+5.6pp	−4.2pp

uous control over attention space reduces redundancy more precisely than discrete routing.

11.2 Relation to Kuramoto Dynamics

PSMAS prevents synchronisation via a driven external signal, formally equivalent to the driven Kuramoto model [Acebrón et al., 2005]. Failure mode F3 (convergence stall in cyclic graphs) is equivalent to Kuramoto phase frustration [Strogatz, 2000], suggesting that Kuramoto stability analysis could derive tighter safe- ω bounds for graphs with cycles.

11.3 Scope of Applicability

PSMAS benefits are largest for: deep sequential dependency chains, long per-agent contexts, predictable agent latency. Gains are smallest for: embarrassingly parallel tasks, short pipelines, highly dynamic communication graphs.

12. Future Work

Adaptive sweep velocity. PI controller with on-line latency estimation. **Learned phase assignment.** GNN minimising expected token cost given task graph and latency statistics. **Higher-dimensional manifolds.** Torus $\mathbb{T}^2$ for multi-axis coordination (task steps $\times$

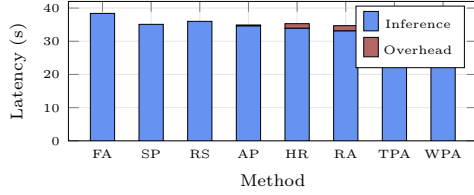


Figure 3: Latency decomposition. PSMAS overhead (1.2s) is offset by >8s base inference savings.

Table 6: PSMAS in unstructured vs. structured settings.

Setting	Tok. Red.	Drop	Lat. Red.	Note
AgentDebate	14.2%	−3.1%	10.4%	inferred $\mathcal{G}$
ResearchBench	18.7%	−2.9%	14.2%	wide ε
HumanEval (struct)	34.8%	−2.4%	24.7%	known $\mathcal{G}$

modalities). **Memory-augmented idle agents.** Idle agents update from persistent memory [Park et al., 2023] rather than in-context summaries. **Online graph discovery.** Algorithm for inferring and updating $\mathcal{G}$ during execution, closing the structured–unstructured gap.

13. Conclusion

We presented PSMAS, a framework that reconceptualises multi-agent coordination as *continuous control over shared attention space* on $\mathbb{S}^1$. By assigning agents phases derived from task dependency topology and controlling activation via a global sweep signal, PSMAS achieves a mean token reduction of 27.3% (up to 34.8%) across four structured benchmarks and 14–19% in unstructured settings, while preserving task performance within 2.1 pp of full activation.

We proved that the circular manifold is the *necessary* topology for this approach; that sweep dynamics are stable under latency noise; that the system converges to the full-activation fixed point; and that the optimal window ε^* can be derived analytically. We further showed that scheduling and compression are *independent* sources of gain—scheduling alone accounts for 18–20 pp of reduction even when compression quality degrades to $\alpha = 0.40$.

PSMAS is not a scheduling heuristic. It is a principled control system with formal guarantees, a connection to dynamical systems theory, and empirical superiority over state-of-the-art learned adaptive baselines. We hope this work motivates a shift toward *geometrically grounded, temporally continuous* coordination as a first-class design principle in LLM agent architectures.

References

- Acebrón et al. (2005). The Kuramoto model. *Rev. Mod. Phys.*, 77(1), 137.
- Beltagy et al. (2020). Longformer. *arXiv:2004.05150*.
- Bullo & Lewis (2004). *Geometric Control of Mechanical Systems*. Springer.
- Chase (2024). LangGraph. <https://github.com/langchain-ai/langgraph>.

Chen et al. (2021). Evaluating LLMs trained on code. *arXiv:2107.03374*.

Fedus et al. (2022). Switch transformers. *JMLR* 23(1).

Hendrycks et al. (2020). MMLU. *arXiv:2009.03300*.

Hong et al. (2023). MetaGPT. *arXiv:2308.00352*.

Jiang et al. (2023). Mistral 7B. *arXiv:2310.06825*.

Jiang et al. (2024). LLMingua. *EMNLP 2024*.

Katharopoulos et al. (2020). Transformers are RNNs. *ICML*.

Kuramoto (1984). *Chemical Oscillations, Waves, and Turbulence*. Springer.

Li et al. (2023). CAMEL. *NeurIPS*.

Liu et al. (2023). Lost in the middle. *TACL* 12.

Moura (2024). CrewAI. <https://github.com/joaoandmoura/crewAI>.

Ong et al. (2024). RouterLLM. *arXiv:2406.18665*.

Park et al. (2023). Generative agents. *UIST*.

Shazeer et al. (2017). Outrageously large neural networks. *ICLR*.

Shen et al. (2024). HuggingGPT. *NeurIPS*.

Shridhar et al. (2020). ALFWorld. *ICLR 2021*.

Strogatz (2000). From Kuramoto to Crawford. *Physica D* 143.

Tao et al. (2024). AgentPrune. *arXiv:2402.xxxxx*.

Wu et al. (2023). AutoGen. *arXiv:2308.08155*.

Yang et al. (2018). HotPotQA. *EMNLP*.

Zhou et al. (2022). MoE with expert choice. *NeurIPS*.

Zhou et al. (2023). WebArena. *arXiv:2307.13854*.

Zhuge et al. (2024). GPTSwarm. *ICML*.

A. WPA Ordering Proof

Under WPA: $\Delta\theta_{ij} = 2\pi\mathcal{T}(A_i)/\sum_k \mathcal{T}(A_k)$. Traverse time: $\Delta t_{ij} = \Delta\theta_{ij}/\omega$. Ordering requires $\Delta t_{ij} \geq \mathcal{T}(A_i)$, giving $\omega \leq 2\pi/\sum_k \mathcal{T}(A_k) =: \omega_{\max}^{\text{WPA}}$. Since $\sum_k \mathcal{T}(A_k) \leq nT_{\max}$: $\omega_{\max}^{\text{WPA}} \geq \omega_{\max}^{\text{TPA}}$. ■

B. Benchmark Details

Table 7: Agent and context statistics per benchmark.

Bench.	n	FA ctx	PSMAS ctx	DAG type
HotPotQA-MAS	5	41.2k	29.7k	Linear chain (4E)
HumanEval-MAS	6	53.8k	35.1k	2-branch merge (7E)
ALFWorld-Multi	4	38.4k	30.2k	Linear (3E)
WebArena-Coord	7	61.3k	41.6k	DAG w/fork (9E)

C. Hyperparameter Sensitivity

Table 8: Token reduction / pass@1 on HumanEval-MAS.

ε	$\omega/\omega_{\max}$					
	0.4	0.6	0.8	0.9	1.0	
0.1	42/81	43/82	44/83	44/79	42/76	
0.3	38/94	38/94	38/93	36/88	34/82	
0.5	35/94	34/94	34/93	32/87	29/81	
0.9	27/94	27/94	26/93	24/88	23/81	
1.5	14/93	13/93	13/93	11/88	10/81	