React.js Component Creation

Name: Perla Anuradha

Email: saianu258@gmail.comRoll NO:


Roll No: 20NN1A1248(IT)

College Name: Vignan's Nirula Institute of Technology and Science For women

University: JNTUK

source code:


CARD COMPONENT:

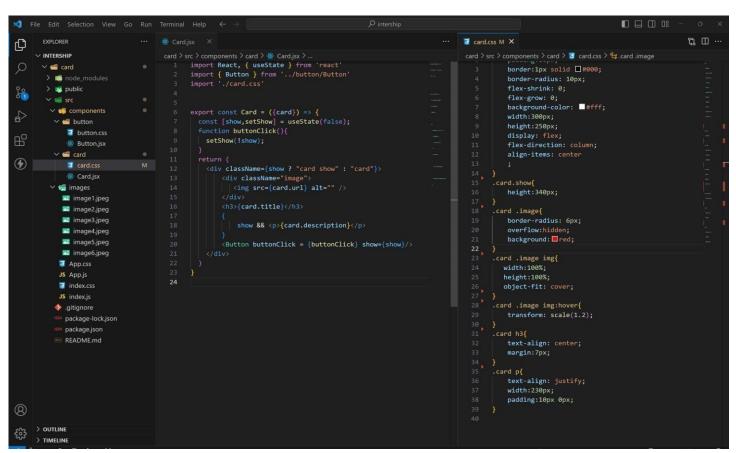

BUTTON COMPONENT:

```
0
                                                                                                   ■ button.css ×
                                                                                                    card > src > components > button > 🧵 button.css > 😘 button
                                 1 import React from 'react'
2 import './button.css'
                                                                                                     button{
  outline:none;
  border:none;
                           > node_modules
H
       > 👿 public
                                                                                                            width:90%;
                                                                                                            width:96%;
padding: 10px 5px;
background: aqua;
border-radius: 5px;
font-weight: bold;
       d button.css
                                                                                                            margin-inline: auto;
          Button.jsx
        ✓ d card
          ard.css
           ∨ 📹 images
         image1.jpeg
          image2.jpeg
          image3.jpeg
          image4.jpeg
          image5.jpeg
          image6.jpeg
         App.css
         index.css
         JS index.js
        .gitignore
         package-lock.json
         package.json
€% > OUTLINE
```

APP COMPONENT:

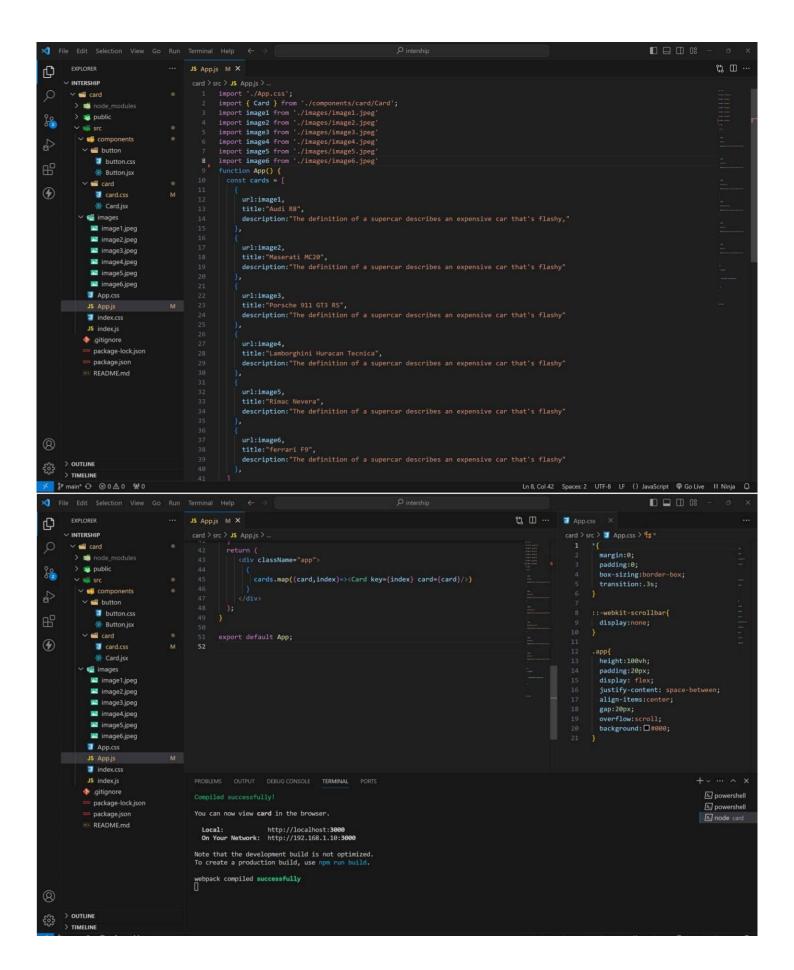


approach:

1. initially taking an array of objects like below

```
const cards = [
   url:image1,
   description: "The definition of a supercar describes an expensive car that's flashy,"
   url:image2,
   title: "Maserati MC20",
   description: "The definition of a supercar describes an expensive car that's flashy"
   url:image3,
   title: "Porsche 911 GT3 RS",
   description: "The definition of a supercar describes an expensive car that's flashy"
   url:image4,
   title: "Lamborghini Huracan Tecnica",
   description: "The definition of a supercar describes an expensive car that's flashy"
   url:image5,
   description: "The definition of a supercar describes an expensive car that's flashy"
   url:image6,
   title:"ferrari F9",
   description: "The definition of a supercar describes an expensive car that's flashy"
```

- 1 . Passing this card array to child (card component) of App component by using props.
- 2 . getting data as argument like {card} in card component.
- 3 . in card component i use one state [show, set Show] to get extra info as description.
- 4 . When we click the button then show becomes true by assigning set Show (! show).

OUTPUT:

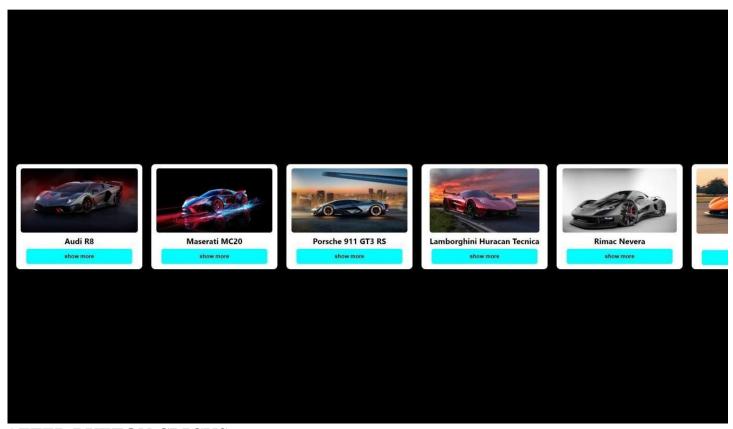

AFTER BUTTON CLICKS:

