

## AI Code Review Agent

Go to GitHub Actions: <https://github.com/SaiGit-source/SpringWebApp/actions>

Create a Feature branch from main branch => make some code changes => push int Feature branch

Create a Pull request: <https://github.com/SaiGit-source/SpringWebApp/pulls>

The screenshot shows the GitHub interface for the repository 'SaiGit-source/SpringWebApp'. The 'Pull requests' tab is selected, showing 1 open pull request. The pull request is titled 'Add intentional code review test method' and was opened 13 minutes ago by the user 'SaiGit-source'. The pull request is marked as 'Owner' and has a green checkmark indicating it is approved. The page also includes a search bar with the filter 'is:pr is:open' and a 'ProTip!' message at the bottom right.

Source / SpringWebApp

Pull requests 1 Agents Actions Projects Wiki Security and quality Insights Settings

Label issues and pull requests for repository  
Now, GitHub will help potential first-time contributors [discover](#)

Filters is:pr is:open

1 Open 1 Closed Author

Add intentional code review test method ✓  
#2 opened 13 minutes ago by SaiGit-source Owner

ProTip! What's not been updated in a month

Go to Settings => Security and variables => Actions

 General

Access

 Collaborators

 Moderation options

▼

Code and automation

 Branches

 Tags

 Rules

▼

 Actions

▼

 Webhooks

 Copilot

▼

 Environments

 Codespaces

 Pages

Security and quality

 Advanced Security

 Deploy keys

 **Secrets and variables**

▲

Actions

Agents

Go to Secrets/Actions: <https://github.com/SaiGit-source/SpringWebApp/settings/secrets/actions>

Add New Repository Secret => Add OPENAI\_API\_KEY

## Actions secrets and variables

Secrets and variables allow you to manage reusable configuration data. Secrets are **encrypted** and are used for sensitive data. [Learn more about encrypted secrets](#). Variables are shown as plain text and are used for **non-sensitive** data. [Learn more about variables](#).

Anyone with collaborator access to this repository can use these secrets and variables for actions. They are not passed to workflows that are triggered by a pull request from a fork.

Secrets

Variables

### Environment secrets

This environment has no secrets.

Manage environment secrets

### Repository secrets

New repository secret

Name 

Last updated



OPENAI\_API\_KEY

1 hour ago



First test GitHub Actions

← Test GitHub Actions

✓ Add test GitHub Actions workflow #14

🏠 Summary

All jobs



✓ test-action

Run details

🕒 Usage

📄 Workflow file

test-action

succeeded 19 minutes ago in 4s

> ✓ Set up job

✓ Print basic info

```
1 ▶ Run echo "GitHub Actions is working"
7 GitHub Actions is working
8 Repository: SaiGit-source/SpringWebApp
9 PR Number: 1
10 Branch: feature/test-github-actions
```

> ✓ Complete job

## Second test GitHub API

It is able to fetch and read file differences from a PR

Summary

All jobs

test-github-api

Run details

Usage

Workflow file

test-github-api

succeeded 20 minutes ago in 13s

> Set up Python

> Install dependencies

< Run GitHub API test

1 ▶ Run python AICodeReviewer\_MVP/github\_api\_test.py

15 GitHub API test is running

16 Repository: SaiGit-source/SpringWebApp

17 Pull Request Number: 1

18 GitHub API status code: 200

19 Changed files count: 12

20 =====

21 Filename: .github/workflows/ai-code-reviewer.yml

22 Status: added

23 Additions: 35

24 Deletions: 0

25 Patch:

26 @@ -0,0 +1,35 @@

27 +name: AI Code Reviewer

28 +

29 +on:

30 + pull\_request:

31 + types: [opened, synchronize, reopened]

32 +

33 +permissions:

34 + contents: read

35 + pull-requests: write

36 +

37 +jobs:

38 + ai-code-reviewer:

39 + runs-on: ubuntu-latest

40 +

41 + steps:

42 + - name: Checkout repository

43 + uses: actions/checkout@v4

44 +

45 + - name: Set up Python

46 + uses: actions/setup-python@v5

47 + with:

48 + python-version: "3.11"

49 +

Third we tested LangGraph workflow with no Agents

```

  ✓ Run LangGraph test

 1 ▶ Run python AICodeReviewer_MVP/langgraph_test.py
11 =====
12 LANGGRAPH TEST OUTPUT
13 =====
14 LangGraph test is running
15
16 Number of changed files: 2
17
18 File: .github/workflows/test-action.yml
19 Status: added
20 Additions: 17
21 Deletions: 0
22
23 File: src/main/java/com/example/DemoController.java
24 Status: modified
25 Additions: 8
26 Deletions: 2
27
28 Result: PR data successfully passed through LangGraph.


> ✓ Post Set up Python
```

Last we tested AI Code Reviewer

Run AI code reviewer

```
1  ▶ Run python AICodeReviewer_MVP/ai_reviewer.py
15 AI reviewer is running
16 Fetch PR details status code: 200
17 PR head commit SHA: c7d9dc9d3a9c064cb5af5557526d88d78d2aebb4
18 Fetch PR files status code: 200
19 Changed files count: 1
20 prepare_added_lines_node completed. Added lines found: 26
21 ai_inline_review_node completed. Inline comments suggested: 3
22 =====
23 AI INLINE COMMENTS OUTPUT
24 =====
25 File: src/main/java/com/telusko/web/TeluskoController1.java
26 Line: 33
27 Comment: **CodeReviewAgent**
28
29         Consider adding a null check for 'username' to avoid NullPointerException.
30
31 -----
32 Post inline comment status code for src/main/java/com/telusko/web/TeluskoController1.java:33: 201
33 File: src/main/java/com/telusko/web/TeluskoController1.java
34 Line: 37
35 Comment: **CodeReviewAgent**
36
37         Avoid hardcoding sensitive information like API keys in the code.
38
39 -----
40 Post inline comment status code for src/main/java/com/telusko/web/TeluskoController1.java:37: 201
41 File: src/main/java/com/telusko/web/TeluskoController1.java
42 Line: 39
43 Comment: **CodeReviewAgent**
44
45         Consider using Optional for 'viewName' to handle potential null values more gracefully.
46
47 -----
48 Post inline comment status code for src/main/java/com/telusko/web/TeluskoController1.java:39: 201
49 Finished posting inline comments.
```

LangGraph workflow simple only for MVP

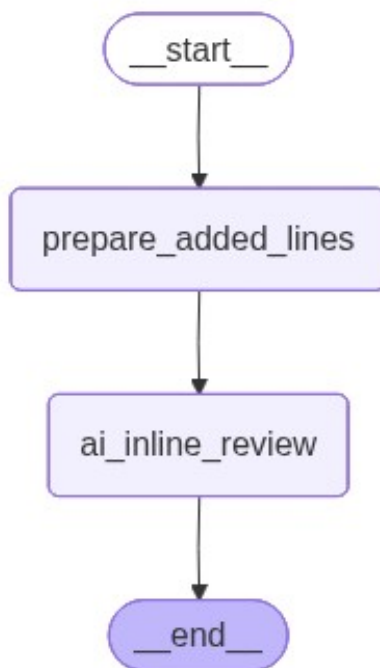

See our AI CodeReviewAgent is writing the PR Comments automatically

 SaiGit-source wants to merge 1 commit into `main` from `feature/review-test` 

src/main/java/com/telusko/web/TeluskoController1.java

30 +

31 +    ModelAndView mav = new ModelAndView();

32 +

33 +    String welcomeMessage = "Hello " + username.toUpperCase() + "! Welcome to our Telusko App";

 **github-actions** Bot 13 minutes ago ...

**CodeReviewAgent**

Consider adding a null check for 'username' to avoid NullPointerException.





 Reply...

Resolve conversation

  **github-actions** Bot reviewed 13 minutes ago View reviewed changes 

src/main/java/com/telusko/web/TeluskoController1.java

34 +

35 +    mav.addObject("message", welcomeMessage);

36 +    mav.addObject("debugMode", true);

37 +    mav.addObject("internalApiKey", "test-api-key-12345");

 **github-actions** Bot 13 minutes ago ...

**CodeReviewAgent**

Avoid hardcoding sensitive information like API keys in the code.



<https://github.com/SaiGit-source/SpringWebApp/pull/2>