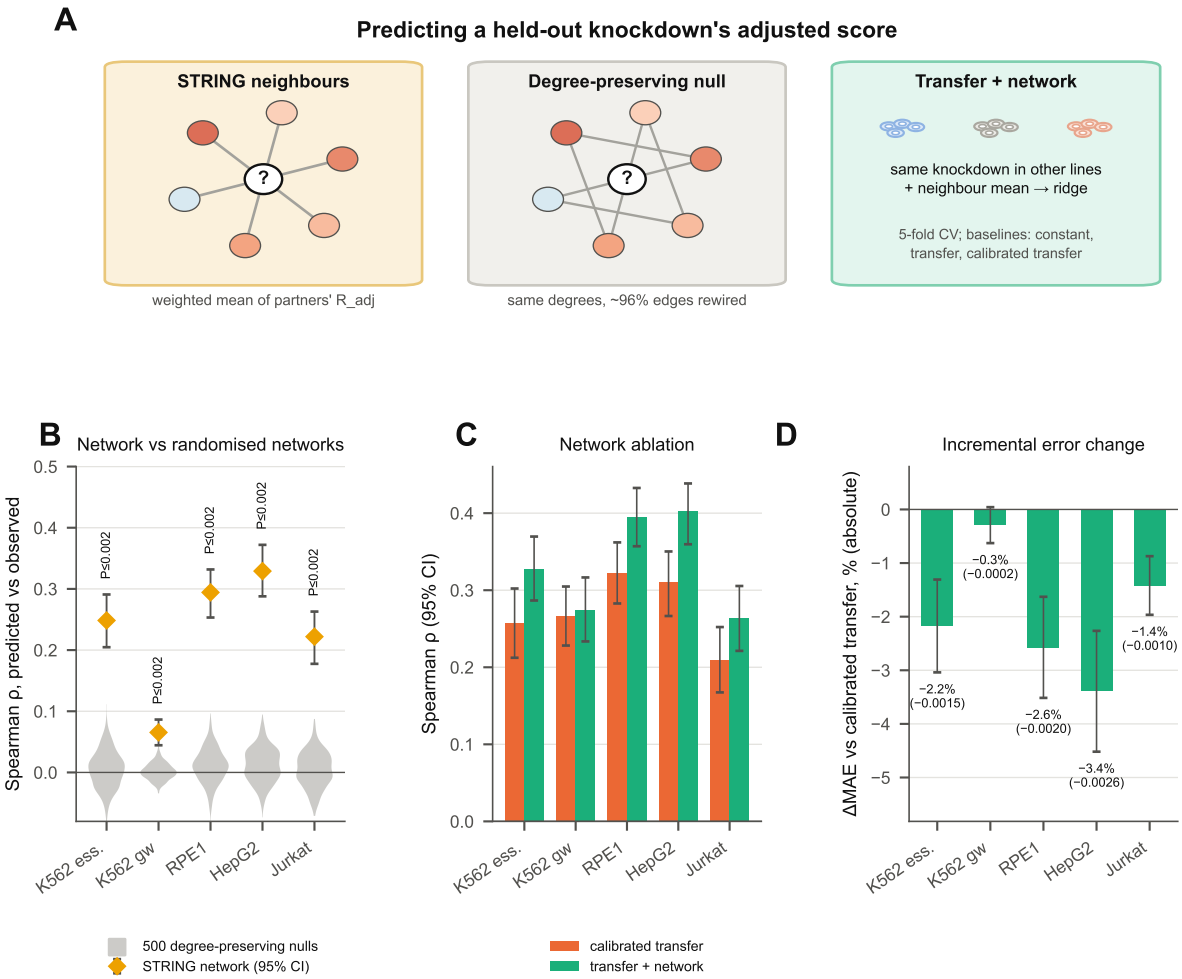

A
Predicting a held-out knockdown's adjusted score
STRING neighbours
?
weighted mean of partners' R_adj
Degree-preserving null
?
same degrees, ~96% edges rewired
Transfer + network
same knockdown in other lines
+ neighbour mean → ridge
5-fold CV; baselines: constant,
transfer, calibrated transfer
B
Network vs randomised networks
Spearman ρ, predicted vs observed
0.5
0.4
0.3
0.2
0.1
0.0
P≤0.002
P≤0.002
P≤0.002
P≤0.002
P≤0.002
K562 ess.
K562 gw
RPE1
HepG2
Jurkat
500 degree-preserving nulls
STRING network (95% CI)
C
Network ablation
Spearman ρ (95% CI)
0.4
0.3
0.2
0.1
0.0
K562 ess.
K562 gw
RPE1
HepG2
Jurkat
calibrated transfer
transfer + network
D
Incremental error change
ΔMAE vs calibrated transfer, % (absolute)
0
−1
−2
−3
−4
−5
−2.2%
(−0.0015)
−0.3%
(−0.0002)
−2.6%
(−0.0020)
−3.4%
(−0.0026)
−1.4%
(−0.0010)
K562 ess.
K562 gw
RPE1
HepG2
Jurkat