




Linux Basic 10 Commands:

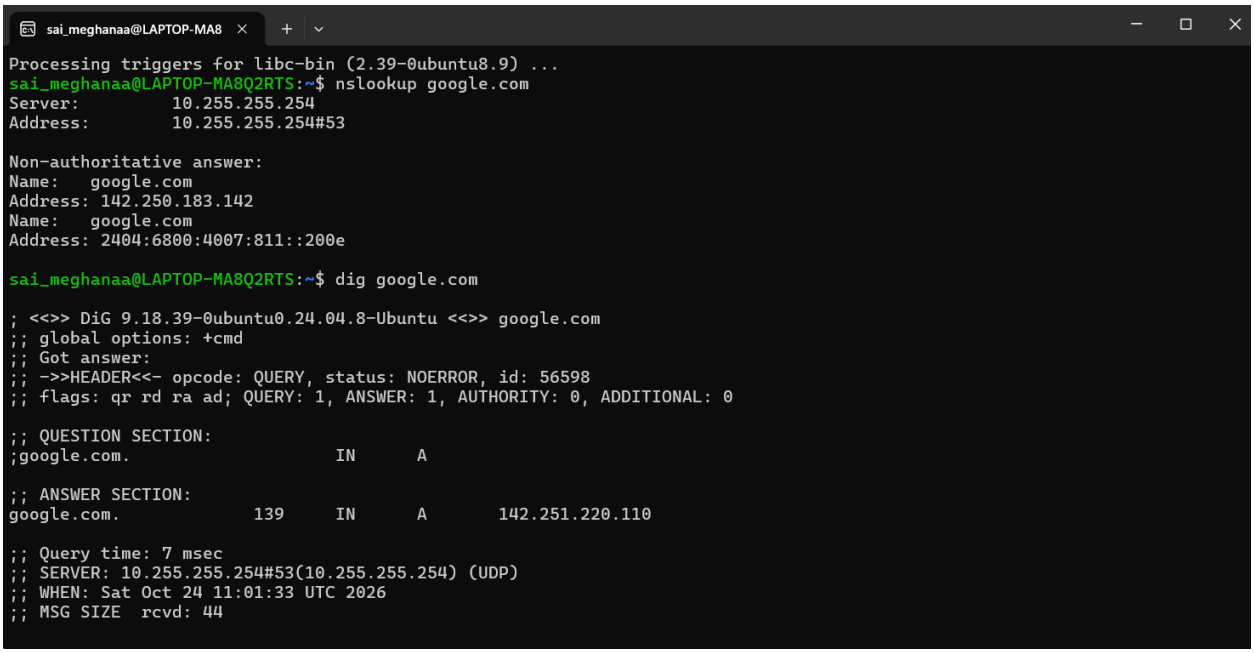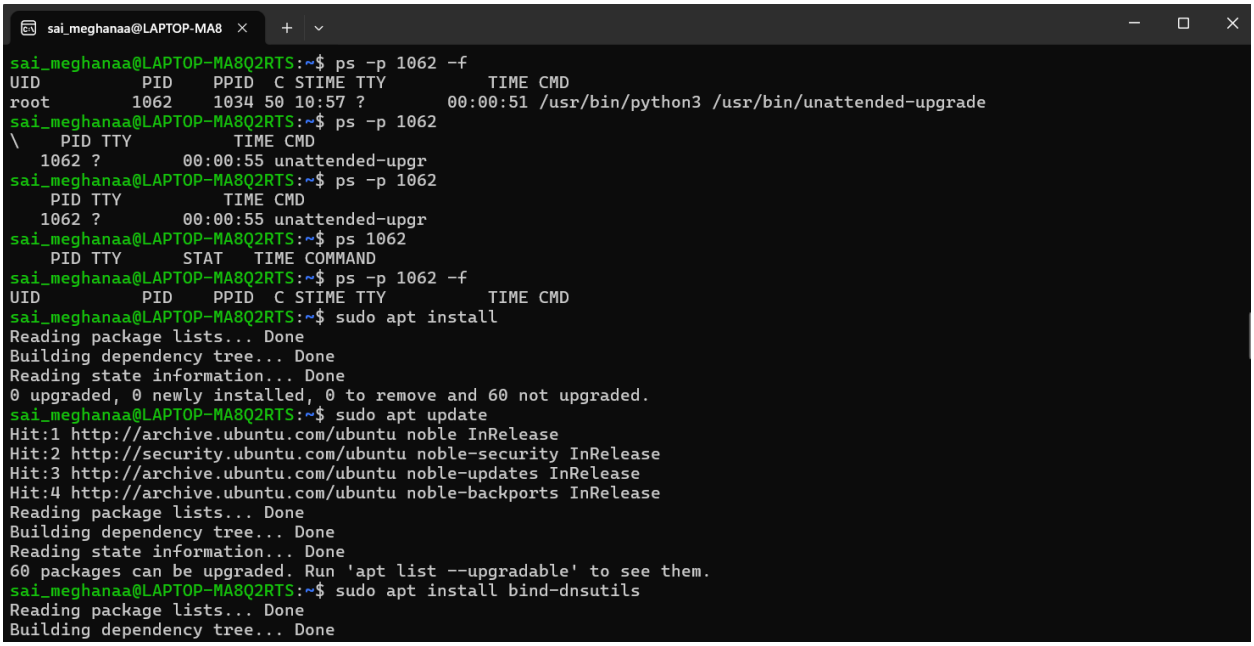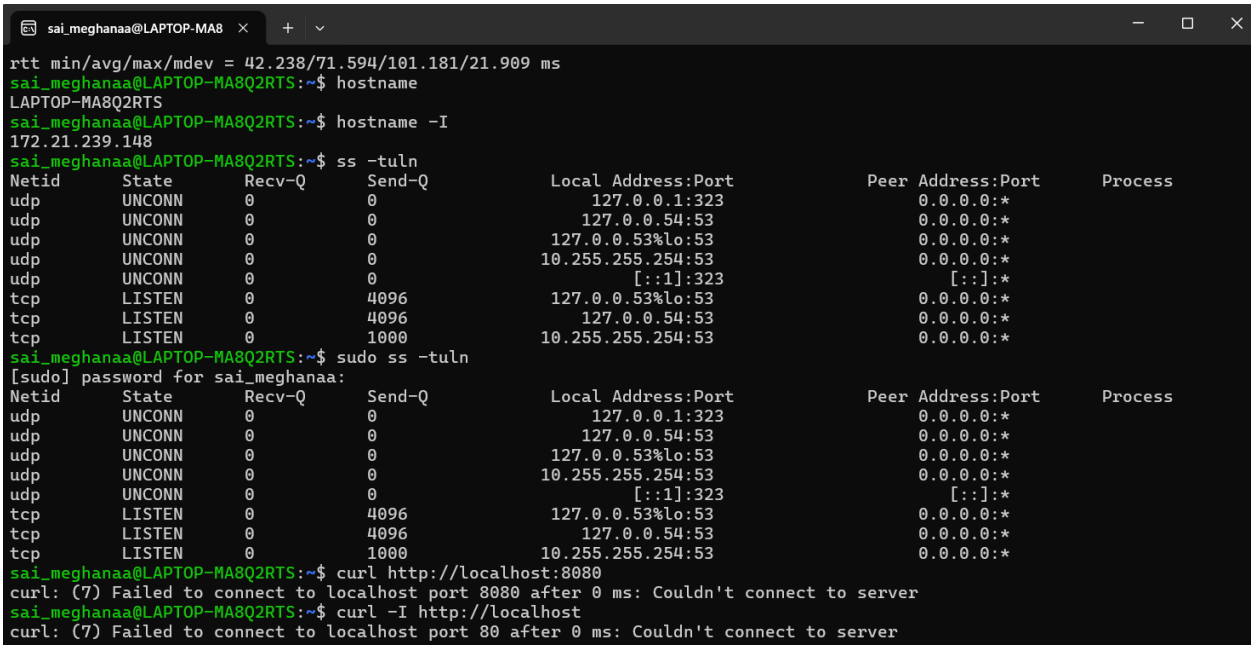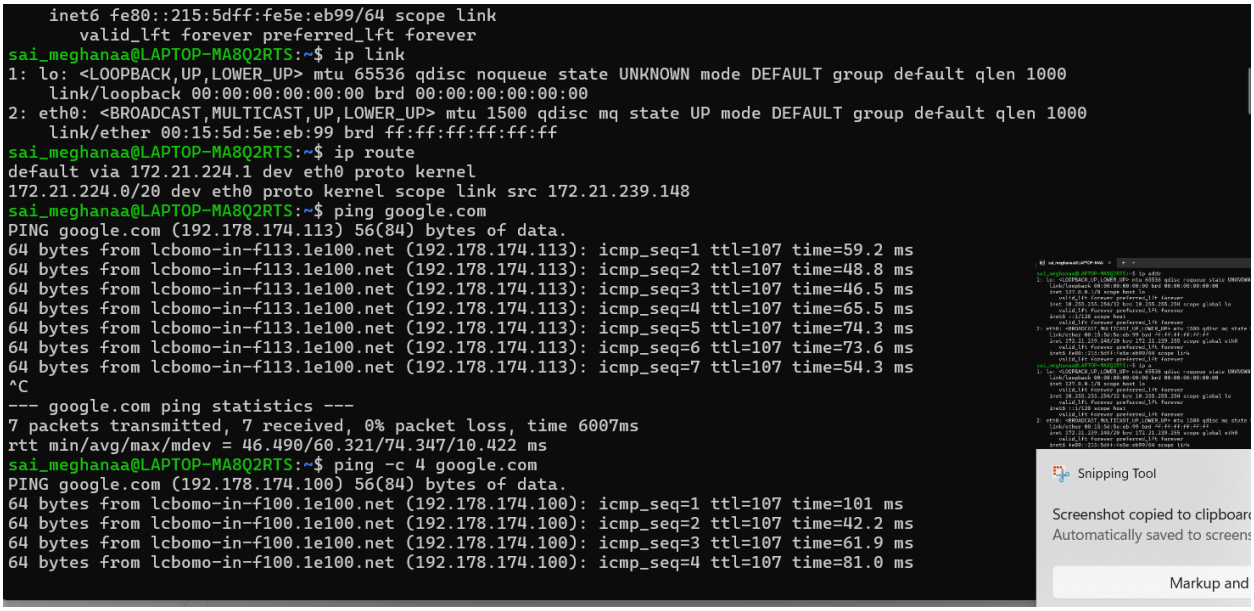

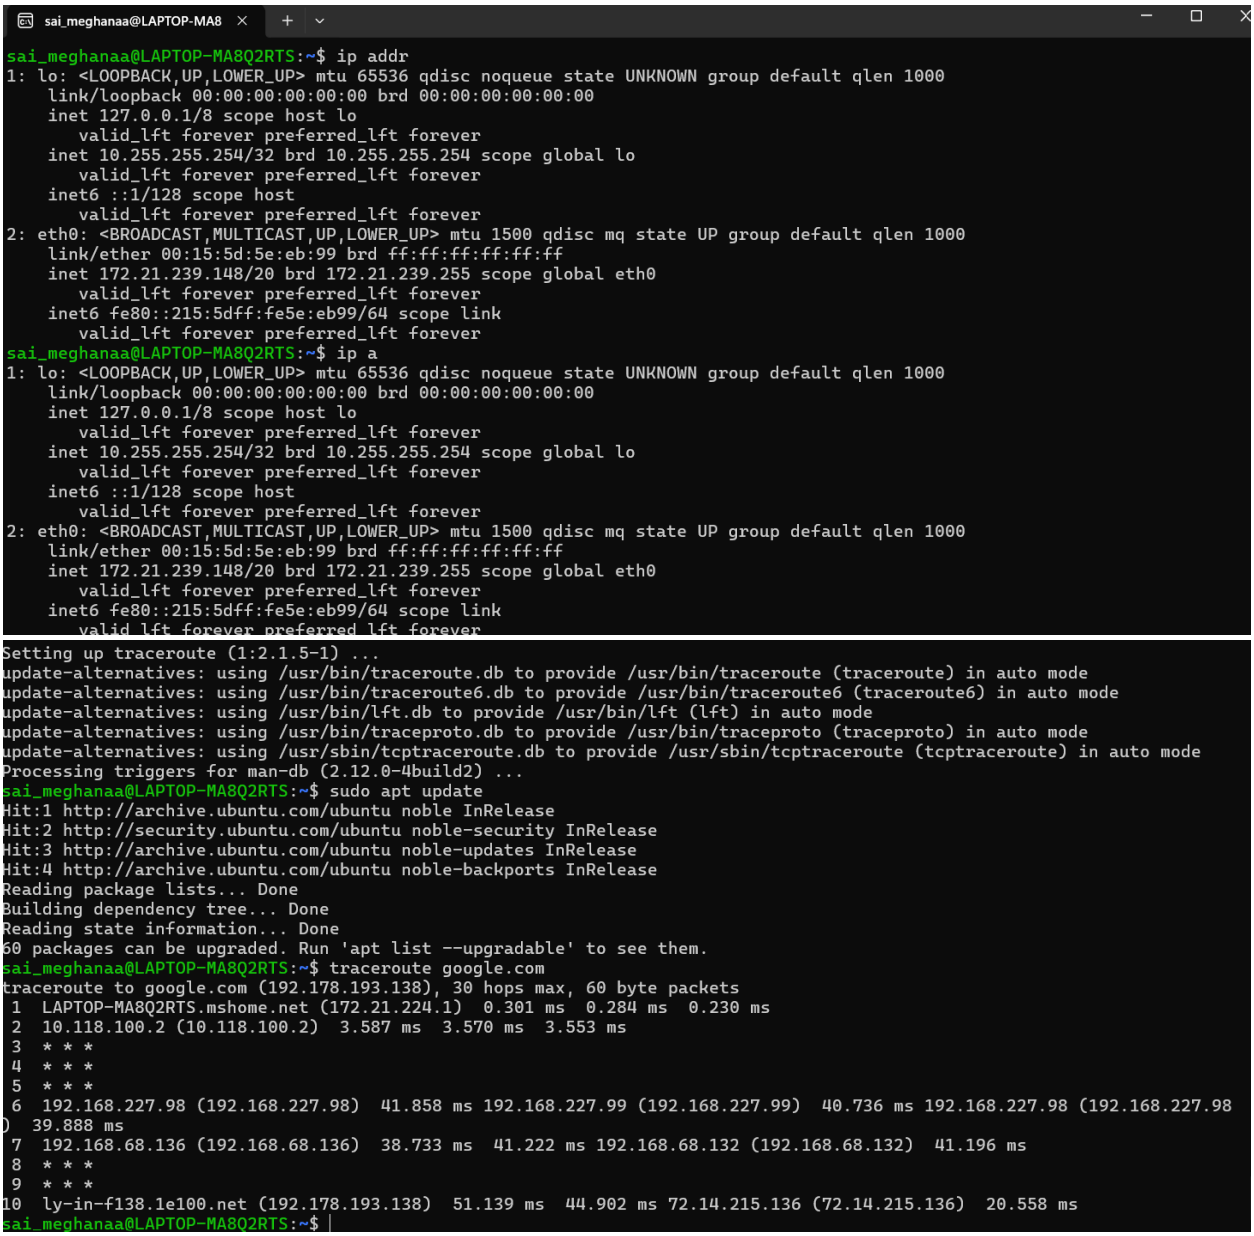




sai_meghanaa@LAPTOP-MA8
rtt min/avg/max/mdev = 42.238/71.594/101.181/21.909 ms
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ hostname
LAPTOP-MA8Q2RTS
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ hostname -I
172.21.239.148
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ss -tuln
Netid State Recv-Q Send-Q Local Address:Port Peer Address:Port Process
udp UNCONN 0 0 127.0.0.1:323 0.0.0.0:*
udp UNCONN 0 0 127.0.0.54:53 0.0.0.0:*
udp UNCONN 0 0 127.0.0.53%lo:53 0.0.0.0:*
udp UNCONN 0 0 10.255.255.254:53 0.0.0.0:*
udp UNCONN 0 0 [::1]:323 [::]:*
tcp LISTEN 0 4096 127.0.0.53%lo:53 0.0.0.0:*
tcp LISTEN 0 4096 127.0.0.54:53 0.0.0.0:*
tcp LISTEN 0 1000 10.255.255.254:53 0.0.0.0:*
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ sudo ss -tuln
[sudo] password for sai_meghanaa:
Netid State Recv-Q Send-Q Local Address:Port Peer Address:Port Process
udp UNCONN 0 0 127.0.0.1:323 0.0.0.0:*
udp UNCONN 0 0 127.0.0.54:53 0.0.0.0:*
udp UNCONN 0 0 127.0.0.53%lo:53 0.0.0.0:*
udp UNCONN 0 0 10.255.255.254:53 0.0.0.0:*
udp UNCONN 0 0 [::1]:323 [::]:*
tcp LISTEN 0 4096 127.0.0.53%lo:53 0.0.0.0:*
tcp LISTEN 0 4096 127.0.0.54:53 0.0.0.0:*
tcp LISTEN 0 1000 10.255.255.254:53 0.0.0.0:*
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ curl http://localhost:8080
curl: (7) Failed to connect to localhost port 8080 after 0 ms: Couldn't connect to server
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ curl -I http://localhost
curl: (7) Failed to connect to localhost port 80 after 0 ms: Couldn't connect to server


inet6 fe80::215:5dff:fe5e:eb99/64 scope link
valid_lft forever preferred_lft forever
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ip link
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN mode DEFAULT group default qlen 1000
link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP mode DEFAULT group default qlen 1000
link/ether 00:15:5d:5e:eb:99 brd ff:ff:ff:ff:ff:ff
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ip route
default via 172.21.224.1 dev eth0 proto kernel
172.21.224.0/20 dev eth0 proto kernel scope link src 172.21.239.148
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ping google.com
PING google.com (192.178.174.113) 56(84) bytes of data.
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=1 ttl=107 time=59.2 ms
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=2 ttl=107 time=48.8 ms
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=3 ttl=107 time=46.5 ms
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=4 ttl=107 time=65.5 ms
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=5 ttl=107 time=74.3 ms
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=6 ttl=107 time=73.6 ms
64 bytes from lcbomo-in-f113.1e100.net (192.178.174.113): icmp_seq=7 ttl=107 time=54.3 ms
^C
--- google.com ping statistics ---
7 packets transmitted, 7 received, 0% packet loss, time 6007ms
rtt min/avg/max/mdev = 46.490/60.321/74.347/10.422 ms
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ping -c 4 google.com
PING google.com (192.178.174.100) 56(84) bytes of data.
64 bytes from lcbomo-in-f100.1e100.net (192.178.174.100): icmp_seq=1 ttl=107 time=101 ms
64 bytes from lcbomo-in-f100.1e100.net (192.178.174.100): icmp_seq=2 ttl=107 time=42.2 ms
64 bytes from lcbomo-in-f100.1e100.net (192.178.174.100): icmp_seq=3 ttl=107 time=61.9 ms
64 bytes from lcbomo-in-f100.1e100.net (192.178.174.100): icmp_seq=4 ttl=107 time=81.0 ms
Snipping Tool
Screenshot copied to clipboard
Automatically saved to screens
Markup and


sai_meghanaa@LAPTOP-MA8
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
inet 127.0.0.1/8 scope host lo
valid_lft forever preferred_lft forever
inet 10.255.255.254/32 brd 10.255.255.254 scope global lo
valid_lft forever preferred_lft forever
inet6 ::1/128 scope host
valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
link/ether 00:15:5d:5e:eb:99 brd ff:ff:ff:ff:ff:ff
inet 172.21.239.148/20 brd 172.21.239.255 scope global eth0
valid_lft forever preferred_lft forever
inet6 fe80::215:5dff:fe5e:eb99/64 scope link
valid_lft forever preferred_lft forever
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
inet 127.0.0.1/8 scope host lo
valid_lft forever preferred_lft forever
inet 10.255.255.254/32 brd 10.255.255.254 scope global lo
valid_lft forever preferred_lft forever
inet6 ::1/128 scope host
valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
link/ether 00:15:5d:5e:eb:99 brd ff:ff:ff:ff:ff:ff
inet 172.21.239.148/20 brd 172.21.239.255 scope global eth0
valid_lft forever preferred_lft forever
inet6 fe80::215:5dff:fe5e:eb99/64 scope link
valid_lft forever preferred_lft forever
Setting up traceroute (1:2.1.5-1) ...
update-alternatives: using /usr/bin/traceroute.db to provide /usr/bin/traceroute (traceroute) in auto mode
update-alternatives: using /usr/bin/traceroute6.db to provide /usr/bin/traceroute6 (traceroute6) in auto mode
update-alternatives: using /usr/bin/lft.db to provide /usr/bin/lft (lft) in auto mode
update-alternatives: using /usr/bin/traceproto.db to provide /usr/bin/traceproto (traceproto) in auto mode
update-alternatives: using /usr/sbin/tcptraceroute.db to provide /usr/sbin/tcptraceroute (tcptraceroute) in auto mode
Processing triggers for man-db (2.12.0-4build2) ...
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ sudo apt update
Hit:1 http://archive.ubuntu.com/ubuntu noble InRelease
Hit:2 http://security.ubuntu.com/ubuntu noble-security InRelease
Hit:3 http://archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:4 http://archive.ubuntu.com/ubuntu noble-backports InRelease
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
60 packages can be upgraded. Run 'apt list --upgradable' to see them.
sai_meghanaa@LAPTOP-MA8Q2RTS:~$ traceroute google.com
traceroute to google.com (192.178.193.138), 30 hops max, 60 byte packets
1 LAPTOP-MA8Q2RTS.mshome.net (172.21.224.1) 0.301 ms 0.284 ms 0.230 ms
2 10.118.100.2 (10.118.100.2) 3.587 ms 3.570 ms 3.553 ms
3 * * *
4 * * *
5 * * *
6 192.168.227.98 (192.168.227.98) 41.858 ms 192.168.227.99 (192.168.227.99) 40.736 ms 192.168.227.98 (192.168.227.98) 39.888 ms
7 192.168.68.136 (192.168.68.136) 38.733 ms 41.222 ms 192.168.68.132 (192.168.68.132) 41.196 ms
8 * * *
9 * * *
10 ly-in-f138.1e100.net (192.178.193.138) 51.139 ms 44.902 ms 72.14.215.136 (72.14.215.136) 20.558 ms
sai_meghanaa@LAPTOP-MA8Q2RTS:~$

GitHub Actions – CI/CD Automation:

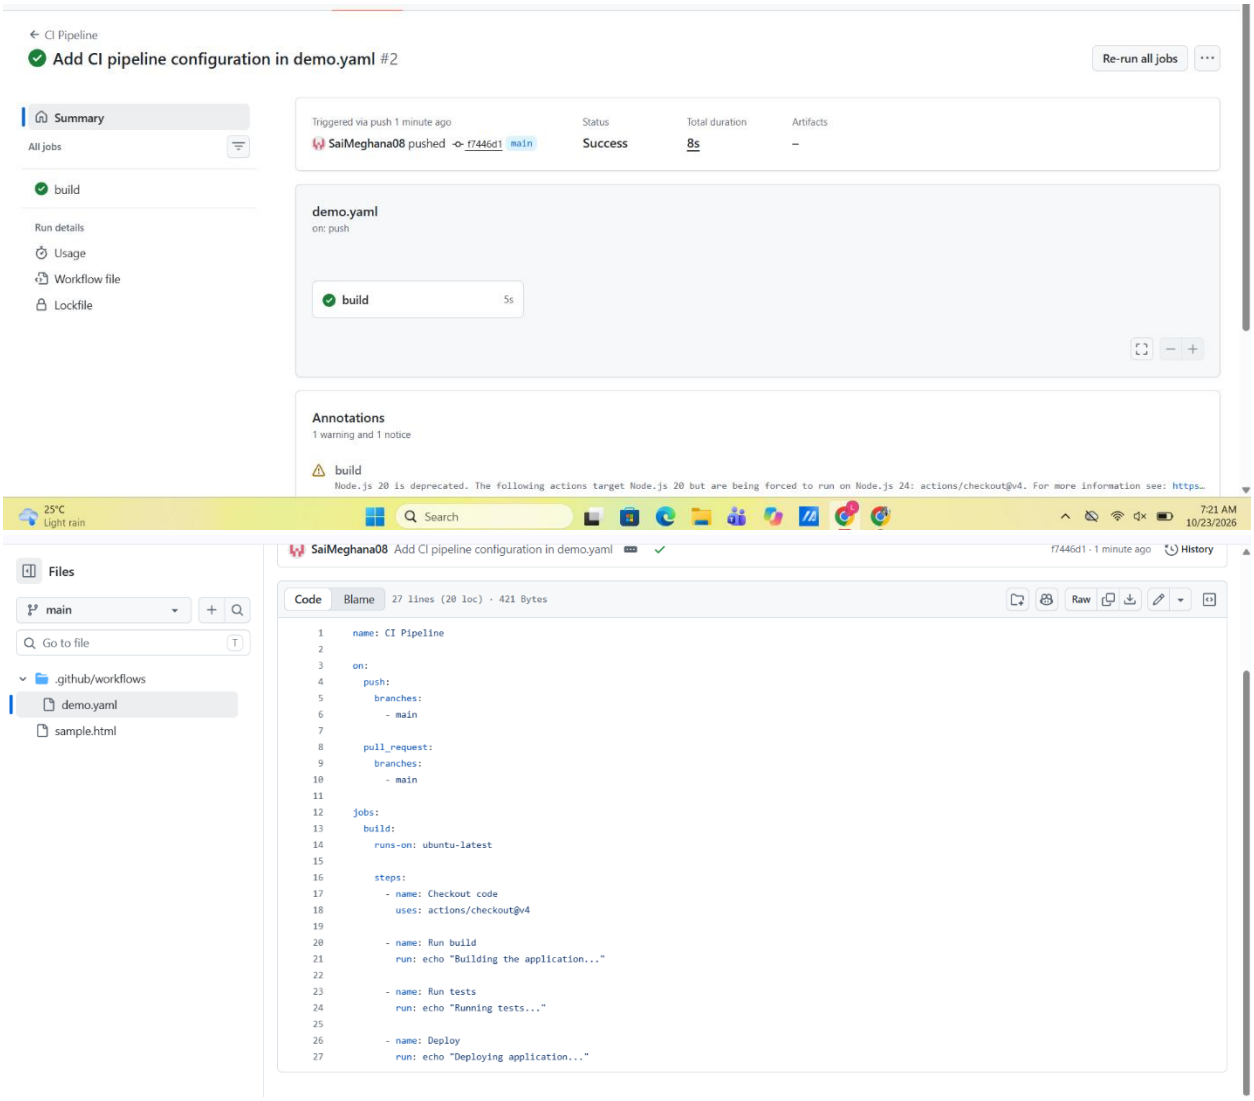

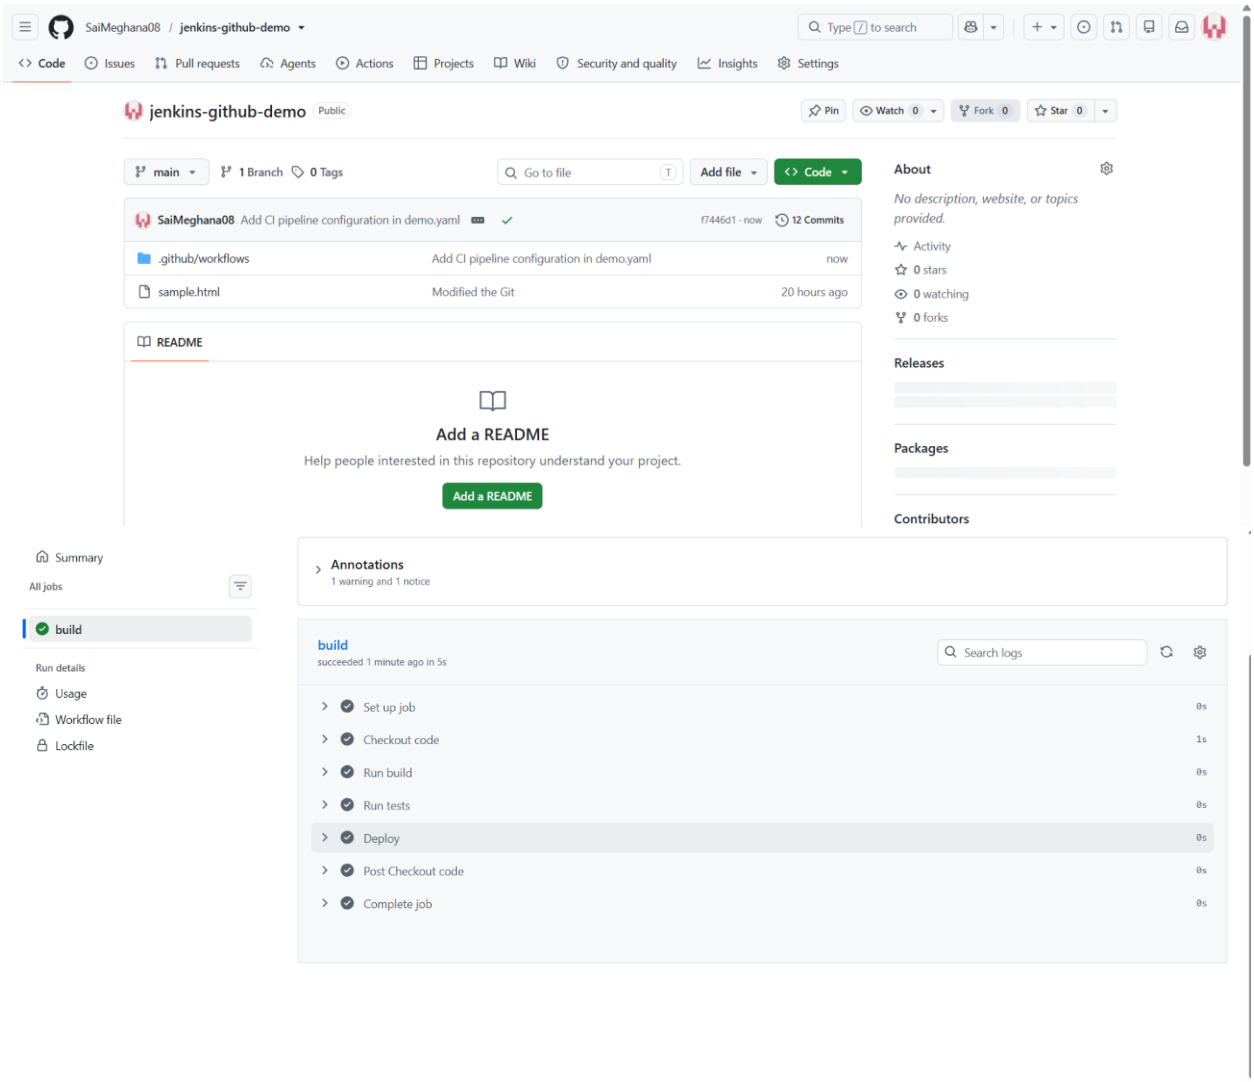

Ansible Master-Slave Architecture and Ad-Hoc Commands:




```
ec2-user@ip-172-31-35-128:~> ansible all -i slaves.txt -m user -a "name=meghana password=hello" -b
[WARNING]: The input password appears not to have been hashed. The 'password' argument must be encrypted for this module to work properly.
[WARNING]: Platform linux on host 172.31.44.239 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.44.239 | CHANGED => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.13"
    },
    "changed": true,
    "comment": "",
    "create_home": true,
    "group": 1001,
    "home": "/home/meghana",
    "name": "meghana",
    "password": "NOT_LOGGING_PASSWORD",
    "shell": "/bin/bash",
    "state": "present",
    "system": false,
    "uid": 1001
}
[WARNING]: Platform linux on host 172.31.35.202 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.35.202 | CHANGED => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.13"
    },
    "changed": true,
    "comment": "",
    "create_home": true,
```



Apache is working successfully!


```
ec2-user@ip-172-31-35-128:~> ansible apache_servers -b -m command -a "systemctl is-active apache2"
[WARNING]: Platform linux on host 172.31.35.202 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.35.202 | CHANGED | rc=0 >>
active
[WARNING]: Platform linux on host 172.31.41.201 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.41.201 | CHANGED | rc=0 >>
active
[WARNING]: Platform linux on host 172.31.44.239 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.44.239 | CHANGED | rc=0 >>
active
ec2-user@ip-172-31-35-128:~> ansible apache_servers -b -m command -a "systemctl is-enabled apache2"
[WARNING]: Platform linux on host 172.31.41.201 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.41.201 | CHANGED | rc=0 >>
enabled
[WARNING]: Platform linux on host 172.31.35.202 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.35.202 | CHANGED | rc=0 >>
enabled
[WARNING]: Platform linux on host 172.31.44.239 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.44.239 | CHANGED | rc=0 >>
enabled
```


```
ec2-user@ip-172-31-35-128:~> ansible all -m ping
[WARNING]: Platform linux on host 172.31.44.239 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.44.239 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.13"
    },
    "changed": false,
    "ping": "pong"
}
[WARNING]: Platform linux on host 172.31.35.202 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.35.202 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.13"
    },
    "changed": false,
    "ping": "pong"
}
[WARNING]: Platform linux on host 172.31.41.201 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of another Python interpreter could change the
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.41.201 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.13"
    },
    "changed": false,
    "ping": "pong"
}
```

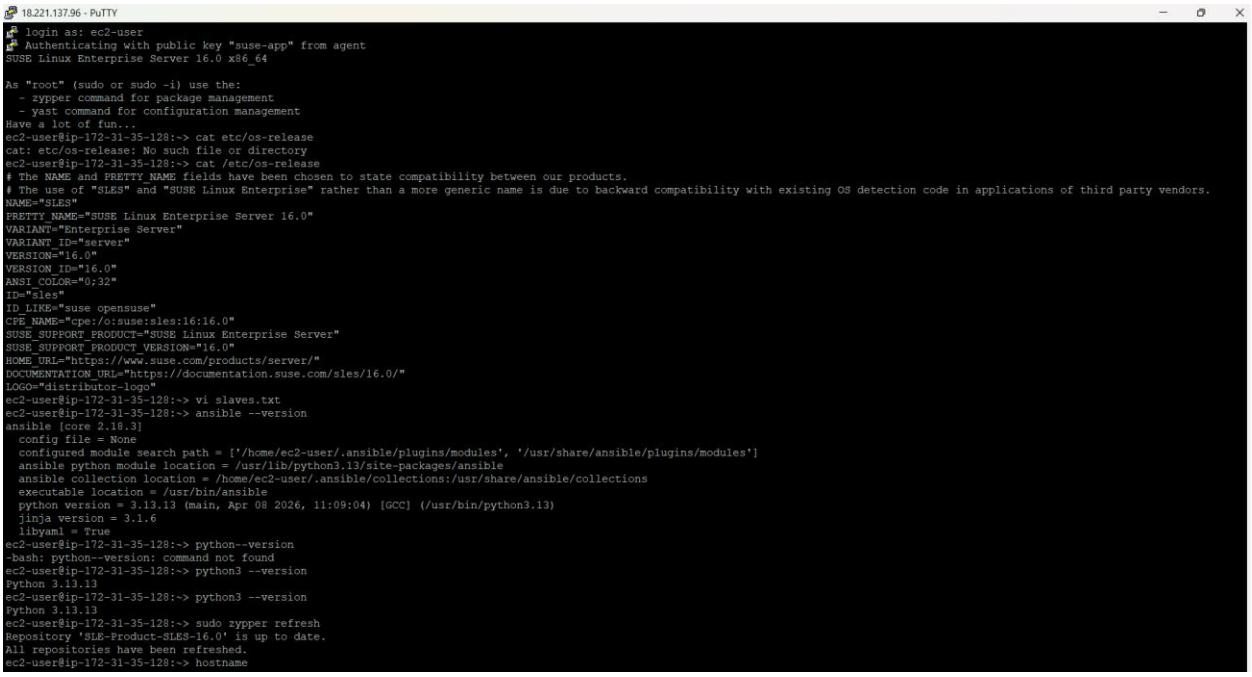


```
172.31.44.239 | CHANGED | rc=0 >>
uid=1001(meghana) gid=1001(meghana) groups=1001(meghana)
ec2-user@ip-172-31-35-128:~> ^C
ec2-user@ip-172-31-35-128:~> ansible all -i slaves.txt -b -m command -a "passwd -S meghana"
[WARNING]: Platform linux on host 172.31.35.202 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.35.202 | CHANGED | rc=0 >>
meghana P 2026-10-24 0 99999 7 -1
[WARNING]: Platform linux on host 172.31.41.201 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.41.201 | CHANGED | rc=0 >>
meghana P 2026-10-24 0 99999 7 -1
[WARNING]: Platform linux on host 172.31.44.239 is using the discovered Python interpreter at /usr/bin/python3.13, but future installation of
meaning of that path. See https://docs.ansible.com/ansible-core/2.18/reference_appendices/interpreter_discovery.html for more information.
172.31.44.239 | CHANGED | rc=0 >>
meghana P 2026-10-24 0 99999 7 -1
```


Nginx Static Web Hosting on All Slave Servers Using Ansible Playbook:




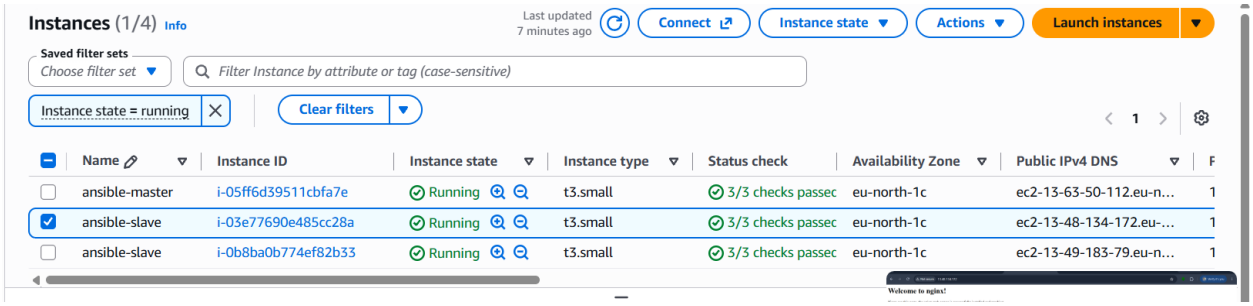



Ansible Playbook Using Tags, Skip-Tags, and When Conditions:

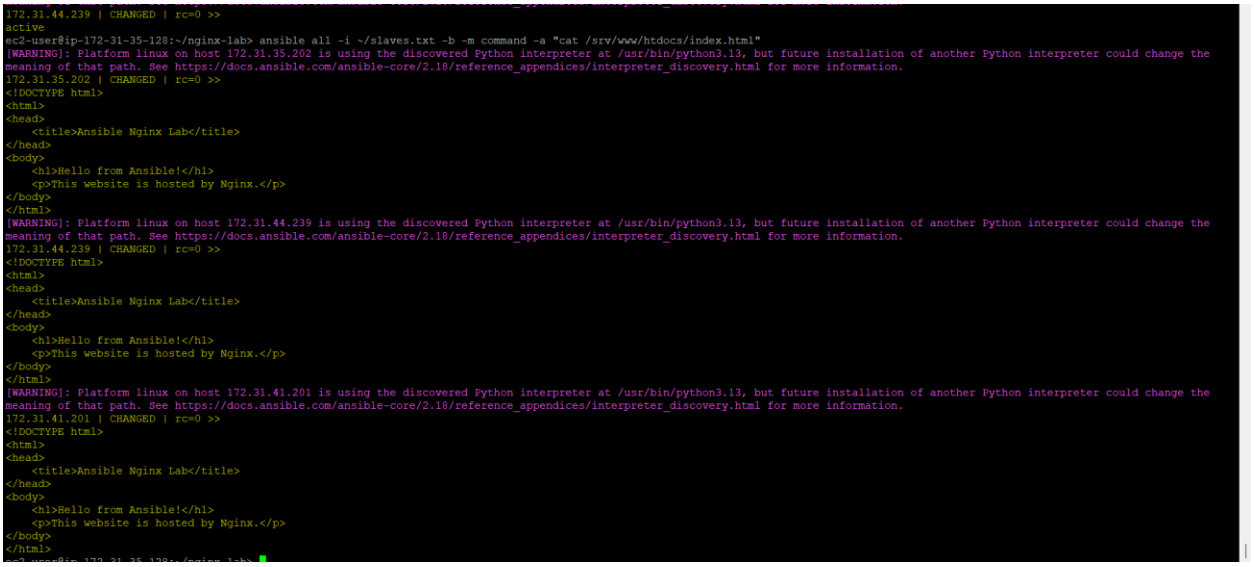

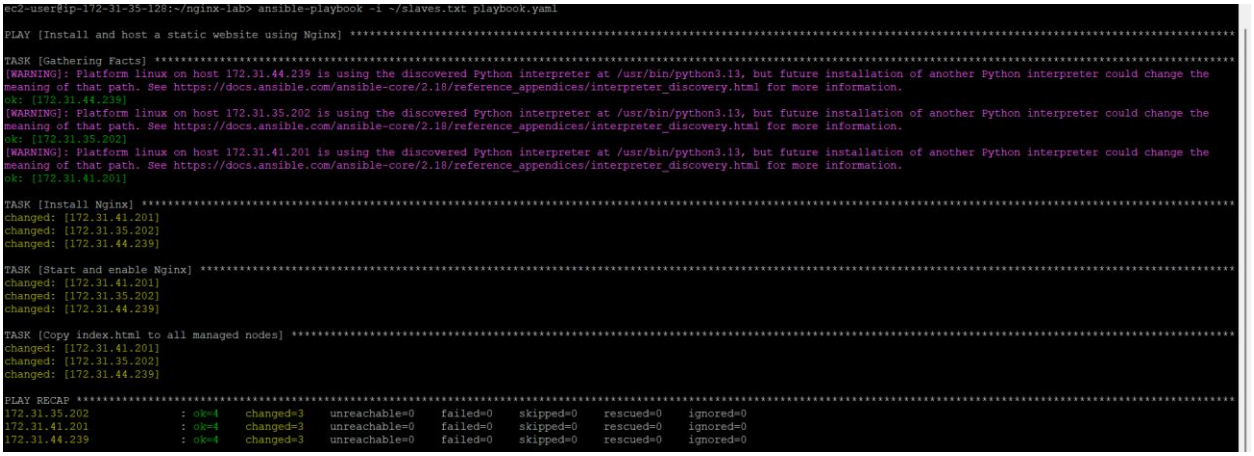



Hello from Ansible!

This website is hosted by Nginx.