



Dogs vs Cats Classification



Sai Prasad (173050010)
Adarsh Rathore (173050050)

Problem Definition



Classify Images whether it contains Dog or Cat using Convolution Neural Networks

Used The Asirra Dataset (From Kaggle)

Describing the Arissa data



- ❖ Labelled Data (25000)
- ❖ Unlabelled Data (12500)

(We Used only Labelled Data)

- Train Data: (20000)
 - Dogs: 10003
 - Cats: 9997
- Testing Data: (5000)
 - Dogs: 2463
 - Cats: 2537

Various Models Used



- ❑ Logistic Regression for Binary Classification
- ❑ Convolution Neural Networks (CNN)

Logistic Regression



- Labelled Dog as 1 and Cat as 0
- Reshaped all images to 64x64 (Using PIL)
- Used GaussianBlur // For Noise Reduction

Accuracy on Machine Data = 0.5432

Loss on Kaggle = 0.70145


```
Training Data: (20000)
               Dogs: 10003
               Cats: 9997

Testing Data: (5000)
               Dogs: 2463
               Cats: 2537

Accuracy 0.5432
```

CNN Preprocessing Data

- Labelled Dog as [0,1] and Cat as [1,0] - One Hot Encoding
- Reshaped all images to 64x64 (Using cv2)
- Saved images data in npy file for fast future access
- **Convolution Layers**

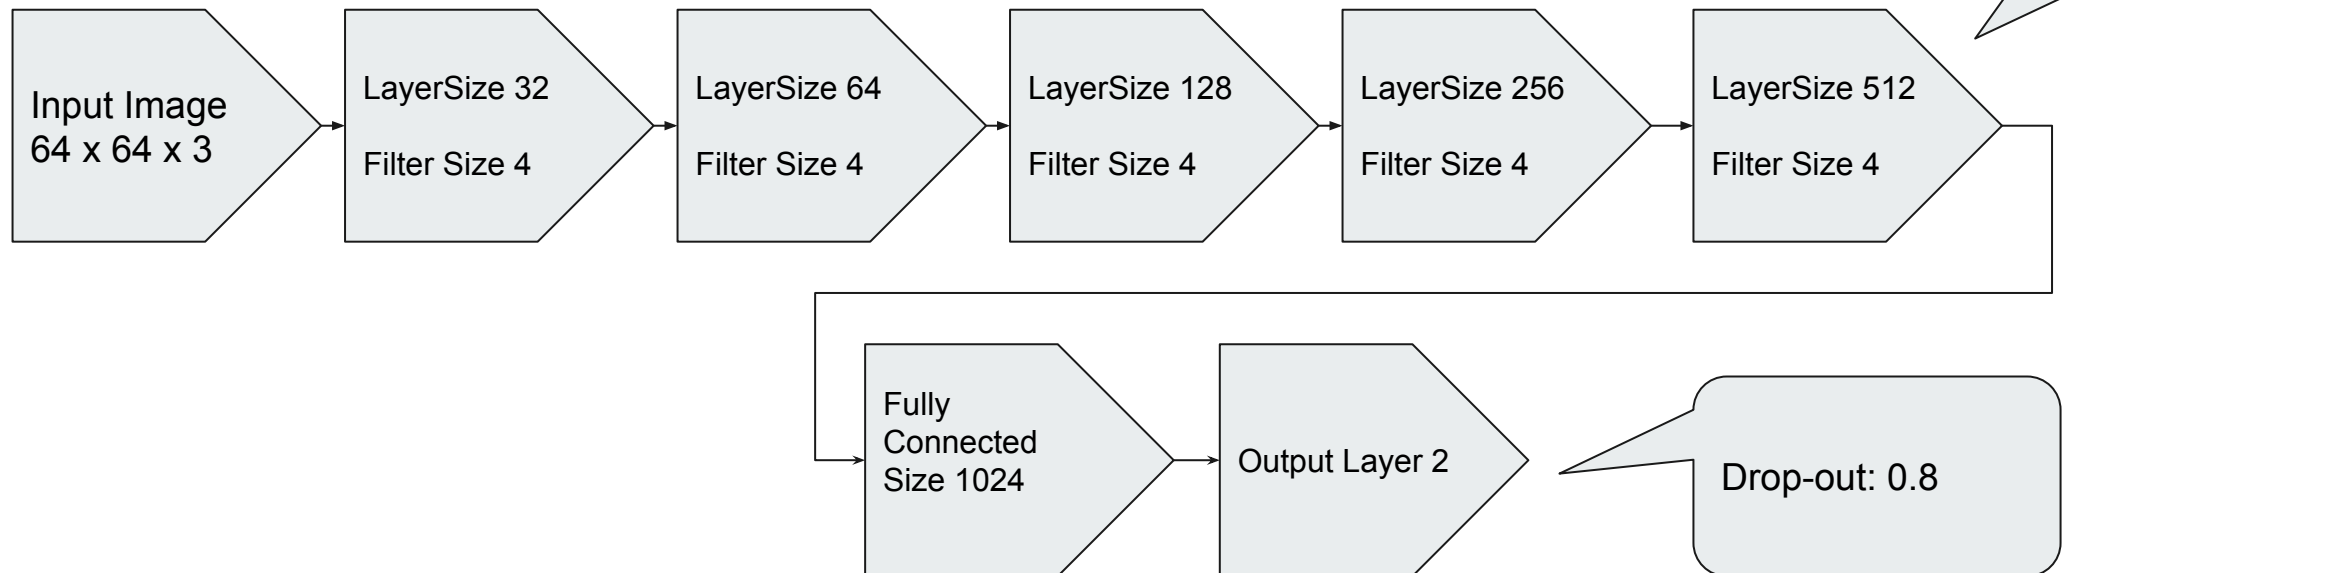

CNN Accuracy



Image from TensorBoard



Thank You