

localhost:8080

Greetings from Spring Boot!

Project Commit Add Sli Run Structure Bookmarks AWS Explorer All

Postman for mac....zip jdk-17_macos-....dmg training-boot.zip 2023 CTP Group....pdf Show All

A screenshot of a macOS desktop environment. On the left, the Postman application window is open, showing a list of API requests in the history panel and a detailed view of a POST request to 'http://localhost:8080/api/v1/items'. The request body is a JSON array containing two items. The response tab shows a 200 OK status with a response time of 142 ms and a response size of 165 B. On the right, the IntelliJ IDEA IDE is visible, showing the Java code editor with some log output in the bottom pane. The IntelliJ interface includes tabs for Git, Run, Debug, TODO, Problems, Messages, Terminal, Build, Dependencies, Event Log, and a status bar indicating 'Spaces: 4'.

A screenshot of a Mac desktop with two main windows open. The top window is Postman, a tool for testing APIs. It shows a list of recent POST requests to 'http://localhost:8080/api/v1/items'. The current request is a POST to 'http://localhost:8080/api/v1/items' with a JSON body containing two items: { "id": "aaa1", "price": 4.54, "name": "5234" } and { "id": "aaa2", "price": 2.54, "name": "3235" }. The response is a 200 OK status with 12 ms latency and 165 B size. The bottom window is IntelliJ IDEA, an IDE for Java development. The status bar at the bottom shows '88:40 (18 chars) CRLF UTF-8 4 spaces' and 'AWS: No credential'. There are also tabs for 'Postman for mac....zip', 'jdk-17_macos....dmg', 'training-boot.zip', and '2023 CTP Group....pdf'.

localhost:8080 localhost:8080/api/v1/items/aaa1


localhost:8080/api/v1/items/aaa1

```
{  
  "id": "aaa1",  
  "price": 4.54,  
  "name": "5234"  
}
```


Raw Parsed

Project Commit AWS Explorer

Postman for mac....zip jdk-17_macos-....dmg training-boot.zip 2023 CTP Group....pdf Show All

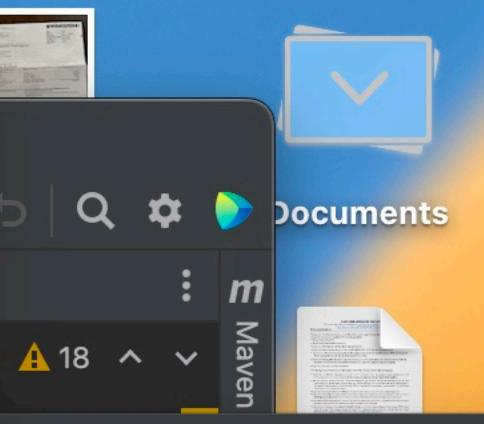

UTF-8 ▾ Text ▾ Spaces: 4
No credentials selected

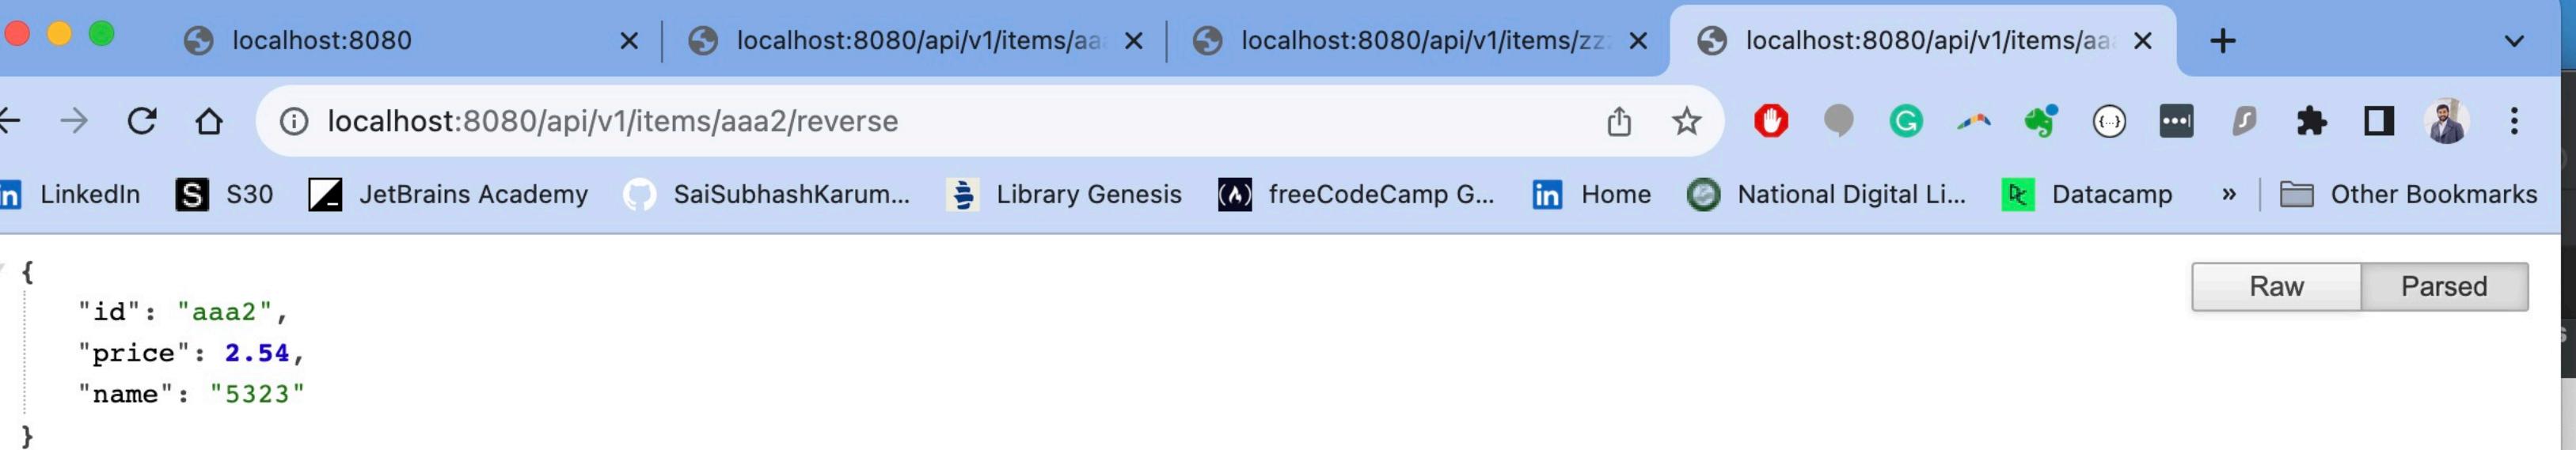


localhost:8080 | localhost:8080/api/v1/items/aaa2/reverse | localhost:8080/api/v1/items/zzz | localhost:8080/api/v1/items/aaa2/reverse | +

localhost:8080/api/v1/items/aaa2/reverse

Raw Parsed

```
{  
  "id": "aaa2",  
  "price": 2.54,  
  "name": "5323"  
}
```

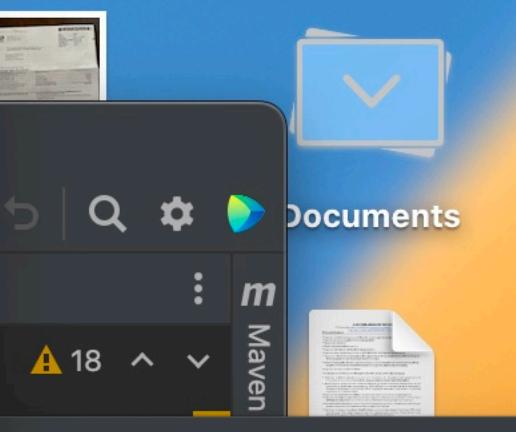

Project Commit

Add

sl


Run

Structure

Bookmarks

All


UTF-8 Text Spaces: 4
No credentials selected

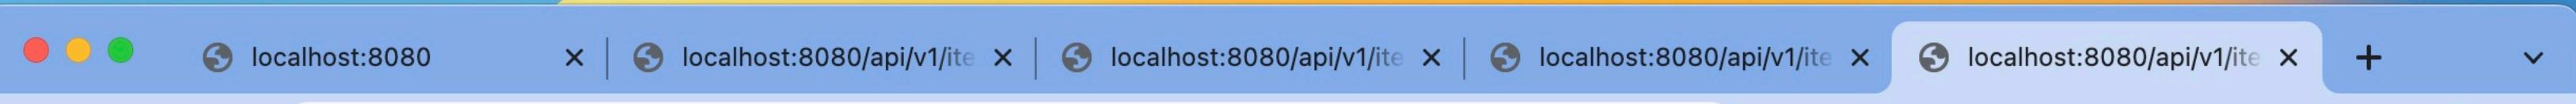

localhost:8080/api/v1/items/zzzz/reverse

LinkedIn S30 JetBrains Academy SaiSubhashKarum... Library Genesis freeCodeCamp G... Home National Digital Li... Datacamp Other Bookmarks

Items Not Found

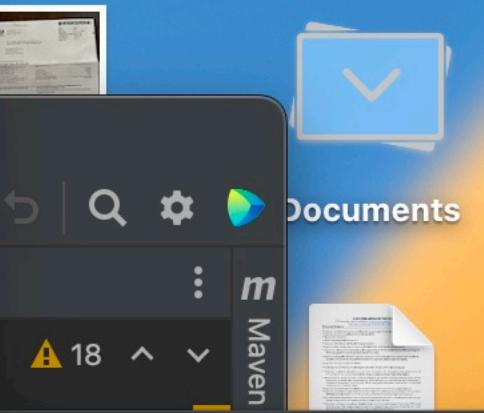

UTF-8 Text Spaces: 4

No credentials selected

Postman for mac....zip

jdk-17_macos-....dmg


training-boot.zip

2023 CTP Group....pdf

Show All

X

```
localhost:8080 x | localhost:8080/api x +  
localhost:8080/api/v1/items Raw Parsed  
  
{  
    "aaa1": {  
        "id": "aaa1",  
        "price": 4.54,  
        "name": "5234"  
    },  
    "aaa2": {  
        "id": "aaa2",  
        "price": 2.54,  
        "name": "3235"  
    },  
    "aaa3": {  
        "id": "aaa3",  
        "price": 1.54,  
        "name": "1236"  
    },  
    "aaa4": {  
        "id": "aaa4",  
        "price": 3.54,  
        "name": "5237"  
    },  
    "aaa5": {  
        "id": "aaa5",  
        "price": 5.66,  
        "name": "2456"  
    },  
    "aaa6": {  
        "id": "aaa6",  
        "price": 5.66,  
        "name": "1234"  
    }  
}
```

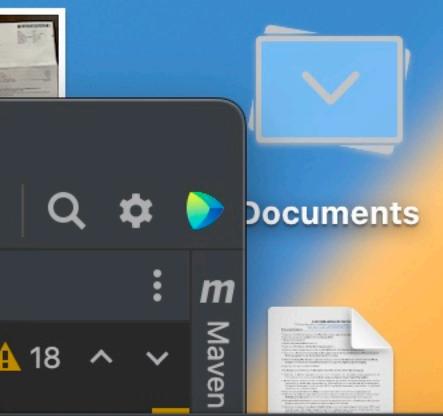


No credentials selected

localhost:8080 X | +

localhost:8080/api/v1/items/reverse


Raw Parsed

```
[  
  {  
    "id": "aaa1",  
    "price": 4.54,  
    "name": "4325"  
  },  
  {  
    "id": "aaa2",  
    "price": 2.54,  
    "name": "5323"  
  },  
  {  
    "id": "aaa3",  
    "price": 1.54,  
    "name": "6321"  
  },  
  {  
    "id": "aaa4",  
    "price": 3.54,  
    "name": "7325"  
  },  
  {  
    "id": "aaa5",  
    "price": 5.66,  
    "name": "6542"  
  },  
  {  
    "id": "aaa6",  
    "price": 5.66,  
    "name": "4321"  
  }]
```

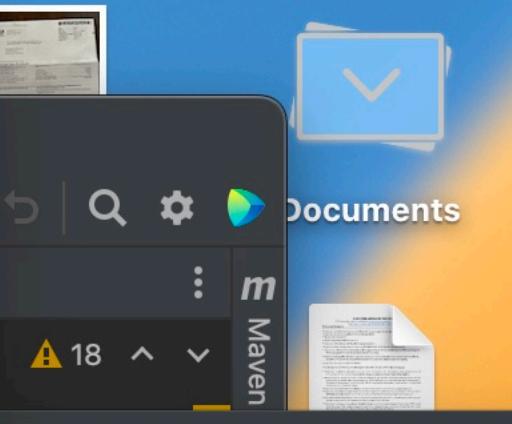


```
[{"id": "aaa3", "price": 1.54, "name": "1236"}, {"id": "aaa2", "price": 2.54, "name": "3235"}, {"id": "aaa4", "price": 3.54, "name": "5237"}, {"id": "aaal", "price": 4.54, "name": "5234"}, {"id": "aaa6", "price": 5.66, "name": "1234"}, {"id": "aaa5", "price": 5.66, "name": "2456"}]
```

Raw Parsed

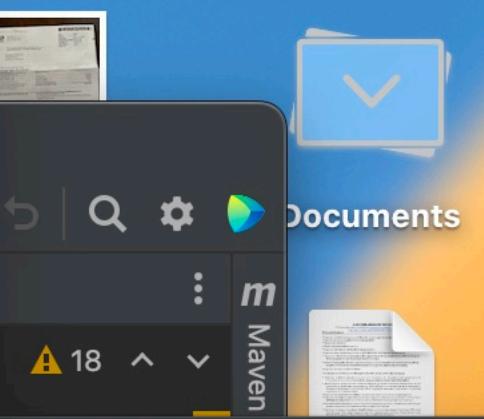

UTF-8 ▾ Text ▾ ○ Spaces: 4



localhost:8080/api/v1/throwException



This page isn't working

localhost is currently unable to handle this request.

HTTP ERROR 500

Reload

The screenshot shows the Postman application interface. At the top, there is a navigation bar with 'Home', 'Workspaces', 'Explore', a search bar 'Search Postman', and 'Sign In' / 'Create Account' buttons. Below the navigation is a 'History' section with a 'New' and 'Import' button, and a list of recent requests. A specific POST request to `http://localhost:8080/api/v1/inclnt/1` is selected. The request details show it's a POST method with the URL `http://localhost:8080/api/v1/inclnt/1`. The 'Params' tab is active, showing a table for Query Params. The 'Body' tab is also visible, showing a JSON response with one item. The response status is 200 OK, and the response body is displayed as JSON.

Home Workspaces Explore

Search Postman

Sign In Create Account

History

New Import

POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1

Add to collection

HTTP http://localhost:8080/api/v1/inclInt/1

POST http://localhost:8080/api/v1/inclInt/1 Send

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

Query Params

	Key	Value	Bulk Edit
	Key	Value	

Body Cookies Headers (5) Test Results

200 OK 5.02 s 165 B Save Response

Pretty Raw Preview Visualize JSON

1 2

Console

Documents

18 Maven

e=true

e had to get 10

Postman for mac....zip jdk-17_macos-....dmg training-boot.zip 2023 CTP Group....pdf

Show All

Home Workspaces Explore

Search Postman

History

New Import

POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1

Add to collection

HTTP http://localhost:8080/api/v1/inclInt/1

POST http://localhost:8080/api/v1/inclInt/1 Send

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

Query Params

	Key	Value	Bulk Edit
	Key	Value	

Body Cookies Headers (5) Test Results

200 OK 20.01 s 165 B Save Response

Pretty Raw Preview Visualize JSON

1 5

Console

143


Line 122, Column 48 — Selected 43 columns — 143 Lines

INS UTF-8

Documents

18

Maven

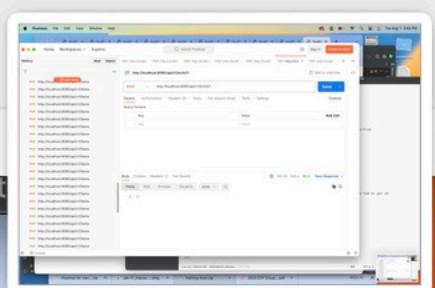

Home Workspaces Explore

Search Postman

History

New Import

POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1

Add to collection

HTTP http://localhost:8080/api/v1/inclInt/1

POST http://localhost:8080/api/v1/inclInt/1 Send

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

Query Params

	Key	Value	Bulk Edit
	Key	Value	

Body Cookies Headers (5) Test Results

200 OK 10.01 s 165 B Save Response

Pretty Raw Preview Visualize JSON

1 3

Console

Documents

18 Maven

e=true

e had to get 10

Postman for mac....zip

jdk-17_macos-....dmg

training-boot.zip

2023 CTP Group....pdf

Show All

143

Line 122, Column 48 — Selected 43 columns — 143 Lines

INS UTF-8

b credential

Home Workspaces Explore

Search Postman

History

New Import

POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1 POST http://localhost:8080/api/v1/inclInt/1

Add to collection

HTTP http://localhost:8080/api/v1/inclInt/1

POST http://localhost:8080/api/v1/inclInt/1 Send

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

Query Params

	Key	Value	Bulk Edit
	Key	Value	

Body Cookies Headers (4) Test Results

409 Conflict 20.01 s 129 B Save Response

Pretty Raw Preview Visualize Text

1

Console

Documents

18 Maven

e=true

e had to get 10

Postman for mac....zip jdk-17_macos-....dmg training-boot.zip 2023 CTP Group....pdf

Show All

The screenshot shows the Postman application interface. The top navigation bar includes Home, Workspaces, Explore, a search bar labeled "Search Postman", and user authentication buttons for Sign In and Create Account. The left sidebar displays a "History" section with a list of 28 new items, all of which are POST requests to `http://localhost:8080/api/v1/items`. The main workspace shows a POST request to `http://localhost:8080/api/v1/keys`. The request details panel shows the method as POST, the URL as `http://localhost:8080/api/v1/keys`, and the Body tab selected with the raw data `SK3anS7wc2rAE1wJNL6UKvNgyPCZPrbQQfw9ITRKpgE=`. The response panel shows a status of 200 OK with a response body containing the number `98765432109876543210`.

