Problem Challenge 1: Minimum Meeting Rooms (hard)

Problem Statement

Given a list of intervals representing the start and end time of 'N' meetings, find the **minimum number of rooms** required to **hold all the meetings**.

Example 1:

```
Meetings: [[1,4], [2,5], [7,9]]
Output: 2
Explanation: Since [1,4] and [2,5] overlap, we need two rooms to hold these two
meetings. [7,9] can occur in any of the two rooms later.
```

Example 2:

```
Meetings: [[6,7], [2,4], [8,12]]
Output: 1
Explanation: None of the meetings overlap, therefore we only need one room to hold
all meetings.
```


Example 3:

```
Meetings: [[1,4], [2,3], [3,6]]
Output:2
Explanation: Since [1,4] overlaps with the other two meetings [2,3] and [3,6], we
need two rooms to hold all the meetings.
```

Example 4:

```
Meetings: [[4,5], [2,3], [2,4], [3,5]]
Output: 2
Explanation: We will need one room for [2,3] and [3,5], and another room for [2,4]
and [4,5].
```

Here is a visual representation of Example 4:

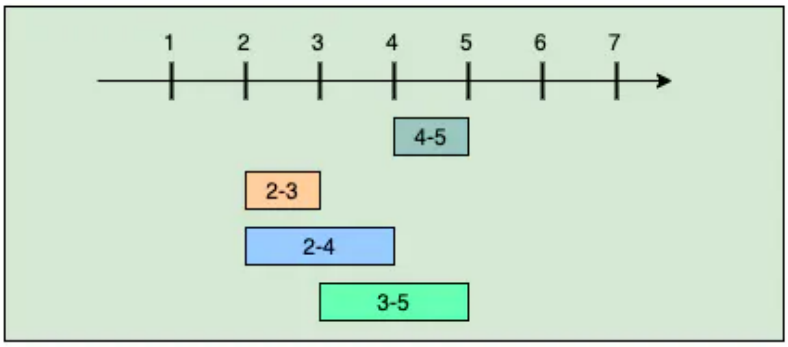

Try it yourself

Try solving this question here:

Java

```java
import java.util.*;

/*class Meeting {
  int start;
  int end;

  public Meeting(int start, int end) {
    this.start = start;
    this.end = end;
  }
};*/

class Solution {

  public int findMinimumMeetingRooms(List<Meeting> meetings) {
    int minRooms = 0;
    // TODO: Write your code here
    return minRooms;
  }

}
```

Test Case | Run Code Result | Stdout

```
[[1, 4], [2, 5], [7, 9]]
```

Use Example Testcases | Run | Submit