Palindromic Partitioning

Problem Statement

Given a string, we want to cut it into pieces such that each piece is a palindrome. Write a function to return the minimum number of cuts needed.

Example 1:

```
Input: "abdbca"
Output: 3
Explanation: Palindrome pieces are "a", "bdb", "c", "a".
```

Example 2:

```
Input: = "cddpd"
Output: 2
Explanation: Palindrome pieces are "c", "d", "dpd".
```

Example 3:


```
Input: = "pqr"
Output: 2
Explanation: Palindrome pieces are "p", "q", "r".
```

Example 4:

```
Input: = "pp"
Output: 0
Explanation: We do not need to cut, as "pp" is a palindrome.
```

Try it yourself

Try solving this question here:

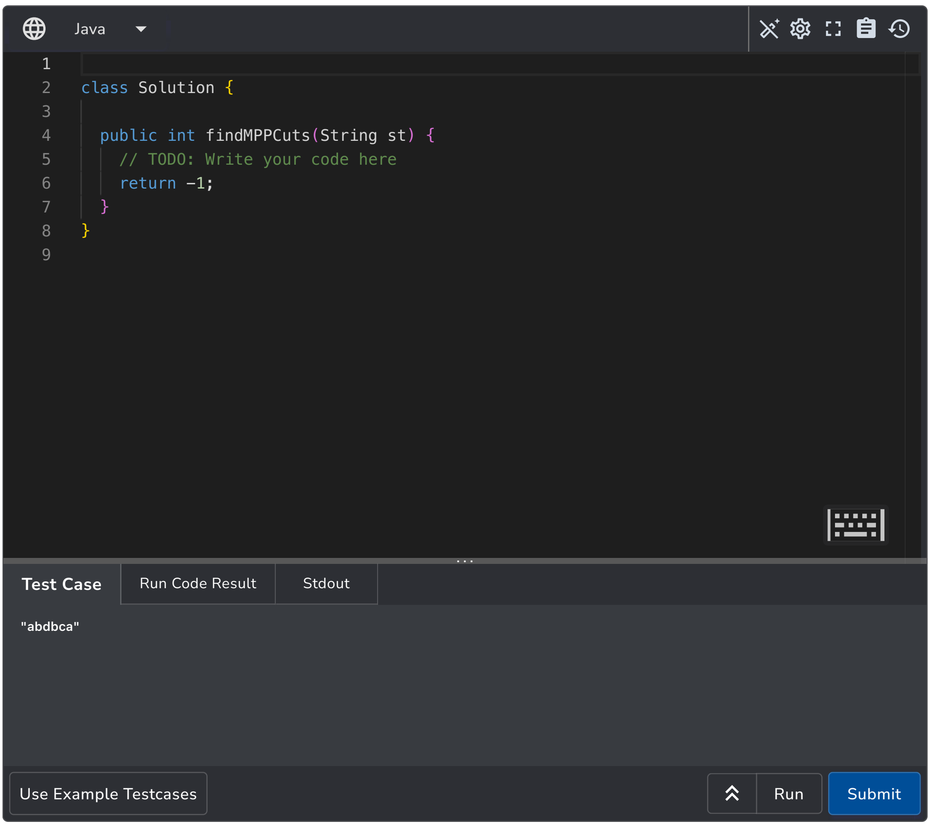

← Previous
Solution: Minimum Deletions In A String To Make It A Palindrome

Next →
Solution: Palindromic Partitioning

Mark as Completed