

VELOOP REWARDS

DATA ANALYST INTERNSHIP — TASK 01

Product Analytics, Data Readiness & Data Management Blueprint

Project Type: Product Development / Data Analytics

Duration: 22–24 Days

Task Dependency: Completely Independent

Working Environment: Simulated VELOOP dataset + publicly available/official product information + clearly documented assumptions

Users Date:

<https://drive.google.com/drive/folders/1dNHyeqGMNLPhND4Ty0Sj0Ca8BgftKeS4?usp=sharing>

2. IMPORTANT DATA AUTHENTICITY POLICY

This is a mandatory requirement.

VELOOP is a real product under development, but **the data supplied for this assignment is fictional/simulated.**

The intern must never describe simulated data as:

- actual VELOOP users
- actual VELOOP earnings
- actual VELOOP withdrawals
- actual VELOOP revenue
- actual VELOOP retention
- actual VELOOP conversion rates
- actual VELOOP performance
- actual company statistics

5. PRODUCT CONTEXT

The intern should understand VELOOP as a developing online rewards and engagement ecosystem.

Relevant product areas may include:

- user accounts
- earning activities
- VEs
- XP
- Gems
- Tokens
- Spins
- daily rewards
- streaks
- tasks
- missions
- badges
- levels
- referrals
- wallet
- exchange functionality
- withdrawals
- feature engagement
- support/help content
- future features

However:

The analyst must not assume that every feature is currently implemented or production-ready.

6. SOURCE & EVIDENCE DISCIPLINE

The analyst must maintain a **Source & Verification Register**.

For important product facts, record:

Field	Requirement
Information	What was found

Field	Requirement
Source	Where it came from
Source Type	Official / Internal / Simulated
Date Checked	When checked
Status	Confirmed / Proposed / To Be Verified
Notes	Any limitation

The analyst must not silently convert assumptions into facts.

For example:

Incorrect

VELOOP currently stores a session ID for every user.

If they have not verified this.

Correct

A session identifier is proposed as an analytics field because it would support session-level analysis. Current implementation status requires engineering verification.

7. WORK PACKAGE A — PRODUCT DATA READINESS AUDIT

Objective

Create a complete map of the data VELOOP will eventually need.

The analyst must review the product and identify:

- product areas
- features
- user actions
- system actions

- transactions
- states
- measurable outcomes

A1. Product Area Mapping

Create a table containing:

Product Area Feature User Action System Outcome Data Required Business Question Status

Examples:

- Registration
- Login
- Watch Ads
- Daily Rewards
- Tap & Earn
- Mining
- Spin
- Missions
- Referrals
- Wallet
- Withdrawals
- Help Center

Do not limit the mapping to these examples if additional measurable areas are identified.

A2. Identify User Actions

For each major feature, determine what the user actually does.

For example:

Task system

Task viewed

↓

Task opened

↓

Task started

↓

Task completed
↓
Completion validated
↓
Reward credited

The analyst must determine which of these should become measurable events.

A3. Identify System Outcomes

Not everything is a user action.

Examples:

- reward credited
- reward reversed
- withdrawal approved/processed
- withdrawal rejected
- account status changed
- referral activated
- mission completed

The analyst must distinguish:

User Event

from

System Event

from

Business Outcome

A4. Data Coverage Matrix

Create a complete matrix containing at minimum:

Field	Description
-------	-------------

Field	Description
Product Area	Feature/module
User Action	What user does
System Action	What system does
Business Outcome	Result
Data Required	Required information
Proposed Event	Event name
Source	Frontend/backend/etc.
Business Question	Why data matters
Status	Confirmed/Proposed/To Be Verified
Priority	Critical/High/Medium/Low

Expected output

Identify at least **10 important analytics gaps** that could affect future production reporting.

8. WORK PACKAGE B — USER & ACCOUNT ANALYTICS SPECIFICATION

Design the analytical structure required to understand the user lifecycle.

The analyst should define requirements for:

Registration

- user ID
- registration timestamp
- registration source
- device/platform
- relevant acquisition information

Login

- login event
- timestamp
- session identifier where appropriate
- device/platform

Onboarding

- onboarding started
- onboarding completed
- important milestones

Account Lifecycle

- account created
 - account status
 - status changes
 - last activity
 - relevant lifecycle timestamps
-

B1. User Identity Requirements

Define:

- stable user identifier
- event identifier
- session identifier
- transaction identifier

Explain why each identifier is needed.

B2. User Analytics Specification

Create:

Field Type Required? Purpose Source Validation Status

Do not request unnecessary personal information.

9. WORK PACKAGE C — EARNING & REWARD ANALYTICS

The analyst must design how VELOOP should measure earning activity.

The basic analytical lifecycle should be investigated:

Discovery
↓
Start
↓
Completion
↓
Validation
↓
Reward

The analyst must determine how each stage should be measured.

C1. Task-Level Analytics

For task-based activity, define:

- task ID
 - task type
 - feature
 - user ID
 - start time
 - completion time
 - status
 - reward amount
 - reward unit
 - validation status
 - relevant source information
-

C2. Failed Activity

Determine how failed activity should be represented.

Examples:

- task failed
- tracking failed

- validation failed
- user abandoned
- system error

Do not invent internal failure codes if they do not exist.

Instead, propose a structured classification and mark it **Proposed**.

C3. Reward Events

Define analytics requirements for:

- reward credited
- reward pending
- reward reversed
- reward corrected

The analyst must distinguish:

activity occurred

from:

reward was actually credited.

C4. Third-Party Dependency

Where an earning feature depends on external:

- advertisements
- surveys
- offers
- games
- tracking systems

the analyst must consider that external systems may affect the resulting data.

Do not design analytics as though VELOOP controls every external outcome.

10. WORK PACKAGE D — WALLET & WITHDRAWAL ANALYTICS

This is a major product-data area.

The intern must design a transaction model that allows VELOOP to understand wallet and withdrawal operations.

D1. Wallet Transaction Model

Define:

- transaction ID
- user ID
- timestamp
- transaction type
- amount
- unit
- status
- source
- reference ID
- reversal/correction relationship where applicable

Potential transaction types can include:

- reward credit
- redemption
- reversal
- adjustment

But the intern must mark any unsupported transaction type as **Proposed**.

D2. Withdrawal Lifecycle

Design the measurable lifecycle:

Withdrawal Requested

↓

Under Review / Processing

↓

Completed

with appropriate alternative states such as:

Rejected
Reversed

where applicable.

The analyst must define:

- withdrawal ID
 - user ID
 - requested amount
 - method
 - requested timestamp
 - processing timestamp
 - final timestamp
 - status
 - relevant reason category
-

D3. Withdrawal KPIs

Define metrics such as:

- withdrawal requests
- completed withdrawals
- pending withdrawals
- rejected withdrawals
- reversed withdrawals
- processing time
- completion rate
- pending queue
- withdrawal volume
- method distribution

Each KPI needs:

Name
Definition
Formula
Data Required
Source
Frequency
Stakeholder

11. WORK PACKAGE E — REFERRAL & ENGAGEMENT ANALYTICS

Design a complete referral measurement structure.

The analyst must distinguish:

Referral Created
↓
User Registered
↓
User Activated
↓
Referral Converted

Do not assume that registration automatically equals successful referral conversion.

E1. Referral Data

Define:

- referral ID
 - referring user
 - referred user
 - creation timestamp
 - registration timestamp
 - activation timestamp
 - status
 - relevant source
-

E2. Engagement

Define measurement for:

- feature adoption
- repeat usage
- task activity

- daily activity
 - feature frequency
 - active users
 - returning users
-

12. WORK PACKAGE F — PRODUCTION EVENT TRACKING PLAN

This is one of the most important deliverables.

The analyst must create an event catalogue that engineering can review.

Every event must contain:

Field

Event Name

Trigger

Definition

User ID

Event ID

Timestamp

Feature

Status

Required Properties

Optional Properties

Data Type

Validation

Source

Business Purpose

Field

KPI Dependency

Implementation Status

Minimum Event Coverage

The analyst should cover at least:

Account

- user_registered
- user_logged_in
- user_logged_out where appropriate
- onboarding_started
- onboarding_completed

Tasks

- task_viewed
- task_opened
- task_started
- task_completed
- task_failed

Rewards

- reward_credited
- reward_pending
- reward_reversed

Daily/Engagement

- daily_reward_claimed
- streak_updated
- mission_started
- mission_completed
- badge_earned
- spin_started
- spin_completed

Only include events that actually make sense for the current/proposed product.

Referrals

- referral_created
- referral_registered
- referral_activated
- referral_converted

Wallet

- wallet_transaction_created
- wallet_transaction_completed
- wallet_transaction_reversed

Withdrawals

- withdrawal_requested
- withdrawal_processing
- withdrawal_completed
- withdrawal_rejected
- withdrawal_reversed

Event Naming Standard

The intern must propose a consistent naming convention.

For example:

object_action

or:

domain_object_action

Then apply the same convention consistently.

The analyst must explain why the selected convention should be used.

13. WORK PACKAGE G — VELOOP DATA DICTIONARY

Build a proper data dictionary.

This is not simply a list of column names.

For every field:

Field	Required Information
Entity	Where it belongs
Field Name	Exact name
Data Type	String/int/date/etc.
Definition	Exact meaning
Example	Example value
Required	Yes/No
Allowed Values	If applicable
Validation	Data rule
Source	Where generated
Sensitivity	Public/Internal/Restricted
Analytical Use	Why needed
Status	Confirmed/Proposed

Minimum Target

Create **at least 75 meaningful fields** across the proposed analytics model.

However:

Do not add meaningless fields merely to reach 75.

If the analyst believes fewer fields are sufficient, they must explain why.

14. WORK PACKAGE H — LOGICAL DATA MODEL

Design the analytical model.

At minimum consider:

Users
Tasks
Task Activity
Rewards
Wallet Transactions
Withdrawals
Referrals
Feature Events

Additional entities can include:

Missions
Badges
Levels
XP Activity
Support Tickets
Content

if justified.

H1. Primary Keys

Identify the primary key for each entity.

H2. Foreign Keys

Identify relationships.

Example:

Users
|
| user_id
↓
Task Activity

H3. Relationship Documentation

Explain:

- one-to-one
- one-to-many
- many-to-many where relevant
- event relationships
- transaction relationships

H4. ER Diagram

Create a professional ER diagram showing:

- entities
- keys
- relationships
- major fields

The diagram must be understandable by an engineer.

15. WORK PACKAGE I — KPI CATALOGUE

Create the first **VELOOP KPI Catalogue**.

Minimum target:

30+ KPIs

across the following areas.

User KPIs

- registrations
- active users
- returning users
- inactive users

Engagement KPIs

- feature usage
- task starts
- task completion
- completion rate
- repeat usage

Reward KPIs

- reward transactions
- reward credits
- reward reversals
- reward activity by feature

Wallet KPIs

- wallet transactions
- credit volume
- redemption activity
- reversals

Withdrawal KPIs

- requests
- completed
- pending
- rejected
- processing time

Referral KPIs

- referrals created
- registrations
- activations
- conversions

Support/Content KPIs

- support requests
 - issue categories
 - help-center engagement
-

KPI Definition Format

Every KPI must contain:

KPI Name:

Definition:

Formula:

Required Fields:

Data Source:

Frequency:

Stakeholder:

Business Purpose:

Interpretation:

Limitation:

Status:

Important

Do not create fictional company targets.

For example:

❌ "VELOOP should have 50,000 DAU."

Instead:

✅ "Daily Active Users = unique users generating a qualifying activity event within a calendar day."

16. WORK PACKAGE J — SIMULATED DATA PROFILING

Now the analyst actually works with the supplied fictional dataset.

The dataset should contain separate sheets for:

- Users
- Task Activity
- Rewards
- Wallet
- Withdrawals
- Referrals
- Feature Events

- Messy Data
-

J1. Profile Each Dataset

For every dataset calculate:

- number of records
 - number of columns
 - date range
 - unique IDs
 - duplicate count
 - missing values
 - unique categories
 - status distribution
 - numeric ranges
-

J2. Test Relationships

Test whether:

Users.user_id

can correctly connect to:

Task Activity.user_id

Rewards.user_id

Wallet.user_id

Withdrawals.user_id

and so on.

Document any problems.

J3. KPI Test

Select a sample of proposed KPIs and determine:

Can this KPI actually be calculated from the supplied structure?

If not:

Explain why.

Then specify:

What additional data would be required?

This is one of the most valuable parts of the project.

17. WORK PACKAGE K — DATA QUALITY AUDIT

The supplied **Messy_Data** sheet intentionally contains data-quality problems.

The analyst must identify them.

Check for:

- duplicate IDs
- missing IDs
- missing timestamps
- malformed dates
- invalid statuses
- inconsistent capitalization
- trailing spaces
- invalid numeric values
- negative values where inappropriate
- unexpected nulls
- orphan records
- duplicate events
- inconsistent naming
- impossible state transitions

Data Quality Report

For each problem:

Field	Requirement
Issue ID	Unique identifier

Field	Requirement
Dataset	Dataset name
Field	Affected field
Issue Type	Problem category
Records Affected	Count
Severity	Critical/High/Medium/Low
Detection Logic	How detected
Likely Cause	Possible reason
Correction	What should happen
Prevention	How to prevent
Owner	Responsible team
Status	Open/Resolved/Proposed

18. WORK PACKAGE L — DATA QUALITY CONTROL FRAMEWORK

Don't stop at identifying bad records.

Design a system to prevent them.

For each quality rule determine where it should operate:

```

Application
↓
Data Collection
↓
Raw Data
↓
Transformation
↓
Analytics Layer
↓
Dashboard

```

Examples:

ID validation

Check at ingestion.

Allowed status

Validate against approved values.

Duplicate transaction

Detect using transaction ID.

Timestamp

Validate format and timezone.

Referential integrity

Check whether referenced user exists.

19. WORK PACKAGE M — ANALYTICS DASHBOARD BLUEPRINT

Design the future VELOOP analytics dashboard.

This is a **dashboard specification**, not necessarily a production dashboard.

Dashboard 1 — Executive Overview

Potential sections:

- user activity
- engagement
- reward activity
- wallet activity
- withdrawal activity
- referral activity

For every visual specify:

Metric
Calculation
Source
Visualization
Filters
Dimensions
Date range
Refresh frequency
Business question
Decision supported

Dashboard 2 — User Analytics

Possible views:

- registrations
 - active users
 - returning users
 - acquisition source
 - device
 - geographic distribution
 - user lifecycle
-

Dashboard 3 — Engagement

Possible views:

- feature usage
- task activity
- completion
- repeat usage
- activity trends

Dashboard 4 — Rewards

Possible views:

- reward activity
- reward source
- reward status

- reward trends
 - reversal activity
-

Dashboard 5 — Wallet

Possible views:

- transactions
 - credits
 - redemptions
 - reversals
 - activity trends
-

Dashboard 6 — Withdrawals

Possible views:

- requests
 - status
 - processing duration
 - payout methods
 - trends
-

Dashboard 7 — Referrals

Possible views:

- referral creation
- registrations
- activations
- conversion

20. WORK PACKAGE N — DEVELOPER ANALYTICS HANDOFF

This is a **critical deliverable**.

The analyst must create a document that developers can actually use.

For every critical event:

Requirement ID:

Event:

Trigger:

Payload:

Field:

Data Type:

Required:

Validation:

Deduplication:

Timestamp:

Source:

Why Needed:

KPI Dependency:

Acceptance Test:

Priority:

Example

Event

task_completed

Trigger

Task completion has passed the applicable validation process.

Required properties

user_id

task_id

task_type

timestamp

status

reward_amount

reward_unit

Acceptance Test


When a valid task completion occurs, exactly one analytically usable completion event should be recorded for the relevant task/user transaction, subject to the final engineering implementation and idempotency design.

The intern must create this level of specification for the important events.

21. WORK PACKAGE O — DATA PIPELINE & OPERATING MODEL

Design a practical analytics flow.

Example:

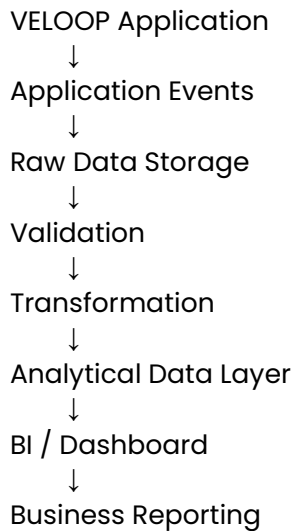

The intern must document:

- source systems
- event producers
- collection
- storage
- raw layer
- transformation
- quality checks
- analytical layer
- dashboard
- refresh
- monitoring
- failure handling
- ownership

Important

Do not recommend expensive infrastructure merely because it sounds professional.

The architecture must be:

practical for a developing product and scalable when justified.

22. WORK PACKAGE P — DATA ACCESS, PRIVACY & GOVERNANCE

Design a basic access model.

For example:

Engineering

Technical event implementation.

Data Analyst

Approved analytical datasets.

Product/Operations

Aggregated business reporting.

Content Team

Aggregated content performance data where required.

Intern

Only approved/sanitized datasets.

The analyst must identify information that should not be unnecessarily exposed.

Examples:

- passwords
- authentication secrets
- API keys
- payment credentials

- private credentials
 - sensitive security controls
-

23. WORK PACKAGE Q — ANALYTICS CHANGE MANAGEMENT

VELOOP will evolve.

Therefore, the analyst must propose how analytics should change when:

- a feature changes
- an event changes
- a reward mechanic changes
- a withdrawal method changes
- a field is renamed
- a KPI definition changes
- a dashboard changes

Create a:

Metric/Event Change Log

with:

Date
Change
Old Definition
New Definition
Reason
Affected KPIs
Affected Dashboards
Affected Reports
Owner
Version

This is particularly important for a developing product.

24. WORK PACKAGE R — ANALYTICS GAP ASSESSMENT

Identify the biggest gaps between:

What VELOOP needs eventually

and

What is currently available/verified.

Evaluate:

- event coverage
 - data model
 - data dictionary
 - KPI definitions
 - data quality
 - dashboard readiness
 - engineering instrumentation
 - access control
 - documentation
 - reporting
-

Priority

Use:

Critical

High

Medium

Low

But every priority must have a reason.

Example:

Critical — without a stable transaction ID, reliable wallet transaction deduplication cannot be guaranteed.

25. WORK PACKAGE S — ASSUMPTION & VERIFICATION REGISTER

This is mandatory.

Whenever the intern doesn't know something, they must record it.

Example:

ID	Unknown	Why It Matters	Source Checked	Risk	Verification Owner	Status
A001	Does backend currently emit task completion events?	Required for task analytics	Product docs	High	Engineering	To Be Verified

This prevents the analyst from guessing.

26. FINAL IMPLEMENTATION BACKLOG

The analyst must finish by producing a prioritized backlog.

Example structure:

Priority	Requirement	Reason	Dependency	Owner	Stage
Critical	Stable user ID	Required for cross-event analysis	Authentication	Engineering	Pre-launch
Critical	Transaction ID	Required for wallet analytics	Wallet	Engineering	Pre-launch
High	Event tracking	Product measurement	Frontend/backend	Engineering	Pre-launch
High	Data quality checks	Prevent unreliable reporting	Data layer	Data/Engineering	Pre-launch
Medium	Advanced dashboard	Management reporting	Production data	Analytics	Post-launch

The intern should determine the actual priorities from their analysis.

27. REQUIRED FINAL DELIVERABLES

The final submission must contain:

01 — Executive Summary

2–4 pages.

Explain:

- what was investigated
 - what was discovered
 - what is currently unknown
 - what VELOOP should implement
 - major risks
 - major priorities
-

02 — Product Data Audit

Detailed report.

03 — Data Coverage Matrix

Spreadsheet.

04 — User Analytics Specification

Document/spreadsheet.

05 — Earning & Reward Analytics Specification

Document.

06 — Wallet & Withdrawal Analytics Specification

Document.

07 — Referral & Engagement Analytics

Document.

08 — Event Tracking Plan

Spreadsheet.

09 — Data Dictionary

Spreadsheet.

10 — Logical Data Model

ER diagram + explanation.

11 — KPI Catalogue

Spreadsheet with 30+ KPIs.

12 — Simulated Data Profiling

Workbook + findings.

13 — Data Quality Audit

Workbook + report.

14 — Dashboard Blueprint

Wireframes + specifications.

15 — Developer Analytics Handoff

Engineering specification.

16 — Data Pipeline Proposal

Architecture diagram + documentation.

17 — Privacy & Governance Proposal

Document.

18 — Analytics Readiness Assessment

Scorecard + evidence.

19 — Assumption & Verification Register

Spreadsheet.

20 — Implementation Backlog

Prioritized development/data backlog.

21 — Final Consolidated Report

A professional document containing the complete conclusion and references to all deliverables.

28. SIMULATED DATA WORKING PACK

The fictional dataset should contain:

Dataset	Approx. Records
Users	1,000
Task Activity	6,000
Rewards	5,000
Wallet	3,500
Withdrawals	1,200
Referrals	900
Feature Events	12,000
Messy Data	500+

The analyst can use these datasets independently.

They may also create additional simulated data if required.

However, every additional dataset must contain:

SIMULATED DATA — CREATED FOR ANALYTICAL TESTING

and its generation methodology must be documented.

29. DATASET RULE

The fictional dataset is **not meant to make VELOOP look successful**.

This is extremely important.

The analyst should not manipulate simulated data to produce impressive results.

The dataset should instead contain:

- successful activity
- unsuccessful activity
- pending activity
- reversed activity
- inactive users
- different feature usage
- different activity levels
- missing values
- duplicate records
- malformed values
- inconsistent values
- realistic variation

The purpose is to test the analyst's system.

30. WHAT THE INTERN MUST NOT DO

The following is prohibited for this assignment:

No fabricated company statistics

Don't write:

"VELOOP has 10,000 active users."

unless verified production data exists.

No fake success claims

Don't write:

"VELOOP's withdrawal system has a 98% success rate."

based on fictional data.

No fake testimonials

Not applicable to analytics.

No invented internal security rules

Do not reverse-engineer or invent fraud thresholds.

No credentials

No:

- passwords
- API keys
- payment credentials
- authentication secrets

No unnecessary personal information

The analyst should work with IDs and analytical attributes rather than real personal information.

31. 22–25 DAY WORKING SCHEDULE

This is **one project**, but the following schedule is recommended.

Days 1–2

Product documentation review

Source register

Confirmed/Proposed/To-Be-Verified classification

Days 3–4

Product Data Audit

Data Coverage Matrix

Analytics gaps

Days 5–6

User Analytics

Account lifecycle

User data requirements

Days 7–8

Earning & Reward Analytics

Task lifecycle

Reward lifecycle

Days 9–10

Wallet & Withdrawal Analytics

Transaction model

Withdrawal lifecycle

Day 11

Referral & Engagement Analytics

Days 12–14

Event Tracking Plan

At least 25 meaningful events

Event naming standards

Days 15–16

Data Dictionary

75+ meaningful fields

Days 17–18

Logical Data Model

ER diagram

Relationship validation

Day 19

KPI Catalogue

30+ KPIs

Day 20

Simulated Data Profiling

Day 21

Data Quality Audit

Day 22

Dashboard Blueprint

Day 23

Developer Analytics Handoff

Day 24

Pipeline + Governance + Gap Analysis

Day 25

Final consolidation

QA

Presentation

Handover

32. DEFINITION OF DONE

The task is considered complete only when:

- Product data areas have been mapped.
- Major analytical events have been defined.
- User analytics requirements are documented.
- Reward analytics requirements are documented.
- Wallet/withdrawal analytics are documented.
- Referral analytics are documented.
- Event naming is standardized.
- Data dictionary is complete.
- Logical data model is complete.
- KPIs have reproducible definitions.
- Simulated data has been profiled.
- Data quality problems have been identified.
- Data quality controls have been proposed.
- Dashboard requirements are documented.
- Engineering requirements are specific and testable.
- Data pipeline is documented.

- Governance/access requirements are documented.
- Unknowns are explicitly recorded.
- Analytics gaps are prioritized.
- Final implementation backlog exists.
- All simulated data is clearly labelled.
- No fictional result is represented as an actual VELOOP result.
- Final documents are internally consistent.

33. EVALUATION FRAMEWORK

Category	Weight
Business/Product Value	25%
Analytical Design	20%
Data Integrity & Trust	20%
Engineering Usefulness	15%
Data Quality & Governance	10%
Documentation & Presentation	10%
Total	100%

Business/Product Value — 25%

Does the work actually help VELOOP?

Analytical Design — 20%

Are the events, models and metrics logically sound?

Data Integrity & Trust — 20%

Did the intern distinguish:

- real facts
- assumptions
- proposed requirements
- simulated data?

Engineering Usefulness — 15%

Can developers actually use the specifications?

Data Quality & Governance — 10%

Are the proposed controls practical?

Documentation — 10%

Can another person understand and reuse the work?

34. NON-NEGOTIABLE INTEGRITY RULES

- 1. Never fabricate production data.**
- 2. Never represent simulated data as actual VELOOP statistics.**
- 3. Never create fake company performance claims from the dataset.**
- 4. Never invent confidential security mechanisms.**
- 5. Never request passwords/API keys/payment credentials.**
- 6. Never claim a proposed analytics event already exists.**
- 7. Never hide uncertainty.**
- 8. Never convert an assumption into a fact.**
- 9. Never add unnecessary personal-data fields.**
- 10. Never optimize the project for appearance instead of accuracy.**
- 11. Every important analytical conclusion must be traceable to a defined dataset, source, or documented assumption.**
- 12. When production data eventually becomes available, simulated datasets must be replaced by appropriately governed production data rather than silently mixed together.**

35. FINAL EXPECTATION TO THE INTERN

This project is not intended to teach you what data analysis is.

You are being asked to work as a **Data Analyst inside a product company that is actively building its analytics foundation.**

VELOOP Rewards currently does not have the volume of production data required for conventional product-performance analysis. Therefore, your responsibility in this project is to build the **structure that will allow meaningful analysis once real production activity exists.**

Your work should help answer:

What should VELOOP collect?

How should VELOOP structure it?

How do we know the data is trustworthy?

What should management measure?

What should engineering implement?

What should the future analytics team be able to see?

The objective is not to manufacture impressive numbers.

The objective is to build a **reliable, traceable and reusable analytical foundation for a developing product ecosystem.**

That distinction is what makes this a genuine product-company assignment rather than a classroom exercise.